

EN750PV Series Solar Pump Inverter



NEW All-new upgrade **CE** CE certified



Applications



Domestic water supply



Agricultural irrigation



Livestock watering



Desert control

WHO WE ARE

Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code.

25%

fee with a referral code (30% without)

0

distributors in between

SADC

we deliver across Southern Africa

How every quote works

1**Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2**Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

3**Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

4**Parts & aftersales**

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.


Product Features

Advanced MPPT+PID algorithms

MPPT efficiency up to 99%, resists sunlight and load fluctuations, enhancing operation stability




MPPT efficiency up to 99%

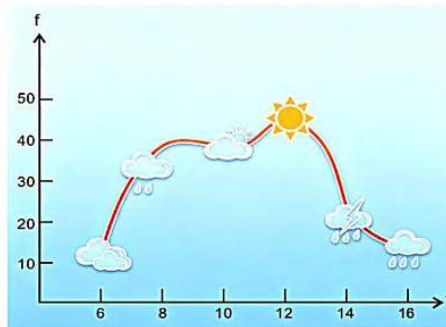

Real-time automatic tracking

AC/DC auto-switching function

Optional AC/DC switching module supports automatic AC/DC power supply switching for 24/7 uninterrupted operation

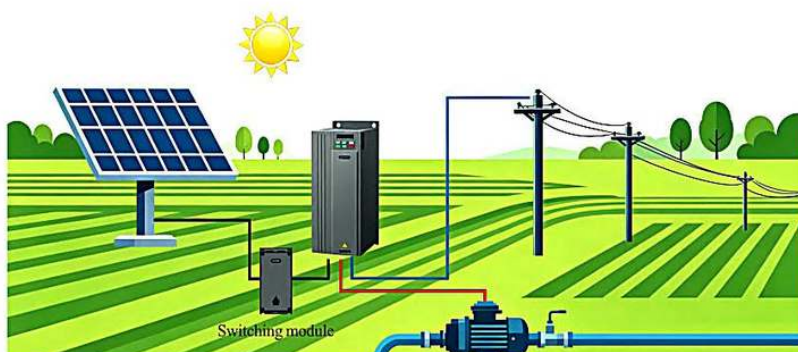

Support multiple types of pumps

High-performance vector control drive for synchronous/asynchronous pumps



User-defined intermittent operation & pump self-cleaning



Multiple pump protections

Pump dry run protection, full-water protection, low frequency protection, minimum power protection, lightning and surge protection, overcurrent protection, overheat protection, short-circuit protection, etc.




Automatic dormancy & wake up

Support automatic dormancy and wake up according to sunlight intensity



PV water supply diagram

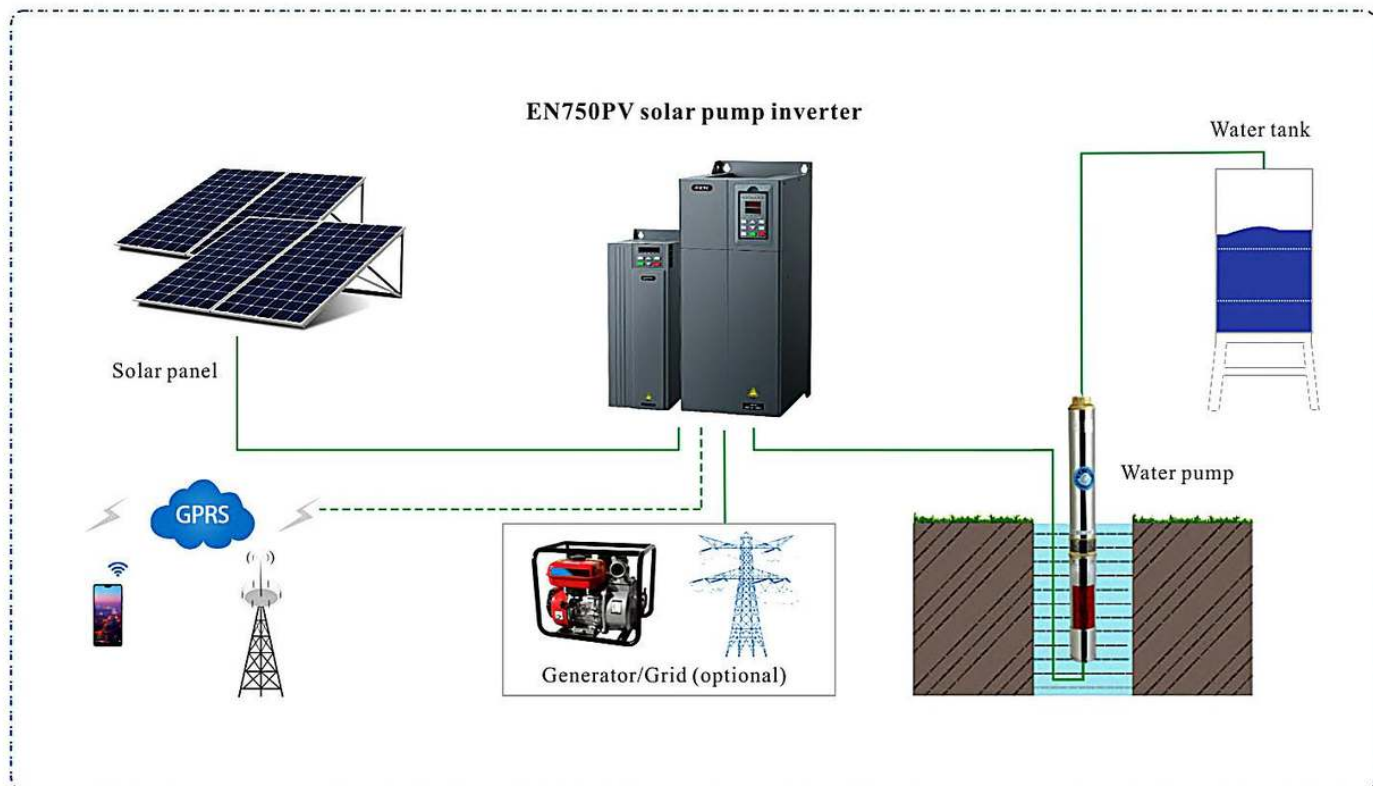

EN750PV Solar panel configuration recommendation

Inverter model	Voc=36±1VDC		Voc=45±1VDC	
	Panel power(W)	Panels per string * strings	Panel power(W)	Panels per string * strings
EN750PV-4T0007	250	18*1	300	15*1
EN750PV-4T0015	250	18*1	300	15*1
EN750PV-4T0022	250	18*1	300	15*1
EN750PV-4T0037	250	18*1	300	16*1
EN750PV-4T0055	250	18*2	300	15*2
EN750PV-4T0075	250	18*2	300	15*2
EN750PV-4T0110	250	18*3	300	15*3
EN750PV-4T0150	250	18*4	300	15*4
EN750PV-4T0185	250	18*5	300	15*5
EN750PV-4T0220	250	18*6	300	15*6
EN750PV-4T0300	250	18*8	300	15*8
EN750PV-4T0370	250	18*10	300	15*9
EN750PV-4T0450	250	18*11	300	15*10
EN750PV-4T0550	250	18*13	300	15*13
EN750PV-4T0750	250	18*18	300	16*16
EN750PV-4T0900	250	18*22	300	18*18


Inverter technical specification

Item		Description
Input(AC)	Rated voltage, frequency	Three phase 380V, 50Hz/60Hz
	Allowable voltage range	Three phase 380V: 320~480V
Input(DC)	Recommended operating voltage range	Three phase 380V: 600~750VDC
	Recommended MPPT operating voltage	Three phase 380V: 550VDC
Output	Voltage	0~input voltage
	Frequency	0~599Hz
	Overload capacity	150% of rated current for 1 minute
Dedicated functions	PV water supply dedicated functions	1. Support multiple solar pump control modes, including MPPT control and MPPT+PID constant pressure water supply control. 2. Support automatic AC/DC power supply switching for 24/7 unattended uninterrupted operation 3. Support automatic dormancy & wake-up, intermittent operation, and pump self-cleaning functions 4. Support multiple pump protections such as pump dry run protection, full-water protection, low frequency protection, minimum power protection, lightning and surge protection, overcurrent protection, overheat protection, and short-circuit protection, etc.
Protection function		Power-on motor short-circuit detection, input/output phase loss protection, overcurrent protection, overvoltage protection, undervoltage protection, overheat protection, overload protection, underload protection, ground short-circuit protection, terminal protection, power failure ride-through protection, etc
Environment	Application site	Indoor, no direct sunlight, free from dust, corrosive gases, flammable gases, oil mist, water vapor, water drop and salt, etc
	Altitude	Below 1000 meters. (When the altitude is above 1000 meters, derating is required. For every additional 1000 meters in altitude, the output current should be reduced by approximately 10% of the rated current.)
	Ambient temperature	-10°C~+40°C (ambient temperature between 40°C~50°C, please derate or enhance cooling)
	Relative humidity	< 95%RH, no condensation
	Vibration	Less than 5.9 m/s ² (0.6g)
	Storage temperature	-40°C~+70°C
Structure	IP grade	IP20
	Cooling method	Forced air cooling
Installation method		Wall-mounted

Inverter model selection

Input voltage	Inverter model	Rated output current(A)	Applicable motor (kW)	Max. DC input voltage (VDC)	Recommended DC input voltage range(VDC)	Allowable DC input voltage range (VDC)
Three phase AC 380V	EN750PV-4T0007	2.3	0.75	900	600~750	300~900
	EN750PV-4T0015	3.7	1.5	900	600~750	300~900
	EN750PV-4T0022	5	2.2	900	600~750	300~900
	EN750PV-4T0037	8.5	3.7	900	600~750	300~900
	EN750PV-4T0055	13	5.5	900	600~750	300~900
	EN750PV-4T0075	17	7.5	900	600~750	300~900
	EN750PV-4T0110	25	11	900	600~750	300~900
	EN750PV-4T0150	33	15	900	600~750	300~900
	EN750PV-4T0185	39	18.5	900	600~750	300~900
	EN750PV-4T0220	45	22	900	600~750	300~900
	EN750PV-4T0300	60	30	900	600~750	300~900
	EN750PV-4T0370	75	37	900	600~750	300~900
	EN750PV-4T0450	91	45	900	600~750	300~900
	EN750PV-4T0550	112	55	900	600~750	300~900
	EN750PV-4T0750	150	75	900	600~750	300~900
	EN750PV-4T0900	176	90	900	600~750	300~900

Inverter outline and installation dimensions

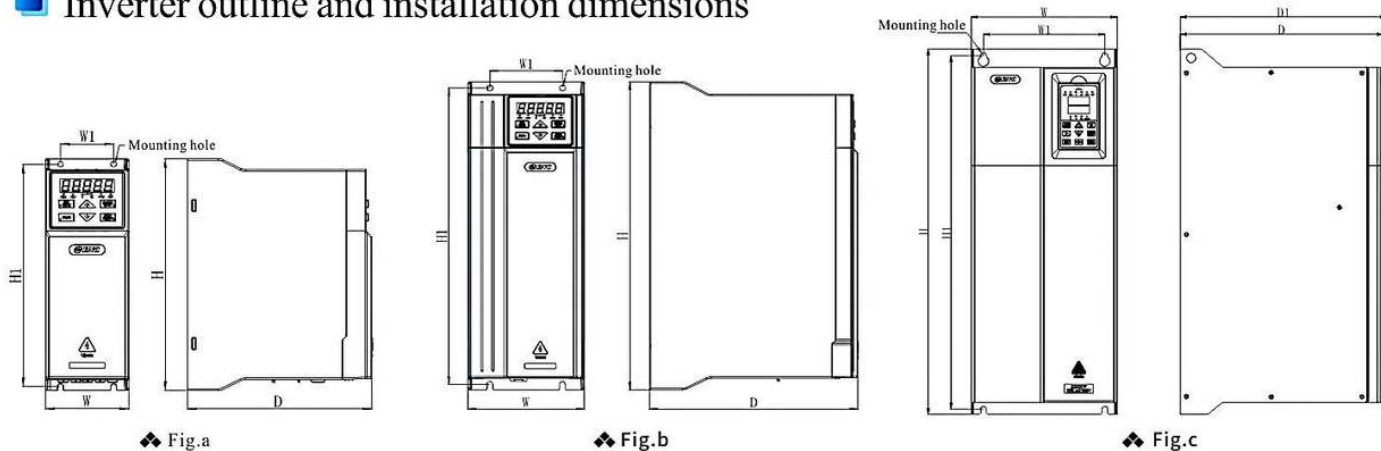


◆ Fig.a

◆ Fig.b


◆ Fig.c

Inverter model	W (mm)	H (mm)	D (mm)	W1 (mm)	H1 (mm)	D1 (mm)	Mounting hole diameter(mm)	Fig.No.
EN750PV-4T0007	67	177	145	40	167	-	5	Fig.a
EN750PV-4T0015								
EN750PV-4T0022								
EN750PV-4T0037	75	210	166	48	201.5	-	5	Fig.a
EN750PV-4T0055	100	242	180	71	232.5	-	6	Fig.b
EN750PV-4T0075								
EN750PV-4T0110	120	320	214.7	75	308	-	6	Fig.b
EN750PV-4T0150								
EN750PV-4T0185	142	408	225	110	394	-	6	Fig.b
EN750PV-4T0220								
EN750PV-4T0300	172	466	230	142	452	-	7	Fig.b
EN750PV-4T0370								
EN750PV-4T0450	225	550	315	185	530	319.5	7	Fig.c
EN750PV-4T0550								
EN750PV-4T0750	240	600	335	200	580	339.5	9	Fig.c
EN750PV-4T0900								


Outline dimensions of keypad and keypad mounting box (unit: mm)

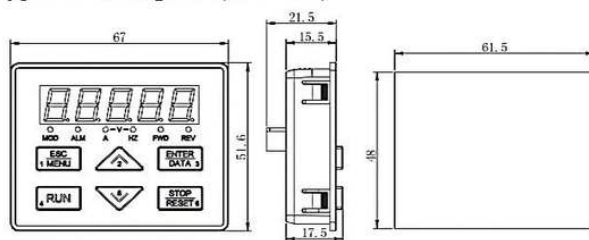

◆ EN-LED15 keypad outline and cutout dimensions

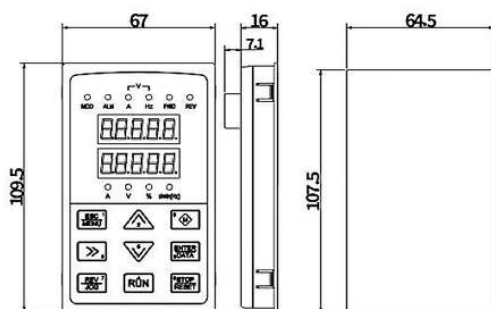

◆ EN-LED16 keypad outline and cutout dimensions

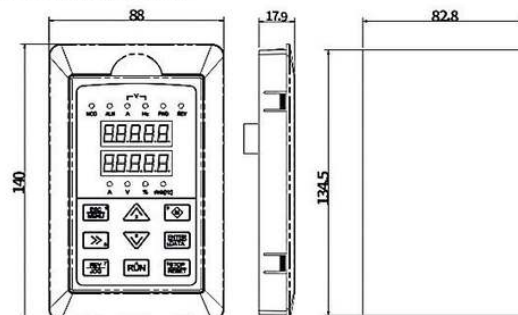


◆ EN-LED16 keypad mounting box outline and cutout dimensions


Note

1. When the EN-LED15 and EN-LED15-D keypads are used externally, mounting via the keypad mounting box is not supported; only direct keypad mounting is supported. The cutout dimensions are shown above.
2. When the EN-LED16 and EN-LED16-D keypads are used externally, the customer can make cutouts according to either the keypad cutout dimensions or the keypad mounting box cutout dimensions based on actual requirements. It is recommended that the panel thickness for mounting the keypad be between 1.0 and 1.5 mm.
3. If the keypad mounting box is used for installation, it is required to be ordered separately.

■ Correspondence between AC/DC switching module and inverter

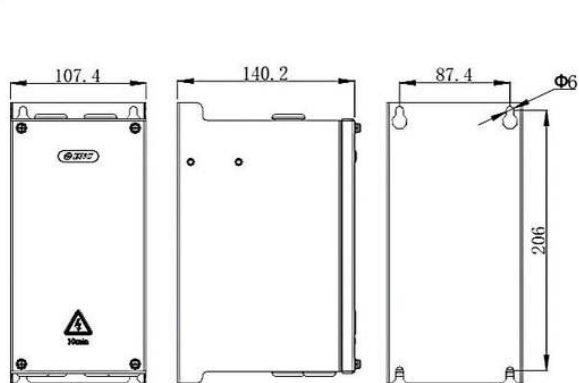

◆ EN-AC/DC-22 outline dimensions

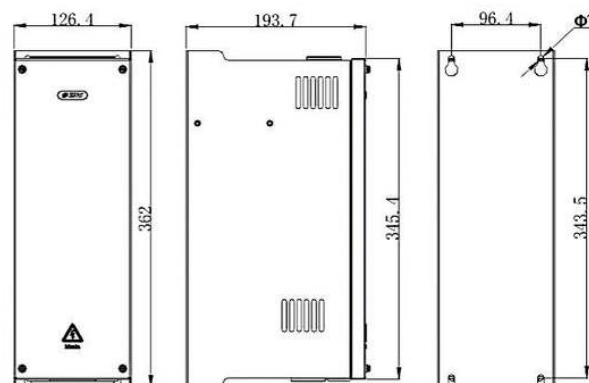

◆ EN-AC/DC-55, EN-AC/DC-90 outline dimensions

AC/DC switching module model	Rated current(A)	Applicable inverter model
EN-AC/DC-22	58A	EN750PV-4T0007
		EN750PV-4T0015
		EN750PV-4T0022
		EN750PV-4T0037
		EN750PV-4T0055
		EN750PV-4T0075
		EN750PV-4T0110
		EN750PV-4T0150
		EN750PV-4T0185
		EN750PV-4T0220
EN-AC/DC-55	144A	EN750PV-4T0300
		EN750PV-4T0370
		EN750PV-4T0450
		EN750PV-4T0550
EN-AC/DC-90	226A	EN750PV-4T0750
		EN750PV-4T0900

■ Basic wiring diagram

