

PRODUCT CATALOG · IRRIGATION

Irrigation accessories

Drip line and drip tape, pressure-compensating drippers, manual filters, hydraulic and solenoid valves, air valves, and the fittings that hold it all together — direct from the factory to your farm.



WHO WE ARE

Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code.

25%

fee with a referral code (30% without)

0

distributors in between

SADC

we deliver across Southern Africa

How every quote works

1**Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2**Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

3**Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

4**Parts & aftersales**

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

CONTENTS

What's in this catalog

Item numbers are the factory codes; quote them when you order. Quantities per bag and carton are packing sizes, and your Andrivo quote confirms the final price.

Drip irrigation

Pressure-compensating drip line	04
Thin-wall drip tape	06
Medium-wall drip tape	08
Online pressure-compensating drippers	10
Dripper stakes and stake kits	14

Plastic filters

Manual disc filters	16
Y-type micro filters and elements	18

Valves

Motorised solenoid valves	19
Hydraulic control main valves	20
Solenoid on/off valves	21
Pressure reducing valves	22

Pressure sustaining and relief valves	24
---------------------------------------	----

Proportional pressure reducing valve	25
--------------------------------------	----

Air valves

K-type kinetic air valve	26
Combination air valve	27
C-type combination air valve	28

Tube and pipe fittings

Lock-ring fittings for drip tape	29
Lock-nut fittings for drip tape	30
Mini valves for drip tape	32
Fittings for PE pipe	34
Lock-nut fittings for pipe	36
Mini valves for tubing	38
Rubber grommets and punch tools	39



Pressure Compensating Drip Line with Anti-Siphon



Excellent flow channel design, featuring wide water passageways

Oversized filter mesh enhances filtration efficiency

Ultra-fine outlet orifices prevent sediment ingestion

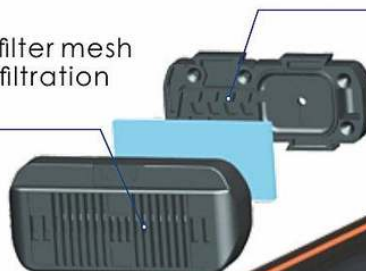

1.0, 1.6, 2.0 L/H



PC Drip Tape with Anti-Siphon

Flow Rate(L/H)	1.0 / 1.6 / 2.0
Diameter(mm)	16 / 22
Thickness(mm)	0.4 / 0.6 / 0.8 / 0.9
Spacing(cm)	15 / 20 / 30 / 40 / 50 / 100

PC Drip Pipe with Anti-Siphon

Flow Rate(L/H)	1.0 / 1.6 / 2.0
Diameter(mm)	16 / 20
Thickness(mm)	1.0 / 1.2
Spacing(cm)	20 / 30 / 40 / 50 / 100

*Package customized is available based on MOQ 1000rolls.

Application


- Working pressure: 0.5-3.5Bar.
- Filtration Required: Above 120mesh.
- Lay in line and levelly, all the holes of emitter must be upward.
- Suitable for the planing on hills and mountains, or Sub-surface multi seasonal row crop.

Technical Data:

16mm / Maximum Length (m) of Run		10% Flow Variation / Inlet Pressure 3.0Bar / Slope 0%				
Flow	Spacing	20cm	30cm	40cm	50cm	100cm
1.0 L/h		150	210	270	320	540
1.6 L/h		110	150	190	230	410
2.0 L/h		90	130	165	200	345

20mm / Maximum Length (m) of Run		10% Flow Variation / Inlet Pressure 3.0Bar / Slope 0%				
Flow	Spacing	20cm	30cm	40cm	50cm	100cm
1.0 L/h		250	340	430	510	850
1.6 L/h		190	270	310	380	620
2.0 L/h		160	220	270	320	540

22mm / Maximum Length (m) of Run		10% Flow Variation / Inlet Pressure 3.0Bar / Slope 0%				
Flow	Spacing	20cm	30cm	40cm	50cm	100cm
1.0 L/h		325	440	540	645	1060
1.6 L/h		225	330	410	490	795
2.0 L/h		210	285	360	430	700

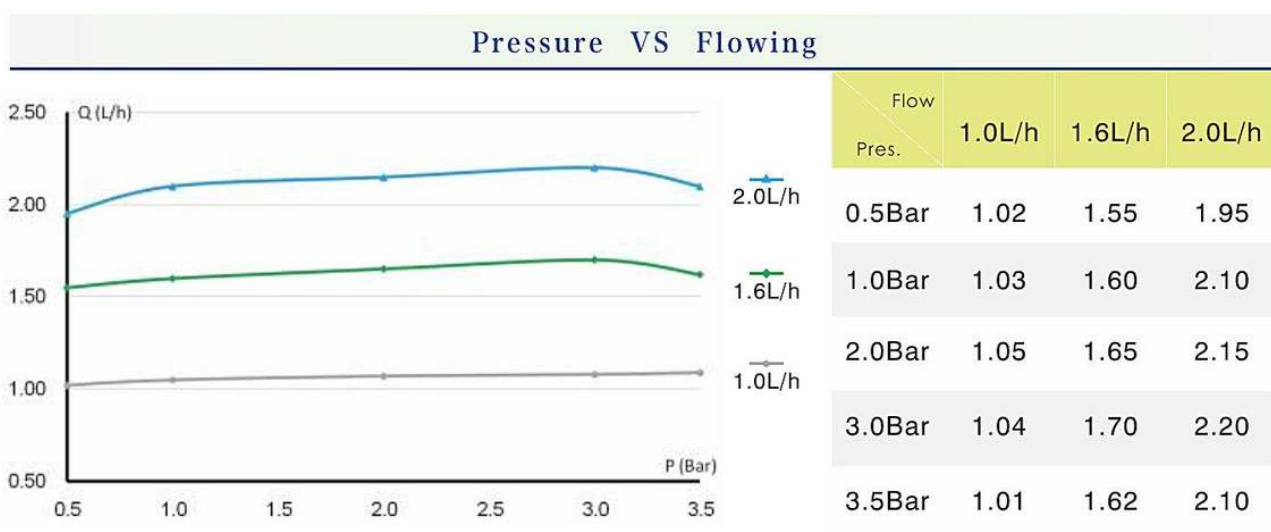

Thin-Wall Drip Tape with Flat Dripper



- ◆ High Uniformity
- ◆ Long Run Length
- ◆ High Clog Resistant



Length: 23mm




0.4 L/H



0.8, 1.0, 1.4, 2.0 L/H

Wide and deep labyrinth permits big particles through the flowing channel

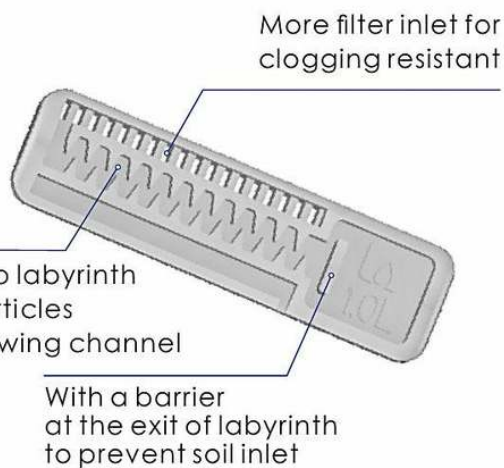

Application

- Working pressure: 0.2-1.2Bar.
- Filtration Required: Above 120mesh.
- Lay in line and levelly, all the holes of emitter must be upward.
- Suitable for single season crops with affordability and quality.

Technical Data

Nominal Flow 0.4/0.8/1.0/1.4/2.0 L/h

Diameter 16 / 22 mm

Spacing 10/15/20/30/40/50 cm

Dripper Length 23 mm

Dia. (mm)	Thickness (mm)	Max. Working Pressure (Bar)	Burst Pressure (Bar)
16	0.15	1.0	1.6
16	0.18	1.1	1.8
16	0.20	1.2	2.0
22	0.20	1.0	1.6
22	0.25	1.1	1.8




16mm / Maximum Length (m) of Run 10% Flow Variation / Inlet Pressure 1.0Bar / Slope 0%

Spacing Flow	10cm	15cm	20cm	30cm	40cm	50cm
0.4 L/h	123	165	202	265	321	371
0.8 L/h	76	102	124	163	198	229
1.0 L/h	65	86	105	136	164	191
1.4 L/h	52	68	94	120	133	154
2.0 L/h	43	54	65	89	106	123

22mm / Maximum Length (m) of Run 10% Flow Variation / Inlet Pressure 1.0Bar / Slope 0%

Spacing Flow	10cm	15cm	20cm	30cm	40cm	50cm
0.4 L/h	267	324	377	492	603	687
0.8 L/h	124	165	235	305	371	427
1.0 L/h	112	148	192	249	304	348
1.4 L/h	92	122	163	202	254	289
2.0 L/h	76	102	123	162	195	224

Pressure VS Flowing

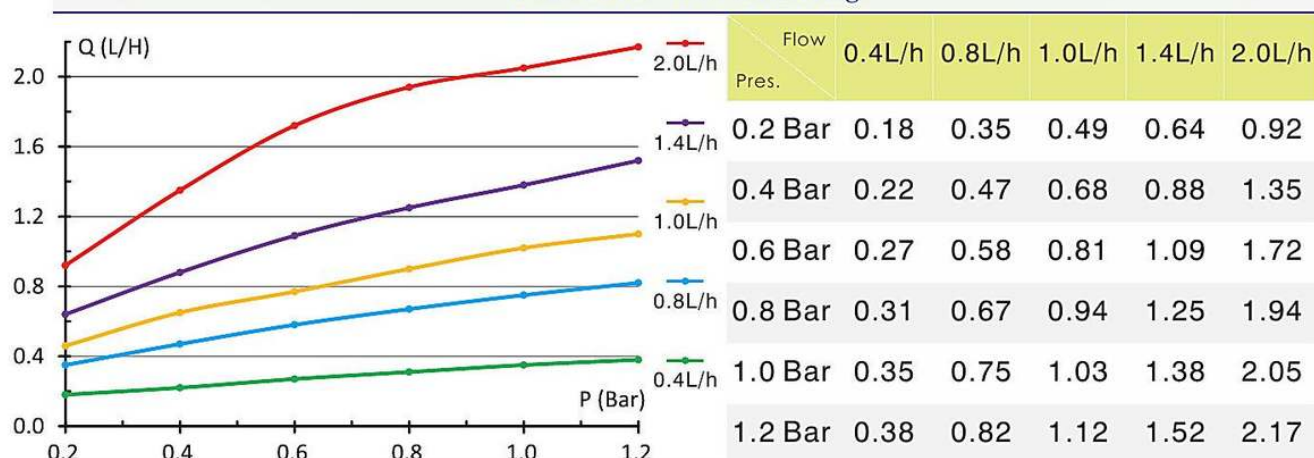

Medium-Wall Drip Tape with Flat Dripper



- ◆ High Uniformity
- ◆ Longer Run Length
- ◆ Higher Clog Resistant

Length: 30mm



1.0, 1.5, 2.0, 3.0, 4.0L/H

Larger Filter Area for superior clogging resistant

Maximized wide and deep labyrinth permits more particles passing through

With special design to minimize sand suction

Application

- Working pressure: 0.4-1.5Bar.
- Filtration Required: Above 120mesh.
- Lay in line and levelly, all the holes of emitter must be upward.
- Suitable for multi season crops/applications with reliable performance.

Technical Data

Nominal Flow 1.0/1.5/2.0/3.0/4.0 L/h

Diameter 16 / 22 mm

Spacing 10/15/20/30/40/50 cm

Dripper Length 30 mm

Dia. (mm)	Thickness (mm)	Max. Working Pressure (Bar)	Burst Pressure (Bar)
16	0.20	1.2	2.0
16	0.30	1.8	3.0
16	0.40	2.2	4.0
22	0.30	1.5	2.5
22	0.40	1.9	3.3




16mm / Maximum Length (m) of Run 10% Flow Variation / Inlet Pressure 1.5Bar / Slope 0%

Spacing Flow	10cm	15cm	20cm	30cm	40cm	50cm
1.0 L/h	68	90	110	145	178	206
1.5 L/h	50	65	83	110	135	157
2.0 L/h	45	57	68	91	111	130
3.0 L/h	36	45	55	73	89	105
4.0L/h	27	35	40	56	69	82

22mm / Maximum Length (m) of Run 10% Flow Variation / Inlet Pressure 1.5Bar / Slope 0%

Spacing Flow	10cm	15cm	20cm	30cm	40cm	50cm
1.0 L/h	115	153	199	260	313	363
1.5 L/h	90	119	158	207	251	293
2.0 L/h	80	108	130	169	204	237
3.0 L/h	65	82	98	129	165	193
4.0L/h	51	69	80	105	128	148

Pressure VS Flowing

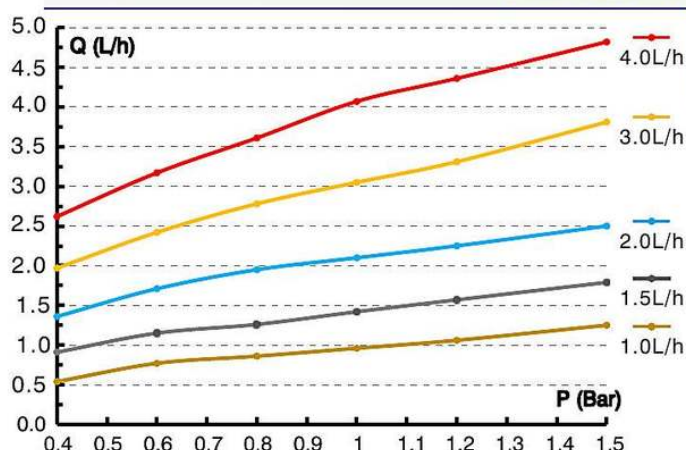

Flow Pres.	1.0L/h	1.5L/h	2.0L/h	3.0L/h	4.0L/h
0.4 Bar	0.54	0.91	1.36	1.97	2.62
0.6 Bar	0.77	1.15	1.71	2.42	3.17
0.8 Bar	0.86	1.26	1.95	2.78	3.61
1.0 Bar	0.96	1.42	2.10	3.05	4.07
1.2 Bar	1.06	1.57	2.25	3.31	4.36
1.5 Bar	1.25	1.79	2.50	3.81	4.82

Compact Online PC Dripper with Self-Cleaning



Anti-Clogging

Engineered with a wide & deep labyrinth flow path, a built-in inlet filter grid and a continuous self-cleaning mechanism.



Uniform Flow Rate

Adopting advanced production technology with minimal CV, ensuring consistent flow rate of each dripper.



Efficient & Reliable

Manufactured with high-quality diaphragms, ensuring effective pressure compensation, excellent stability and long service life.



Durable & Resilient

Manufactured with 100% new materials and additives, offering excellent corrosion resistance, aging resistance, and strong UV protection.



Mechanization-friendly


Compact structure and small size minimize interference with field machinery operations.



Modular & Affordable

The barbed outlet allows direct attachment to tube for 1-way drip stakes, and the nipple outlet works with multi-ways drip stakes. Simplified installation minimizes additional components.

Pressure VS Flowing

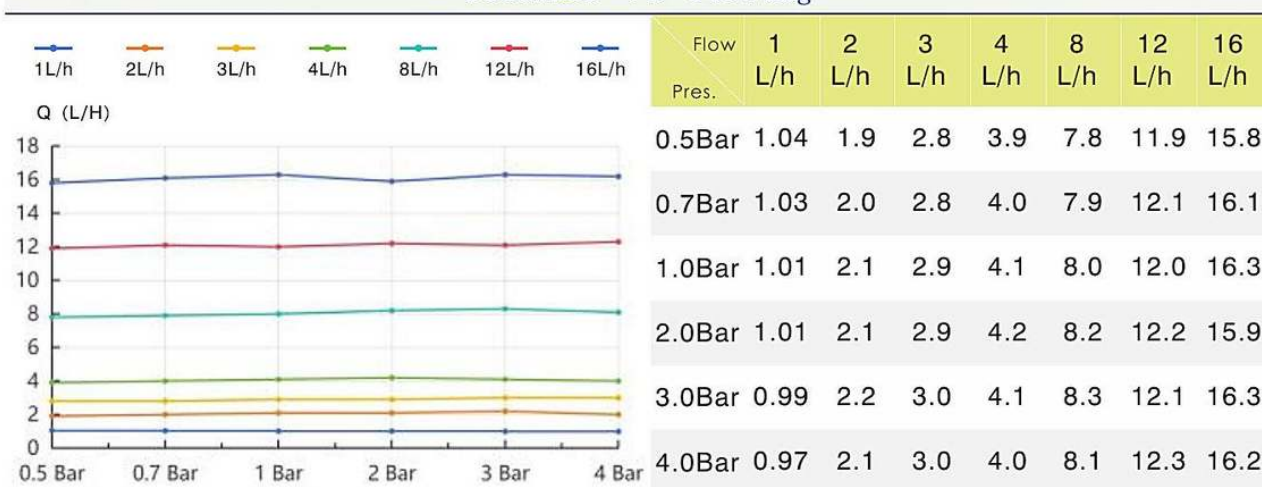

Common PC Dripper (Range of PC 0.5-4.0Bar)



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCD0201B	1L/h	Barb	1000	12000
PCD0201N	1L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCD0202B	2L/h	Barb	1000	12000
PCD0202N	2L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCD0203B	3L/h	Barb	1000	12000
PCD0203N	3L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCD0204B	4L/h	Barb	1000	12000
PCD0204N	4L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCD0208B	8L/h	Barb	1000	12000
PCD0208N	8L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCD0212B	12L/h	Barb	1000	12000
PCD0212N	12L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCD0216B	16L/h	Barb	1000	12000
PCD0216N	16L/h	Nipple	1000	12000

No-Drain PC Dripper (with Low Shutoff Pressure 0.12Bar, Range of PC 0.7-4.0Bar)



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCND0201B	1L/h	Barb	1000	12000
PCND0201N	1L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCND0202B	2L/h	Barb	1000	12000
PCND0202N	2L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCND0203B	3L/h	Barb	1000	12000
PCND0203N	3L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCND0204B	4L/h	Barb	1000	12000
PCND0204N	4L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCND0208B	8L/h	Barb	1000	12000
PCND0208N	8L/h	Nipple	1000	12000

No-Drain PC Dripper (with High Shutoff Pressure 0.18Bar, Range of PC 1.3-4.0Bar)



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCHD0201B	1L/h	Barb	1000	12000
PCHD0201N	1L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCHD0202B	2L/h	Barb	1000	12000
PCHD0202N	2L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCHD0203B	3L/h	Barb	1000	12000
PCHD0203N	3L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCHD0204B	4L/h	Barb	1000	12000
PCHD0204N	4L/h	Nipple	1000	12000



Item No.	Size	Outlet	Qty/Bag	Qty/Ctn
PCHD0208B	8L/h	Barb	1000	12000
PCHD0208N	8L/h	Nipple	1000	12000

Dripper Stake/Support Stake


Dripper Stake

Item No. 2102H
Size 2.2L/h
Length 10cm
Filtration 120mesh
Pres.: 0.2-2 Bar



Dripper Stake

Item No. 2152H
Size 2.2L/h
Length 15cm
Filtration 120mesh
Pres.: 0.2-2 Bar

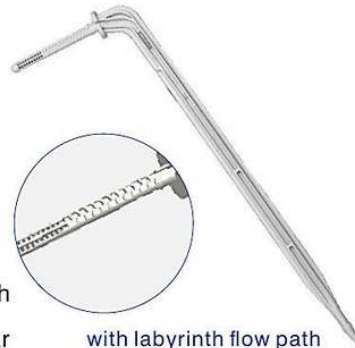

Dripper Stake

Item No. 4152
Size 2.2L/h
Length 15cm
Filtration 120mesh
Pres.: 0.2-2 Bar



Dripper Stake

Item No. 5152
Size 2.2L/h
Length 15cm
Filtration 120mesh
Pres.: 0.2-2 Bar



Support Stake

Item No. 5151
Size 2.2L/h
Filtration 120mesh
Pres.: 0.2-2 Bar



Support Stake

Item No. 2151
Size 2.2L/h
Filtration 120mesh
Pres.: 0.2-2 Bar



Manifold Connectors

5231B
Dn5*5



5133A
Dn5*4



5133P
Dn5*5






5135A
Dn5*4



5135P
Dn5*5



Drip Stake Kits

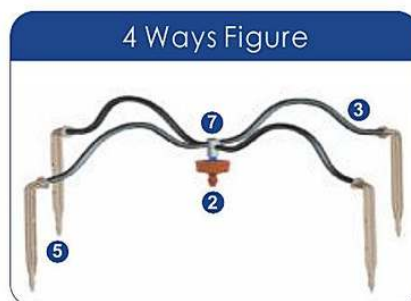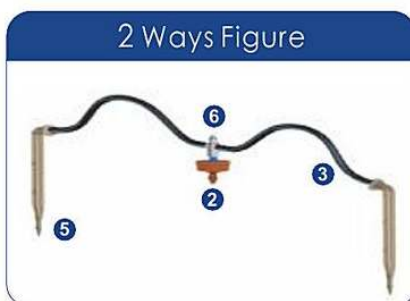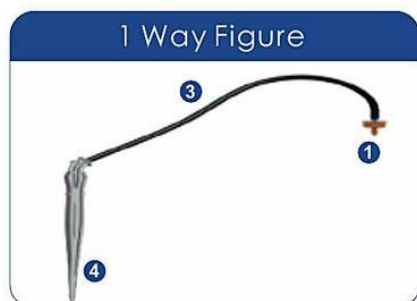

1-Way Stake Kit




- ① PC Dripper with Barb Outlet
- ② PC Dripper with Nipple Outlet
- ③ 5/3 Micro PE Tube
- ④ Support Stake
- ⑤ Dripper Stake
- ⑥ 2 Ways Connector 5133P
- ⑦ 4 Ways Connector 5135P

Item No.	Stake	Connector	Tube Length	Tube Type
PCND0202B50P/5151	5151	PCND0202B	50cm	W/B PE

2-Way Dripper Stake Kit




2-Way Long Dripper Stake Kit

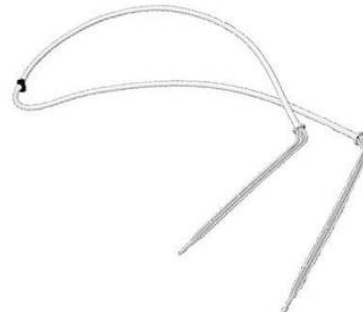

Item No.	Stake	Connector	Tube Length	Tube Type
W2122B	2102H	5133P	50cm	W/B PE

Item No.	Stake	Connector	Tube Length	Tube Type
W21522B	2152H	5133P	50cm	W/B PE

4-Way Dripper Stake Kit

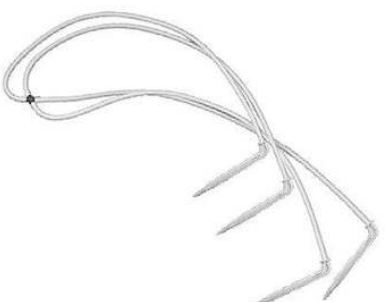

4-Way Long Dripper Stake Kit



Item No.	Stake	Connector	Tube Length	Tube Type
W2142B	2102H	5135P	50cm	W/B PE

Item No.	Stake	Connector	Tube Length	Tube Type
W21524B	2152H	5135P	50cm	W/B PE

Manual Disc Filter



Highly Efficient Filtration

Less head loss and backflush frequency by large filtration area size and centrifugal water inlet.



Less Maintenance Effort

Reduces manual maintenance via a grooved autoflush disc, enabling dual surface and depth filtration.



Reliable and Durable

Produced by excellent raw material which is of corrosion, chemical and UV resistant.

T Type



H Type



Item No.	Size	Filtering Surface cm ²	Max. Flow m ³ /h	Mesh	Disc Color
T2MD080	2"	1198	34	80	Green
T2MD120	2"	1198	30	120	Red
T2MD150	2"	1198	26	150	Orange
T3MD080	3"	1699	56	80	Green
T3MD120	3"	1699	50	120	Red
T3MD150	3"	1699	38	150	Orange

Item No.	Size	Filtering Surface cm ²	Max. Flow m ³ /h	Mesh	Disc Color
H3MD080	3"	2396	69	80	Green
H3MD120	3"	2396	60	120	Red
H3MD150	3"	2396	51	150	Orange
H4MD080	4"	3398	113	80	Green
H4MD120	4"	3398	110	120	Red
H4MD150	4"	3398	75	150	Orange

Technology:

- Filtration


The entering water passes through centrifugal structure, then being centrifugal effect flowing. The flowing enforce large contaminants away from discs. The water then passes efficiently through the discs thus small contaminants be trapped.



Technical Data:

- Maximum Temperature: 60°C
- End Connections: Threaded, Flange, VIC Grooved
- Maximum Pressure: 10 Bar (145 Psi)

Head Loss Data:

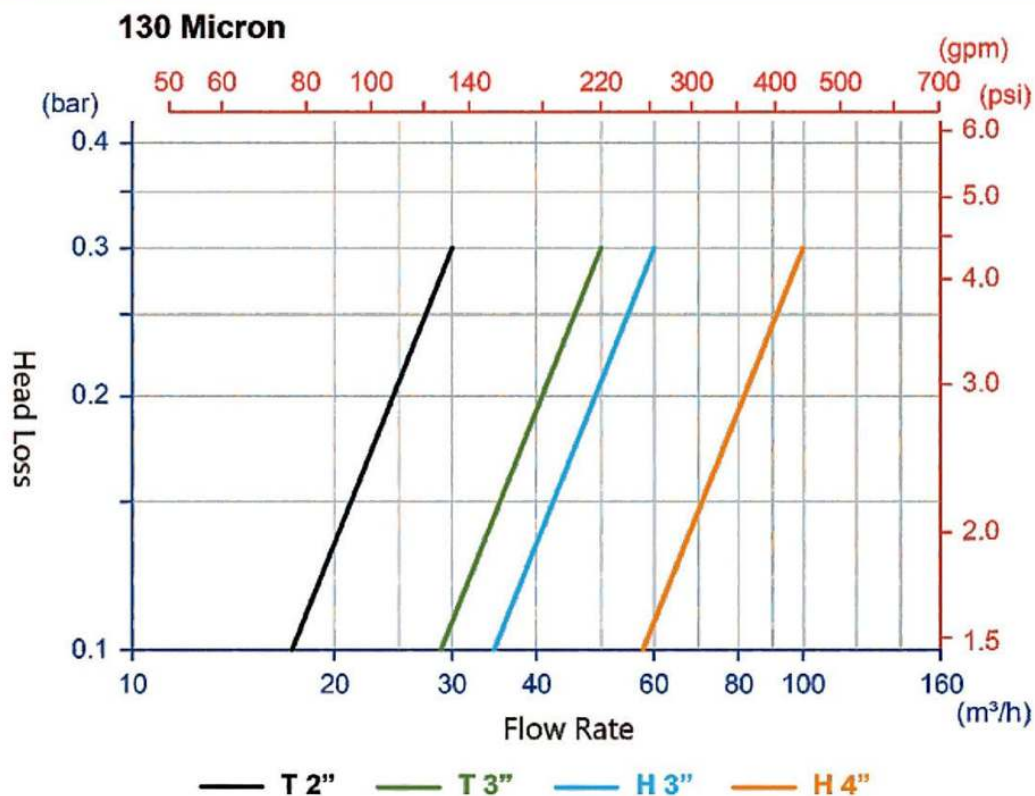

Y Type Micro Filter (Filtration Grade:120mesh)

3/4"



Item No.	Size	Type	Max. Flow	Filtration Surface	Max. Pres.
1725S120B/N	3/4"	Screen	5m3/h	95cm2	8bar
1725D120B/N	3/4"	Disc	4m3/h	150cm2	8bar

1"



Item No.	Size	Type	Max. Flow	Filtration Surface	Max. Pres.
1732S120B/N	1"	Screen	5m3/h	95cm2	8bar
1732D120B/N	1"	Disc	4m3/h	150cm2	8bar

1-1/2"



Item No.	Size	Type	Max. Flow	Filtration Surface	Max. Pres.
Y50S120B/N	1.5"	Screen	20m3/h	488cm2	8bar
Y50D120B/N	1.5"	Disc	20m3/h	568cm2	8bar

2"



Item No.	Size	Type	Max. Flow	Filtration Surface	Max. Pres.
Y63S120B/N	2"	Screen	25m3/h	488cm2	8bar
Y63D120B/N	2"	Disc	25m3/h	568cm2	8bar

2" Super



Item No.	Size	Type	Max. Flow	Filtration Surface	Max. Pres.
YB63S120B/N	2"S	Screen	32m3/h	802cm2	8bar
YB63D120B/N	2"S	Disc	32m3/h	884cm2	8bar

Filter Elements



Screen Elements



Disc Elements

Solenoid Valve (Motor Type)

24V AC (DC)







12V DC Latching



Technical Data

- AC (DC) version: Voltage 24V (18-30V), Current Inrush 250 mA, Holding 15 mA
- DC Latching version has red (positive) wire and black (negative) wire
- DC Latching version: Voltage 9-40V, Pulse width: 80-500ms
- Max. ambient temperature: 60°C (140 °F)
- Filtration: Min. 80 mesh
- With 100cm Wires
- Pressure range: 0-10bar (0-140 psi)
- Max. fluid temperature: 60°C (140 °F)
- Hydraulic ports connecting: 1/8" BSP
- Waterproof Rating: Ip68

How to Connect with Main Hydraulic Valve:

	Flowing Direction	
	NC (Normally Closed)	NO (Normally Open)
De-energized	 A: Pressure B: Vent C: Command	 A: Vent B: Pressure C: Command
Energized	 A: Pressure B: Vent C: Command	 A: Vent B: Pressure C: Command

Note: NC & NO is referring to the Hydraulic valve. NC is hydraulic valve closing when de-energized, NO is hydraulic valve opening when de-energized.

Hydraulic Control Main Valve

T Type



Size	Connection	Kv m ³ /h@ 1bar	Cv gpm@ 1psi
3/4" (Dn20)	Threaded	11	13
1" (Dn25)	Threaded	11	13
1-1/2" (Dn40)	Threaded	40	46
2" (Dn50)	Threaded	50	58

Y Type





Size	Connection	Kv m ³ /h@ 1bar	Cv gpm@ 1psi
2" (Dn50)	Threaded	100	115
2-1/2" (Dn65)	Threaded	100	115
3" (Dn80)	Threaded/Flange/VIC	100	115
4" (Dn100)	Flange/VIC	200	230
5" (Dn125)	Flange	500	575
6" (Dn150)	Flange	500	575

Technical Data

- Working Pressure : 0.35-10bar (5-145psi)
- Max pressure: 10Bar / 145psi
- Threaded / Flange / VIC Grooved
- Highest working temperature: 60°C

Head Lose Chart

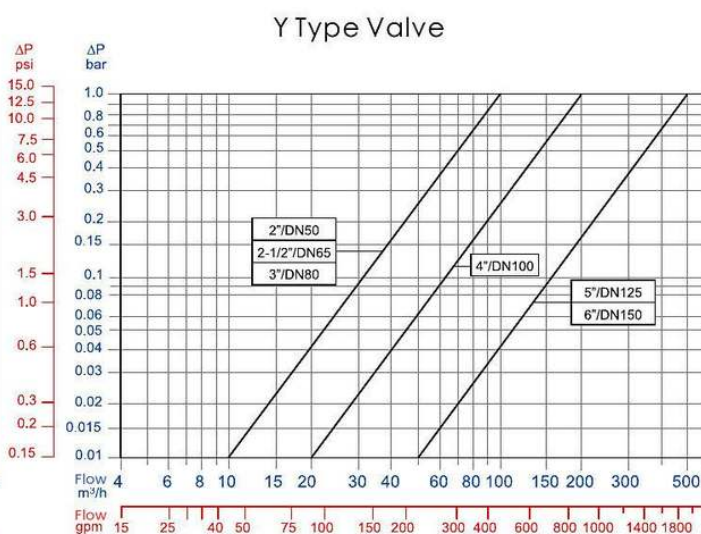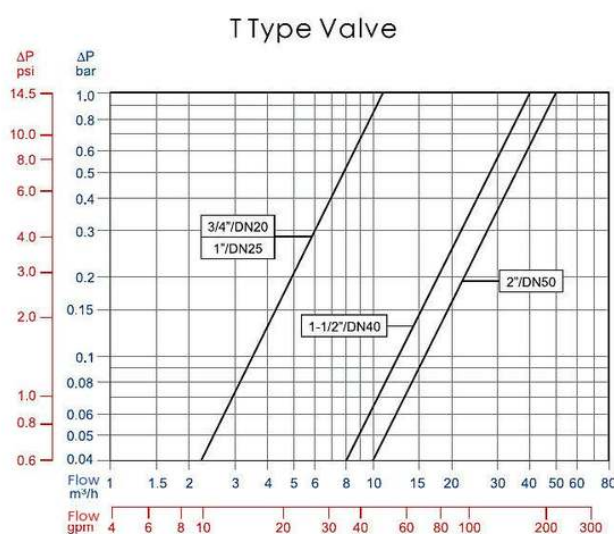

Solenoid Valve for On/Off Control (Working Pressure:0.4-10Bar)

T Type

Female Threaded



Item No.	Size	Solenoid
E12HV0220B/N	3/4" (Dn20)	12V DC Latching
E24HV0220B/N	3/4" (Dn20)	24V AC(DC)
E12HV0225B/N	1" (Dn25)	12V DC Latching
E24HV0225B/N	1" (Dn25)	24V AC(DC)

Y Type

Female Threaded



Item No.	Size	Solenoid
E12HV0150B/N	2" (Dn50)	12V DC Latching
E24HV0150B/N	2" (Dn50)	24V AC(DC)
E12HV0165B/N	2-1/2" (Dn65)	12V DC Latching
E24HV0165B/N	2-1/2" (Dn65)	24V AC(DC)
E12HV0180B/N	3" (Dn80)	12V DC Latching
E24HV0180B/N	3" (Dn80)	24V AC(DC)

Y Type

Flange



Item No.	Size	Solenoid
E12HV0180F	3" (Dn80)	12V DC Latching
E24HV0180F	3" (Dn80)	24V AC(DC)
E12HV01100F	4" (Dn100)	12V DC Latching
E24HV01100F	4" (Dn100)	24V AC(DC)

T Type

Female Threaded



Item No.	Size	Solenoid
E12HV0240B/N	1-1/2" (Dn40)	12V DC Latching
E24HV0240B/N	1-1/2" (Dn40)	24V AC(DC)
E12HV0250B/N	2" (Dn50)	12V DC Latching
E24HV0250B/N	2" (Dn50)	24V AC(DC)

Y Type

VIC Grooved



Item No.	Size	Solenoid
E12HV0180V	3" (Dn80)	12V DC Latching
E24HV0180V	3" (Dn80)	24V AC(DC)
E12HV0100V	4" (Dn100)	12V DC Latching
E24HV0100V	4" (Dn100)	24V AC(DC)

Y Type

Flange



Item No.	Size	Solenoid
E12HV01125F	5" (Dn125)	12V DC Latching
E24HV01125F	5" (Dn125)	24V AC(DC)
E12HV01150F	6" (Dn150)	12V DC Latching
E24HV01150F	6" (Dn150)	24V AC(DC)

Pressure Reducing Valve (Pressure Adjusting Range:0.8-6.5Bar)

Pressure Reducing Valve (with Solenoid Valve)

T Type

Female Threaded



Item No.	Size	Solenoid
E12MHV0240B/N	1-1/2" (Dn40)	12V DC Latching
E24MHV0240B/N	1-1/2" (Dn40)	24V AC(DC)
E12MHV0250B/N	2" (Dn50)	12V DC Latching
E24MHV0250B/N	2" (Dn50)	24V AC(DC)

Y Type

Female Threaded



Item No.	Size	Solenoid
E12MHV0150B/N	2" (Dn50)	12V DC Latching
E24MHV0150B/N	2" (Dn50)	24V AC(DC)
E12MHV0165B/N	2-1/2" (Dn65)	12V DC Latching
E24MHV0165B/N	2-1/2" (Dn65)	24V AC(DC)
E12MHV0180B/N	3" (Dn80)	12V DC Latching
E24MHV0180B/N	3" (Dn80)	24V AC(DC)

Y Type

VIC Grooved



Item No.	Size	Solenoid
E12MHV0180V	3" (Dn80)	12V DC Latching
E24MHV0180V	3" (Dn80)	24V AC(DC)
E12MHV01100V	4" (Dn100)	12V DC Latching
E24MHV01100V	4" (Dn100)	24V AC(DC)

Y Type

Flange



Item No.	Size	Solenoid
E12MHV0180F	3" (Dn80)	12V DC Latching
E24MHV0180F	3" (Dn80)	24V AC(DC)
E12MHV01100F	4" (Dn100)	12V DC Latching
E24MHV01100F	4" (Dn100)	24V AC(DC)

Y Type

Flange



Item No.	Size	Solenoid
E12MHV01125F	5" (Dn125)	12V DC Latching
E24MHV01125F	5" (Dn125)	24V AC(DC)
E12MHV01150F	6" (Dn150)	12V DC Latching
E24MHV01150F	6" (Dn150)	24V AC(DC)

Pressure Reducing Valve (With Manual 3-Way Valve)

T Type

Female Threaded



Item No.	Size	Connection
MHV0240B/N	1-1/2" (Dn40)	Threaded
MHV0250B/N	2" (Dn50)	Threaded

Y Type

Female Threaded



Item No.	Size	Connection
MHV0150B/N	2" (Dn50)	Threaded
MHV0165B/N	2-1/2" (Dn65)	Threaded
MHV0180B/N	3" (Dn80)	Threaded

Y Type

VIC Grooved



Item No.	Size	Connection
MHV0180V	3" (Dn80)	VIC
MHV01100V	4" (Dn100)	VIC

Y Type

Flange



Item No.	Size	Connection
MHV0180F	3" (Dn80)	Flange
MHV01100F	4" (Dn100)	Flange

Y Type

Flange



Item No.	Size	Connection
MHV01125F	5" (Dn125)	Flange
MHV01150F	6" (Dn150)	Flange

Pressure Sustaining Valve (Pressure Adjusting Range: 0.8-6.5Bar)

T Type
Female Threaded



Item No.	Size	Connection
SHV0240B/N	1-1/2"(Dn40)	Threaded
SHV0250B/N	2"(Dn50)	Threaded

Y Type
Female Threaded



Item No.	Size	Connection
SHV0150B/N	2"(Dn50)	Threaded
SHV0165B/N	2-1/2"(Dn65)	Threaded

Y Type
VIC Grooved



Item No.	Size	Connection
SHV0180V	3"(Dn80)	VIC
SHV01100V	4"(Dn100)	VIC

Y Type
Flange



Item No.	Size	Connection
SHV0180F	3"(Dn80)	Flange
SHV01100F	4"(Dn100)	Flange

Y Type
Flange



Item No.	Size	Connection
SHV01125F	5"(Dn125)	Flange
SHV01150F	6"(Dn150)	Flange

Pressure Relief Valve (Pressure Adjusting Range: 1.0-10Bar)

T Type
Female Threaded



Item No.	Size	Connection
RHV0240B/N	1-1/2"(Dn40)	Threaded
RHV0250B/N	2"(Dn50)	Threaded
RHV0150B/N	2"(Dn50)	Threaded
RHV0180B/N	3"(Dn80)	Threaded

Y Type



Item No.	Size	Connection
RHV0180F/V	3"(Dn80)	Flange/VIC
RHV01100F/V	4"(Dn100)	Flange/VIC
RHV01125F	5"(Dn125)	Flange
RHV01150F	6"(Dn150)	Flange


Proportional Pressure Reducing Valve

(Pressure Adjusting Range:0.5-10Bar)



Item No.	Size	Connection	Kv	Cv	Reduction Ratio (Flow Velocity:2-3m/s)	Pressure Rating
			m ³ /h@ 1bar	gpm@ 1psi		
PDV0150B/N	2"(Dn50)	Threaded	100	115	3:1	10Bar
PDV0165B/N	2-1/2"(Dn65)	Threaded	100	115	3:1	10Bar
PDV0180B/N/V/F	3"(Dn80)	Threaded/VIC/Flange	100	110	3:1	10Bar
PDV01100V/F	4"(Dn100)	VIC/Flange	200	230	3:1	10Bar

Head Lose Chart

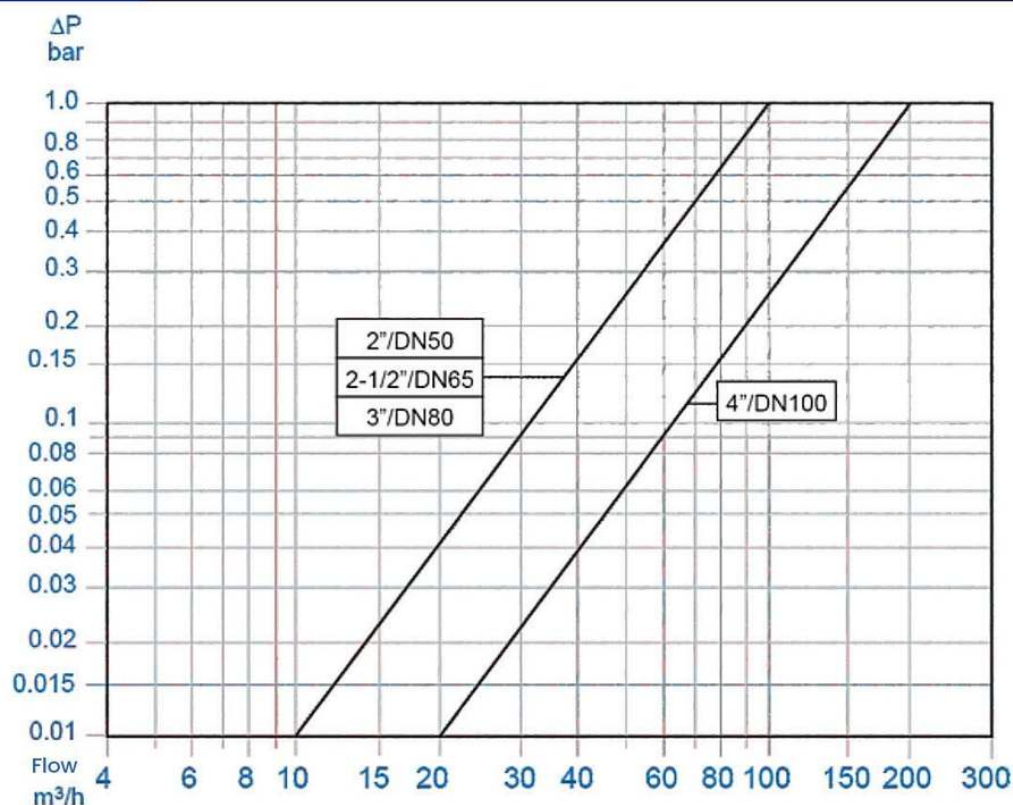



K Type Kinetic Air Valve




Item No.	KAV0125B/N
Size	1"(Dn25)
Connector	Threaded
Weight	0.2kg
Material	Glass Reinforced Nylon
Working Pressure	0.1-10Bar
Kinetic Orifice	320mm ²
Quantity/Carton	70 Pcs



Item No.	KAV0150B/N
Size	2"(Dn50)
Connector	Threaded
Weight	1.3kg
Material	Glass Reinforced Nylon
Working Pressure	0.1-10Bar
Kinetic Orifice	755mm ²
Quantity/Carton	36 Pcs

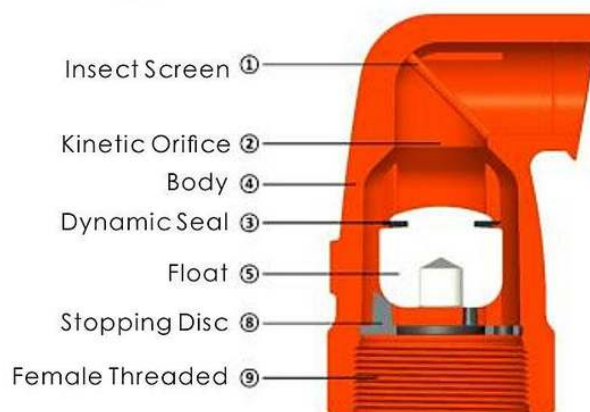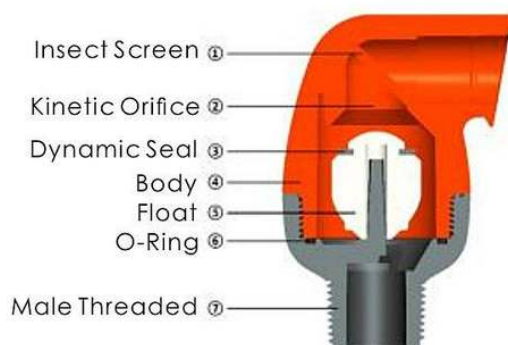

Air Flow Performance Charts

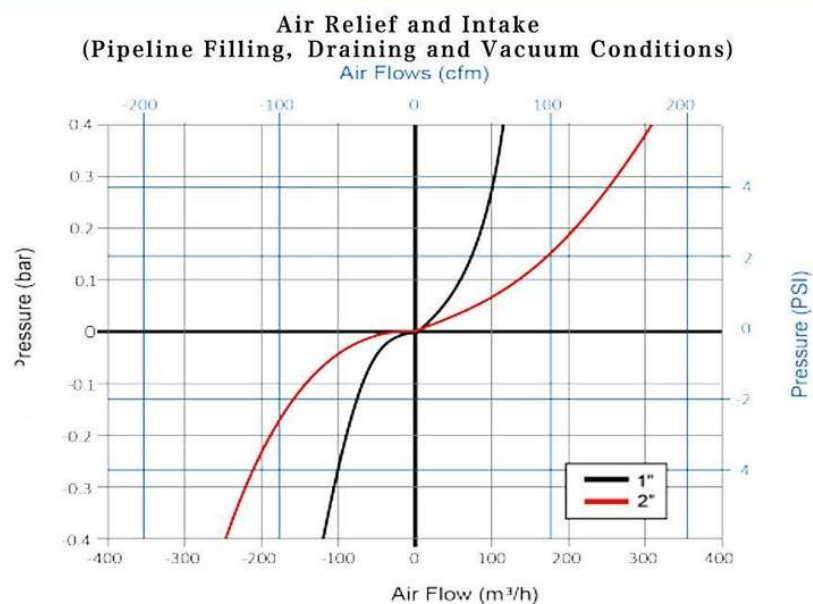

Combination Air Valve (Working Pressure Range: 0.5-15Bar)




Item No.	Size	Air Outtake Flow	Air Intake Flow	Qty/Ctn
AV0120B/N	3/4"	0-280m3/h@0-0.35bar	-280-0m3/h@-0.35-0Bar	64 Pcs
AV0125B/N	1"	0-280m3/h@0-0.35bar	-280-0m3/h@-0.35-0Bar	64 Pcs
AV0140B/N	1-1/2"	0-280m3/h@0-0.35bar	-280-0m3/h@-0.35-0Bar	64 Pcs




Item No.	Size	Air Outtake Flow	Air Intake Flow	Qty/Ctn
AV0150B/N	2"	0-360m3/h@0-0.35bar	-360-0m3/h@-0.35-0Bar	15 Pcs

Air Flow Performance Charts

Air Relief and Intake
(Pipeline Filling, Draining and Vacuum Conditions)

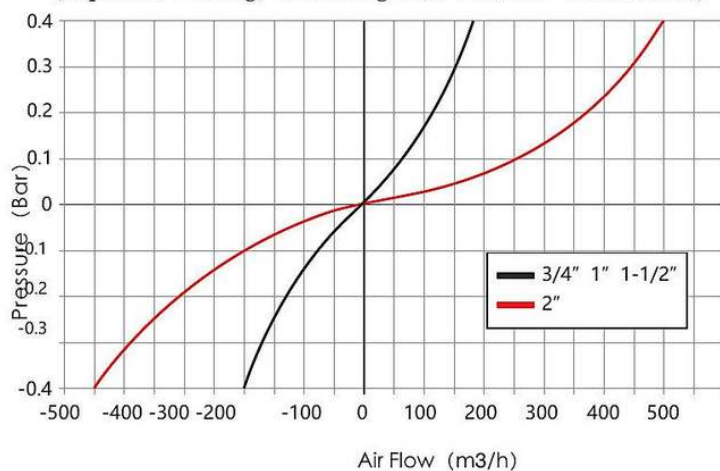

Air Release (Pressurized Operation)

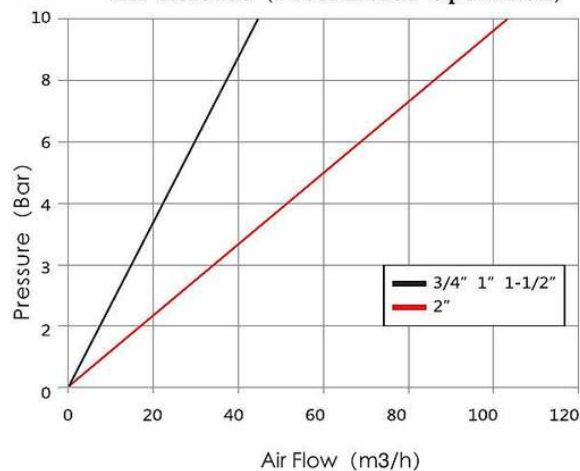


C Type Combination Air Valve



Item No. CAV0125B/N
 Size 1" (Dn25)
 Connector Male Threaded
 Weight 0.5kg
 Material Glass Reinforced Nylon
 Working Pressure 0.2-10Bar
 Automatic Orifice 5.4mm²
 Kinetic Orifice 320mm²
 Quantity/Carton 36 Pcs




Item No. CAV0150B/N
 Size 2" (Dn50)
 Connector Male Threaded
 Weight 1.4kg
 Material Glass Reinforced Nylon
 Working Pressure 0.2-10Bar
 Automatic Orifice 12.2mm²
 Kinetic Orifice 1590mm²
 Quantity/Carton 12 Pcs

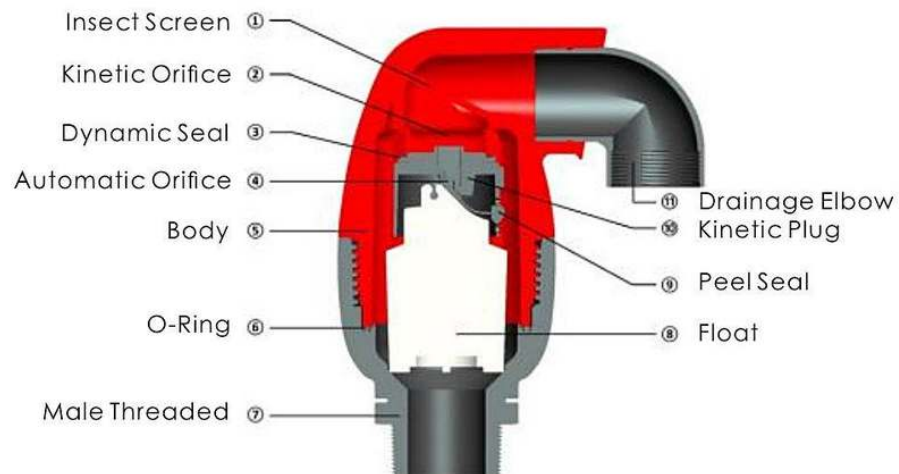


Air Flow Performance Charts

Air Relief and Intake
 (Pipeline Filling, Draining and Vacuum Conditions)

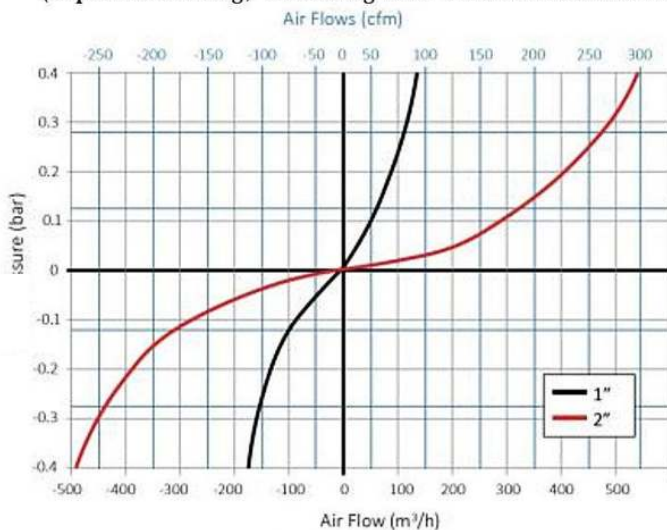

Air Release (Pressurized Operation)

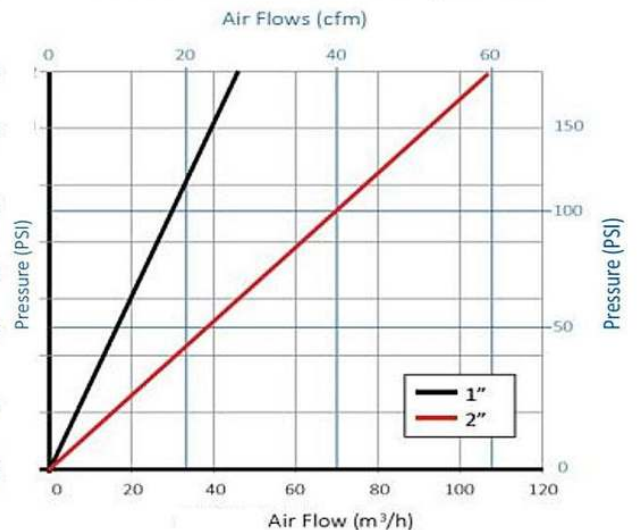

Lock Ring Fitting for Drip Tape (For 0.15-0.3mm Thickness)

**Lock Ring
Offtake**



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TO021715B	Dn17*15	100	1600

**Lock Ring
Coupling (Barb)**



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
BC021617B	Dn17*16	100	1600

**Lock Ring
Coupling**



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
LC0217B	Dn17	100	1300

**Lock Ring Elbow
(Male Thread)**



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EC021712B	Dn17*1/2"	100	1100

**Lock Ring Tee
(Male Thread)**



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TC021712B	Dn17*1/2"	100	700

**Lock Ring Coupling
(Male Thread)**



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MT021712B	Dn17*1/2"	100	1600

**Lock Ring Tape
Plug**



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TP0317B	Dn17	50	2000

Lock Nut Fitting for Drip Tape (For 0.15-0.6mm Thickness)

Tape Offtake



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TO011715BDn17*15		100	1300

Lock Coupling for Tape



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
LC0117B	Dn17	100	800

Lock Type Offtake



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
LO0117B	Dn17	100	1000

Male Threaded Coupling for Tape



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MT011712B	Dn17*1/2"	100	1000
MT011734B	Dn17*3/4"	100	900

Barbed Coupling for Tape



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
BC011617BDn17*16		100	1100

Croco Offtake for Lay Flat Tube



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
CT0317B	Dn17	50	700

Connection for Lay Flat Tube



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
CT0217B	Dn17	100	550

Lock Elbow for Tape



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
ET0117B	Dn17	100	700

Male Threaded Tape Tee



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TT011712B	Dn17*1/2"	50	450

Lock Tee for Tape



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TT0117B	Dn17	50	350

Tape Plug



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TP0117B	Dn17	100	1300

Tape Tee for Lay Flat Hose



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TT0417B	Dn17	50	250

Mini Valve for Drip Tape (Maximum pressure:6Bar)

Offtake Tape Valve



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OV031715B	Dn17*15	50	500

Offtake Valve for Tape



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OV0217B	Dn17	50	450

Barb-Lock Valve for Tape



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
BV011617B	Dn16*17	50	400

Male Thread Valve for Tape



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TV0117B	Dn17*1/2"	50	450

Multi Valve for Driptape and Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MV021617B	Dn16*17	50	400

Tape Valve for Lay Flat Hose



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TV0217B	Dn17	50	250

Lock Tape Coupler with Valve



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
LV0117B	Dn17	50	400

Mini Valve for Drip Tape with Low Pressure

(Maximum pressure:3Bar)

Offtake Tape Valve



Item No.	Size	Qty/Bag Pc
OV021715	Dn17*15	50

Barb-Lock Valve for Tape



Item No.	Size	Qty/Bag Pc
BV021617	Dn16*17	50

Male Thread Valve for Tape



Item No.	Size	Qty/Bag Pc
MV021712	Dn17*1/2"	50

Tape Valve for Layflat Hose



Item No.	Size	Qty/Bag Pc
TV021715	Dn17*15	50

Lock Ring Elbow Valve for Tape



Item No.	Size	Qty/Bag Pc
EV021712B	Dn17*1/2"	50

Lock Ring Tee Valve for Tape



Item No.	Size	Qty/Bag Pc
DV021712	Dn17*1/2"	50

Fitting for Pipe

Offtake for PE Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OP011615	Dn16*15	100	2800
OP012018	Dn20*18	100	1400

Straight Connector



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
SC0116	Dn16	100	2200
SC0120	Dn20	100	1100

Tee Connector



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TC0116	Dn16	100	1300
TC0120	Dn20	50	600

Elbow Connector



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EC0116	Dn16	100	2100
EC0120	Dn20	100	1100

Offtake Tee for PVC Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OT0116	Dn16	100	1200

Male Threaded Connector



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MC011612	Dn16*1/2"	100	1900
MC011634	Dn16*3/4"	100	1200

Elbow With Male Thread



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EC021612	Dn16*1/2"	100	1600

Barb End Line



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EL0216	Dn16	100	4000
EL0220	Dn20	100	2000

Water Stop Hook for PE pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
HC0216	Dn16-17	500	15000
HC0220	Dn20-22	500	10000

Water Stop Hook for PE pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
HC0316	Dn16	500	8000

End Line



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EL0116	Dn16	100	3000
EL0120	Dn20	100	1600

Flush Valve



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
FV0234	3/4", 0.18bar	100	1200

Holddown Support



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
HS0216	Dn16	100	2300

Lock Nut Fitting for Pipe

Lock Offtake for Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OP021615	Dn16*15	100	1400

Lock Coupling (Male Thread)



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MC021612	Dn16*1/2"	100	1200
MC021634	Dn16*3/4	100	1000

Lock Elbow for Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EC0216	Dn16	100	700

Lock End Line for Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EL0316	Dn16	100	1500

Lock Coupling (Female Thread)



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
FC021634	Dn16*3/4"	100	900

Lock Coupling for Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
SC0216	Dn16	100	900

Lock Tee for Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TC0216	Dn16	50	400

Lock Connection for Lay Flat Tube



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
CT0216	Dn16	100	900

Lock Offtake for Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OP032018	Dn20*18	50	600

Lock Coupling for Pipe



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
SC0320	Dn20	50	400

Lock Adaptor (Male thread)



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MC032034	Dn20*3/4"	50	550

Lock Elbow



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EC0320	Dn20	50	300

Lock Tee



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TC0320	Dn20	25	200

Lock Tee (Male Thread)



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TC032034	Dn20*3/4"	25	250

Lock End line



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
EL0320	Dn20	50	500

Dn16/20 Barb Mini Valve for Tubing

Maxi Valve



Barb Offtake Valve



Thread-barb Valve



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MV0116	Dn16	50	600
MV0120	Dn20	50	500

Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OV011615	Dn16*15	50	600
OV012015	Dn20*15	50	550

Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TV011216	Dn1/2"*16	50	600
TV011220	Dn1/2"*20	50	550

Dn16/20 Lock Nut Mini Valve for Tubing

Lock Offtake Valve



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OV021615	Dn16*15	50	500

Lock Joint Valve



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MV0216	Dn16	50	350

Lock Offtake Valve



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
OV032018	Dn20*18	50	300

Lock Joint Valve
(Male Thread)



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
TV032034	Dn20*3/4"	50	300

Lock Joint Valve



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
MV0320	Dn20	40	200

Rubber Grommet

T Type



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
RR011613	Dn16*13	100	7000
RR012018	Dn20*18	100	4000

H Type



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
RR011610	Dn16*10	100	5000

Punch Tool

Simple Punch



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
SP0103	Dn3	10	450

Simple Punch



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
SP0203	Dn3	100	450

Handle Punch



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
SP250	Dn3	1	60

Punch for Lay Flat Hose



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
PF0215	Dn15	1	50
PF0217	Dn17	1	50

Multi Size Drill



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
SP0616	Dn16	1	200

Multi Size Drill



Item No.	Size	Qty/Bag Pc	Qty/Ctn Pc
SP0620	Dn20	1	200