

PRODUCT CATALOG · IRRIGATION

Filtration systems for irrigation

Sand media, disc, screen, self-cleaning brush and hydrocyclone filters, plus fertiliser tanks — sized for every water source, from boreholes to dams and rivers.



WHO WE ARE

Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code.

25%

fee with a referral code (30% without)

0

distributors in between

SADC

we deliver across Southern Africa

How every quote works

1**Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2**Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

3**Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

4**Parts & aftersales**

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

CONTENTS

What's in this catalog

Choosing a filter	03
DMF automatic sand media filter	04
DLLF automatic disc filter	06
DLHF300 vertical hydraulic screen filter	08
DLHF400 horizontal hydraulic screen filter	10
DLD-FW horizontal electric brush filter	12
DLD-FZ vertical electric brush filter	14
DLLW centrifugal and double-screen filter	16
DLS semi-automatic screen filter	18
DLFT fertiliser tank	19

Which filter for which water?

A typical head-works uses a first stage to take out the bulk of the dirt and a second stage to protect the drippers. Tell us your water source and flow and we will size the system for you.

Sand media filter

Deep sand bed for dam, river and canal water with algae and organic matter (over 10 mg/L). Usually the first stage.

Disc filter

Stacked grooved discs for drip and micro systems; traps fine and fibrous particles, 40–200 micron.

Screen filter

Stainless-steel screen, 10–500 mesh; economical final filtration for cleaner water.

Hydrocyclone

Spins out over 80% of suspended sand; the first stage for boreholes and sandy water.

90%

fewer blockage failures

65%

lower labour cost

25%

lower maintenance cost

Typical results reported by the manufacturer for automatic filtration compared with manual systems.

DMF automatic sand media filter

SAND MEDIA FILTER



Primary filtration through a deep sand bed, which traps organic and inorganic impurities in three dimensions. Choose a sand filter when the water carries more than 10 mg/L of organic matter, such as dam, river or canal water with algae.

- High flow with low pressure loss
- Modular, compact layout with less pipework, so it costs less to install
- Use one unit or several in parallel to suit the irrigation project
- Automatic backwash, so water supply never stops

OPERATING PARAMETERS

Capacity per tank 15–80 m³/h	Filtration grade 5–40 micron	Design pressure 0.8 MPa / 8 bar
Minimum pressure 0.2 MPa / 2 bar	Working temperature up to 65 °C	Pressure loss ≤ 0.02 MPa / 0.2 bar
Control Pressure difference, timer or manual	Backwash time 10–200 s	Power supply AC 220 V 50 Hz / DC 9–24 V
Collector material ABS	Delivery Skid-mounted, easy to install	

TECHNICAL DATA


Model	Tanks	Min flow (m³/h)	Max flow (m³/h)	Filter area (m²)	Backwash flow per tank (m³/h)	Max pressure (MPa)	Inlet / outlet	Drain
DMF-2416-2A	2	27	50	0.56	22	0.8	3" / DN80	2" / DN50
DMF-3216-2A	2	60	80	1.0	40	0.8	4" / DN100	3" / DN80
DMF-3616-2A	2	75	100	1.28	50	0.8	4" / DN100	3" / DN80
DMF-4016-2A	2	80	120	1.88	60	0.8	6" / DN150	3" / DN80
DMF-4816-2A	2	100	160	2.26	80	0.8	6" / DN150	3" / DN80
DMF-4816-3A	3	150	240	3.39	80	0.8	8" / DN200	3" / DN80
DMF-4816-4A	4	200	320	4.52	80	0.8	8" / DN200	3" / DN80

DIMENSIONS

Model	D (mm)	L1 (mm)	H1 (mm)	H2 (mm)	L×W×H (mm)	Weight (kg)
DMF-2416-2A	600	700	235	1410	1300×640×1640	155
DMF-3216-2A	800	900	255	1640	1770×820×1970	240
DMF-3616-2A	900	900	255	1640	1976×910×1916	275
DMF-4016-2A	1000	1200	300	1830	2100×1010×1850	320
DMF-4816-2A-S	1200	1400	230	1930	2500×1220×1900	520
DMF-4816-2A-D	1200	1400	600	1780	2600×1350×2000	590
DMF-4816-3A-S	1200	1400	240	1840	3900×1200×1950	790
DMF-4816-3A-D	1200	1400	600	1810	4010×1350×2050	880
DMF-4816-4A-S	1200	1400	240	1810	5500×1200×2000	1000
DMF-4816-4A-D	1200	1400	600	1810	5410×1350×2150	1160

S = single chamber, D = dual chamber. Actual flow depends on water quality and filtration grade; ask us to size it for your water.

DIMENSION DRAWINGS

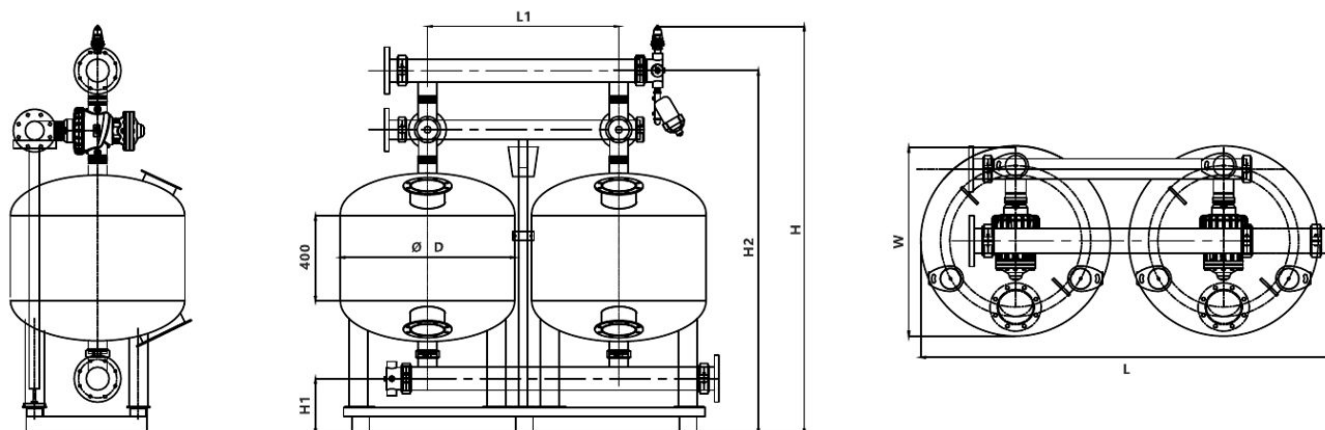

DLLF automatic disc filter

DISC FILTER

Secondary filtration for drip and micro-irrigation. Stacked grooved discs catch fibrous and soft impurities especially well, and the battery backwashes itself one unit at a time so water keeps flowing.



- Automatic backwash, with water supply continuing while it flushes
- High filtration precision in a compact, flexible assembly
- Removes inorganic impurities (sand, sediment) and organic impurities (seeds, algae, floating debris)
- Disc heads in high-pressure reinforced fibreglass with a Victaulic clamp for easy opening
- Polypropylene disc elements in a cylindrical filter body for reliable filtration

TECHNICAL DATA AND DIMENSIONS

Model	Inlet / outlet	Flow (m ³ /h)	Drain	H (mm)	H1 (mm)	H2 (mm)	D (mm)	L (mm)
DLLF-2-2-A	3" / DN80	≤ 30	2" / DN50	964	215	185	710	615
DLLF-2-3-A	4" / DN100	45	2" / DN50	1000	225	195	750	890
DLLF-3-2-A	4" / DN100	60	3" / DN80	1165	235	245	835	615
DLLF-3-3-A	4" / DN100	90	3" / DN80	1255	300	266	930	890
DLLF-3-4-A	6" / DN150	120	3" / DN80	1295	300	266	930	1165
DLLF-3-5-A	8" / DN200	150	3" / DN80	1320	300	266	960	1440
DLLF-4-3-A	8" / DN200	180	3" / DN80	1640	210	1180	1200	950
DLLF-4-4-A	8" / DN200	240	3" / DN80	1700	210	1180	1200	1225
DLLF-4-5-A	8" / DN200	300	3" / DN80	1755	285	1320	1200	1500
DLLF-4-6-A	10" / DN250	360	3" / DN80	1655	285	1320	1200	1775
DLLF-4-7-A	10" / DN250	420	3" / DN80	1763	285	1400	1200	2050

Model code: DLLF – disc unit size (inch) – number of disc heads – A (automatic) or M (manual). Actual flow depends on water quality and filtration grade.

DIMENSION DRAWINGS

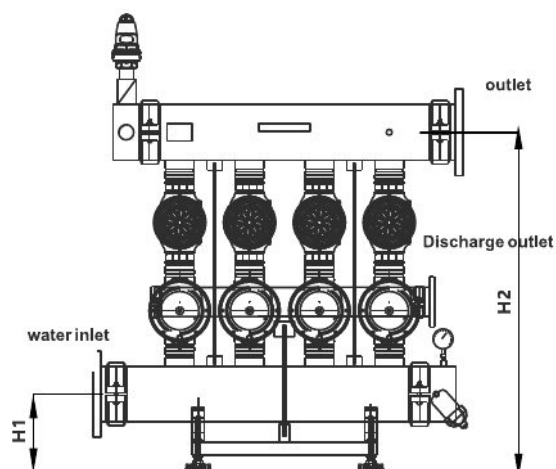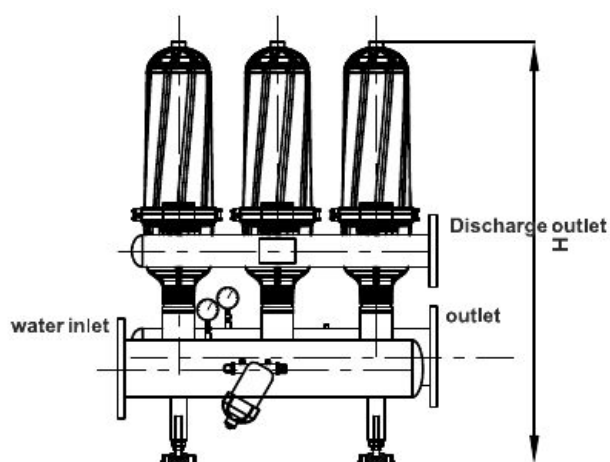

DLHF300 vertical hydraulic screen filter

SCREEN FILTER


Single-stage filtration through a stainless-steel screen that removes silt, sand and scale from irrigation water, and also handles water carrying a little organic matter. For systems from 10 to 200 m³/h.

- Driven entirely by water pressure in the pipeline, so no external power is needed
- Fully automatic control
- Automatic backwash
- Parts: hydraulic piston, stainless-steel screen and suction nozzles

OPERATING PARAMETERS

Capacity per unit 10–200 m³/h	Filtration grade 25–2000 micron	Design pressure 1.0 MPa / 10 bar
Minimum pressure 0.2 MPa / 2 bar	Screen material Stainless steel 304 / 316	Control Pressure difference, timer or manual
Backwash time 10–200 s, adjustable	Working temperature up to 65 °C	Pressure loss ≤ 0.01 MPa / 0.1 bar
Backwash power Uses line pressure only, no external power		

TECHNICAL DATA


Model	Inlet / outlet	Screen area (cm ²)	Flow (m ³ /h)	Weight (kg)
DLHF-302	3" / DN80	1720	20	42
DLHF-303	3" / DN80	1720	50	47
DLHF-304	4" / DN100	1720	80	60
DLHF-304MAX	4" / DN100	3430	100	82
DLHF-306	6" / DN150	4330	130	90
DLHF-308	8" / DN200	5500	200	182

DIMENSIONS

Model	D1 (mm)	X (mm)	Y (mm)	H (mm)	H1 (mm)
DLHF-302	273	237	250	605	755
DLHF-303	273	237	250	605	755
DLHF-304	273	237	250	605	755
DLHF-304MAX	273	237	400	855	1155
DLHF-306	273	237	550	985	1455
DLHF-308	325	283	560	1175	1755

Model code: DLHF-300 series – connection size – filtration grade – design pressure. Pressure and materials can be customised on request.

DIMENSION DRAWINGS

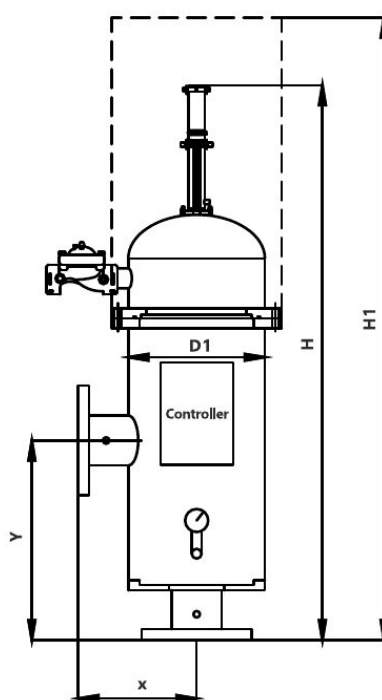

DLHF400 horizontal hydraulic screen filter

SCREEN FILTER


Two-stage filtration through a coarse and a fine stainless-steel screen in a horizontal body. It removes silt, sand and scale, also handles water with a little organic matter, and suits main lines from 50 to 1 500 m³/h.

- Driven entirely by water pressure in the pipeline, so no external power is needed
- Fully automatic control
- Two-stage filtration with automatic backwash
- Parts: hydraulic piston, stainless-steel screens and suction nozzles

OPERATING PARAMETERS

Capacity per unit 50–1 500 m³/h	Filtration grade 20–2000 micron	Design pressure 1.0 MPa / 10 bar
Minimum pressure 0.2 MPa / 2 bar	Screen material Stainless steel 304 / 316	Control Pressure difference, timer or manual
Backwash time 10–200 s, adjustable	Working temperature up to 65 °C	Pressure loss ≤ 0.01 MPa / 0.1 bar
Backwash power Uses line pressure only, no external power		

TECHNICAL DATA


Model	Inlet / outlet	Screen area (cm ²)	Flow (m ³ /h)	Weight (kg)
DLHF-403	3" / DN80	3220	50	140
DLHF-404	4" / DN100	5780	100	170
DLHF-406	6" / DN150	5780	150	183
DLHF-406MAX	6" / DN150	8410	160	205
DLHF-408	8" / DN200	5780	250	195
DLHF-408MAX	8" / DN200	8410	300	235
DLHF-410	10" / DN250	8410	350	250
DLHF-410MAX	10" / DN250	10290	400	270
DLHF-412	12" / DN300	11710	600	435
DLHF-414	14" / DN350	12990	1000	455
DLHF-416	16" / DN400	12990	1200	480
DLHF-416MAX	16" / DN400	17020	1500	680

DIMENSIONS

Model	D1 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	H (mm)
DLHF-403	273	450	1370	2120	560
DLHF-404	273	900	1730	2850	580
DLHF-406	325	900	1730	2850	635
DLHF-406MAX	325	900	1920	3210	635
DLHF-408	325	900	1920	3210	635
DLHF-408MAX	325	900	2310	4010	640
DLHF-410	325	900	2310	4010	690
DLHF-410MAX	426	1100	2560	4290	760
DLHF-412	426	1100	2960	5290	760
DLHF-414	480	1270	2960	5290	820
DLHF-416	480	1270	2960	5290	820
DLHF-416MAX	630	1270	2960	5290	1020

Model code: DLHF-400 series – connection size – filtration grade – design pressure. Pressure and materials can be customised on request.

DIMENSION DRAWING

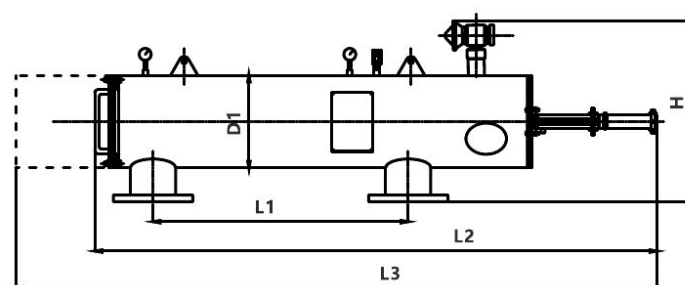

DLD-FW horizontal electric brush filter

SELF-CLEANING SCREEN FILTER


A motor-driven brush scrubs the stainless-steel screen while it backwashes, so algae and suspended solids come off even in very dirty water. Built for high-turbidity sources such as dams and rivers; it cuts manual cleaning by about 90% and saves more than 15% of flushing water.

- High flow with high filtration accuracy
- Low pressure loss and little backwash water
- Highly automated
- Parts: electric brush and stainless-steel screen

OPERATING PARAMETERS

Capacity per unit 50–4 000 m³/h	Filtration grade 20–4000 micron	Design pressure 1.0 MPa / 10 bar
Minimum pressure 0.1 MPa / 1 bar	Screen material Stainless steel 304 / 316	Control Pressure difference, timer or manual
Backwash time 10–200 s	Working temperature up to 65 °C	Pressure loss ≤ 0.01 MPa / 0.1 bar

TECHNICAL DATA


Model	Inlet / outlet	Drain outlet	Motor (kW)	Flow (m³/h)	Weight (kg)
DLD-FW-80	3" / DN80	1¼" / DN40	0.18	50	180
DLD-FW-100	4" / DN100	1¼" / DN40	0.18	80	198
DLD-FW-150	6" / DN150	2" / DN50	0.18	150	328
DLD-FW-200	8" / DN200	2" / DN50	0.25	320	375
DLD-FW-250	10" / DN250	2" / DN50	0.25	450	470
DLD-FW-300	12" / DN300	2" / DN50	0.37	600	519
DLD-FW-350	14" / DN350	2" / DN50	0.37	850	660
DLD-FW-400	16" / DN400	2" / DN50	0.37	1200	708

DIMENSIONS

Model	L (mm)	L1 (mm)	L2 (mm)	H (mm)
DLD-FW-80	450	1338	2038	493
DLD-FW-100	450	1338	2038	493
DLD-FW-150	900	1705	2705	545
DLD-FW-200	900	1765	2765	617
DLD-FW-250	900	1845	2895	720
DLD-FW-300	1100	2400	3792	800
DLD-FW-350	1100	2442	3792	800
DLD-FW-400	1100	2792	4142	900

Model code: DLD-FW – connection size – filtration grade – design pressure. Actual flow depends on water quality and filtration grade.

DIMENSION DRAWINGS

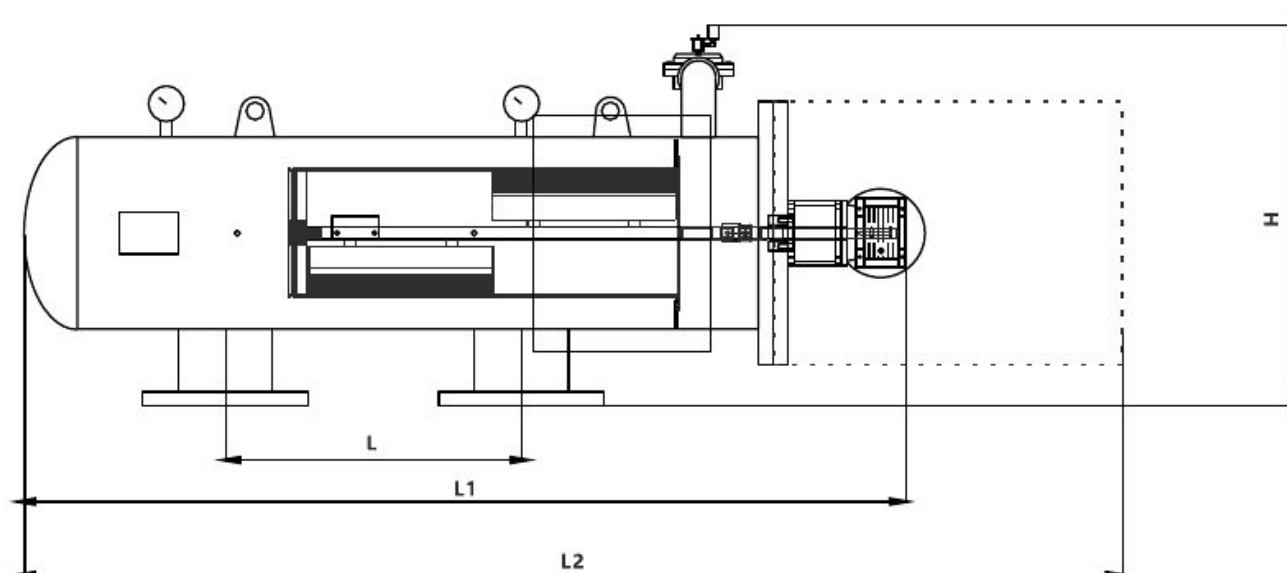

DLD-FZ vertical electric brush filter

SELF-CLEANING SCREEN FILTER


The vertical version of the electric brush filter, with a smaller footprint. Brushing plus backwash removes algae and suspended solids from dam and river water, cutting manual cleaning by about 90% and saving more than 15% of flushing water.

- High flow with high filtration accuracy
- Low pressure loss and little backwash water
- Highly automated
- Parts: electric brush and stainless-steel screen

OPERATING PARAMETERS

Capacity per unit 10–2 000 m³/h	Filtration grade 20–2400 micron	Design pressure 1.0 MPa / 10 bar
Minimum pressure 0.1 MPa / 1 bar	Screen material Stainless steel 304 / 316	Control Pressure difference, timer or manual
Backwash time 10–200 s	Working temperature up to 65 °C	Pressure loss ≤ 0.01 MPa / 0.1 bar


TECHNICAL DATA

Model	Inlet / outlet	Drain outlet	Motor (kW)	Flow (m³/h)	Weight (kg)
DLD-FZ-50	2" / DN50	1" / DN25	0.18	19	50
DLD-FZ-65	2½" / DN65	1" / DN25	0.18	30	70
DLD-FZ-80	3" / DN80	1¼" / DN40	0.18	50	87
DLD-FZ-100	4" / DN100	1¼" / DN40	0.18	80	106
DLD-FZ-150	6" / DN150	2" / DN50	0.18	150	197
DLD-FZ-200	8" / DN200	2" / DN50	0.25	320	248
DLD-FZ-250	10" / DN250	2" / DN50	0.25	490	360
DLD-FZ-300	12" / DN300	2" / DN50	0.37	710	486
DLD-FZ-350	14" / DN350	2" / DN50	0.37	970	653
DLD-FZ-400	16" / DN400	2" / DN50	0.37	1260	765
DLD-FZ-450	18" / DN450	2" / DN50	0.37	1600	814
DLD-FZ-500	20" / DN500	2½" / DN65	0.55	1970	920

DIMENSIONS

Model	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	W (mm)
DLD-FZ-50	1100	770	200	425	1270	453
DLD-FZ-65	1200	820	180	500	1270	453
DLD-FZ-80	1200	820	180	500	1270	473
DLD-FZ-100	1530	1160	180	600	1780	473
DLD-FZ-150	1700	1200	200	700	1870	561
DLD-FZ-200	2040	1380	200	720	2360	617
DLD-FZ-250	2120	1465	200	720	2360	670
DLD-FZ-300	2610	1820	200	950	3150	830
DLD-FZ-350	2695	1820	200	950	3150	830
DLD-FZ-400	2700	1820	200	950	3310	930
DLD-FZ-450	2700	1820	200	950	3360	1020
DLD-FZ-500	2700	1820	200	950	3500	1020

Model code: DLD-FZ – connection size – filtration grade – design pressure. Actual flow depends on water quality and filtration grade.

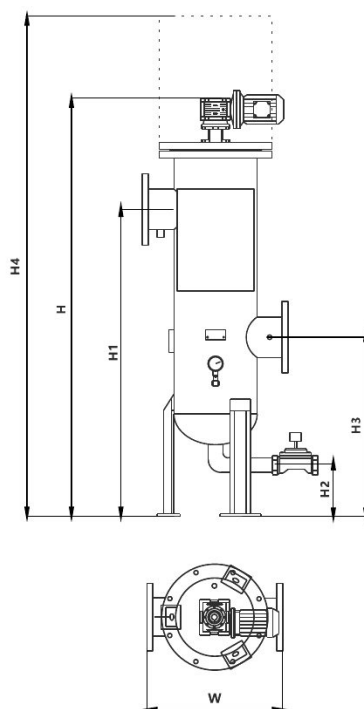DIMENSION DRAWINGS


DLLW centrifugal and double-screen filter

HYDROCYCLONE FILTER



Primary filtration for borehole, deep-well and sandy surface water. A hydrocyclone spins out heavy particles (over 99% of the sand) into a collection tank, then two screen filters polish the water. Manual, with no power needed.

- Simple construction at a low cost
- Easy to install and operate, with almost no maintenance
- Handles small and large flows while saving installation space


HYDROCYCLONE SAND SEPARATOR (DLXL)

Model	Inlet / outlet	Flow (m ³ /h)	Sand tank (L)	Sand removal (%)	D (mm)	L1 (mm)	L2 (mm)	L3 (mm)
DLXL-50	2" / DN50	20	20	> 99	219	780	985	485
DLXL-80	3" / DN80	50	36	> 99	273	950	1230	645
DLXL-100	4" / DN100	80	60	> 99	325	1025	1295	750
DLXL-150	6" / DN150	160	100	> 99	377	1220	1570	940

CENTRIFUGAL AND DOUBLE-SCREEN UNIT (DLLW)

Model	H (mm)	H1 (mm)	H2 (mm)	L (mm)	W (mm)
DLLW-80-3-2	1600	950	200	1100	800
DLLW-100-4-2	1600	980	200	1200	800
DLLW-150-4-3	2100	1250	230	1500	950
DLLW-200-4-4	2250	1330	230	1650	1350

Model code: DLLW – connection size – screen size – number of screens.

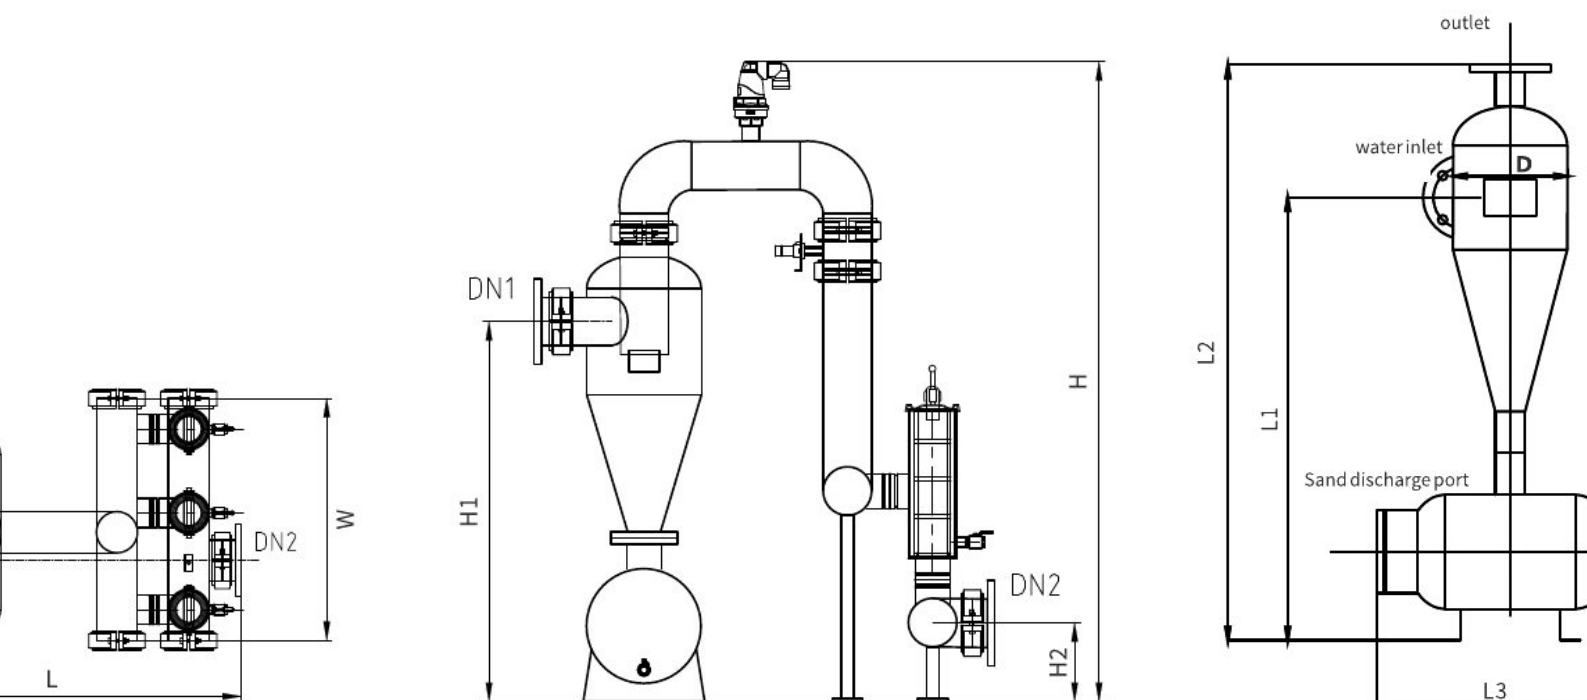DIMENSION DRAWINGS


DLS semi-automatic screen filter

SCREEN FILTER


A Y-pattern steel screen filter with a built-in cleaning brush. When the screen needs cleaning, open the drain valve and turn the handle a few times: the brush scrubs the stainless-steel screen and flushes the dirt out, with no need to open the filter or stop the water.

- Filter body, stainless-steel screen, brush with handle, drain valve and pressure gauges
- Clean without dismantling the screen
- Water keeps flowing while it is cleaned


OPERATING PARAMETERS

Filtration grade 20–4000 micron	Design pressure 1.0 MPa / 10 bar	Minimum pressure 0.1 MPa / 1 bar
Operation Semi-automatic (hand brush)	Screen material Stainless steel 304 / 316	Pressure loss ≤ 0.01 MPa / 0.1 bar

TECHNICAL DATA AND DIMENSIONS

Model	Inlet / outlet	L1 (mm)	L2 (mm)	L (mm)	D (mm)	H (mm)	Drain (DN)	Max flow (m³/h)
DLS-50	2" / DN50	500	673	330	159	520	25	19
DLS-80	3" / DN80	550	710	330	159	550	25	50
DLS-100	4" / DN100	670	810	430	159	670	32	80
DLS-150	6" / DN150	800	950	480	275	800	32	150
DLS-200	8" / DN200	900	1050	560	325	900	40	320
DLS-250	10" / DN250	1200	1350	744	377	1200	50	490
DLS-300	12" / DN300	1250	1630	780	426	1250	65	710
DLS-350	14" / DN350	1300	1980	820	478	1300	65	970

Pressure and materials can be customised on request.



DLFT fertiliser tank

FERTIGATION


A pressure tank that feeds liquid or dissolved fertiliser into the irrigation line, so nutrients go out with the water. Sizes from 50 to 500 litres.

- Steel pressure tank with a quick-opening filler lid
- Connects across the main line to dose fertiliser with the irrigation water

DIMENSIONS

Model	Capacity (L)	D (mm)	H (mm)	H1 (mm)
DLFT-50	50	377	785	400
DLFT-100	100	426	1050	600
DLFT-200	200	530	1350	900
DLFT-300	300	630	1450	1000
DLFT-500	500	800	1500	900

