



2026

PRODUCT CATALOG

Potato equipment

Planting, ridging, crop protection, harvesting, handling and storage — direct from the factory to your farm.

WHO WE ARE

Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code from an Andrivo farmer. It's shown to you before you order, not folded into a price you can't verify.

25%

fee with a referral code
(30% without)

0

distributors in between

SADC

we deliver across
Southern Africa

How every quote works

1**Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2**Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

3**Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

4**Parts & aftersales**

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

EXAMPLE: A POTATO PLANTER ORDER

Factory price	R36 000
Freight, duties & customs	R7 000
Transport: port to farm	R2 000
Andrivo fee (25% with a code)	R11 250
You pay	R56 250

CONTENTS

What's in this catalog

Specifications are typical for each model; your Andrivo quote confirms the exact configuration, size and price for your farm.

Potato planters	04
2CM-4 Potato Planter	04
2CMX-4/2 Potato Planter	04
2CMX-4K Potato Planter	05
2CMX-4W Mini Potato Planter	05
2CMX-2/4/ 2CMXQ-2 Potato Planter	06
5ZB-5B Seed Mixer (powder / pesticide)	06
5ZT Potato Seed Cutter	07
1TF-2500-36 Fertilizer Spreader	07
Ridge formers & cultivators	08
3ZMP-150/180/300/360 Potato Ridge Former	08
Boom sprayers	08
3ZMP-360M/300C/360C/360F Four-row Potato Cultivator	08
3WP-1500-21/24 Mounted Boom Sprayer	09

3WP-21/120 Front Mounted Sprayer	09
3WP-3000 Trailed Boom Sprayer	10
Potato haulm cutters	10
4JM-180/200/300/360B/360D Potato Haulm Cutter	10
Potato harvesters	11
4UL-170Z/4UL-170C Potato Combine Harvester	11
4UL-170F/4UL-170G Potato Combine Harvester	11
4UL-170D/170E Combine Harvester With Bagging Function	12
4UX-170A/180B/180E/200 Potato Harvester	12
4UX-160/160G/170G Potato Harvester	13
4UQ-160/170A Potato Harvester	13
4UZ-80/100 Sweet Potato Combine Harvester	14
Handling & storage equipment	14
5SY-8/12 Potato Trailer	14

5XF-100 Potato Receiving Hopper	15
5XF-40.2/40.3 Potato Receiving Hopper	15
5XF-60X/60X.1/60X.6 Potato Receiving Hopper	16
5XF-80 Potato Receiving Hopper	16
5SI-60 Belt Conveyor/5S2-60 Telescopic Conveyor	17
5SI-80 Belt Conveyor/5S2-80 Telescopic Conveyor	17
5XW-40 Handling Platform	18
5SG-40 Potato Loader	18
5XT-40 Potato Soil Removal and Cleaning Machine	19
5SD-40/60/80 Potato Piler	19
5SZ-40/60/60X Potato Scooper	20
Storage & ventilation	20
5SZC-60 Potato Loader	20
5SJ-3 Potato Bagging Machine	21

PLANTING

Potato planters

Precision planters that open the furrow, plant, ridge, fertilise and spray in a single pass. Vibration-tensioned seed cups keep miss and double rates low, and planting depth is controlled from the tractor for consistent emergence.

2CM-4
Potato Planter


Specification	Unit	2CM-4
Hitch type		Trailed
Dimensions (L × W × H)	mm	5670×3950×2170
Weight	kg	3695
Tractor power required	hp	140–200
Row spacing	mm	750–900(adjustable)
Rows		4
Working width	mm	3000–3600
Seed hopper capacity	L	4000
Fertiliser hopper capacity	L	1000
Pesticide tank capacity	L	700
Work rate	ha/h	≥1.33

2CMX-4/2
Potato Planter


Specification	Unit	2CMX-2	2CMX-4
Hitch type		Mounted	Mounted
Dimensions (L × W × H)	mm	1835×2220×1820	1810×3890×1820
Weight	kg	760	1400
Tractor power required	hp	60–125	125–180
Row spacing	mm	750–900(adjustable)	750–900(adjustable)
Rows		2	4
Working width	mm	1500–1800	3000–3600
Seed hopper capacity	L	1000	2000
Fertiliser hopper capacity	L	300 (optional)	700(optional)
Pesticide tank capacity	L	350 (optional)	350(optional)
Work rate	ha/h	≥0.53	≥1

2CMX-4K Potato Planter



Specification	Unit	2CMX-4K (tipping seed hopper)	2CMX-4K (tipping seed + fertiliser hoppers)
Hitch type		Mounted	Mounted
Dimensions (L x W x H)	mm	2366×3864×1915	2427×3864×1915
Weight	kg	1788	2354
Tractor power required	hp	125–200	≥180
Row spacing	mm	900	900
Rows		4	4
Working width	mm	3600	3600
Seed hopper capacity	L	2200	2200
Fertiliser hopper capacity	L	1000	1000
Pesticide tank capacity	L	350	350
Work rate	ha/h	≥1.33	≥1.33

2CMX-4W Mini Potato Planter



Specification	Unit	2CMX-4W
Hitch type		Mounted
Dimensions (L x W x H)	mm	2238×3778×1570
Weight	kg	2100
Tractor power required	hp	125–200
Rows		4
Work rate	ha/h	≥0.8
Planting depth accuracy	%	80 %
Row spacing	mm	900
Seed potato size	g	5–35
Seed metering		Belt-type or chain-type cup
Seed cups		4×40
Seed hopper capacity	L	600
Plant spacing	mm	6–20
Working speed	km/h	2–5
Spacing accuracy	%	≥85 %
Miss rate	%	≤8 %

2CMX-2/4/

2CMXQ-2 Potato Planter



Specification	Unit	2CMX-2/4	2CMXQ-2
Hitch type		Mounted	Mounted
Dimensions (L x W x H)	mm	4505×2435×1717	1573×1900×2106
Weight	kg	1860	573
Tractor power required	hp	82–125	50–80
Row spacing	mm	1000–1100	750–900
Rows		2	2
Working width	mm	2000–2200	1500–1800
Seed hopper capacity	L	750	500
Fertiliser hopper capacity	L	400	160
Pesticide tank capacity	L	350	70
Work rate	ha/h	≥0.65	≥0.6

5ZB-5B

Seed Mixer (powder / pesticide)



Specification	Unit	Mix power Mixer	Pesticide Mixer
Dimensions (L x W x H)	mm	2300×1955×1700	2300×1472×1375 1613×880×1105(pesticide)
Weight	kg	440	360+120(pesticide)
Work rate	kg/h	4500	4500
Pesticide tank capacity	L	—	350
Motor power	kW	1.7	1.5
Drum volume	L	1000	1000

5ZT

Potato Seed Cutter



Specification	Unit	5ZT
Hitch type		Trailed
Dimensions (L x W x H)	mm	9100×2285×2010
Weight	kg	4365
Seed lifting conveyor		Toothed rubber belt
Grading conveyor		Toothed cups
Alignment conveyor		Profiled cups
Cutter		Cutting disc
Disinfection		Timed pump spray
Screening conveyor		Toothed cups
Work rate	t/h	≥5

1TF-2500-36

Fertilizer Spreader



Specification	Unit	1TF-2500-36 mounted	1TF-2500-36 trailed
Hitch type		Mounted	Trailed
Dimensions (L x W x H)	mm	1400×2390×1260	2850×2390×2350
Weight	kg	410	920
Tractor power required	hp	125–180	100–125
Fertiliser hopper capacity	L	2500	2500
Payload	kg	2500	2500
Spreading width	m	36	36
Spreading mechanism		Rear twin-disc	Rear twin-disc twin-disc
Work rate	ha/h	≥3.33	≥4.67

CROP PROTECTION

Boom sprayers

Mounted and trailed boom sprayers with hydraulic fold, boom balancing, jet agitation and multi-stage filtration. One-button boom deployment and an independent rinse tank keep spraying even, fast and clean.

3ZMP-150/180/300/360
Potato Ridge Former


Specification	Unit	3ZMP-150	3ZMP-180	3ZMP-300	3ZMP-360
Hitch type		Mounted	Mounted	Mounted	Mounted
Dimensions (L × W × H)	mm	2370×1920×1530	2370×1920×1530	3270×3320×1650	3270×3920×1650
Weight	kg	613	630	885	930
Tractor power required	hp	60–120	60–120	125–180	125–180
Row spacing	mm	750	900	750	900
Rows		2	2	4	4
Working width	mm	1500	1800	3000	3600
Working speed	km/h	4–6	4–6	4–6	4–6
Work rate	ha/h	≥0.46	≥0.53	≥0.86	≥1.06
Fertiliser hopper capacity	L	315(optional)	315(optional)	630(optional)	630(optional)

3ZMP-360M/300C/360C/360F
Four-row Potato Cultivator


Specification	Unit	3ZMP-360M	3ZMP-300C	3ZMP-360C	3ZMP-360F
Hitch type		Mounted	Mounted	Mounted	Mounted
Dimensions (L × W × H)	mm	2590×4200×1530	2270×3290×1460	2250×3890×1463	2534×4038×1975
Weight	kg	1350	2030	2299	2213
Tractor power required	hp	140–220	≥200	140–220	140–220
Rows		4	4	4	4
Cutter shaft		Through shaft	Through shaft	Through shaft	Half shaft
PTO input speed	rpm	—	1000	1000	540
Blades		30	114/74	132/84	6+12+12+12+6
Work rate	ha/h	≥1	≤1	≤1	≤1
Fertiliser hopper capacity	L	—	—	800(optional)	1000

3WP-1500-21/24
Mounted Boom Sprayer


Specification	Unit	3WP-1500-21	3WP-1500-24
Hitch type		Mounted	Mounted
Dimensions, folded (L x W x H)	mm	2130×2400×3000	2130×2400×3000
Weight	kg	1200	1260
Tractor power required	hp	120–180	120–180
Working pressure	MPa	0.2–0.5	0.2–0.5
Boom width	mm	20500	23500
Nozzles		110° fan nozzles	110° fan nozzles
Tank capacity	L	1500	1500
Agitation		Jet agitation	Jet agitation
Tank rinse system	L	Fixed tank cleaning spray	Fixed tank cleaning spray
Work rate	ha/h	≥3.33	≥4

3WP-21/120
Front Mounted Sprayer


Specification	Unit	3WP-21/120
Dimensions (L x W x H)	mm	1422×1820×1326
Weight	kg	280
Tank capacity	L	1150
Front tank	L	700
Rear tank	L	450
Power supply	V	12 V DC

HAULM TOPPING

Potato haulm cutters

Haulm cutters top and chop the foliage before harvest and return it to the field. Three-point mounted, with cutters that move to suit different row spacings.

3WP-3000

Trailed Boom Sprayer



Specification	Unit	3WP-3000
Hitch type		Trailed
Dimensions, folded (L x W x H)	mm	6800×3000×3600
Weight	kg	2700
Tractor power required	hp	130–180
Working pressure	MPa	0.2–0.5
Tank capacity	L	3 000 main tank + 300 rinse tank
Agitation		Jet agitation
Tank rinse system		Fixed tank cleaning spray
Work rate	ha/h	≥5.33

4JM-180/200/300/360B/360D

Potato Haulm Cutter



Specification	Unit	4JM-180	4JM-200	4JM-300	4JM-360B	4JM-360D
Hitch type		Mounted	Mounted	Mounted	Mounted	Mounted
Dimensions (L x W x H)	mm	2390×2060 ×1200	2334×2552 ×1262	2390×3430 ×1200	2390×4030 ×1200	2390×4030 ×1200
Weight	kg	800	865	1060	1180	1188
Tractor power required	hp	60–100	80–125	100–180	100–180	100–180
Row spacing	mm	900	1000	750	900	900
Rows		2	2	4	4	4
Working width	mm	1800	2000	3000	3600	3600
Stubble height	mm	≤100	≤100	≤100	≤100	≤100
Work rate	ha/h	≥0.53	≥0.6	≥0.83	≥1	≥1
Working speed	km/h	3–7	3–7	3–7	3–7	3–7

HARVESTING

Potato harvesters

Trailed, mounted and self-propelled harvesters for every farm size, with combined digging shares, sieving webs and haulm separation for a low bruising rate and clean, well-exposed tubers.

4UL-170Z/4UL-170C
Potato Combine Harvester


Specification	Unit	4UL-170Z	4UL-170C
Hitch type		Trailed	Trailed
Dimensions (L × W × H)	mm	9700×3200×3400	6670×2680×2890
Weight	kg	5960	3270
Tractor power required	hp	140–210	120–180
Row spacing	mm	900	900
Rows		2+2	2
Working width	mm	1700	1700
Digging depth	mm	150–300	150–300
Digging share		Fixed combined shovel	Fixed combined shovel
Web width	mm	1660	1660
Max. loading height	mm	4000	2940
Work rate	ha/h	≥0.53	≥0.4

4UL-170F/4UL-170G
Potato Combine Harvester


Specification	Unit	4UL-170F	4UL-170G
Hitch type		Trailed	Trailed
Dimensions (L × W × H)	mm	10500×3300×3900	11650×3100×3950
Weight	kg	12180	12650
Tractor power required	hp	120–200	140–200
Row spacing	mm	750–900	750–900
Rows		2	2
PTO speed	rpm	540	540
Hopper capacity	kg	6000	6000
Discharge height	mm	4500	4500
Sorting platform crew		2+2	2+2
Cleaning system		Haulm pulling rollers + spiral roller cleaner	+ Haulm separation web + spiked roller sieve + finger-bar stone separator

4UL-170D/170E

Combine Harvester With Bagging Function



Specification	Unit	4UL-170D	4UL-170E
Hitch type		Trailed	Trailed
Dimensions (L × W × H)	mm	9210×3400×3000	9627×3147×3031
Weight	kg	6500	5500
Tractor power required	hp	140–210	140–210
Working width	mm	1700	1800
Depth control		Depth limiting wheel	Depth limiting wheel
Digging depth	mm	150–300	150–300
Haulm removal	mm	Counter-rotating haulm rollers	Haulm separation web
Digging share		Fixed combined shovel	Fixed combined shovel
Cleaning & separation	/ Conveying	Conveying web + star-wheel separator	Vibrating screen
Conveyor		Grid chain	Grid chain
Work rate	ha/h	≥0.4	≥0.33

4UX-170A/180B/180E/200

Potato Harvester



Specification	Unit	4UX-170A	4UX-180B	4UX-180E	4UX-200
Hitch type		Mounted	Mounted	Mounted	Mounted
Dimensions (L × W × H)	mm	3875×2110×1255	3880×2215×1215	4350×2175×1300	3880×2568×1260
Weight	kg	1580	1630	1800	1867
Tractor power required	hp	120–160	120–160	≥118	140–200
Row spacing	mm	850–900	900–1000	900–1000	≤1100
Rows		2	2	2	2
Working width	mm	1700	1800	1800	2000
Digging depth	mm	150–300	150–300	150–300	150–300
Lifting rate (potatoes exposed)		≥96%	≥96%	≥96%	≥96%
Potato damage rate		≤1.5%	≤1.5%	≤1.5%	≤1.5%
Skin damage rate		≤2%	≤2%	≤2%	≤2%
Work rate	ha/h	≥0.46	≥0.53	≥0.53	0.6

4UX-160/160G/170G

Potato Harvester

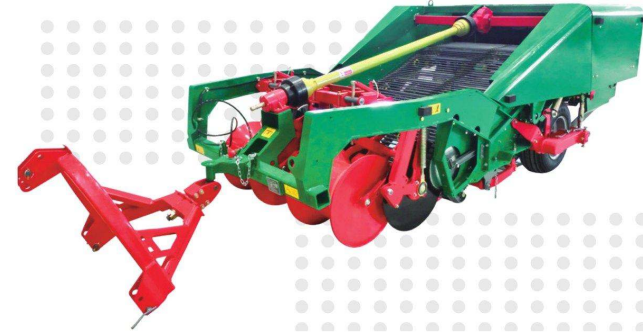


▲ 4UX-170G

Specification	Unit	4UX-160	4UX-160G	4UX-170G
Hitch type		Mounted	Mounted	Mounted
Dimensions (L x W x H)	mm	3880×1982×1260	4450×2800×1400	4450×2900×1400
Weight	kg	1415	1570	1640
Tractor power required	hp	120–160	≥92	≥92
Row spacing	mm	750–800	750–800	750–900
Rows		2	2 (22/24 web)	2 (22/24 web)
Working width	mm	1600	1600	1700
Digging depth	mm	150–300	150–300	150–300
Lifting rate (potatoes exposed)		≥96%	≥96%	≥96%
Potato damage rate		≤1.5%	≤1.5%	≤1.5%
Skin damage rate		≤2%	≤2%	≤2%
Work rate	ha/h	≥0.33	≥0.33	≥0.46

4UQ-160/170A

Potato Harvester



Specification	Unit	4UQ-160	4UQ-170A
Hitch type		Trailed	Trailed
Dimensions (L x W x H)	mm	5100×1942×1467	5595×2610×1625
Weight	kg	1483	2447
Tractor power required	hp	≥85	125–160
Row spacing	mm	≤800	800–900
Rows		2	2
Working width	mm	1400	1700
Digging depth	mm	150–300	150–300
Lifting rate (potatoes exposed)		≥96%	≥96%
Potato damage rate		≤1.5%	≤1.5%
Skin damage rate		≤2%	≤2%
Work rate	ha/h	≥0.4	≥0.4

HANDLING

Handling & storage equipment

Trailers, receiving hoppers, cleaners, conveyors, pilers and bagging lines for everything that happens after harvest — soil removal, sorting, transport into store and out again.

4UZ-80/100

Sweet Potato Combine Harvester



Specification	Unit	4UZ-80	4UZ-100
Hitch type		Self-propelled	Self-propelled
Dimensions (L x W x H)	mm	4150×2050×2200	4200×2250×2200
Weight	kg	1500	1550
Working width	cm	80	100
Engine power	kW	25.8	25.8
Engine speed	rpm	2400	2400
Track gauge	mm	780	780
Track width	mm	230	230
Working speed	km/h	0.5–1.0	0.5–1.0
Work rate	ha/h	0.04–0.053	0.047–0.067

5SY-8/12

Potato Trailer



Specification	Unit	5SY-8	5SY-12
Hitch type		Trailed	Trailed
Dimensions (L x W x H)	mm	7440×2240×2270	9064×2671×2365
Weight	kg	2830	4090
Tractor power required	hp	90–160	90–160
Payload	t	8	12
Belt speed	m/s	0–1.6(adjustable)	0–1.6(adjustable)
Road speed	km/h	≤35	≤35
Work rate	t/h	35	50
Body volume	L	7000–10000	14900

5XF-100
Potato Receiving Hopper


Specification	Unit	5XF-100
Hitch type		Trailed
Dimensions (L x W x H)	mm	15000×3200×3100
Weight	kg	7780
Capacity	t/h	100
Belt drive		Hydraulic motor
Drive		Electric motor + gear pump
Motor power	kW	18
Hydraulic tank	L	90
Power supply		380 V AC, 50 Hz
Controls		Touch screen + buttons
Receiving belt width	mm	720
/ Lifting/pitch of the manual picking up web	mm	45
/ Lifting/width of the manual picking up web	mm	1550
Cleaning rollers		Polyurethane spiral / spring rollers
Cleaning roller gap	mm	0–45
Manual picking positions		6–8
Intake arm length	mm	4400

5XF-40.2/40.3
Potato Receiving Hopper


Specification	Unit	5XF-40.2	5XF-40.3
Dimensions (L x W x H)	mm	6892×3036×2090	7500×3036×2683
Weight	kg	3392	4095
Sorting table width	mm	1600	1600
Capacity	t/h	40	40
Conveyor type		Toothed rubber belt + PVC belt	Toothed rubber belt + PVC belt
Drive		Hydraulic power pack	Hydraulic power pack + drum motor
Total power	kW	7.65	13.35
Power supply		380 V AC, 50 Hz	380 V AC, 50 Hz
Controls		Lever + buttons	Lever + buttons
Hopper volume	m³	8 m³ (≈5.2 t potatoes)	8 m³ (≈5.2 t potatoes)
Cleaning roller type		Polyurethane rollers	Polyurethane rollers
Cleaning rollers		7	13 (7 front + 6 rear)
Sorting stages		Two-stage sorting	Three-stage sorting

5XF-60X/60X.1/60X.6
Potato Receiving Hopper


Specification	Unit	5XF-60X	5XF-60X.1	5XF-60X.6
Dimensions (L x W x H)	mm	6795×3400×3300	7391×3400×3300	12149×3400×3426
Weight	kg	4790	5600	6470
Sorting table width	mm	2000	2000	2000
Capacity	t/h	60	60	60
Conveyor type		PVC rod web + PVC belt	PVC rod web + PVC belt	PVC rod web + PVC belt
Drive		Hydraulic power pack + drum motor	Hydraulic power pack + drum motor	Hydraulic power pack + drum motor
Total power	kW	17.2	18.3	18.4
Power supply		380 V AC, 50 Hz	380 V AC, 50 Hz	380 V AC, 50 Hz
Controls		Lever + buttons	Lever + buttons	Lever + buttons
Hopper volume	m³	12.6 m³ (≈8.2 t potatoes)	12.6 m³ (≈8.2 t potatoes)	12.6
Cleaning roller type		Polyurethane rollers	Polyurethane rollers	Polyurethane rollers
Cleaning rollers		7	13	7
Sorting stages		Two-stage sorting	Three-stage sorting	Two-stage sorting

5XF-80
Potato Receiving Hopper

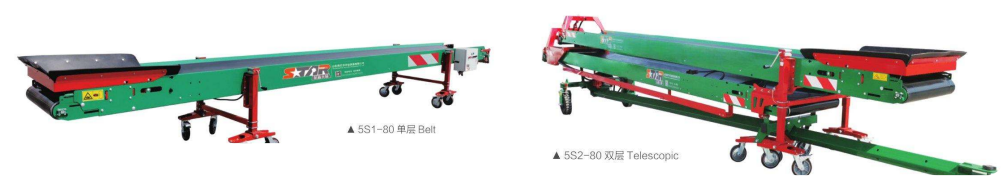

Specification	Unit	5XF-80
Dimensions (L x W x H)	mm	8650×3400×3300
Weight	kg	6100
Sorting table width	mm	2400
Capacity	t/h	80
Conveyor type		PVC rod web + PVC belt
Drive		Hydraulic power pack + drum motor
Total power	kW	17.2
Power supply		380 V AC, 50 Hz
Controls		Lever + buttons
Hopper volume	m³	18.4 m³ (≈11.9 t potatoes)
Cleaning roller type		Polyurethane rollers
Cleaning rollers		9
Sorting stages		Two-stage sorting

5S1-60 Belt Conveyor/5S2-60 Telescopic Conveyor



Specification	Unit	5S1-60-4	5S1-60-6	5S1-60-8	5S2-60-8
Dimensions (L × W × H)	mm	4200×1180×1100	6200×1180×1100	8060×1180×1100	9900×1360×2000
Weight	kg	475	630	703	1680
Max. incline		3	3	4	3
Capacity	t/h	60	60	60	60
Potato damage rate		≤1	≤1	≤1	≤1
Motor power	kW	1.5	2.2	2.2	2.2
Belt speed	m/s	0.55/0.85/1.1	0.55/0.85/1.1	0.55/0.85/1.1	0.55/0.85/1.1
Motors		1	1	1	2
Power supply		380 V AC	380 V AC	380 V AC	380 V AC
Conveyor belt		Multi-ply rubber belt	Multi-ply rubber belt	Multi-ply rubber belt	Multi-ply rubber belt
Belt width	mm	685	685	685	685
Height adjustment		Support legs	Support legs	Support legs	Support legs / lifting jack

5S1-80 Belt Conveyor/5S2-80 Telescopic Conveyor



Specification	Unit	5S1-80-6.5	5S1-80-8.5	5S1-80-9.0	5S2-80-8.5
Dimensions (L × W × H)	mm	7000×1190×1060	8750×1190×1060	9500×1190×1060	10031×1558×2055
Weight	kg	550	660	700	1800
Max. incline		4.7	4.7	4.1	7.1
Capacity	t/h	80	80	80	80
Potato damage rate		≤1	≤1	≤1	≤1
Motor power	kW	2.2	2.2	2.2	2.2
Belt speed	m/s	0.55/0.85/1.06	0.55/0.85/1.06	0.55/0.85/1.06	0.55/0.85/1.06
Motors		1	1	1	2
Power supply		380 V AC	380 V AC	380 V AC	380 V AC
Conveyor belt		Multi-ply rubber belt, 13495 mm	Multi-ply rubber belt, 17020 mm	Multi-ply rubber belt, 18495 mm	Multi-ply rubber belt, 17020×2 mm
Belt width	mm	780	780	780	780
Height adjustment		Support legs	Support legs	Support legs	Support legs / lifting jack
Telescopic extension	mm	—	—	—	6229
Total power	kW	2.2	2.2	2.2	5.15

5XW-40

Handling Platform



Specification	Unit	5XW-40
Dimensions (L × W × H)	mm	7700×2546×1345
Weight	kg	1912
Capacity	t/h	60
Max. lift	mm	360
Potato damage rate		≤1
Upper conveyor		Chain web
Web pitch	mm	45
Web width	mm	1200
Conveyor belt		Flat belt
Soil belt width	mm	600
Power supply		380 V AC, 50 Hz
Total power	kW	2.25

5SG-40

Potato Loader



Specification	Unit	5SG-40
Dimensions (L × W × H)	mm	13000×2300×3000
Weight	kg	1770
Capacity	t/h	60
Max. discharge height	mm	6650
Potato damage rate		≤1
Hydraulic pump power	kW	0.75
Telescopic hopper motor	kW	0.55
Main motor power	kW	3.5
Power supply		380 V AC
Belt speed	m/min	50

5XT-40
Potato Soil Removal and Cleaning Machine


Specification	Unit	5XT-40
Dimensions (L × W × H)	mm	4280×2400×1800
Weight	kg	1004
Capacity	t/h	40
Belt drive		Geared motor
Drive		Motor
Total power	kW	4.5
Power supply		380 V AC, 50 Hz
Conveying width	mm	800
Soil web pitch	mm	45
Cleaning roller type		Spiral spring rollers
Cleaning rollers		5
Min. intake height	mm	1020
Soil discharge height	mm	1600
Soil belt width	mm	480

5SD-40/60/80
Potato Piler


Specification	Unit	5SD-40	5SD-60	5SD-80
Dimensions (L × W × H)	mm	9492×2440×1500	18600×2780×2990	10160×2982×2163 (retracted)
Weight	kg	3705	7280	5680
Capacity	t/h	60	60	80
Telescopic extension	mm	4950	5500	5800
Max. extended length	mm	14440	24100	15240
Max. lift height	mm	7300	7000	7300
Potato damage rate		≤1	≤1	≤1
Max. slewing radius	mm	12720	16100	14550
Min. slewing radius	mm	7712	10600	8750
Belt speed	m/min	50 max.	60.6 max.	78 max.
Belt width	mm	650	790	800
Total power	kW	8.4	18.65	11
Power supply		380 V AC, 50 Hz	380 V AC, 50 Hz	380 V AC, 50 Hz

STORAGE

Storage & ventilation

Purpose-designed potato stores with ducted ventilation, climate control, humidification and impact-recording sensors, plus the loaders and bagging machines that feed them.

5SZ-40/60/60X
Potato Scooper


Specification	Unit	5SZ-40	5SZ-60	5SZ-60X
Dimensions (L × W × H)	mm	8000×1250×1450	8845×2180×1550	8000×1250×1450
Extended length	mm	10800	11845	11000
Max. slewing radius	mm	10000	11300	10500
Weight	kg	1878	1770	1420
Discharge height	mm	460–1366	1000–1300	1000–1300
Slewing angle		130	130	130
Capacity	t/h	40	60	40
Potato damage rate	%	≤1 %	≤1 %	≤1 %
Total power	kW	6	8.1	7.4
Power supply		380 V AC, 50 Hz	380 V AC, 50 Hz	380 V AC, 50 Hz

5SZC-60
Potato Loader


Specification	Unit	5SZC-60
Dimensions (L × W × H)	mm	5080×2450×3300
Weight	kg	3000
Capacity	t/h	60
/ Max inclination angle of the lower arm		28.5
/ Max inclination angle of the upper arm		131
Max. belt speed	m/s	1.2
Belt width	mm	1038
Side guard width	mm	850
Controls		Wireless remote control
Power supply		380 V AC, 50 Hz
Total power	kW	11

5SJ-3

Potato Bagging Machine



Specification	Unit	5SJ-3
Dimensions (L × W × H)	mm	2720×1000×1950
Weight	kg	230
Capacity	t/h	3
Motor power	kW	0.37
Potato damage rate		≤1