

Embedded Systems with ARM Cortex-M Microcontrollers in Assembly Language and C

Chapter 13 Fixed-point Numbers


Z. Gu

Fall 2025


Acknowledgement: Lecture slides based on Embedded Systems with ARM Cortex-M Microcontrollers in Assembly Language and C, University of Maine <https://web.eece.maine.edu/~zhu/book/>

Fixed-point Format: Q Notation


UQm.n for unsigned fixed-point

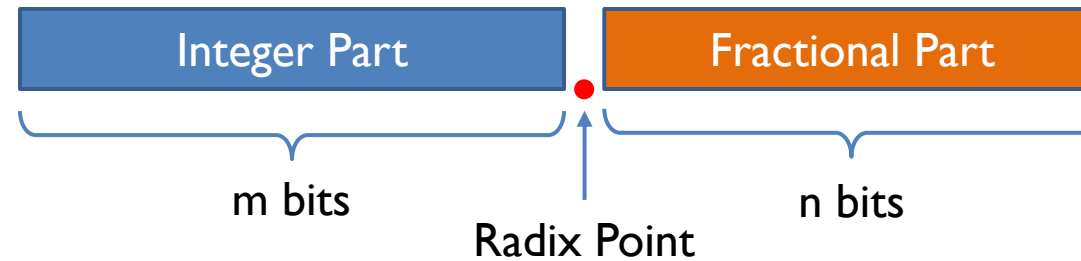


Qm.n for signed fixed-point

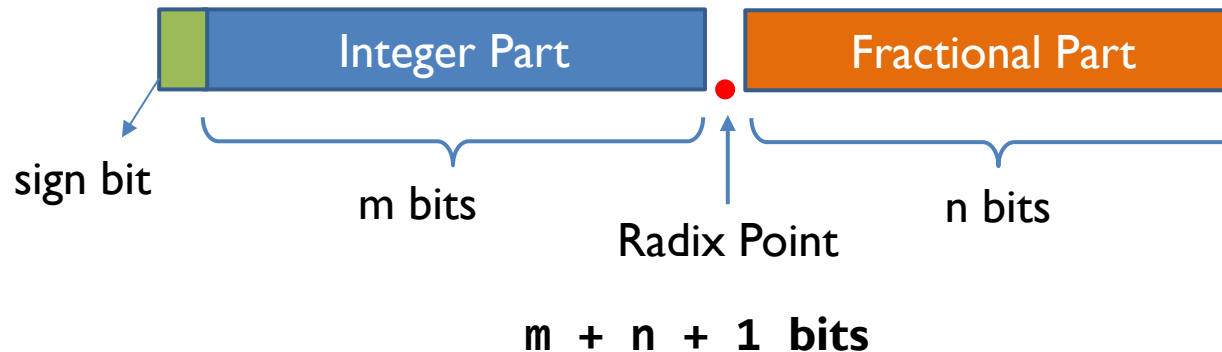

Q Notation: **UQm.n**

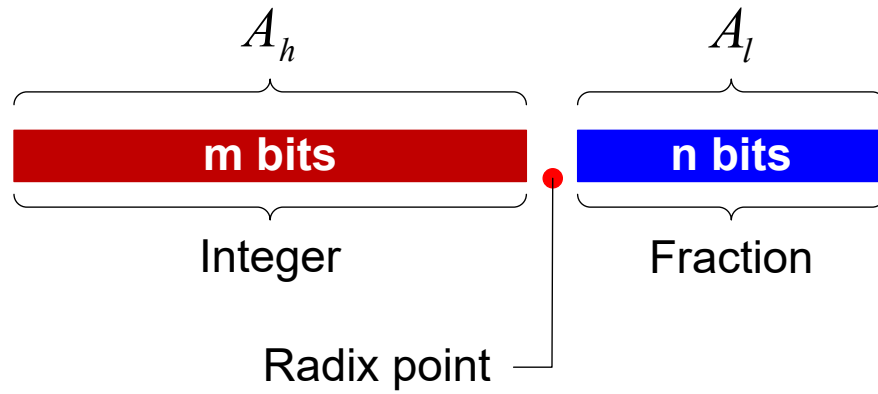


$$f = A_h + A_l \times 2^{-n}$$

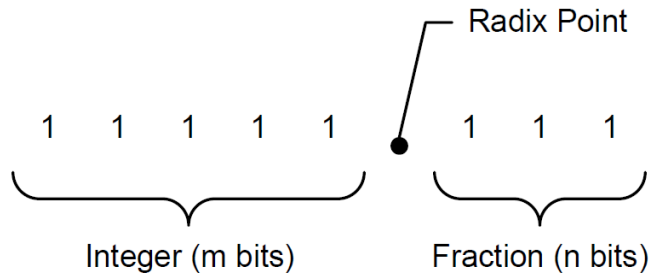

$$\begin{aligned} 10101.101_2 &= A_h + A_l \times 2^{-3} \\ &= 21 + 5 \times 2^{-3} \\ &= 21.625 \end{aligned}$$

Converting Fixed-point UQ5.3 to Float

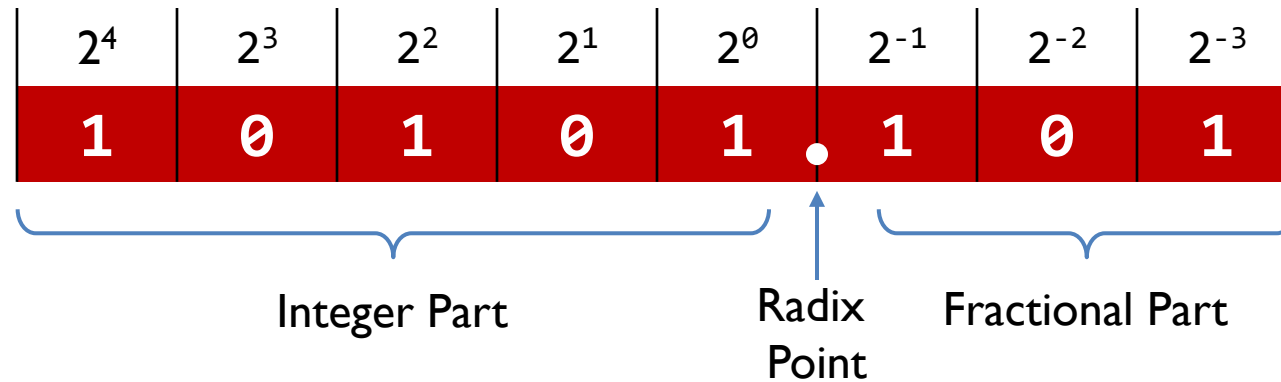


$$10101.101_2$$

$$= 1 \times 2^4 + 0 \times 2^3 + 1 \times 2^2 + 0 \times 2^1 + 1 \times 2^0 + 1 \times 2^{-1} + 0 \times 2^{-2} + 1 \times 2^{-3}$$

$$= 21.625$$

$$10101.101_2 = \frac{10101101_2}{2^3} = \frac{173}{8} = 21.625$$

Converting Fixed-point Q4.3 to Float

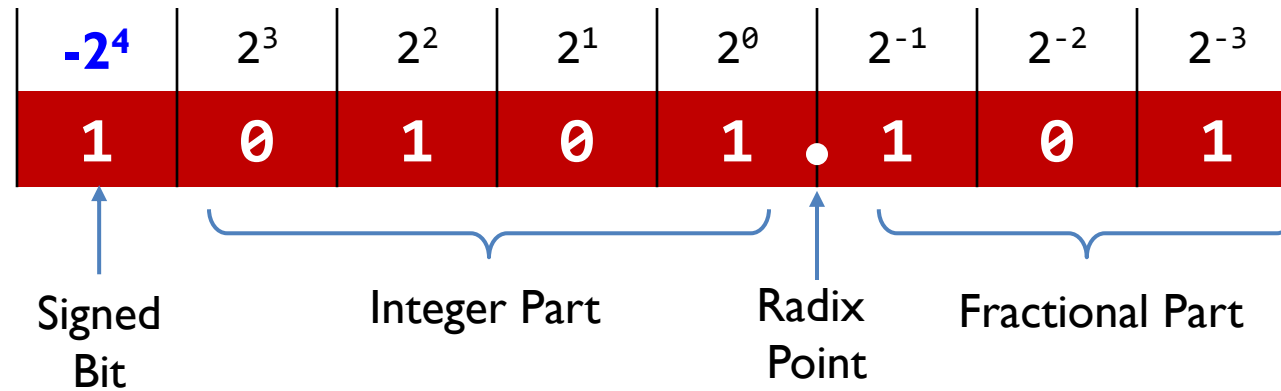

$$10101.101_2$$


$$= 1 \times (-2^4) + 0 \times 2^3 + 1 \times 2^2 + 0 \times 2^1 + 1 \times 2^0 + 1 \times 2^{-1} + 0 \times 2^{-2} + 1 \times 2^{-3}$$

$$= -10.375$$

$$10101.101_2 = \frac{10101101_2}{2^3} = \frac{-83}{8} = -10.375$$

U5.3 vs. Q4.3

Unsigned Fixed-point Representation **Um.n**

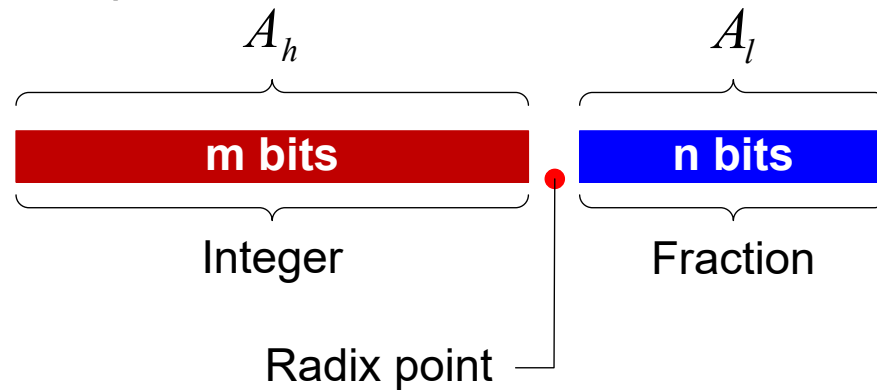

$$f = A_h + A_l \times 2^{-n}$$

$$\begin{aligned} 10101.101_2 &= A_h + A_l \times 2^{-3} \\ &= 21 + 5 \times 2^{-3} \\ &= 21.625 \end{aligned}$$

Signed Fixed-point Representation **Qm.n**



$$f = A_h + A_l \times 2^{-n}$$

$$\begin{aligned} 10101.101_2 &= A_h + A_l \times 2^{-3} \\ &= -11 + 5 \times 2^{-3} \\ &= -10.375 \end{aligned}$$

Two Ways of Calculating Two's Complement (integer)

- ▶ Convert 10101 into decimal with Two's Complement notation'
- ▶ Method 1, invert bits and add 1:
 - ▶ $01010 + 1 = 01011 = 11$ in decimal, hence $10101 = -11$ in decimal
- ▶ Method 2, calculate directly:
 - ▶ $1 \times (-2^4) + 0 \times 2^3 + 1 \times 2^2 + 0 \times 2^1 + 1 \times 2^0 = -16 + 4 + 1 = -11$ in decimal

Convert Float to Fixed-point UQ4.12

UQm.n for unsigned fixed-point

$$\text{Representation} = \text{round}(\text{float} \times 2^n)$$

Example: Convert $f = 3.141593$ to UQ4.12

- ▶ Calculate $f \times 2^{12} = 12867.964928$
- ▶ Round the result to nearest integer, $\text{round}(12867.964928) = 12868$
- ▶ Convert the integer to binary: $12868 = 0011_0010_0100_0100_2$
- ▶ Organize into UQ4.12: $0011.0010_0100_0100_2$
- ▶ Final result in Hex: **0x3244**
- ▶ Error: $\frac{12868}{2^{12}} - f = 8.5625 \times 10^{-6}$

Convert Float to Fixed-point Q3.12


Qm.n for signed fixed-point

$$\text{Representation} = \text{round}(\text{float} \times 2^n)$$

Example: Convert $f = -3.141593$ to Q3.12

- ▶ Calculate $f \times 2^{12} = -12867.964928$
- ▶ Round the result to an integer, $\text{round}(-12867.964928) = -12868$
- ▶ Find the 16-bit two's complement: **1100_1101_1011_1100**₂
 - ▶ $12868 = 0x3244 = 0011\ 0010\ 0100\ 0100_2$
 - ▶ Invert bits and add 1 $\rightarrow -12868 = 1100\ 1101\ 1011\ 1100_2$
- ▶ Organize into Q3.12: **1100.1101_1011_1100**₂
- ▶ Final result in Hex: **0xCDBC**
- ▶ Error: $-\frac{12868}{2^{12}} - f = 8.5625 \times 10^{-6}$

Why use fixed-point?

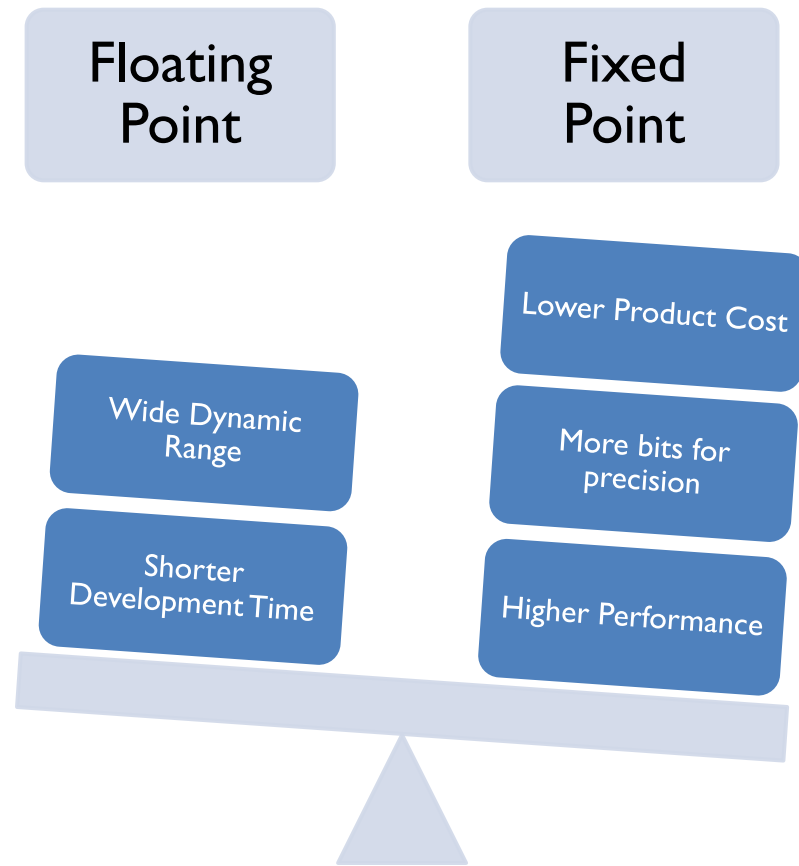

Embedded Systems with ARM Cortex-M Microcontrollers in Assembly Language and C


Chapter 13 Floating-point Numbers

Z. Gu

Fall 2025

Acknowledgement: Lecture slides based on Embedded Systems with ARM Cortex-M Microcontrollers in Assembly Language and C, University of Maine <https://web.eece.maine.edu/~zhu/book/>

Normalization

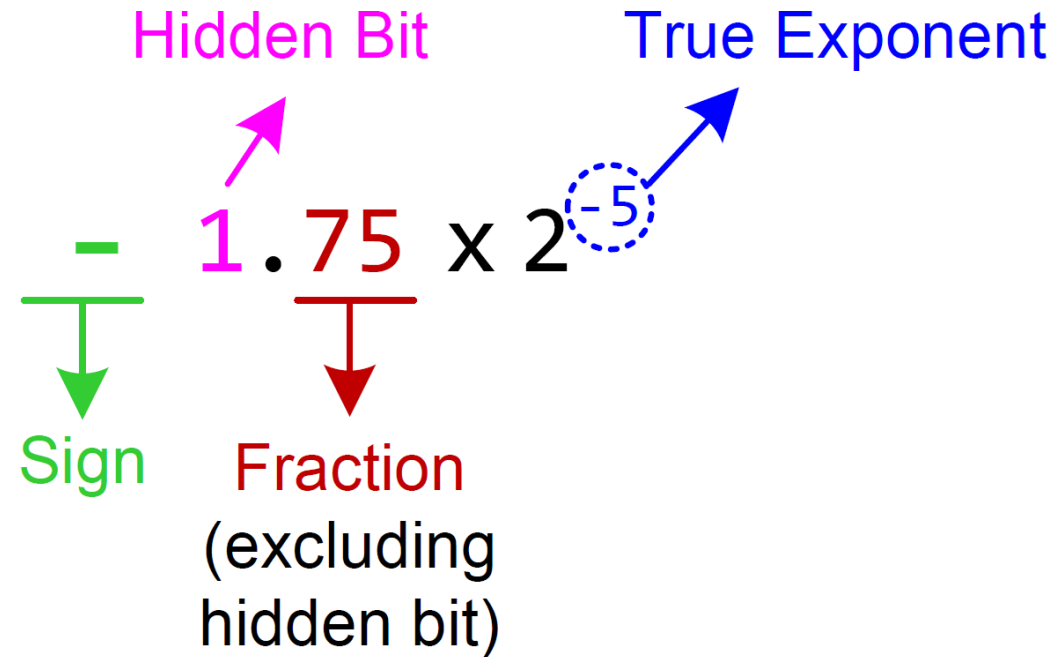


We can convert 10.746×2^6 to normalized format as follows:

$$10.746 \times 2^6 = \frac{10.746}{8} \times 8 \times 2^6 = 1.34325 \times 2^9$$

IEEE Standard 754

Single Precision (32 bits)

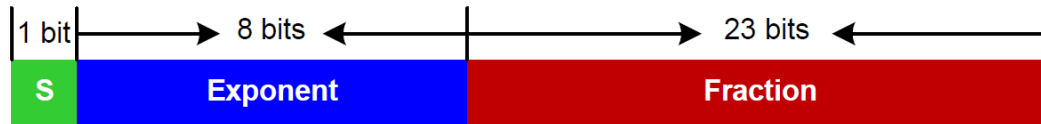

Double Precision (64 bits)



IEEE 754 value:


$$(-1)^S \times (1 + \textit{Fraction}) \times 2^{\textit{Exponent} - \textit{Bias}}$$

where Bias = 127 for single precision

Bias = 1023 for double precision

Fraction is also called significand or mantissa

Decoding **0xC1FF0000** into a floating-point number

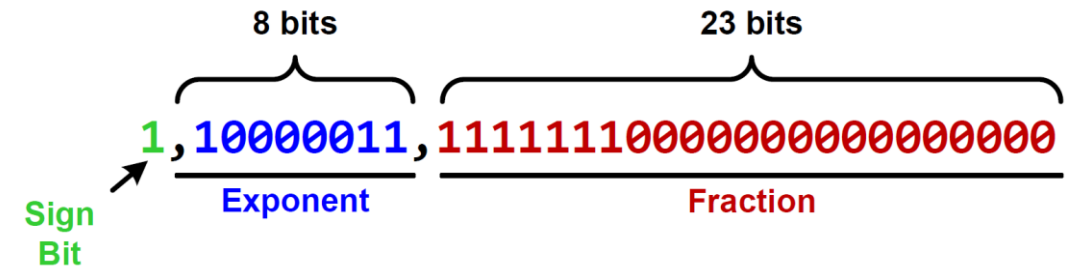

- ▶ Binary **11000001111111110000000000000000**
- ▶ Sign = 1
- ▶ Exponent = $10000011_2 = 131$
- ▶ Fraction = $0.1111111_2 = 1 \times 2^{-1} + 1 \times 2^{-2} + 1 \times 2^{-3} + 1 \times 2^{-4} + 1 \times 2^{-5} + 1 \times 2^{-6} + 1 \times 2^{-7} = 0.9921875$
- ▶ $f = (-1)^S \times (1 + \text{Fraction}) \times 2^{\text{Exponent}-127}$
 $= (-1)^1 \times (1 + 0.9921875) \times 2^{131-127}$
 $= -1 \times 1.9921875 \times 2^4$
 $= -31.875$

Decoding 0x40920000 into a floating-point number

- ▶ Binary 01000000100100000000000000000000
- ▶ Sign = 0
- ▶ Exponent = $10000001_2 = 129$
- ▶ Fraction = $0.001_2 = 0 \times 2^{-1} + 0 \times 2^{-2} + 1 \times 2^{-3} = 0.125$
- ▶ $f = (-1)^S \times (1 + \text{Fraction}) \times 2^{\text{Exponent} - 127}$
$$= (-1)^0 \times (1 + 0.125) \times 2^{129 - 127}$$
$$= -1 \times 1.125 \times 2^2$$
$$= 4.5$$
- ▶ How Floating Point Numbers Work (in 7 minutes!)
 - ▶ https://www.youtube.com/watch?v=W_Knvo9NuJY

Decoding 0x3F800000 into a floating-point number

- ▶ Binary 00111111000000000000000000000000
- ▶ Sign = 0
- ▶ Exponent = $01111111_2 = 127$
- ▶ Fraction = 0
- ▶
$$\begin{aligned} f &= (-1)^S \times (1 + \text{Fraction}) \times 2^{\text{Exponent} - 127} \\ &= (-1)^0 \times (1 + 0) \times 2^{127 - 127} \\ &= -1 \times 1 \times 2^0 \\ &= 1.0 \end{aligned}$$
- ▶ How Floating Point Numbers Work (in 7 minutes!)
 - ▶ https://www.youtube.com/watch?v=W_Knvo9NuJY

Decoding 0x41680000 into a floating-point number


- ▶ Binary 01000001011010000000000000000000
- ▶ Sign = 0
- ▶ Exponent = $10000010_2 = 130$
- ▶ Fraction = $0.1101_2 = 1 \times 2^{-1} + 1 \times 2^{-2} + 1 \times 2^{-4} = 0.8125$
- ▶ $f = (-1)^S \times (1 + \text{Fraction}) \times 2^{\text{Exponent}-127}$
$$= (-1)^0 \times (1 + 0.8125) \times 2^{130-127}$$
$$= 1 \times 1.8125 \times 2^3$$
$$= 14.5$$

Encoding 14.5 into IEEE Std 754 Single-Precision

- ▶ Normalization:
- ▶ $2^3 < 14.5 < 2^4, \frac{14.5}{2^3} = 1.8125$
- ▶ Hence $14.5 = 1.8125 \times 2^3 = (1 + 0.8125) \times 2^3$
- ▶ Conversion:
- ▶ $Sign = 0$
- ▶ $Exponent = 3 + 127 = 130 = 1000010_2$
- ▶ $Fraction = 0.1101_2$ (multiply by 2 repeatedly)
- ▶ Assume $Fraction = b1 \times 2^{-1} + b2 \times 2^{-2} + b3 \times 2^{-3} + b4 \times 2^{-4} + \dots$
 - ▶ $0.8125 \times 2 = 1.625 = 1 + 0.625 \Rightarrow b1 = 1$
 - ▶ $0.625 \times 2 = 1.25 = 1 + 0.25 \Rightarrow b2 = 1$
 - ▶ $0.25 \times 2 = 0.5 = 0 + 0.5 \Rightarrow b3 = 0$
 - ▶ $0.5 \times 2 = 1 \Rightarrow b4 = 1$
- ▶ $14.5 = 01000001011010000000000000000000$ in binary or 0x41680000 in hex

Special Values

- ▶ Exponents 00000000 and 11111111 are reserved.

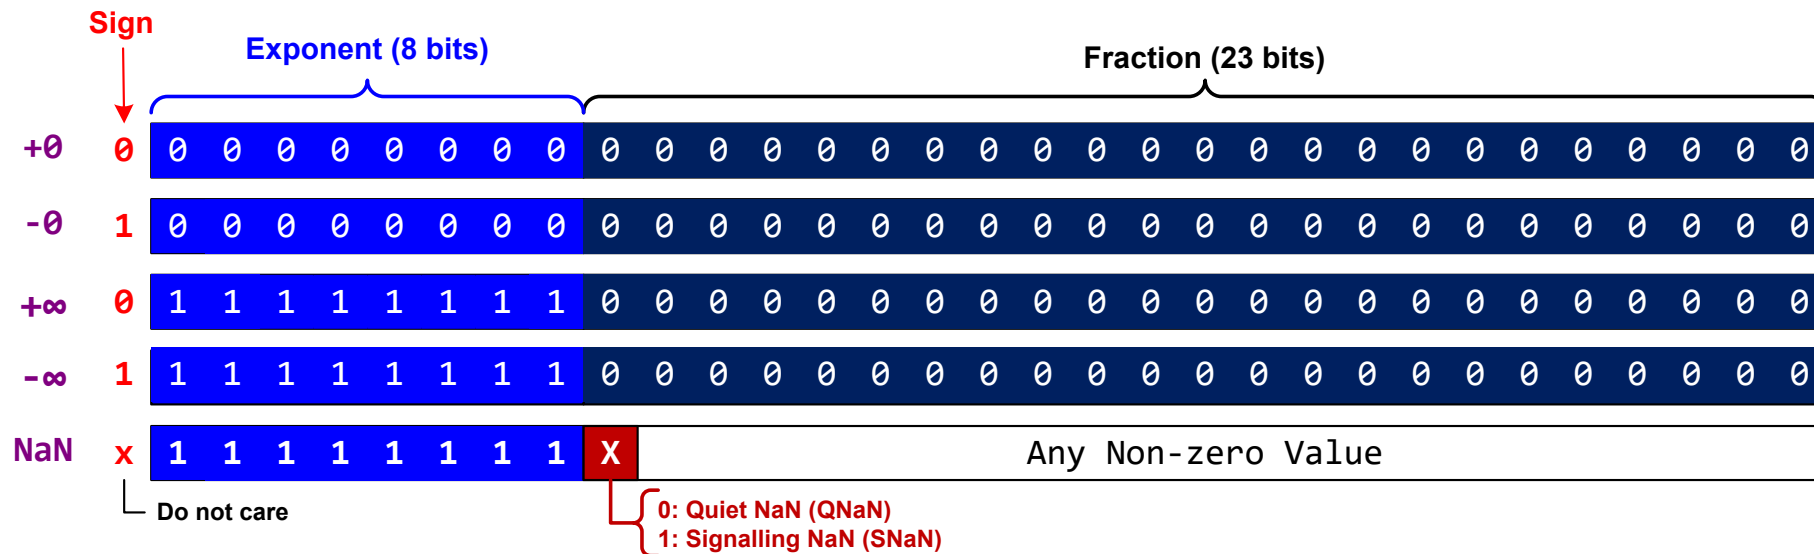

- ▶ Example of Not-A-Number (NaN)
 - ▶ $\log(-10.0)$, $\sqrt{-1.0}$, $0.0/0.0$, $-\infty + \infty$,

Subnormalized Float Number


- ▶ To represent numbers between 0 and the minimum positive number that the normalized format can represent.
- ▶ **Normalized Format**

$$(-1)^S \times (\mathbf{1} + Fraction) \times 2^{\text{Exponent}-127}$$

- ▶ **Sub-normalized** Format

$$(-1)^S \times Fraction \times 2^{-126}$$

Overflow and Underflow

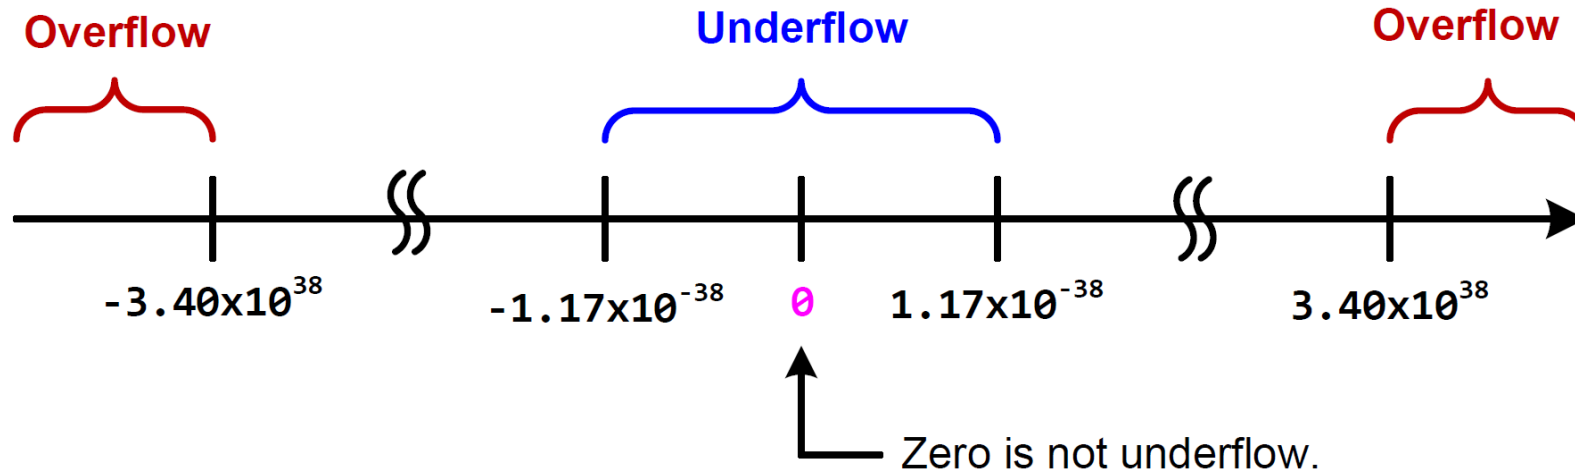

Smallest Positive Normal Number:

0 00000001 000000000000000000000000


$$(-1)^0 \times (1 + 0) \times 2^{1-127} = 2^{-126} \approx 1.18 \times 10^{-38}$$

Smallest Positive Subnormal Number:

0 00000000 000000000000000000000001

$$(-1)^0 \times (0 + 2^{-23}) \times 2^{1-127} = 2^{-149} \approx 1.40 \times 10^{-45}$$

Overflow and Underflow

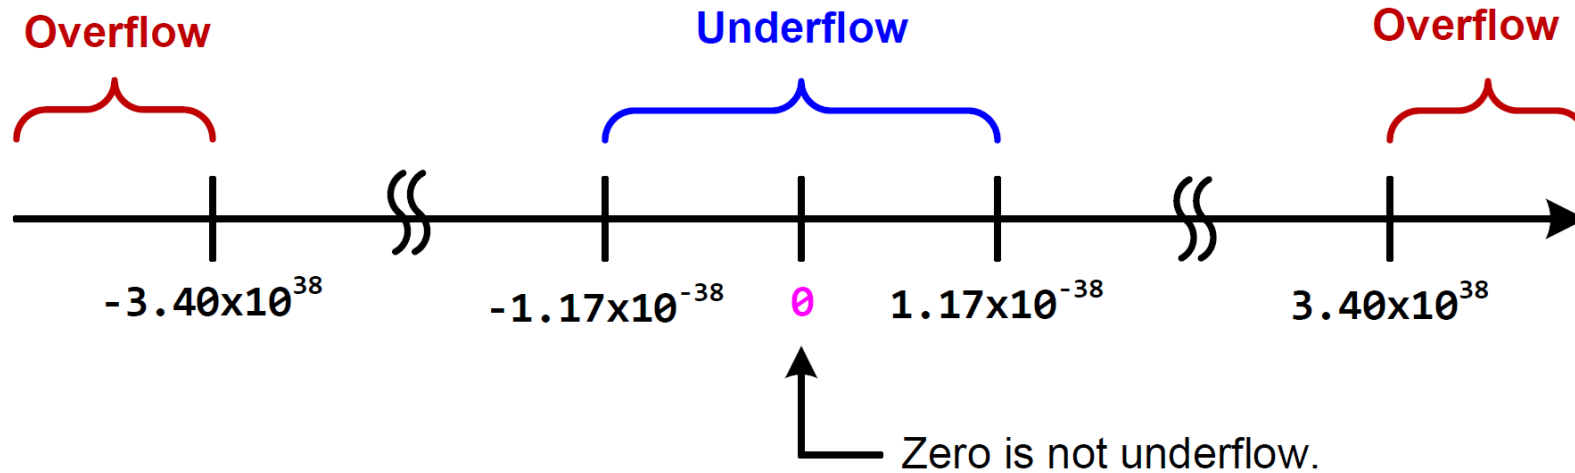

To find the largest representable number:

Exponent = largest possible **finite** value = 254 (since 255 is reserved for infinity and NaN)


Mantissa = all 1s $\rightarrow 1.11111111111111111111111_2 = 1 + (1 - 2^{-23})$

Numbers farthest from zero:

$$(-1)^S \times (1 + (1 - 2^{-23})) \times 2^{254-127} = \pm(2^{128} - 2^{104}) \approx \pm 3.40 \times 10^{38}$$


Resolution

- ▶ Given a hypothetical five-bit floating-point system (similar to IEEE 754).
 - ▶ the sign bit, an exponent (2 bits), and a fraction (2 bits)

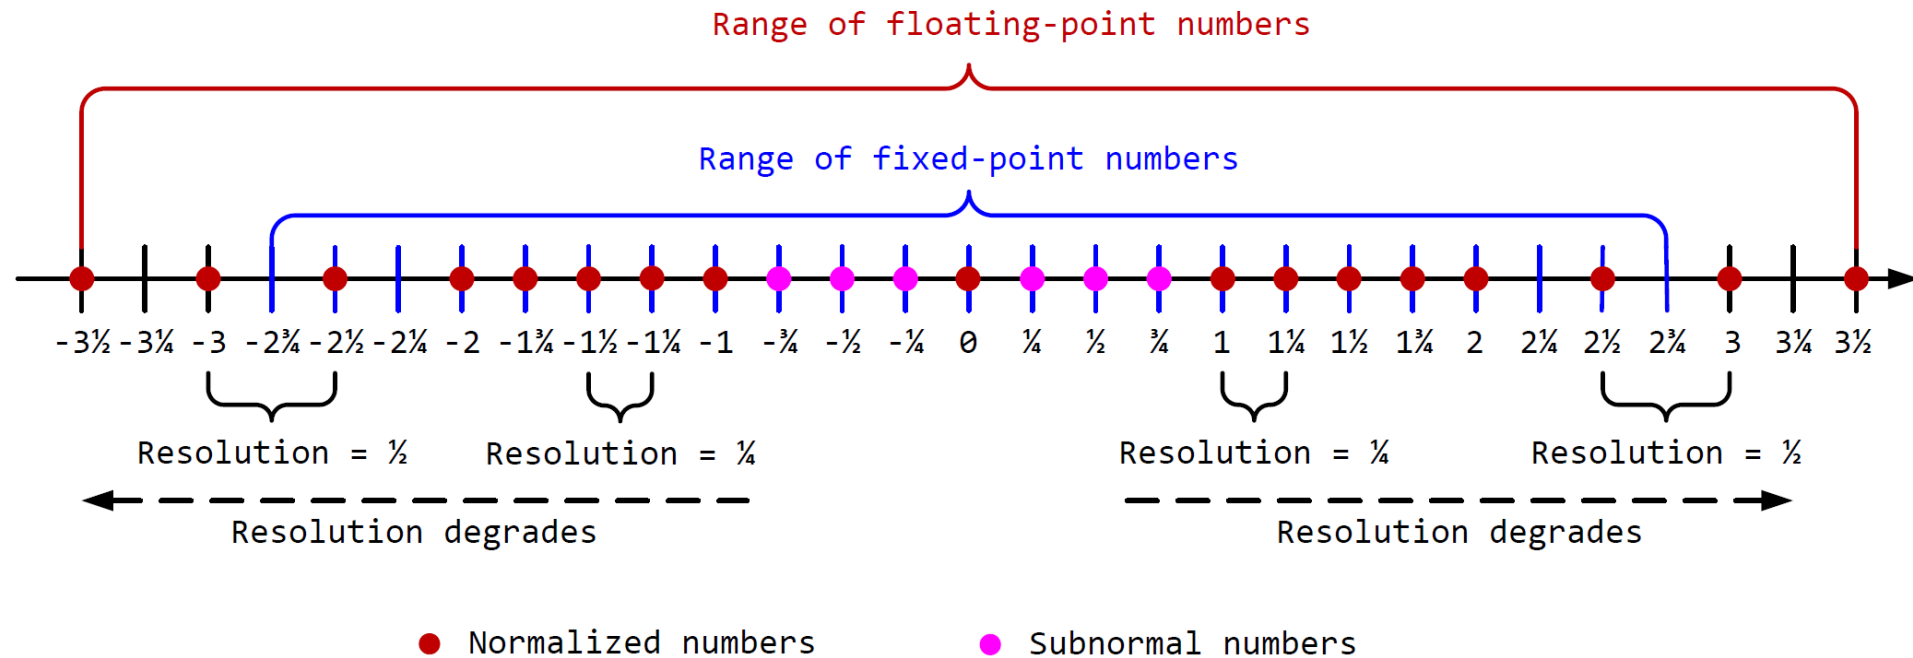

Tradeoff between Range and Precision

A simplified 5-bit floating-point (IEEE 754 style)

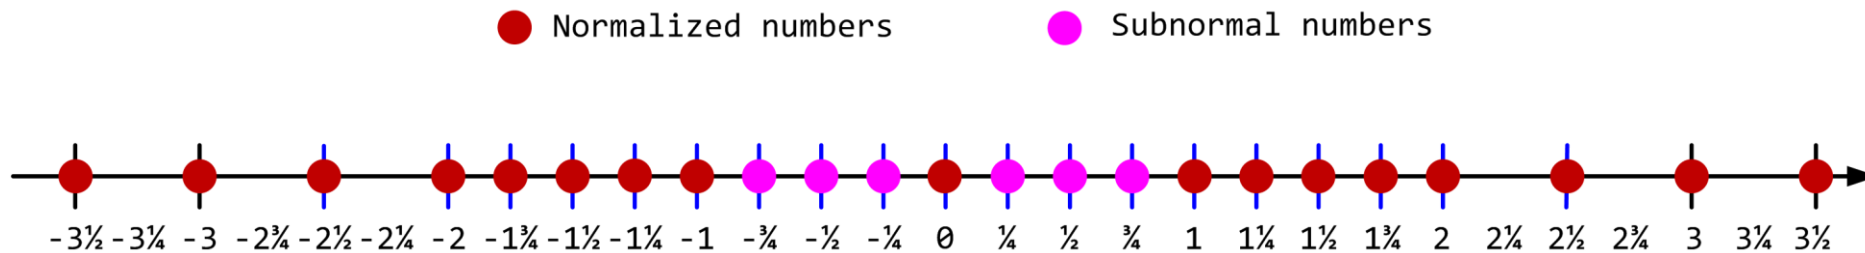

- ▶ Floating-Point
 - ▶ Resolution: difference between two neighbor numbers
 - ▶ Precision decreases as the magnitude increases
- ▶ Fixed-Point
 - ▶ Numbers are evenly distributed among the representable range
 - ▶ Precision is fixed