

PRODUCT CATALOG · ELECTRICAL

YE3 electric motors

IE3 high-efficiency three-phase induction motors from 0.12 to 375 kW, for pumps, fans, augers, mills, mixers and packhouse lines — direct from the factory to your farm.



WHO WE ARE

Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code.

25%

fee with a referral code (30% without)

0

distributors in between

SADC

we deliver across Southern Africa

How every quote works

1**Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2**Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

3**Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

4**Parts & aftersales**

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

YE3 SERIES

High-efficiency motors that cost less to run

YE3 motors meet the IE3 premium-efficiency level, so they use less electricity than older standard motors doing the same job. On a pump or fan that runs all day, the saving on your power bill adds up quickly. They are fully enclosed and fan-cooled, dust- and water-jet-protected, and built for continuous duty.

0.12–375 kW
power range

IE3
premium efficiency

IP55
dust and water-jet
protected

380 V
three-phase, 50 Hz (60 Hz
on request)

CHOOSING A MOTOR

1. Power (kW)
Match the power your pump, fan or machine needs. The machine's own nameplate or manual gives it. When in doubt, go one size up rather than down.

2. Speed
The number of poles sets the speed. 2-pole ≈ 2 900 rpm for most pumps and fans. 4-pole ≈ 1 450 rpm, the all-round choice. 6-, 8- and 10-pole run slower with more torque, for mills, mixers and conveyors.

3. Mounting
Foot-mounted (B3) bolts to a base. Flange-mounted (B5, B14) bolts to the machine. Foot-and-flange (B35, B34) does both. V1 hangs vertically, shaft down, on a flange.

4. Supply
These motors run on three-phase 380–400 V. For single-phase farms, ask us about a frequency inverter that runs a three-phase motor from a single-phase supply.

SPECIFICATIONS

Item	Standard
Frame sizes	63 to 355
Poles	2, 4, 6, 8 and 10
Voltage and frequency	380 V, 50 Hz (60 Hz available)
Efficiency class	IE3
Duty	S1, continuous
Enclosure and cooling	Totally enclosed, fan-cooled (IC411)
Protection	IP55
Insulation class	F
Terminal box	Right-hand side as standard

PERFORMANCE DATA • 380 V 50 HZ

2-pole motors • about 2 900 rpm

Most pumps, fans and blowers.

Model	Frame	Power kW	Power hp	Speed rpm	Current A at 380 V	Efficiency %	Power factor
YE3-63M1-2	63M	0.18	0.24	2720	0.53	63.9	0.80
YE3-63M2-2	63M	0.25	0.34	2720	0.70	67.1	0.81
YE3-71M1-2	71M	0.37	0.5	2740	1.0	69.0	0.81
YE3-71M2-2	71M	0.55	0.74	2740	1.4	72.3	0.82
YE3-80M1-2	80M	0.75	1	2870	1.7	80.7	0.82
YE3-80M2-2	80M	1.1	1.5	2875	2.4	82.7	0.83
YE3-90S-2	90S	1.5	2	2880	3.2	84.2	0.84
YE3-90L-2	90L	2.2	3	2880	4.6	85.9	0.85
YE3-100L-2	100L	3	4	2880	6.0	87.1	0.87
YE3-112M-2	112M	4	5.4	2915	7.8	88.1	0.88
YE3-132S1-2	132S	5.5	7.4	2935	10.6	89.2	0.88
YE3-132S2-2	132S	7.5	10	2930	14.4	90.1	0.88
YE3-160M1-2	160M	11	15	2950	20.6	91.2	0.89
YE3-160M2-2	160M	15	20	2945	27.9	91.9	0.89
YE3-160L-2	160L	18.5	25	2945	34.2	92.4	0.89
YE3-180M-2	180M	22	30	2950	40.5	92.7	0.89
YE3-200L1-2	200L	30	40	2965	54.9	93.3	0.89
YE3-200L2-2	200L	37	50	2965	67.4	93.7	0.89
YE3-225M-2	225M	45	60	2965	80.8	94.0	0.90
YE3-250M-2	250M	55	74	2975	98.5	94.3	0.90
YE3-280S-2	280S	75	101	2975	134	94.7	0.90
YE3-280M-2	280M	90	121	2975	160	95.0	0.90
YE3-280M1-2	280M	110	148	2975	195	95.2	0.90
YE3-315S-2	315S	110	148	2985	195	95.2	0.90
YE3-315M-2	315M	132	177	2985	234	95.4	0.90
YE3-315L1-2	315L	160	215	2985	279	95.6	0.91
YE3-315L-2	315L	185	248	2985	323	95.7	0.91
YE3-315L2-2	315L	200	268	2985	349	95.8	0.91
YE3-315L3-2	315L	220	295	2985	383	95.8	0.91
YE3-355M1-2	355M	220	295	2985	383	95.8	0.91
YE3-355M-2	355M	250	335	2985	436	95.8	0.91
YE3-355L1-2	355L	280	375	2985	488	95.8	0.91
YE3-355L-2	355L	315	422	2985	549	95.8	0.91
YE3-355-1-2	355	355	476	2985	619	95.8	0.91
YE3-355-2-2	355	375	503	2985	654	95.8	0.91

PERFORMANCE DATA • 380 V 50 HZ

4-pole motors • about 1 450 rpm

The all-round choice: pumps, compressors, conveyors and general machinery.

Model	Frame	Power kW	Power hp	Speed rpm	Current A at 380 V	Efficiency %	Power factor
YE3-63M1-4	63M	0.12	0.16	1310	0.45	55.8	0.72
YE3-63M2-4	63M	0.18	0.24	1310	0.64	58.6	0.73
YE3-71M1-4	71M	0.25	0.34	1330	0.81	63.6	0.74
YE3-71M2-4	71M	0.37	0.5	1330	1.1	65.3	0.75
YE3-80M1-4	80M	0.55	0.74	1430	1.4	80.6	0.75
YE3-80M2-4	80M	0.75	1	1430	1.8	82.5	0.75
YE3-90S-4	90S	1.1	1.5	1430	2.6	84.1	0.76
YE3-90L-4	90L	1.5	2	1430	3.5	85.3	0.77
YE3-100L1-4	100L	2.2	3	1440	4.8	86.7	0.81
YE3-100L2-4	100L	3	4	1440	6.3	87.7	0.82
YE3-112M-4	112M	4	5.4	1455	8.4	88.6	0.82
YE3-132S-4	132S	5.5	7.4	1465	11.2	89.6	0.83
YE3-132M-4	132M	7.5	10	1465	15.0	90.4	0.84
YE3-160M-4	160M	11	15	1470	21.5	91.4	0.85
YE3-160L-4	160L	15	20	1470	28.8	92.1	0.86
YE3-180M-4	180M	18.5	25	1470	35.3	92.6	0.86
YE3-180L-4	180L	22	30	1470	41.8	93.0	0.86
YE3-200L-4	200L	30	40	1475	56.6	93.6	0.86
YE3-225S-4	225S	37	50	1480	69.6	93.9	0.86
YE3-225M-4	225M	45	60	1480	84.4	94.2	0.86
YE3-250M-4	250M	55	74	1485	103	94.6	0.86
YE3-280S-4	280S	75	101	1490	136	95.0	0.88
YE3-280M-4	280M	90	121	1490	163	95.2	0.88
YE3-280M1-4	280M	110	148	1490	197	95.4	0.89
YE3-315S-4	315S	110	148	1490	197	95.4	0.89
YE3-315M-4	315M	132	177	1490	236	95.6	0.89
YE3-315L1-4	315L	160	215	1490	285	95.8	0.89
YE3-315L-4	315L	185	248	1490	329	95.9	0.89
YE3-315L2-4	315L	200	268	1490	352	96.0	0.90
YE3-315L3-4	315L	220	295	1490	387	96.0	0.90
YE3-355M1-4	355M	220	295	1490	387	96.0	0.90
YE3-355M-4	355M	250	335	1495	440	96.0	0.90
YE3-355L1-4	355L	280	375	1495	492	96.0	0.90
YE3-355L-4	355L	315	422	1495	554	96.0	0.90
YE3-355-1-4	355	355	476	1495	638	96.0	0.88
YE3-355-2-4	355	375	503	1495	674	96.0	0.88

PERFORMANCE DATA • 380 V 50 HZ

6-pole motors • about 960 rpm

Slower speed and more torque: mills, mixers, crushers and heavy conveyors.

Model	Frame	Power kW	Power hp	Speed rpm	Current A at 380 V	Efficiency %	Power factor
YE3-71M1-6	71M	0.18	0.24	850	0.76	54.6	0.66
YE3-71M2-6	71M	0.25	0.34	850	0.97	57.4	0.68
YE3-80M1-6	80M	0.37	0.5	910	1.2	68.0	0.70
YE3-80M2-6	80M	0.55	0.74	925	1.6	72.0	0.71
YE3-90S-6	90S	0.75	1	945	2.0	78.9	0.71
YE3-90L-6	90L	1.1	1.5	950	2.8	81.0	0.73
YE3-100L-6	100L	1.5	2	950	3.8	82.5	0.73
YE3-112M-6	112M	2.2	3	965	5.4	84.3	0.74
YE3-132S-6	132S	3	4	975	7.2	85.6	0.74
YE3-132M1-6	132M	4	5.4	975	9.5	86.8	0.74
YE3-132M2-6	132M	5.5	7.4	975	12.7	88.0	0.75
YE3-160M-6	160M	7.5	10	980	16.2	89.1	0.79
YE3-160L-6	160L	11	15	980	23.1	90.3	0.80
YE3-180L-6	180L	15	20	980	30.9	91.2	0.81
YE3-200L1-6	200L	18.5	25	985	37.8	91.7	0.81
YE3-200L2-6	200L	22	30	985	44.8	92.2	0.81
YE3-225M-6	225M	30	40	985	59.1	92.9	0.83
YE3-250M-6	250M	37	50	985	71.7	93.3	0.84
YE3-280S-6	280S	45	60	990	85.8	93.7	0.85
YE3-280M-6	280M	55	74	990	103	94.1	0.86
YE3-280M1-6	280M	75	101	990	143	94.6	0.84
YE3-315S-6	315S	75	101	990	143	94.6	0.84
YE3-315M-6	315M	90	121	990	170	94.9	0.85
YE3-315L1-6	315L	110	148	990	207	95.1	0.85
YE3-315L2-6	315L	132	177	990	244	95.4	0.86
YE3-315L3-6	315L	160	215	990	296	95.6	0.86
YE3-355M1-6	355M	160	215	995	296	95.6	0.86
YE3-355M-6	355M	185	248	995	342	95.7	0.86
YE3-355M2-6	355M	200	268	995	365	95.8	0.87
YE3-355L1-6	355L	220	295	995	401	95.8	0.87
YE3-355L-6	355L	250	335	995	456	95.8	0.87
YE3-355-1-6	355	280	375	995	510	95.8	0.87
YE3-355-2-6	355	315	422	995	581	95.8	0.86

PERFORMANCE DATA • 380 V 50 HZ**8-pole motors • about 730 rpm**

Low speed and high torque for large, slow machines.

Model	Frame	Power kW	Power hp	Speed rpm	Current A at 380 V	Efficiency %	Power factor
YE3-80M1-8	80M	0.18	0.24	700	0.8	56.0	0.61
YE3-80M2-8	80M	0.25	0.34	700	1.1	59.0	0.61
YE3-90S-8	90S	0.37	0.5	695	1.4	66.0	0.61
YE3-90L-8	90L	0.55	0.74	695	2.0	70.0	0.61
YE3-100L1-8	100L	0.75	1	705	2.3	73.5	0.67
YE3-100L2-8	100L	1.1	1.5	705	3.2	76.5	0.69
YE3-112M-8	112M	1.5	2	715	4.2	77.5	0.70
YE3-132S-8	132S	2.2	3	730	5.9	80.0	0.71
YE3-132M-8	132M	3	4	730	7.6	82.5	0.73
YE3-160M1-8	160M	4	5.4	725	9.8	85.0	0.73
YE3-160M2-8	160M	5.5	7.4	725	13.1	86.0	0.74
YE3-160L-8	160L	7.5	10	730	17.4	87.5	0.75
YE3-180L-8	180L	11	15	725	25.0	89.0	0.75
YE3-200L-8	200L	15	20	730	33.2	90.4	0.76
YE3-225S-8	225S	18.5	25	735	40.6	91.2	0.76
YE3-225M-8	225M	22	30	735	46.8	91.5	0.78
YE3-250M-8	250M	30	40	735	62.6	92.2	0.79
YE3-280S-8	280S	37	50	740	76.5	93.0	0.79
YE3-280M-8	280M	45	60	740	92.6	93.5	0.79
YE3-280M1-8	280M	55	74	740	110	93.8	0.81
YE3-315S-8	315S	55	74	740	110	93.8	0.81
YE3-315M-8	315M	75	101	740	150	94.0	0.81
YE3-315L1-8	315L	90	121	740	176	94.5	0.82
YE3-315L2-8	315L	110	148	740	215	94.8	0.82
YE3-355M1-8	355M	132	177	745	257	95.0	0.82
YE3-355M2-8	355M	160	215	745	312	95.0	0.82
YE3-355L1-8	355L	185	248	745	360	95.2	0.82
YE3-355L-8	355L	200	268	745	385	95.2	0.83
YE3-355-1-8	355	220	295	745	423	95.2	0.83
YE3-355-2-8	355	250	335	745	481	95.2	0.83

PERFORMANCE DATA · 380 V 50 HZ**10-pole motors · about 590 rpm**


Very low speed for large, slow machines. Larger frames only.

Model	Frame	Power kW	Power hp	Speed rpm	Current A at 380 V	Efficiency %	Power factor
YE3-315S-10	315S	45	60	590	99	92.0	0.75
YE3-315M-10	315M	55	74	590	120	92.5	0.75
YE3-315L1-10	315L	75	101	590	161	93.0	0.76
YE3-315L2-10	315L	90	121	590	190	93.4	0.77
YE3-355M1-10	355M	110	148	595	228	93.8	0.78
YE3-355M2-10	355M	132	177	595	273	94.2	0.78
YE3-355L1-10	355L	160	215	595	331	94.2	0.78
YE3-355L-10	355L	185	248	595	383	94.2	0.78
YE3-355-1-10	355	200	268	595	414	94.2	0.78
YE3-355-2-10	355	220	295	595	455	94.2	0.78

DIMENSIONS · MM

Foot-mounted (B3) dimensions

Key sizes for replacing a motor or making a base. Where two values are given, the first is for 2-pole motors and the second for 4-, 6-, 8- and 10-pole. Full drawings for every mounting type are available on request.

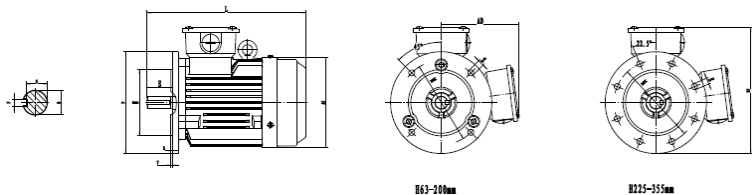

Frame	Shaft height H	Foot holes A × B	Shaft Ø D	Shaft length E	Bolt hole K	Overall length L
63M	63	100 × 80	11	23	7	230
71M	71	112 × 90	14	30	7	255
80M	80	125 × 100	19	40	10	295
90S	90	140 × 100	24	50	10	345
90L	90	140 × 125	24	50	10	385
100L	100	160 × 140	28	60	12	390
112M	112	190 × 140	28	60	12	425–455
132S	132	216 × 140	38	80	12	475
132M	132	216 × 178	38	80	12	510
160M	160	254 × 210	42	110	15	610
160L	160	254 × 254	42	110	15	655
180M	180	279 × 241	48	110	15	680
180L	180	279 × 279	48	110	15	715
200L	200	318 × 305	55	110	19	770
225S	225	356 × 286	60	140	19	795
225M	225	356 × 311	55 / 60	110 / 140	19	800 / 825
250M	250	406 × 349	60 / 65	140	24	890
280S	280	457 × 368	65 / 75	140	24	975
280M	280	457 × 419	65 / 75	140	24	1 025
315S	315	508 × 406	65 / 80	140 / 170	28	1 180 / 1 210
315M	315	508 × 457	65 / 80	140 / 170	28	1 215 / 1 245
315L	315	508 × 508	65 / 80	140 / 170	28	1 290 / 1 320
355M	355	610 × 560	75 / 95	140 / 170	28	1 390 / 1 420
355L	355	610 × 630	75 / 95	140 / 170	28	1 500 / 1 530

MOUNTING OPTIONS BY FRAME SIZE

Frame	B3 foot	B5 flange	B35 foot + flange	V1 vertical	B14 small flange	B34 foot + small flange
63–112	✓	✓	✓	✓	✓	✓
132–160	✓	✓	✓	✓	✓	–
180–280	✓	✓	✓	✓	–	–
315–355	✓	–	✓	✓	–	–