


PRODUCT CATALOG · IRRIGATION

Irrigation pumps

Four pump ranges for irrigation: in-line booster pumps, end-suction pump-station pumps and high-pressure multistage pumps, from 1.8 to 2 000 m³/h — direct from the factory to your farm, complete with motor.

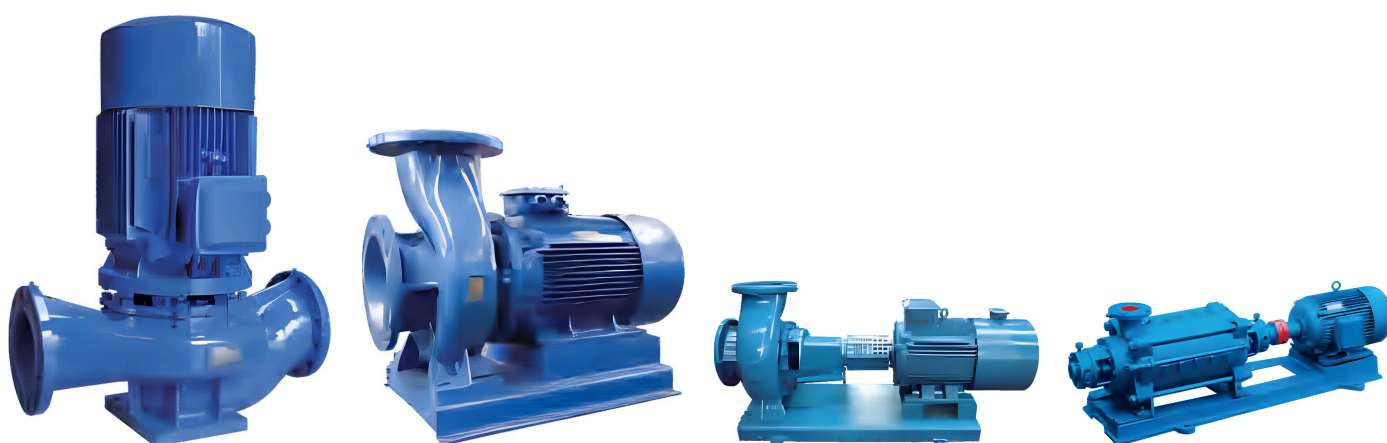

WHO WE ARE

Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code.

25%

fee with a referral code (30% without)

0

distributors in between

SADC

we deliver across Southern Africa

How every quote works

1**Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2**Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

3**Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

4**Parts & aftersales**

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

CONTENTS

Which pump for which job?


Every pump is quoted complete with its electric motor. To size one, we need the flow you need (m³/h), the total head (the height you lift the water plus the pressure your emitters need and the friction in the pipes) and your power supply. Send us those and we will pick the model.




SLS



SLW

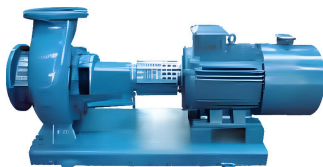

SLNC

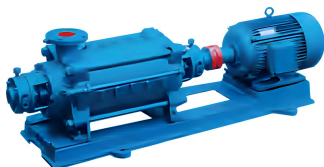

SLD

Range	Type	Flow	Head	Typical irrigation use
SLS	Vertical single-stage centrifugal pump	1.8–1 400 m³/h	9.2–156 m	Booster pump on an irrigation main or in a pump room, lifting pressure for drip and micro-sprinkler blocks, and circulating clean water for fertigation and packhouses.
SLW	Horizontal single-stage centrifugal pump	2.8–1 400 m³/h	9.2–156 m	Booster and transfer pump for irrigation mains, filter stations and fertigation lines where there is little headroom, or where a low, stable pump on a plinth is preferred.
SLNC	Single-stage end-suction pump with back pull-out	15–2 000 m³/h	10–140 m	Main irrigation pump drawing from dams, rivers and canals to feed centre pivots, sprinklers and drip systems.
SLD	Horizontal multistage centrifugal pump	6.3–1 100 m³/h	22–1 153 m	Pumping to lands on high ground or a long way from the water source, feeding pivots and sprinklers at the end of long mainlines, and filling reservoirs uphill.

SLS vertical in-line pump	04
SLW horizontal in-line pump	05
SLNC end-suction centrifugal pump	06
SLD horizontal multistage pump	07

VERTICAL SINGLE-STAGE CENTRIFUGAL PUMP

SLS vertical in-line pump

A compact vertical pump with the inlet and outlet on the same centre line, so it bolts straight into a pipe like a valve. It takes up very little floor space in a pump room.



1.8–1 400

m³/h flow

9.2–156

m head

≤ 16

bar pressure

–20 to 100

°C water

FEATURES

- Inlet and outlet the same size and in line: fits directly into the pipeline
- Low-noise motor bearings and a dynamically and statically balanced impeller, for smooth, quiet running
- Corrosion-resistant carbide mechanical seal that does not leak
- Easy to service without removing the pipework

WHERE IT FITS ON THE FARM

Booster pump on an irrigation main or in a pump room, lifting pressure for drip and micro-sprinkler blocks, and circulating clean water for fertigation and packhouses. Choose it where floor space is tight.

Quoted complete with motor. Your Andrivo quote confirms the exact model, impeller and motor size for your duty point.

HORIZONTAL SINGLE-STAGE CENTRIFUGAL PUMP

SLW horizontal in-line pump

The horizontal version of the in-line pump. It needs about 30% less floor space than an ordinary horizontal pump and sits low, which suits pump houses with little headroom.



2.8–1 400

m³/h flow

9.2–156

m head

≤ 16

bar pressure

–20 to 100

°C water

FEATURES

- Compact design with about 30% less floor space than standard horizontal pumps
- Smooth, quiet running with low vibration and well-aligned components
- Corrosion-resistant carbide mechanical seal that does not leak
- Easy to service without removing the pipework

WHERE IT FITS ON THE FARM


Booster and transfer pump for irrigation mains, filter stations and fertigation lines where there is little headroom, or where a low, stable pump on a plinth is preferred.

Quoted complete with motor. Your Andrivo quote confirms the exact model, impeller and motor size for your duty point.

SINGLE-STAGE END-SUCTION PUMP WITH BACK PULL-OUT

SLNC end-suction centrifugal pump

A high-efficiency end-suction pump and the workhorse of an irrigation pump station. The back cover pulls out for servicing, so the pump comes apart without disturbing the pipework.

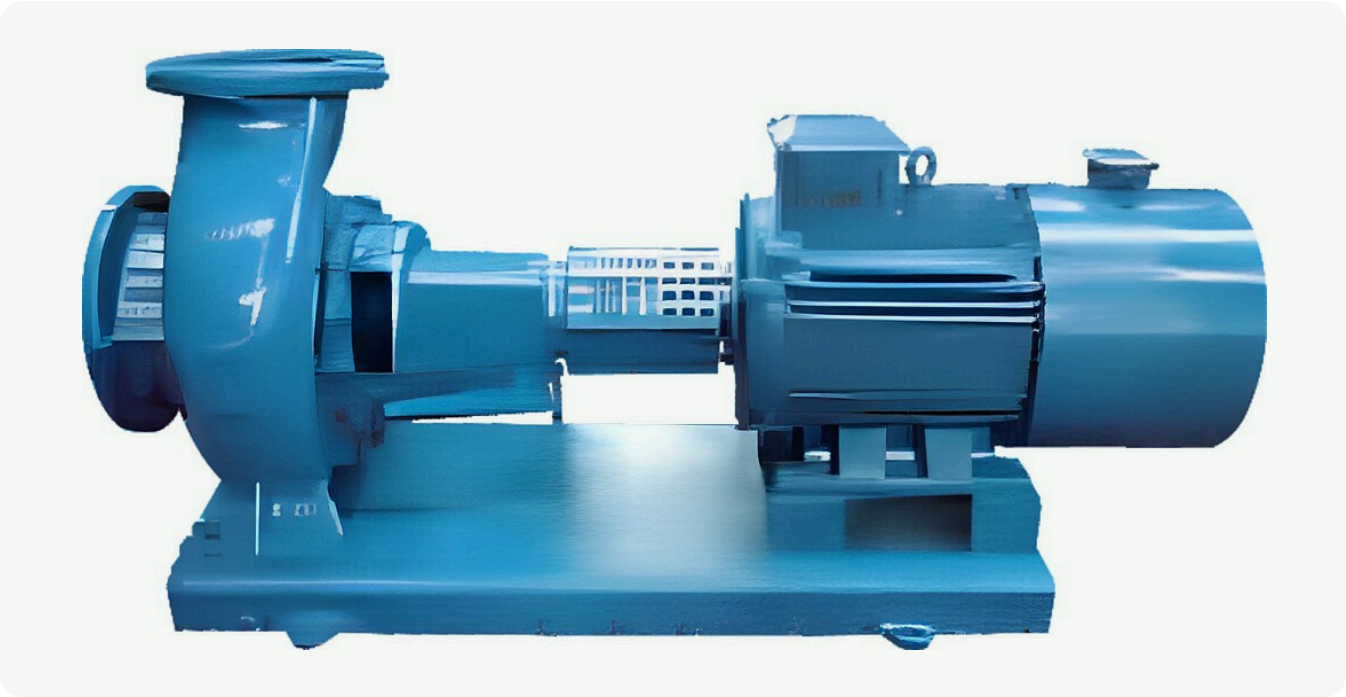

15–2 000

m³/h flow

10–140

m head

≤ 16

bar pressure

0 to 80

°C water

FEATURES

- Energy-saving, high-efficiency hydraulics
- Back pull-out design: service the pump without removing the pipes
- Reliable sealing with a high-quality mechanical seal and very little leakage
- Stable, easy operation and a long service life

WHERE IT FITS ON THE FARM


Main irrigation pump drawing from dams, rivers and canals to feed centre pivots, sprinklers and drip systems. It suits large flows at medium pressure and is often installed as duty and standby pair.

Quoted complete with motor. Your Andrivo quote confirms the exact model, impeller and motor size for your duty point.

HORIZONTAL MULTISTAGE CENTRIFUGAL PUMP

SLD horizontal multistage pump

Several impellers in series on one shaft build very high pressure. The suction is horizontal and the outlet points straight up. Replaceable shaft sleeves at both ends protect the shaft.

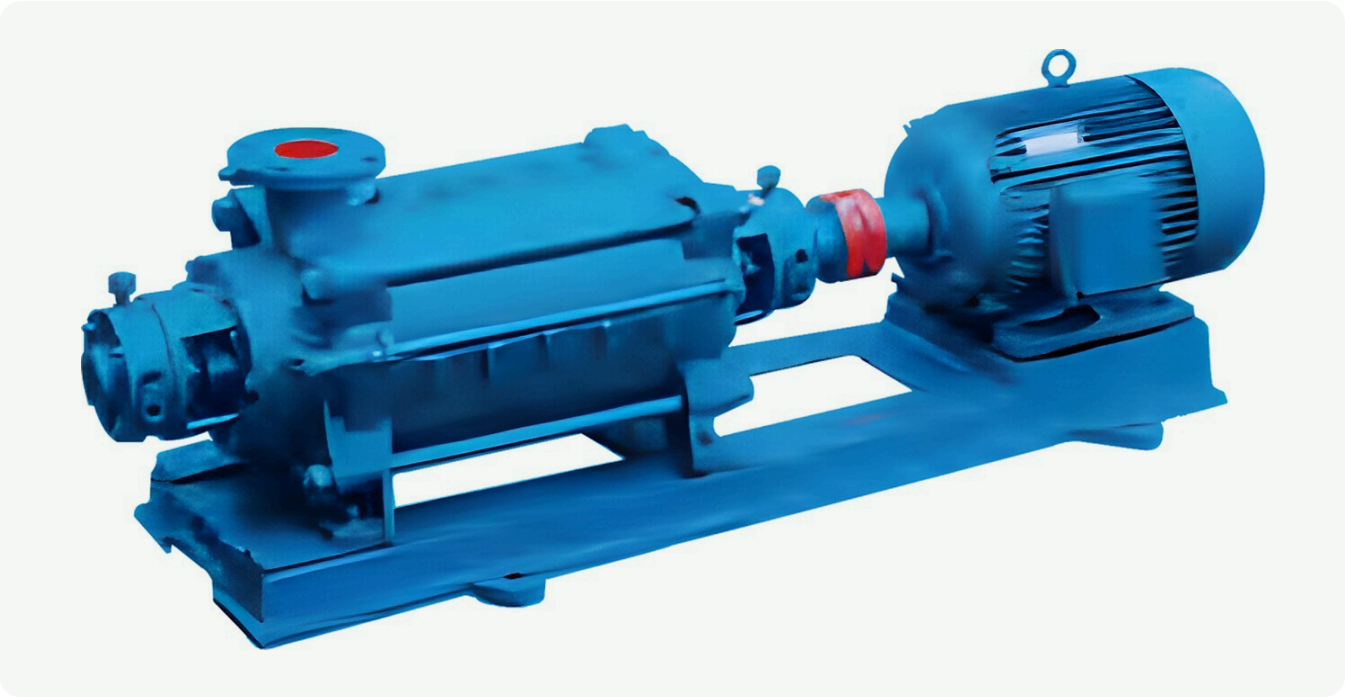

6.3–1100

m³/h flow

22–1153

m head

0 to 80

°C water

Multistage

high pressure

FEATURES

- High heads, from 22 m up to more than 1 100 m
- Replaceable shaft sleeves protect the shaft and cut repair costs
- Choice of rolling or sliding bearings; packing-gland shaft seal
- Driven directly by the motor through a flexible coupling

WHERE IT FITS ON THE FARM

Pumping to lands on high ground or a long way from the water source, feeding pivots and sprinklers at the end of long mainlines, and filling reservoirs uphill.

Quoted complete with motor. Your Andrivo quote confirms the exact model, impeller and motor size for your duty point.