


Performance characteristics




Multi-mode water supply

- Single-unit water supply: one Frequency Inverter drives one motor to provide constant pressure water supply.
- It supports one-to-many water supply, supporting up to one-to-four water supply, realizing the logic of one Frequency Inverter driving four motors to switch between industrial frequency and variable frequency for water supply.
- The Networked water supply system uses a star topology network structure to centrally control up to 5 Frequency Inverters driving 5 motors, thereby realizing the constant pressure water supply logic function.

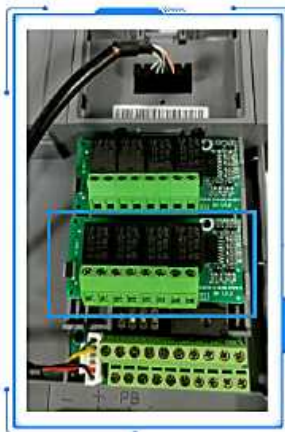

- ✓ EN-WS9 Constant Pressure Water Supply Four-Channel Relay Expansion Card: One card for dual-channel constant pressure water supply; two cards for quad-channel constant pressure water supply.

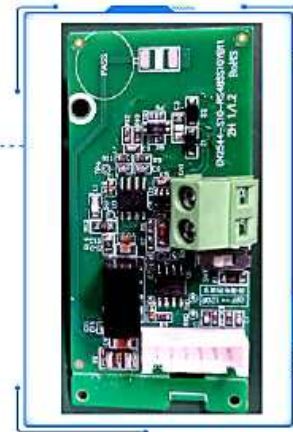

- ✓ EN-TX485-76 Expansion Card (Adds one more 485 terminal interface; this card is compatible with the entire series)

Application characteristics



Dedicated functions for fans and water pumps

- **Multi-pump control function:** Some models support the control of multiple pumps, enabling alternating operation, sequential start-stop, and pump switching, balancing the operating time of each pump, and extending the system life.
- **Automatic acceleration and deceleration:** Automatically adjusts acceleration and deceleration times according to load characteristics to avoid water hammer effect (for pump systems) and pressure fluctuations.



High reliability

- Coated circuit boards can resist moisture, corrosive gases and dust, improving reliability in harsh environments.
- The wide voltage range design provides good adaptability to power grid fluctuations.