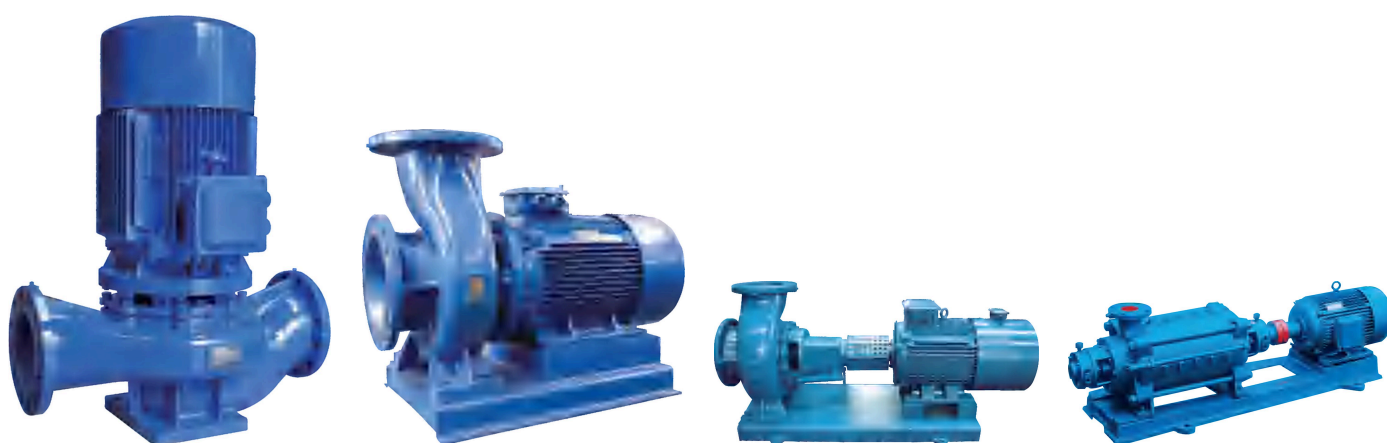


**PRODUCT CATALOG · IRRIGATION**

# Irrigation pumps

Four pump ranges for irrigation: in-line booster pumps, end-suction pump-station pumps and high-pressure multistage pumps, from 1.8 to 2 000 m<sup>3</sup>/h — direct from the factory to your farm, complete with motor.



## WHO WE ARE

# Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code.

**25%**

fee with a referral code (30% without)

**0**

distributors in between

**SADC**

we deliver across Southern Africa

## How every quote works

**1****Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

**2****Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

**3****Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

**4****Parts & aftersales**


Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

**CONTENTS**

# Which pump for which job?

Every pump is quoted complete with its electric motor. To size one, we need the flow you need ( $\text{m}^3/\text{h}$ ), the total head (the height you lift the water plus the pressure your emitters need and the friction in the pipes) and your power supply. Send us those and we will pick the model.


**SLS**

**SLW**

**SLNC**

**SLD**

| Range       | Type                                             | Flow                            | Head       | Typical irrigation use                                                                                                                                                      |
|-------------|--------------------------------------------------|---------------------------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SLS</b>  | Vertical single-stage centrifugal pump           | 1.8–1 400 $\text{m}^3/\text{h}$ | 9.2–156 m  | Booster pump on an irrigation main or in a pump room, lifting pressure for drip and micro-sprinkler blocks, and circulating clean water for fertigation and packhouses.     |
| <b>SLW</b>  | Horizontal single-stage centrifugal pump         | 2.8–1 400 $\text{m}^3/\text{h}$ | 9.2–156 m  | Booster and transfer pump for irrigation mains, filter stations and fertigation lines where there is little headroom, or where a low, stable pump on a plinth is preferred. |
| <b>SLNC</b> | Single-stage end-suction pump with back pull-out | 15–2 000 $\text{m}^3/\text{h}$  | 10–140 m   | Main irrigation pump drawing from dams, rivers and canals to feed centre pivots, sprinklers and drip systems.                                                               |
| <b>SLD</b>  | Horizontal multistage centrifugal pump           | 6.3–1 100 $\text{m}^3/\text{h}$ | 22–1 153 m | Pumping to lands on high ground or a long way from the water source, feeding pivots and sprinklers at the end of long mainlines, and filling reservoirs uphill.             |

SLS vertical in-line pump **04**

SLW horizontal in-line pump **05**

SLNC end-suction centrifugal pump **06**

SLD horizontal multistage pump **07**

**VERTICAL SINGLE-STAGE CENTRIFUGAL PUMP**

# SLS vertical in-line pump

A compact vertical pump with the inlet and outlet on the same centre line, so it bolts straight into a pipe like a valve. It takes up very little floor space in a pump room.


**1.8–1 400**

m³/h flow

**9.2–156**

m head

**≤ 16**

bar pressure

**–20 to 100**

°C water

**FEATURES**

- Inlet and outlet the same size and in line: fits directly into the pipeline
- Low-noise motor bearings and a dynamically and statically balanced impeller, for smooth, quiet running
- Corrosion-resistant carbide mechanical seal that does not leak
- Easy to service without removing the pipework

**WHERE IT FITS ON THE FARM**

Booster pump on an irrigation main or in a pump room, lifting pressure for drip and micro-sprinkler blocks, and circulating clean water for fertigation and packhouses. Choose it where floor space is tight.

Quoted complete with motor. Your Andrivo quote confirms the exact model, impeller and motor size for your duty point.

**HORIZONTAL SINGLE-STAGE CENTRIFUGAL PUMP**

# SLW horizontal in-line pump

The horizontal version of the in-line pump. It needs about 30% less floor space than an ordinary horizontal pump and sits low, which suits pump houses with little headroom.


**2.8–1 400**

m³/h flow

**9.2–156**

m head

**≤ 16**

bar pressure

**–20 to 100**

°C water

**FEATURES**

- Compact design with about 30% less floor space than standard horizontal pumps
- Smooth, quiet running with low vibration and well-aligned components
- Corrosion-resistant carbide mechanical seal that does not leak
- Easy to service without removing the pipework

**WHERE IT FITS ON THE FARM**

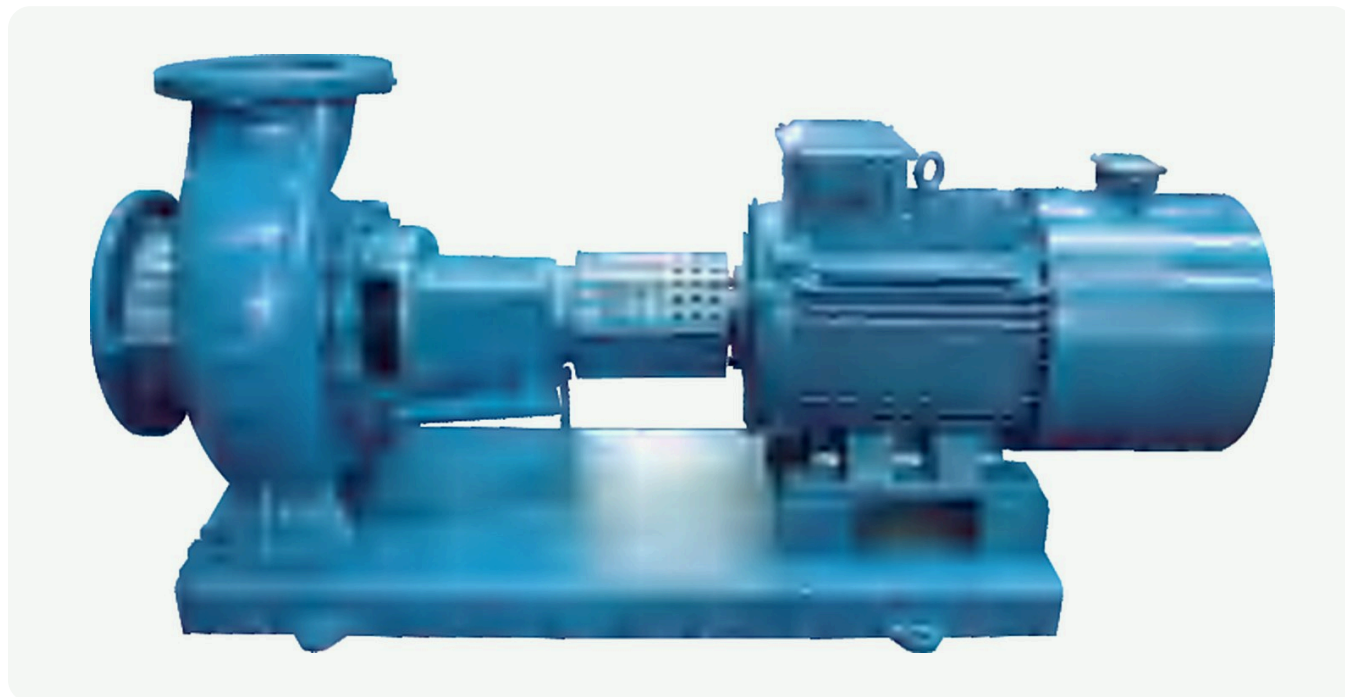
Booster and transfer pump for irrigation mains, filter stations and fertigation lines where there is little headroom, or where a low, stable pump on a plinth is preferred.

Quoted complete with motor. Your Andrivo quote confirms the exact model, impeller and motor size for your duty point.

**SINGLE-STAGE END-SUCTION PUMP WITH BACK PULL-OUT**

# SLNC end-suction centrifugal pump

A high-efficiency end-suction pump and the workhorse of an irrigation pump station. The back cover pulls out for servicing, so the pump comes apart without disturbing the pipework.


**15–2 000**

m³/h flow

**10–140**

m head

**≤ 16**

bar pressure

**0 to 80**

°C water

**FEATURES**

- Energy-saving, high-efficiency hydraulics
- Back pull-out design: service the pump without removing the pipes
- Reliable sealing with a high-quality mechanical seal and very little leakage
- Stable, easy operation and a long service life

**WHERE IT FITS ON THE FARM**

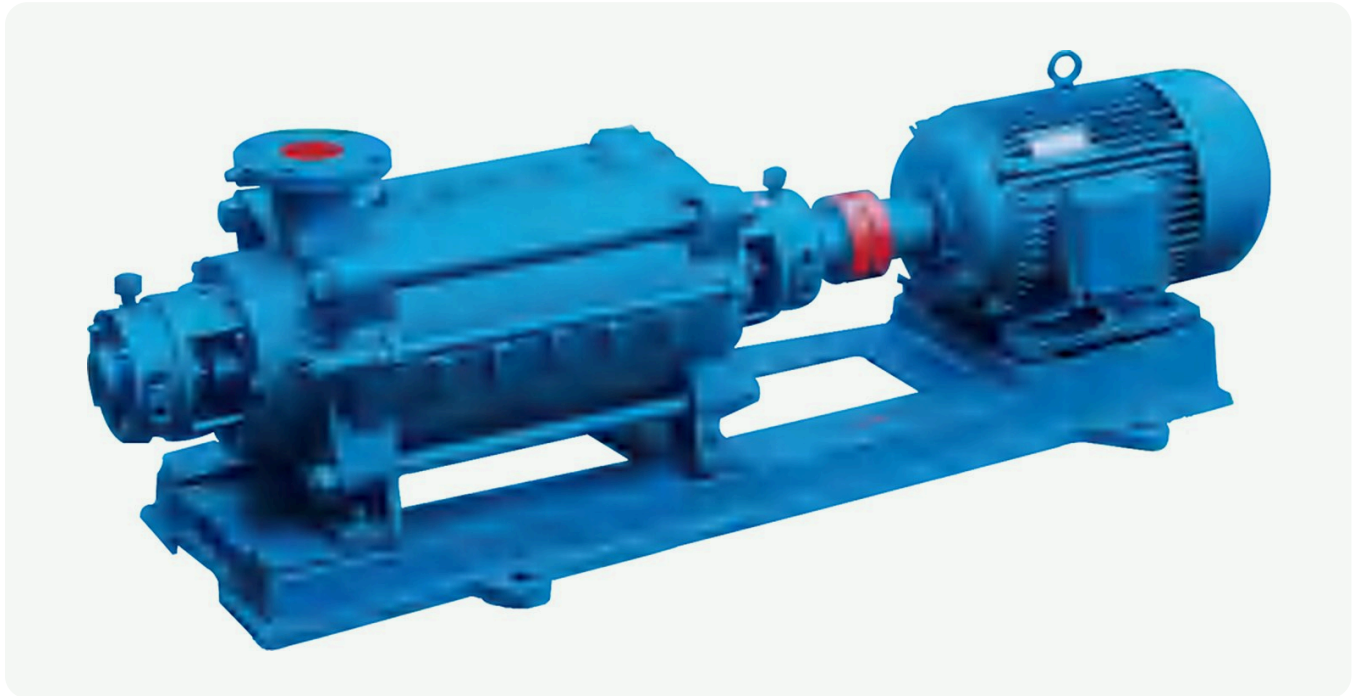
Main irrigation pump drawing from dams, rivers and canals to feed centre pivots, sprinklers and drip systems. It suits large flows at medium pressure and is often installed as duty and standby pair.

Quoted complete with motor. Your Andrivo quote confirms the exact model, impeller and motor size for your duty point.

**HORIZONTAL MULTISTAGE CENTRIFUGAL PUMP**

# SLD horizontal multistage pump

Several impellers in series on one shaft build very high pressure. The suction is horizontal and the outlet points straight up. Replaceable shaft sleeves at both ends protect the shaft.


**6.3–1100**

m³/h flow

**22–1153**

m head

**0 to 80**

°C water

**Multistage**

high pressure

**FEATURES**

- High heads, from 22 m up to more than 1100 m
- Replaceable shaft sleeves protect the shaft and cut repair costs
- Choice of rolling or sliding bearings; packing-gland shaft seal
- Driven directly by the motor through a flexible coupling

**WHERE IT FITS ON THE FARM**

Pumping to lands on high ground or a long way from the water source, feeding pivots and sprinklers at the end of long mainlines, and filling reservoirs uphill.

Quoted complete with motor. Your Andrivo quote confirms the exact model, impeller and motor size for your duty point.