


External shape and installation dimensions

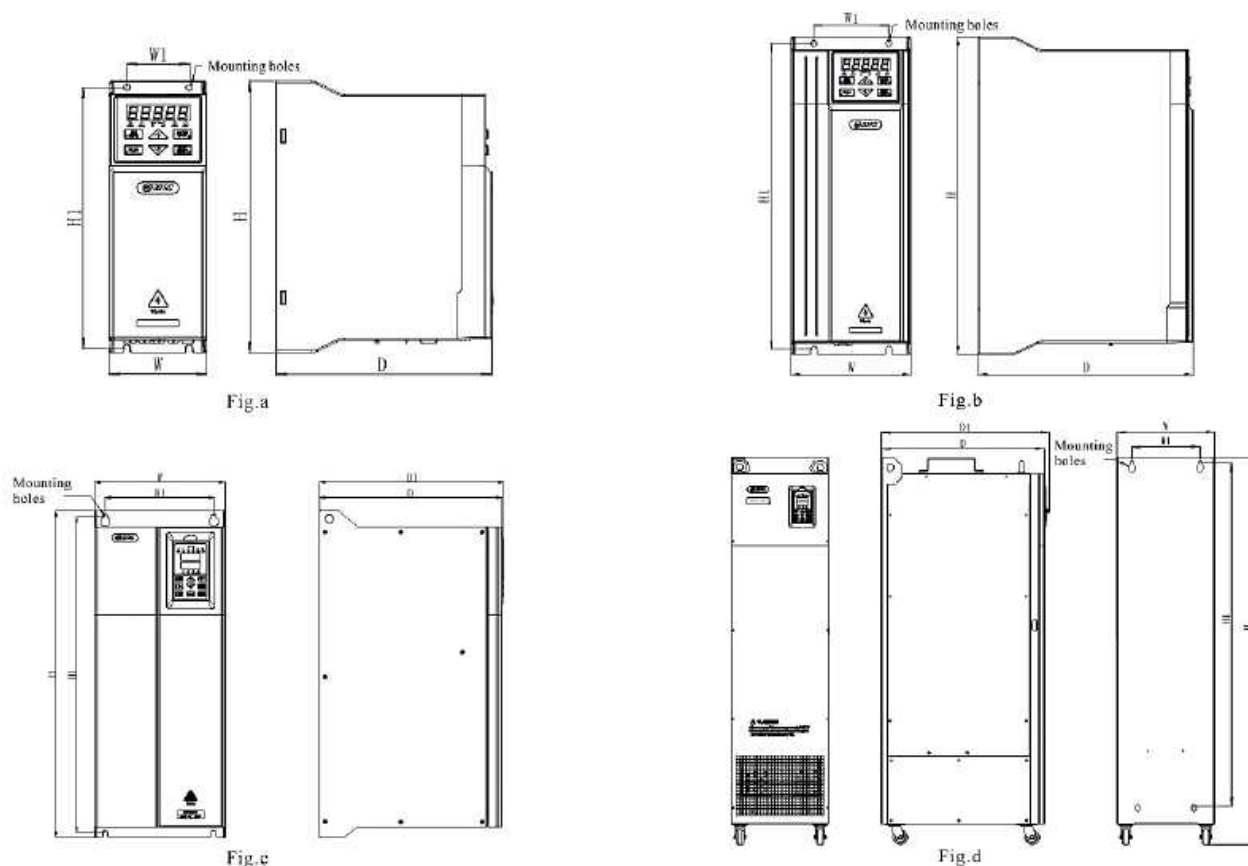

Input Voltage	W (mm)	H (mm)	D (mm)	W1 (mm)	H1 (mm)	D1 (mm)	Fix Hole (mm)	Fig.
EN760-4T0015P/0007GB	67	177	145	40	167	-	5	Fig.a
EN760-4T0022P/0015GB								
EN760-4T0037P/0022GB								
EN760-4T0055P/0037GB	75	210	166	48	201.5	-	5	Fig.a
EN760-4T0075P/0055GB	100	242	180	71	232.5	-	6	Fig.b
EN760-4T0110P/0075GB	120	320	214.7	75	308	-	6	Fig.b
EN760-4T0150P/0110GB								
EN760-4T0185P/0150GB								
EN760-4T0220P/0185GB	142	408	225	110	394	-	6	Fig.b
EN760-4T0300P/0220GB	172	466	230	142	452	-	7	Fig.b
EN760-4T0370P/0300G								
EN760-4T0450P/0370G								
EN760-4T0550P/0450G	225	550	315	185	530	319.5	7	Fig.c
EN760-4T0750P/0550G								
EN760-4T0900P/0750G								
EN760-4T1100P/0900G	240	600	335	200	580	339.5	9	Fig.c
EN760-4T1320P/1100G	310	730	390	230	710	394.5	9	Fig.c
EN760-4T1600P/1320G	335	750	405	245	730	409.5	9	Fig.c
EN760-4T1850P/1600G								
EN760-4T2000P/1850G	300	1150	505	180	1005	509.5	13	Fig.d