

# PRODUCT CATALOG





## WHO WE ARE

# Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code from an Andrivo farmer. It's shown to you before you order, not folded into a price you can't verify.

## 25%

fee with a referral  
code (30% without)

## 0

distributors in  
between

## SADC

we deliver across  
Southern Africa

## How every quote works

1

### Factory direct

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2

### Inspected before it ships

Each order is checked against the factory spec sheet before it leaves the plant.

3

### Shipping & customs handled

Freight, duties, clearing and transport to your gate are all managed by us.

4

### Parts & aftersales

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

### EXAMPLE: A MOWER ORDER

|                               |                |
|-------------------------------|----------------|
| Factory price                 | R36 000        |
| Freight, duties & customs     | R7 000         |
| Transport: port to farm       | R2 000         |
| Andrivo fee (25% with a code) | R11 250        |
| <b>You pay</b>                | <b>R56 250</b> |



# Table of Contents

|                                                                                    |                             |    |
|------------------------------------------------------------------------------------|-----------------------------|----|
|    | Commercial Zero-Turn Mowers | 04 |
|    | Zero-Turn Mowers            | 08 |
|    | Lawn Tractor                | 12 |
|   | Stand-On Mowers             | 16 |
|  | Leaf Blower                 | 20 |
|  | Front Lawn Aerator          | 24 |
|  | Wood Chipper                | 28 |
|  | Soil, Ture & Grounds Care   | 30 |
|  | Cylinder Mowers             | 33 |
|  | Parts & Accessories         | 36 |



WhatsApp +27 79 519 8131  
andrivo.sales@outlook.com





# COMMERCIAL LAWN MOWERS

For large-scale commercial mowing, efficiency and durability matter most. Our commercial zero-turn mowers are built for demanding workloads across business parks, municipal areas, and multi-site projects.





# COMMERCIAL LAWN MOWERS

ZTR48C // ZTR54C // ZTR62C // ZTR72C

A commercial zero-turn mower designed for efficient operation and precise maneuverability, suitable for professional lawn maintenance applications.



## BLADEP ATTERNE

Depending on your lawn environment, you can choose the type of blade you need.

## Full-Floating Heavy-Duty Steel Deck

High-capacity, heavy-duty steel mower decks with full-floating design, durable straps, and large idler pulleys for reduced wear.

|                   |                   |                            |
|-------------------|-------------------|----------------------------|
| Number of blades: | Cutting width:    | Cutting height range:      |
| Three pieces      | 72 inch / 1828 mm | 1 - 5 inch / 25.4 - 127 mm |



Deep cushions and generous bolsters offers superior comfort and reduced vibrations.

## High-Back Seat



Adjustable Height

1-5inch



**ROPS**  
Effectively improves operational safety and protects the operator.

**Heavy-Duty Cutting Deck**

**Turf-Friendly Tires**  
Harmless to lawns, stable grip, smooth driving.



## ZTR-48C



48 in  
1.0-5.0 in  
25 /24 HP  
35 L

• ZONSEN engine  
• Hydro-Gear ZT-3800  
• Electromagnetic Clutch  
• Roll Over Protection system (ROPS)

## ZTR-54C



54 in  
1.0-5.0 in  
33 HP  
73 L

• ZONSEN engine  
• Hydro-Gear ZT-3800  
• Electromagnetic Clutch  
• Roll Over Protection system (ROPS)

## ZTR-62C



62 in  
1.0-5.0 in  
35 HP  
73 L

• ZONSEN engine  
• Hydro-Gear ZT-3800  
• Electromagnetic Clutch  
• Roll Over Protection system (ROPS)

## ZTR-72C



72 in  
1.0-5.0 in  
35 HP  
73 L

• ZONSEN engine  
• Hydro-Gear ZT-5400  
• Electromagnetic Clutch  
• Roll Over Protection system (ROPS)

Engineered for professional landscaping demands, this machine delivers consistent power, exceptional durability and reliable operation day in and day out.

## Strong Output



Other Models

COMPACT DESIGN HIGH  
POWER AND TORQUE

24 KW 35 HP 999 cc

Zonsen XP1000 EFI V-Twin  
Built to excel in heavy-duty commercial use, the engine provides stable power output and exceptional durability.

COMPACT DESIGN HIGH  
POWER AND TORQUE

Hydro-Gear ZT-5400

SPEED  
up to 18 mph [up to 29 kph]

TORQUE  
up to 700 lb-ft [up to 949 Nm]



Hydro-Gear ZT-5400



Hydro-Gear ZT-3800



Side Discharge

Rear Discharge

Mulching


Three-blade cutter disk delivers clean, even and precise cutting results for a perfectly manicured lawn.

## PROTECTIVE STRUCTURE

Rollover Protective Structure (ROPS) and retractable seatbelt are both standard features. ROPS can be easily folded when storing in sheds or garages.





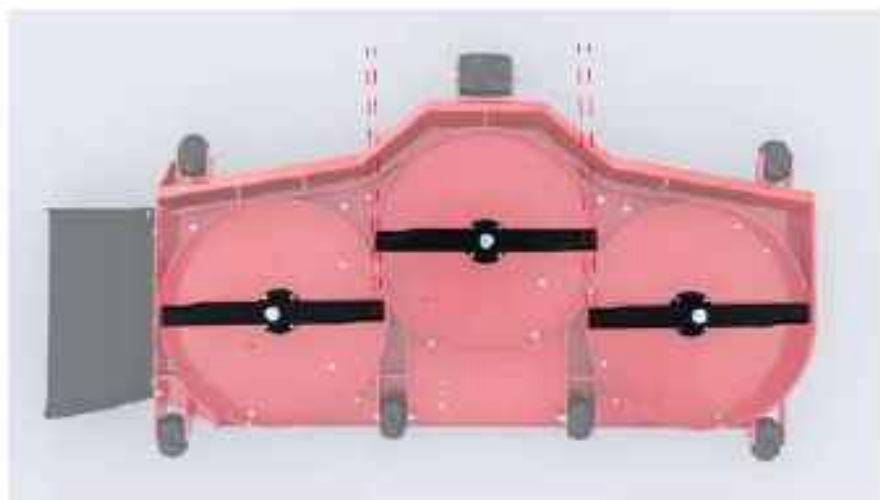

## HEAVY DUTY FABRICATED CUTTING DECK

- ✓ The robust construction effortlessly handles the most demanding commercial environments
- ✓ Overlapping mower blades ensure efficient cutting, with overlap ratio adjusted by model and blade size for optimal cutting quality

## Machine Parts



# TECHNICAL SPECIFICATIONS

Commercial Zero Turn Mower

| Model                         | ZTR-48C                          | ZTR-54C                     | ZTR-62C                            | ZTR-72C                          |
|-------------------------------|----------------------------------|-----------------------------|------------------------------------|----------------------------------|
| <b>Engine &amp; Power</b>     |                                  |                             |                                    |                                  |
| Engine                        | ZONSEN XP750 BEI/ LC2P82F V-Twin | ZONSEN XP1000 V-Twin        | ZONSEN XP1000 EFI V-Twin           | ZONSEN XP1000 EFI V-Twin         |
| Rated Power                   | 25 HP/24 HP                      | 33 HP                       | 35 HP                              | 35 HP                            |
| Displacement                  | 750 cc / 803 cc                  | 999 cc                      | 999 cc                             | 999 cc                           |
| Fuel Capacity                 | 35 L                             | 73 L                        | 73 L                               | 73 L                             |
| <b>Drive System</b>           |                                  |                             |                                    |                                  |
| Transmission                  | Hydro-Gear ZT-3800               | Hydro-Gear ZT-3800          | Hydro-Gear ZT-3800                 | Hydro-Gear ZT-5400               |
| Drive Mode                    | Zero-Turn,Hydrostatic            | Zero-Turn,Hydrostatic       | Zero-Turn,Hydrostatic              | Zero-Turn,Hydrostatic            |
| Tires-Front                   | 0-10 MPH (16 km/h)               | 0-12 MPH (19.2 km/h)        | 0-12 MPH (19.2 km/h)               | 0-14 MPH (22.4 km/h)             |
| Tires-Rear                    | 0-5 MPH (8 km/h)                 | 0-6 MPH (9.6 km/h)          | 0-6 MPH (9.6 km/h)                 | 0-8 MPH (12.8 km/h)              |
| Start                         | Electric start                   | Electric start              | Electric start                     | Electric start                   |
| <b>Cutting System</b>         |                                  |                             |                                    |                                  |
| Deck Type                     | Fabricated                       | Fabricated                  | Fabricated                         | Fabricated                       |
| Number of Blades              | 3 pieces                         | 3 pieces                    | 3 pieces                           | 3 pieces                         |
| Cutting Width                 | 48 in(1219 mm)                   | 54 in(1371 mm)              | 62 in(1573 mm)                     | 72 in(1828 mm)                   |
| Cutting Height Range          | 1.0-5.0 in (25.4-127 mm)         | 1.0-5.0 in (25.4-127 mm)    | 1.0-5.0 in (25.4-127 mm)           | 1.0-5.0 in (25.4-127 mm)         |
| Spindles                      | Aluminum                         | Aluminum                    | Aluminum                           | Aluminum                         |
| Blade Engagement              | Electromagnetic Clutch           | Electromagnetic Clutch      | Electromagnetic Clutch             | Electromagnetic Clutch           |
| <b>Tires &amp; Dimensions</b> |                                  |                             |                                    |                                  |
| Tires - Front                 | 13*6.5-6                         | 13*6.5-6                    | 13*6.5-6                           | 13*6.5-6                         |
| Tires - Rear                  | 23*10.5-12 Turf                  | 24*12-12 Turf               | 24*12-12 Turf                      | 26*14-12 Turf                    |
| Dimensions(L*W*H)             | 1938*1500*1765 mm                | 2160*1747*1867 mm           | 2160*1923*1867 mm                  | 2145*2208 *1888.5 mm             |
| Package Size(L*W*H)           | 1982*1244*855 mm                 | 2104*1408*875 mm            | 2104*1580*875 mm                   | 2118*1866*865mm                  |
| Weight Overall                | 460 kg                           | 510 kg                      | 538 kg                             | 646 kg                           |
| <b>Additional Features</b>    |                                  |                             |                                    |                                  |
| Certificate                   | CE/EPA/Euro5                     | CE/EPA/Euro5                | CE/EPA/Euro5                       | CE/EPA/Euro5                     |
| Container Load                | 40HQ: 24 pcs<br>20GP: 6 pcs      | 40HQ: 24 pcs<br>20GP: 6 pcs | 40HQ: 14 pcs /21pcs<br>20GP: 6 pcs | 40HQ: 12pcs/18pcs<br>20GP: 6 pcs |



A man wearing a yellow safety vest, sunglasses, and a dark cap is operating a red Kutter zero-turn mower on a green lawn. The mower has "KUTTER" and "53" printed on its side. The background shows a line of trees and a blue sky with light clouds.

# ZERO-TURN MOWER

A well-maintained lawn shouldn't take all day. Our residential zero-turn mowers are designed to make mowing faster, smoother, and easier to control. With precise maneuverability around trees, fences, and garden features, they help homeowners achieve a clean, even cut with less effort. Simple operation and low maintenance make them a practical choice for everyday lawn care.



# ZERO TURN MOWERS

**ZTR36B // ZTR42E // ZTR42B // ZTR50B**

A residential zero-turn mower designed for efficient mowing and precise handling. Equipped with a comfortable operator seat, intuitive controls, and a compact cutting deck, it provides smooth, even, and precise cutting performance across residential lawns, supporting more efficient yard maintenance.



## Ergonomic controls

Comfortable, user-focused controls put everything needed to operate the mower within easy reach.



One-Touch Start & Stop

Multi-speed drive settings, up to 3.4 MPH.







## POWER FOR PROFESSIONAL LAWN CARE

- 50 in
- 24.5 HP / 23 HP
- Hydro Gear EZT-2200

Everything is in your control. Add a little ease to your daily routine with a ZTR mower.



## Find your perfect match

### ZTR-36B



- 36 in
- 1.5-4.5 in
- 23 / 17 HP
- 25 L

- ZONSEN / LC engine
- Hydro-Gear EZT-2200
- Electromagnetic Clutch
- Electric start

### ZTR-42E



- 42 in
- 1.5-4.5 in
- 20 / 23 / 17 HP
- 25 L

- ZONSEN / LC engine
- Hydro-Gear EZT-2200
- Electromagnetic Clutch
- Electric start

### ZTR-50B(2023 Model)



- 50 in
- 1.5-4.5 in
- 25 / 23 HP
- 20 L

- ZONSEN / LC engine
- Hydro-Gear EZT-2200
- Electromagnetic Clutch
- Electric start

### ZTR-42B



- 42 in
- 1.5-4.5 in
- 23 HP
- 25 L

- ZONSEN / LC engine
- Hydro-Gear EZT-2200
- Electromagnetic Clutch
- Electric start

## BUILT TOUGH. CUTS BETTER.

- One-Piece Stamped Cutter Disc
- Optimized airflow for a cleaner cut
- Longer lifespan with less maintenance



## DURABLE WELDED DECK

- Thick steel construction for lasting strength
- Reinforced frame ensures smooth, consistent cutting
- Low maintenance for reliable, long-term performance




## Compact design high power and torque

Delivering seamless, infinitely variable speed control and zero-turn precision, it ensures smooth, responsive maneuvering across any terrain.

### Hydro-Gear ZT-2200 System

- SPEED  
up to 7 mph [up to 11 kph]
- TORQUE  
up to 215 lb-ft [up to 291 Nm]

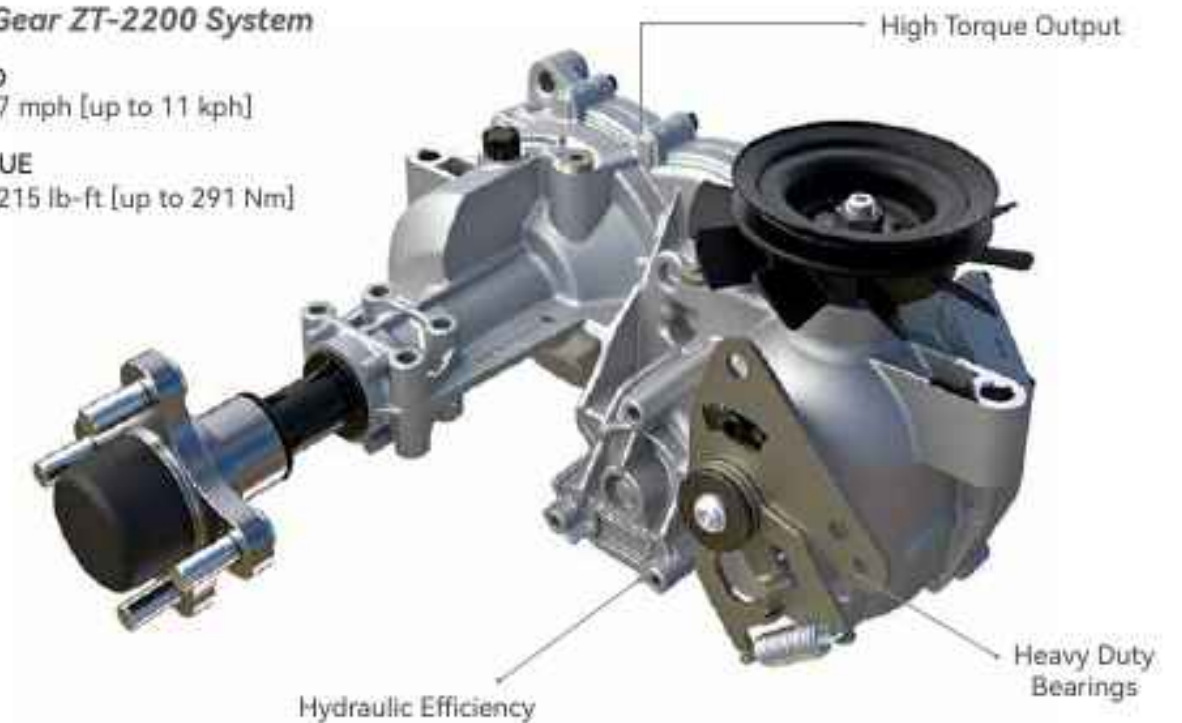

Content sourced from the Hydro-Gear official website.



Robot Welding ( $\pm 0.5$  mm tolerance, 100% consistency); Electrostatic Coating + Powder Coating.

- Salt Spray Test:  
1,500 hours without rust spots (vs. GB standard 800 hours)
- Weatherability:  
QUV accelerated aging test 3,000 hours, color difference  $\Delta E < 1.5$





## Machine Parts



Sun Shade  
Designed ZTR-50



Lawn Tire  
18x6.5/9.5-8 Turf  
Designed for Zero Turn Mowers



Standard Flat Blade  
Designed for Zero Turn Mowers



Mulching Blade  
Designed for Zero Turn Mowers



Drive Belt  
Designed for Zero Turn Mowers



Electromagnetic Clutch  
Designed for Zero Turn Mowers



Spark Plug  
Designed for Zero Turn Mowers



Air Cleaner Element  
Designed for Zero Turn Mowers

## TECHNICAL SPECIFICATIONS

Zero Turn Mower

| Model                         | ZTR-36B                                   | ZTR-42B                                   | ZTR-42E                              | ZTR-50B<br>(23 Model)                     | ZTR-50B<br>(25 Model)                     |
|-------------------------------|-------------------------------------------|-------------------------------------------|--------------------------------------|-------------------------------------------|-------------------------------------------|
| <b>Engine &amp; Power</b>     |                                           |                                           |                                      |                                           |                                           |
| Engine                        | ZONSEN XP680 II<br>LC2P73F V-Twin         | ZONSEN XP680 II<br>LC2P80F V-Twin         | ZONSEN XP590/680II<br>LC2P73F V-Twin | ZONSEN XP750II EI<br>LC2P80F V-Twin       | ZONSEN XP720 II<br>LC2P80F V-Twin         |
| Rated Power                   | 23 HP/17 HP                               | 23 HP                                     | 20 HP/23 HP/17 HP                    | 25 HP/23 HP                               | 24.5 HP/23 HP                             |
| Displacement                  | 679 cc/586 cc                             | 679 cc/764 cc                             | 594 cc/679 cc<br>/586 cc             | 750 cc/764 cc                             | 714 cc/764 cc                             |
| Fuel Capacity                 | 25 L                                      | 25 L                                      | 25 L                                 | 20 L                                      | 25 L                                      |
| <b>Drive System</b>           |                                           |                                           |                                      |                                           |                                           |
| Transmission                  | Hydro Gear EZT-2200<br>(Optional ZT-2800) | Hydro Gear EZT-2200<br>(Optional ZT-2800) | Hydro Gear EZT-2200                  | Hydro Gear EZT-2200<br>(Optional ZT-2800) | Hydro Gear EZT-2200<br>(Optional ZT-2800) |
| Drive Mode                    | Zero-Turn,<br>Hydrostatic                 | Zero-Turn,<br>Hydrostatic                 | Zero-Turn,<br>Hydrostatic            | Zero-Turn,<br>Hydrostatic                 | Zero-Turn,<br>Hydrostatic                 |
| Tires-Front                   | 0-7.7 MPH<br>(12.4 km/h)                  | 0-7.7 MPH<br>(12.4 km/h)                  | 0-7.7 MPH<br>(12.4 km/h)             | 0-7.7 MPH<br>(12.4 km/h)                  | 0-7.7 MPH<br>(12.4 km/h)                  |
| Tires-Rear                    | 0-3.4 MPH<br>(5.5 km/h)                   | 0-3.4 MPH<br>(5.5 km/h)                   | 0-3.4 MPH<br>(5.5 km/h)              | 0-3.4 MPH<br>(5.5 km/h)                   | 0-3.4 MPH<br>(5.5 km/h)                   |
| Start                         | Electric start                            | Electric start                            | Electric start                       | Electric start                            | Electric start                            |
| <b>Cutting System</b>         |                                           |                                           |                                      |                                           |                                           |
| Deck Type                     | Fabricated                                | Fabricated                                | One-Piece Stamped<br>Blade Disc      | Fabricated                                | Fabricated                                |
| Number Of Blades              | 2 pieces                                  | 3 pieces                                  | 2 pieces                             | 3 pieces                                  | 3 pieces                                  |
| Cutting Width                 | 36 in(915 mm)                             | 42 in(1060 mm)                            | 42 in(1060 mm)                       | 50 in(1270 mm)                            | 50 in(1270 mm)                            |
| Cutting Height Range          | 1.5-4.5 in<br>(38-114 mm)                 | 1.5-4.5 in<br>(38-114 mm)                 | 1.5-4.5 in<br>(38-114 mm)            | 1.5-4.5 in<br>(38-114 mm)                 | 1.5-4.5 in<br>(38-114 mm)                 |
| Spindles                      | Aluminum                                  | Aluminum                                  | Aluminum                             | Aluminum                                  | Aluminum                                  |
| Blade Engagement              | Electromagnetic<br>Clutch                 | Electromagnetic<br>Clutch                 | Electromagnetic<br>Clutch            | Electromagnetic<br>Clutch                 | Electromagnetic<br>Clutch                 |
| <b>Tires &amp; Dimensions</b> |                                           |                                           |                                      |                                           |                                           |
| Tire Size                     | F:11x4.0-5<br>R:18x6.5-8 Turf             | F:11x4.0-5<br>R:18x9.5-8 Turf             | F:11x4.0-5<br>R:18x9.5-8 Turf        | F:11x4.0-5<br>R:18x9.5-8 Turf             | F:11x4.0-5<br>R:18x9.5-8 Turf             |
| Weight Overall                | 250 kg                                    | 300 kg                                    | 221 kg                               | 320 kg                                    | 300 kg                                    |
| Package Size                  | 1690x930x700 mm                           | 1687x1154x700 mm                          | 1705x1115 x700 mm                    | 1833x1300x875 mm                          | 1687x1115x700 mm                          |
| <b>Additional Features</b>    |                                           |                                           |                                      |                                           |                                           |
| Certificate                   | CE/EPA/Euro5                              | CE/EPA/Euro5                              | CE/EPA/Euro5                         | CE/EPA/Euro5                              | CE/EPA/Euro5                              |
| Container Load                | 40HQ: 56 pcs<br>20GP: 18pcs               | 40HQ: 56 pcs<br>20GP: 18pcs               | 40HQ: 56 pcs<br>20GP: 18pcs          | 40HQ: 30 pcs<br>20GP: 10 pcs              | 40HQ: 40 pcs<br>20GP: 15 pcs              |



# LAWN TRACTORS

For users who value simplicity and versatility, our lawn tractors offer a practical solution for regular property maintenance. Suitable for larger lawns, estates, and light-duty applications, they provide a stable and familiar driving experience. With reliable cutting performance and easy operation, they help maintain consistent results while keeping maintenance straightforward and manageable.

**2026  
NEW**





# RIDING LAWN TRACTORS

**LT34R // LT36R // LT40R // LT38S**  
**LT42R // LT42S // LTP42R**

A powerful and user-friendly riding lawn tractor designed for efficient and comfortable mowing over large areas, delivering consistent results.

## Stylish Hood

The exclusive design provides excellent cooling and durability.

## LED Headlights

High visibility in low light situations, these LED are aimed so you see what is in front of you. Better lighting and longer lasting than incandescent lights.

## Anti-Collision Guard

CE | EURO5 | ISO

## Performance Meets Power

Achieve a neatly manicured lawn in just minutes with a ride-on lawn mower. This mower comes standard with a comfortably upholstered seat and is available with cutting decks of various sizes, allowing you to achieve a clean, even cut at higher speeds. Additionally, you can add a utility cart to easily transport any debris that may accumulate on your lawn.



## One-Touch Control Technology

Grass cutting and shredding. Weed removal. Effortless one-touch weed removal operation.



## ZONSEN XP680 V-Twin

Powerful engine with abundant and stable power output, providing strong support for efficient mowing and complex lawn maintenance.



## Grass Bag

Equipped with a rear grass bag mounting system, it features a large capacity and high collection efficiency.

**320 L**

## One-Piece Stamped Blade Disc



**1-5 inch Adjustable Height**





**2026  
NEW**

## LTP-42R | 380L

42 in / 1070 mm

LONCIN LC2P73F-A 15HP V-Twin  
ZONSEN XP680II 23HP V-Twin

Hydro-Gear T2



**SPEED**  
3000 / 1800 rpm  
**OUTPUT TORQUE**  
156 / 291Nm

**ADVANCED INTEGRATED  
TRANSMISSION**

### LT-34R



34 in  
1.18-3.15 in  
11.5 / 13 HP  
8 L  
• ZONSEN Engine  
• Hydrostatic  
• Collector Emptying: Manual  
• Seat with Safety Contact Breaker

### LT-36R



36 in  
1.18-3.15 in  
13 HP  
8 L  
• ZONSEN Engine  
• Hydrostatic  
• Collector Emptying: Manual  
• Seat with Safety Contact Breaker

### LT-40R



40 in  
1.18-3.15 in  
15 / 23 HP  
8 L  
• ZONSEN/LC Engine  
• Hydrostatic  
• Collector Emptying: Manual  
• Seat with Safety Contact Breaker

### LT-42R



42 in  
1.18-3.15 in  
15 / 23 HP  
8 L  
• ZONSEN/LC Engine  
• Hydrostatic  
• Collector Emptying: Manual  
• Seat with Safety Contact Breaker

High-quality mowing is just the first step. These tractors can also mulch the lawn, traverse muddy areas with confidence, and go wherever needed—all supported by a heavy-duty frame.

### LT-42S

Lawn Tractor with 42-in. Deck

1.18-3.15 in  
15 / 23 HP  
8 L

High-Efficiency Side Discharge System  
Clippings are discharged quickly and evenly for smooth and effortless mowing



### LT-38S

38 in / 965 mm  
ZONSEN XP 440E 13HP  
Hydrostatic / Mechanical Bridge





Maximize your mower's efficiency. Tackle any task on your list with ease. From hauling, grading and bagging to topdressing, our wide range of attachments ensures reliable, high-quality lawn care all year round.

## From Lawn Care to Snow Removal



## Machine Parts



**Trailer**  
Designed for LT-32/36/40/42



**Lawn Tire**  
23x10.5/12/14-12 Turf  
Designed for Lawn Tractors



**Snow Plow**  
Designed for LT-32/36/40/42



**Drive Belt**  
Designed for Lawn Tractors



**Electric Clutch**  
Designed for Lawn Tractors



**Air Cleaner Element**  
Designed for Lawn Tractors



**Air Filter**  
Designed for Lawn Tractors



**Mulching Blade**  
Designed for Lawn Tractors



**Tractor Blade**  
Designed for Lawn Tractors

# TECHNICAL SPECIFICATIONS

## Riding Lawn Tractors

| Model                     | LT-34R                         | LT-36R                        | LT-38S                           | LT-40R                          | LT-42R                          | LT-42S                          | LTP-42R <small>2024 NEW</small>    |
|---------------------------|--------------------------------|-------------------------------|----------------------------------|---------------------------------|---------------------------------|---------------------------------|------------------------------------|
| <b>Engine &amp; Power</b> |                                |                               |                                  |                                 |                                 |                                 |                                    |
| Engine                    | ZONSEN XP380A or XP440E V-Twin | ZONSEN XP440E V-Twin          | ZONSEN XP440E V-Twin             | ZONSEN XP680II LC2P73F-A V-Twin | ZONSEN XP680II LC2P73F-A V-Twin | ZONSEN XP680II LC2P73F-A V-Twin | ZONSEN XP680II LC2P73F-A V-Twin    |
| Rated Power               | 11.5 / 13 HP                   | 13 HP                         | 13 HP                            | 23 HP/15 HP                     | 23 HP/15 HP                     | 23 HP/15 HP                     | 23 HP/15 HP                        |
| Displacement              | 382 cc / 439 cc                | 439 cc                        | 439 cc                           | 680 cc/586 cc                   | 680 cc/586 cc                   | 680 cc/586 cc                   | 680 cc/586 cc                      |
| Fuel Capacity             | 8 L                            | 8 L                           | 8 L                              | 8 L                             | 8 L                             | 8 L                             | 8 L                                |
| <b>Drive System</b>       |                                |                               |                                  |                                 |                                 |                                 |                                    |
| Drive Model               | ZONSEN YT145 LONCIN HT20       | LONCIN HT20                   | LONCIN HT20 or T2000             | LONCIN HT20                     | LONCIN HT20                     | LONCIN HT20                     | Hydro-Gear T2                      |
| Drive Type                | Hydrostatic                    | Hydrostatic                   | Hydrostatic or Mechanical Bridge | Hydrostatic                     | Hydrostatic                     | Hydrostatic                     | Hydrostatic                        |
| Tires-Front               | 0-4.3 MPH (0-7 km/h)           | 0-4.3 MPH (0-7 km/h)          | 0-4.3 MPH (0-7 km/h)             | 0-4.3 MPH (0-7 km/h)            | 0-4.3 MPH (0-7 km/h)            | 0-4.3 MPH (0-7 km/h)            | 0-4.3 MPH (0-7 km/h)               |
| Tires-Rear                | 0-2.5 MPH (0-4 km/h)           | 0-2.5 MPH (0-4 km/h)          | 0-2.5 MPH (0-4 km/h)             | 0-2.5 MPH (0-4 km/h)            | 0-2.5 MPH (0-4 km/h)            | 0-2.5 MPH (0-4 km/h)            | 0-2.5 MPH (0-4 km/h)               |
| Steering Wheel            | Premium With Soft Grip         | Premium With Soft Grip        | Premium With Soft Grip           | Premium With Soft Grip          | Premium With Soft Grip          | Premium With Soft Grip          | Premium With Soft Grip             |
| <b>Deck</b>               |                                |                               |                                  |                                 |                                 |                                 |                                    |
| Cutting Width             | 34 in (860 mm)                 | 36 in (915 mm)                | 38 in (965 mm)                   | 40 in (1020 mm)                 | 42 in (1070 mm)                 | 42 in (1070 mm)                 | 42 in (1070 mm)                    |
| Height Range              | 1.18-3.15 in (30-80 mm)        | 1.18-3.15 in (30-80 mm)       | 1.18-3.15 in (30-80 mm)          | 1.18-3.15 in (30-80 mm)         | 1.18-3.15 in (30-80 mm)         | 1.18-3.15 in (30-80 mm)         | 1.18-3.15 in (30-80 mm)            |
| Number Of Blades          | 2 pieces                       | 2 pieces                      | 2 pieces                         | 2 pieces                        | 2 pieces                        | 2 pieces                        | 2 pieces                           |
| Minimum Uncut Radius      | 39.37 in(1000 mm)              | 39.37 in(1000 mm)             | 39.37 in(1000 mm)                | 39.37 in(1000 mm)               | 39.37 in(1000 mm)               | 39.37 in(1000 mm)               | 39.37 in(1000 mm)                  |
| Reverse Mowing            | Yes                            | Yes                           | Yes                              | Yes                             | Yes                             | Yes                             | Yes                                |
| <b>Dimensions</b>         |                                |                               |                                  |                                 |                                 |                                 |                                    |
| Tyres                     | F:15x6.0-6<br>R:18x8.5-8 Turf  | F:15x6.0-6<br>R:18x8.5-8 Turf | F:15x6.0-6<br>R:18x8.5-8 Turf    | F:15x6.0-6<br>R:18x8.5-8 Turf   | F:15x6.0-6<br>R:18x8.5-8 Turf   | F:15x6.0-6<br>R:18x8.5-8 Turf   | F:15x6.0-6<br>R:20x10-8 Turf       |
| Package Size              | 1690x1130x840mm                | 1690x1130x840mm               | 1690x1130x840mm                  | 1690x1130x840mm                 | 1690x1130x840mm                 | 1690x1130x840mm                 | 1960x1100x860mm                    |
| Weight                    | 206 kg                         | 208 kg                        | 203 kg                           | 210 kg                          | 212 kg                          | 206 kg                          | 270 kg                             |
| Container Load            | 40HQ:42 pcs<br>20GP:12 pcs     | 40HQ:42 pcs<br>20GP:12 pcs    | 40HQ:42 pcs<br>20GP:12 pcs       | 40HQ:42 pcs<br>20GP:12 pcs      | 40HQ:42 pcs<br>20GP:12 pcs      | 40HQ:42 pcs<br>20GP:12 pcs      | 40HQ:36 pcs                        |
| <b>Features</b>           |                                |                               |                                  |                                 |                                 |                                 |                                    |
| Collector Type            | Textile                        | Textile                       | No                               | Textile                         | Textile                         | No                              | Textile                            |
| Collector Capacity        | 320L                           | 320L                          | No                               | 320L                            | 320L                            | No                              | 340L without lid,<br>380L with lid |
| Collector Emptying        | Manual                         | Manual                        | No                               | Manual                          | Manual                          | No                              | Manual                             |
| Washing Connection        | Yes                            | Yes                           | Yes                              | Yes                             | Yes                             | Yes                             | Yes                                |





# STAND-ON MOWER

When space is tight and efficiency matters, maneuverability is key. Our stand-on mowers deliver agile movement, clear visibility, and precise control in complex environments, step-off operation with steady performance and enhanced workflow efficiency.







## COMPACT DESIGN

Easy to tow with excellent maneuverability

- Superior slope performance.
- Enhanced operator comfort on uneven ground.
- Improved traction.

# STAND-ON MOWERS

ZTS32B // ZTS36B // ZTS42B // ZTS50B  
ZTS61C // ZTS52C // ZTS48C

A compact, high-performance solution built for precision control and productivity.



### Heavy-Duty Cutting Deck

Delivers clean, consistent results with reinforced durability

### Commercial-Grade Engine

Provides reliable power for demanding workloads

### Precision Control System

Enables smooth handling with responsive control



### Reinforced Front Protection

Reduces impact and protects key components

### Quick Height Adjustment

Allows easily to changing grass conditions.





## Find Your Perfect Match

### ZTS-32B



32 in  
1.5-4.5 in  
25 / 23 HP  
10 L

- ZONSEN/LC Engine
- Hydro-Gear EZT-2200
- Electromagnetic Clutch
- Electric Start

### ZTS-36B



36 in  
1.5-4.5 in  
25 / 23 HP  
10 L

- ZONSEN/LC Engine
- Hydro-Gear EZT-2200
- Electromagnetic Clutch
- Electric Start

### ZTS-42B



42 in  
1.5-4.5 in  
25 / 22 HP  
15 L

- ZONSEN/LC Engine
- Hydro-Gear EZT-2200
- Electromagnetic Clutch
- Electric Start

### ZTS-50B



50 in  
1.5-4.5 in  
25 / 23 in  
15 L

- ZONSEN/LC Engine
- Hydro-Gear EZT-2200
- Electromagnetic Clutch
- Electric Start

## Commercial-Grade Preferred

2026 NEW



### ZTS-61C

62 in 35 HP 45 L

Features wide coverage in a single pass, an efficient and durable mowing deck, a lower center of gravity, excellent visibility, and easy on/off access.



52 in / 1321 mm

ZTS-52C 23 / 24.5 / 25 HP

Hydro-Gear EZT-2800



48 in / 1219 mm

ZTS-48C 23 / 24.5 / 25 HP

Hydro-Gear EZT-2800



ZONSEN XP1000 EI V-Twin

35 HP 999 cc 74 N·m

Powerful commercial-grade engine delivers strong, consistent output for efficient mowing and reliable performance under heavy-duty conditions.

### EASY TO OPERATE



Ergonomic design keeps you well aligned with the machine even on slopes and complex terrains. The large suspended platform with intuitive controls ensures easy entry and exit. Adjustable footrests and comfort features enable long-lasting, efficient mowing.

### EASY TO MAINTAIN



Oil check via easy-access cover, battery replacement simplified by external box — keeping your mower running strong. Quick cleanup with a water hose after a full day's work makes maintenance effortless.

### SERIOUSLY PRODUCTIVE



Available with 32-inch, 36-inch, 42-inch, 50-inch, and 61-inch mowing decks. The larger cutting area provides thorough ground coverage and better visibility. The zero-turning front track enables easy moving in all directions.



## Boosting Zero-Turn Mower Performance

Provides smooth, precise control, enhances power output, reduces maintenance, and makes mowing more efficient and comfortable.

**Strong Output**  
Hydro-Gear EZT-2200 / ZT-3800



## Machine parts



**Aluminum Grass Catcher**  
Designed for Stand-On Mowers



**Lawn Tire**  
18 x 6.5-8 / 9.5-8 Turf  
Designed for Stand-On Mowers



**Standard Flat Blade**  
Designed for Stand-On Mowers



**Mulching Blade**  
Designed for Stand-On Mowers



**Snow Plow**  
Designed for Stand-On Mowers



**Electric Clutch**  
Designed for Stand-On Mowers



**Spark Plug**  
Designed for Stand-On Mowers



**Air Cleaner Element**  
Designed for Stand-On Mowers

# TECHNICAL SPECIFICATIONS

Stand-on Mower

|                               | ZTS-32B                                | ZTS-36B                                | ZTS-42B                                | ZTS-50B                                | ZTS-61C                       |
|-------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|-------------------------------|
| <b>Engine &amp; Power</b>     |                                        |                                        |                                        |                                        |                               |
| Engine                        | ZONSEN XP750B LC2P80F V-Twin           | ZONSEN XP750B LC2P80F V-Twin           | ZONSEN XP750B LC2P80F V-Twin           | ZONSEN XP750B LC2P80F V-Twin           | ZONSEN XP1000 EI V-Twin       |
| Rated Power                   | 25 HP/23 HP                            | 25 HP/23 HP                            | 25 HP/23 HP                            | 25 HP/23 HP                            | 35 HP                         |
| Displacement                  | 750 cc/764 cc                          | 750 cc/764 cc                          | 750 cc/764 cc                          | 750 cc/764 cc                          | 999 cc                        |
| Fuel Capacity                 | 10 L                                   | 10 L                                   | 15 L                                   | 15 L                                   | 45 L                          |
| <b>Drive System</b>           |                                        |                                        |                                        |                                        |                               |
| Transmission                  | Hydro Gear EZT-2200 (Optional ZT-2800) | Hydro Gear EZT-2200 (Optional ZT-2800) | Hydro Gear EZT-2200 (Optional ZT-2800) | Hydro Gear EZT-2200 (Optional ZT-2800) | Hydro-Gear ZT-3800            |
| Drive Mode                    | Zero-Turn, Hydrostatic                 | Zero-Turn, Hydrostatic                 | Zero-Turn, Hydrostatic                 | Zero-Turn, Hydrostatic                 | Zero-Turn, Hydrostatic        |
| Tires-Front                   | 0-7.7 MPH (12.4 km/h)                  | 0-7.7 MPH (12.4 km/h)                  | 0-7.7 MPH (12.4 km/h)                  | 0-7.7 MPH (12.4 km/h)                  | 0-12 MPH (19.2 km/h)          |
| Tires-Rear                    | 0-3.4 MPH (5.5 km/h)                   | 0-3.4 MPH (5.5 km/h)                   | 0-3.4 MPH (5.5 km/h)                   | 0-3.4 MPH (5.5 km/h)                   | 0-6 MPH (9.6 km/h)            |
| Start                         | Electric start                         | Electric start                         | Electric start                         | Electric start                         | Electric start                |
| <b>Cutting System</b>         |                                        |                                        |                                        |                                        |                               |
| Deck Type                     | Fabricated                             | Fabricated                             | Fabricated                             | Fabricated                             | Fabricated                    |
| Number Of Blades              | 2 pieces                               | 2 pieces                               | 3 pieces                               | 3 pieces                               | 3 pieces                      |
| Cutting Width                 | 32 in (810 mm)                         | 36 in (915 mm)                         | 42 in (1060 mm)                        | 50 in (1270 mm)                        | 62 in (1573 mm)               |
| Cutting Height Range          | 1.5-4.5 in (38-114 mm)                 | 1.5-4.5 in (38-114 mm)                 | 1.5-4.5 in (38-114 mm)                 | 1.5-4.5 in (38-114 mm)                 | 1.0-5.0 in (25.4-127 mm)      |
| Spindles                      | Aluminum                               | Aluminum                               | Aluminum                               | Aluminum                               | Aluminum                      |
| Blade Engagement              | Electromagnetic Clutch                 | Electromagnetic Clutch                 | Electromagnetic Clutch                 | Electromagnetic Clutch                 | Electromagnetic Clutch        |
| <b>Tires &amp; Dimensions</b> |                                        |                                        |                                        |                                        |                               |
| Tire Size                     | F:11x4.0-5<br>R:18x6.5-8 Turf          | F:11x4.0-5<br>R:18x9.5-8 Turf          | F:11x4.0-5<br>R:18x9.5-8 Turf          | F:11x4.0-5<br>R:18x9.5-8 Turf          | F:13x6.5-6<br>R:24x12-12 Turf |
| Overall Weight                | 280 kg                                 | 290 kg                                 | 298 kg                                 | 310 kg                                 | 508 kg                        |
| Package Size                  | 1850x950x870 mm                        | 1700x1100x870 mm                       | 1700x1114x870 mm                       | 1700x1305x870 mm                       | 1842x1585x880 mm              |
| <b>Additional Features</b>    |                                        |                                        |                                        |                                        |                               |
| Certificate                   | CE/EPA/Euro5                           | CE/EPA/Euro5                           | CE/EPA/Euro5                           | CE/EPA/Euro5                           | CE/EPA/Euro5                  |
| Container Load                | 40HQ: 36 pcs<br>20GP: 12 pcs           | 40HQ: 39 pcs<br>20GP: 12 pcs           | 40HQ: 39 pcs<br>20GP: 12 pcs           | 40HQ: 30 pcs<br>20GP: 12 pcs           | 40HQ: 21 pcs<br>20GP: 6 pcs   |





# LEAF BLOWER

- ✓ **Stand-on Leaf Blower**
- ✓ **Tow Behind Leaf Blower**
- ✓ **Walk-behind leaf Blower**

Whether you're maintaining residential landscapes, municipal parks, or specialized venues like golf courses, our three blower series—stand-on, walk-behind, and tow behind—deliver exceptional performance, low maintenance costs, and proven reliability. Designed for landscape contractors and rental businesses alike, these machines boost productivity, reduce operating expenses, and help you achieve greater profitability and long-term return on investment.



# STAND-ON LEAF BLOWER

SLBH22 // SLBH23 // DTBH22 // DTBH23  
LB1/2 // TLBSU25

Featuring a robust engine, high-capacity airflow system, and operator-oriented platform, this unit delivers reliable performance for professional grounds care and landscape maintenance.



## Pure Innovation

Our blowers feature a unique design with wheels positioned in front of the impeller head, allowing unobstructed airflow for maximum efficiency and consistent performance.



## High-Power Airflow Performance

High-output airflow efficiently clears large areas of leaves and light debris.

The air outlet supports 360° horizontal electric adjustment with no blind spots and  $\pm 17^\circ$  vertical adjustment, covering the cleaning area in all directions.

**360°  $\pm 17^\circ$**

**Air Outlet**



**EFFORTLESS CONTROL**



## STRONG OUTPUT

HONDA GX690

**16.5 kW 22 HP 688 cc**

The ground tracking system provides smooth and quiet operation, reduces heat buildup for extended durability, and improves fuel efficiency.



## TRANSMISSION SYSTEM



Hydro-Gear ZT-3100



Electricmeganetic Clutch

### SLBH22/23



165 mph  
4500 cfm  
22 / 23 HP  
15 L

- Honda / VANGUARD Engine
- Hydro-Gear ZT-3100
- Electric Joystick
- 180° free rotation

### DTBH22/23



102.5 mph  
6000 cfm  
22 / 23 HP  
15 L

- Honda / VANGUARD Engine
- Hydro-Gear ZT-3100
- Electric Joystick
- 360° pivot

**2026  
NEW**

TLBSU25

136.45 MPH  
8186 CFM  
22 HP

# Tow Behind Leaf Blower



## Walk-Behind Leaf Blower

Efficient debris clearing in tight and challenging areas, with operator comfort and powerful airflow.



CE | G130 | Euro 5

|                     |                     |
|---------------------|---------------------|
| Engine              | Xinyuan 6.5 / 9 HP  |
| Turbo Thickness     | 4.5 in              |
| Air Velocity (km/h) | 160 MPH / 165 MPH   |
| Fan Disc Speed      | 3600 RPM            |
| Air Flow (m³/min)   | 2300 cfm / 2700 cfm |
| Impeller Blades     | 7-Blade             |





⑤ Ergonomic Layout: All operational functions are within easy reach.

⑥ Ergonomically designed to fit body curves and reduce work fatigue.

⑦ Low-ground-pressure tires minimize turf damage during operation in sensitive areas.



## Machine Parts



**Lawn Tire**  
18×9.5-8 / 22×10-10 Turf  
Designed for Leaf Blower



**Spark Plug**  
Designed for Leaf Blower



**Electric Clutch**  
Designed for Leaf Blower

## TECHNICAL SPECIFICATIONS

### Leaf Blower

| Model                         | SLBH22                                 | SLBV23                                 | DTBH22                             | DTBV23                              |
|-------------------------------|----------------------------------------|----------------------------------------|------------------------------------|-------------------------------------|
| <b>Engine &amp; Power</b>     |                                        |                                        |                                    |                                     |
| Engine                        | Honda GX690 V-Twin Petrol              | VANGUARD 17.2 GROSS KW                 | Honda GX690 V-Twin Petrol          | VANGUARD 17.2 GROSS KW              |
| Rated Power                   | 22 HP                                  | 23 HP                                  | 22 HP                              | 23 HP                               |
| Displacement                  | 688 cc                                 | 627 cc                                 | 688 cc                             | 627 cc                              |
| Fuel Capacity                 | 15 L                                   | 15 L                                   | 15 L                               | 15 L                                |
| Performance                   | 16.5 kW                                | 17.2 kW                                | 16.5 kW                            | 17.2 kW                             |
| <b>Impeller</b>               |                                        |                                        |                                    |                                     |
| Impeller Blades               | 6 pieces                               | 6 pieces                               | 25 pieces                          | 25 pieces                           |
| Impeller Diameter             | 18 in (475 mm)                         | 18 in (475 mm)                         | 14 in (358 mm)                     | 14 in (358 mm)                      |
| Impeller Construction         | All-steel,welded,dynam-ically balanced | All-steel,welded,dynam-ically balanced | Ducted Fan                         | Ducted Fan                          |
| Air Velocity                  | 165 MPH (252 kw/h)                     | 165 MPH (252 kw/h)                     | 102.5 MPH (165 kw/h)               | 102.5 MPH (165 kw/h)                |
| Air flow                      | 4500 CFM (127 m³/min)                  | 4500 CFM (127 m³/min)                  | 6000 CFM (170 m³/min)              | 6000 CFM (170 m³/min)               |
| Air Discharge Locations       | 180° freely rotating                   | 180° freely rotating                   | Pivot 360 Degrees                  | Pivot 360 Degrees                   |
| Air Discharge Control         | Electric joystick                      | Electric joystick                      | Electric joystick                  | Electric joystick                   |
| <b>Drive System</b>           |                                        |                                        |                                    |                                     |
| Drive Type                    | Dual hydrostatic                       | Dual hydrostatic                       | Dual hydrostatic                   | Dual hydrostatic                    |
| Electric Clutch               | Yse                                    | Yse                                    | Yse                                | Yse                                 |
| Transmission                  | Hydro-Gear ZT-3100                     | Hydro-Gear ZT-3100                     | Hydro-Gear ZT-3100                 | Hydro-Gear ZT-3100                  |
| Parking Brake                 | Manual                                 | Manual                                 | Manual                             | Manual                              |
| Forward Speed                 | 9 MPH (14.4 km/h)                      | 9 MPH (14.4 km/h)                      | 9 MPH (14.4 km/h)                  | 9 MPH (14.4 km/h)                   |
| <b>Tires &amp; Dimensions</b> |                                        |                                        |                                    |                                     |
| Tire Size                     | F:11×4-5<br>R:18×9.5-8 Turf            | F:11×4-5<br>R:18×9.5-8 Turf            | F:13×6.5-6/4.50<br>R:22×10-10 Turf | F:13×6.50-6/4.50<br>R:22×10-10 Turf |
| Package Size                  | 1580×1070×1255 mm                      | 1580×1070×1255 mm                      | 1500×1130×1286 mm                  | 1500×1130×1286 mm                   |
| Weight                        | 320 kg                                 | 320 kg                                 | 412 kg                             | 412 kg                              |
| Certificate                   | CE/EPA/Euro5                           | CE/EPA/Euro5                           | CE/EPA/Euro5                       | CE/EPA/Euro5                        |
| Container Load                | 40HQ: 28 pcs<br>20GP: 6 pcs            | 40HQ: 28 pcs<br>20GP: 6 pcs            | 40HQ: 30 pcs<br>20GP: 6 pcs        | 40HQ: 30 pcs<br>20GP: 6 pcs         |





# LAWN AERATOR

Whether you're maintaining golf course greens, fairways, or other professional turf, the FLA1220 Turf Punching Machine delivers efficient coverage with a working rate of 0.3–0.6 hectares per hour and consistent punching results.



# LAWN AERATOR

Featuring a stable operator platform, intuitive controls, and a balanced tine assembly, it delivers consistent and precise aeration results to support routine lawn and turf maintenance.

**24 TEETH**  
tines

**688 cc**  
engine

**1220 mm**  
working width

## STANDARD CONFIGURATION

Equipped with a stable operating platform, intuitive controls, and a balanced rake assembly, it enables consistent and precise aeration for daily lawn care and maintenance.

1



**102 mm**  
Drilling depth

**18°**  
Max slope

**6–16 mm**  
Core diameter range

## EXACT STANDARDS PROVEN DESIGN

The ground tracking system provides smooth operation, superior drilling quality, and consistent depth.

## HONDA GX690

**22.1 HP**  
Rated Power

**16.5 kW**  
Power

**688 cc**  
Displacement

It supports stable movement and operation across various terrains without power loss, even under fluctuating loads.



2

Protective Cover

**Power Compartment**  
Ensures continuous power delivery and stable operation over long periods.

26.5L

**Operating Handle**

Intuitive control and comfortable operation.

Storage Box



Rake Assembly

**267mm**  
Travel Wheel




## FLA1220

- 102 mm
- 1220 mm
- 22.1 HP
- 26.5 L

- Honda engine
- Vertical Reciprocating Motion
- Titan Tines
- Solid round, cross-shaped, or flat



### Smooth, Quiet, and Powerful

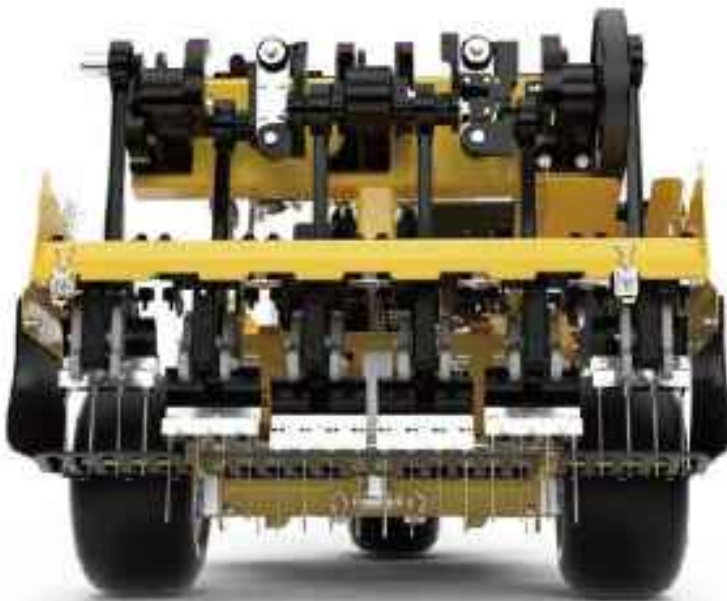

- Air-cooled 4-stroke OHV petrol engine, 90° V-twin design, horizontal shaft
- Flexible Steering**  
Motion control levers are shaped and positioned for operator comfort and ease of control.
- The precise configuration virtually eliminates hopping, rocking, and unnecessary vibration.



### SAFE AND EASY THROUGHOUT THE DAY

- Features an intuitive control panel for efficient and easy operation.
- A high-capacity 26.5 L tank supports longer operation with fewer refueling stops.



## TECHNICAL SPECIFICATIONS

Lawn Aerator

| Model                                     | FLA1220                                                                    |
|-------------------------------------------|----------------------------------------------------------------------------|
| <b>Engine &amp; Power</b>                 |                                                                            |
| Engine:                                   | HONDA GX690                                                                |
| Motor                                     | Air cooled 4-stroke OHV petrol engine, 90° V-twin design, horizontal shaft |
| Rated Power                               | 22.1 HP                                                                    |
| Power                                     | 16.5 kW                                                                    |
| Displacement                              | 688 cc                                                                     |
| Fuel Capacity                             | 26.5 L                                                                     |
| Certification                             | CE                                                                         |
| <b>Working Assembly &amp; Performance</b> |                                                                            |
| Tines                                     | Titan Tines                                                                |
| Number of Sharp Teeth                     | 24                                                                         |
| Lubrication                               | Hydraulic                                                                  |
| Maximum Operating Slope                   | 18°                                                                        |
| Tine Action                               | Vertical reciprocating motion                                              |
| Coring Depth                              | 102 mm                                                                     |
| Core Diameter Range                       | 6–16 mm                                                                    |
| Core Pattern Options                      | Circular / Cross-shaped / Flat                                             |
| Aeration Width                            | 1220 mm                                                                    |
| <b>Drive System &amp; Dimensions</b>      |                                                                            |
| Start Type                                | Key Start                                                                  |
| Primary Drive                             | Belt drive                                                                 |
| Clutch                                    | Warner 5218438                                                             |
| Forward Speed                             | 0–6 km/h                                                                   |
| Reverse Speed                             | 0–3 km/h                                                                   |
| Work Efficiency                           | 0.3–0.6 hm <sup>2</sup>                                                    |
| Tires                                     | 19×10.5–8 (smooth tread)                                                   |
| Operating Weight                          | 780 kg                                                                     |
| Package Size                              | 2230×1410×1310 mm                                                          |



# GARDEN EQUIPMENT

- ✓ **Wood chipper**
- ✓ **Lawn Aerator**
- ✓ **Core Aerator**
- ✓ **Lawn Edger**
- ✓ **Lawn Comber**

Engineered for demanding commercial mowing, our zero-turn mowers combine efficiency, durability, and consistent cutting performance. They help crews maximize productivity while maintaining professional results with minimal downtime.



# WOOD CHIPPER


## HEAVY-DUTY CHIPPING CAPACITY

**270 cc**  
**9 HP**  
PROFESSIONAL SERIES



Loncin G270FD

270cc 4-Stroke 13 HP Engine: Incredible power matched to a compact design. It delivers strong torque, eliminating bogging and stalling during heavy mulching and chipping.



70 mm 75 mm 90 mm 120 mm

The wood chipper is engineered for reliable performance. Its aggressive cutting blades, intuitive feed system, and robust frame deliver fast, smooth, and consistent chipping of branches, small logs, and garden prunings.



**Euro 5**

## **2** BLADE DRUM MECHANISM



Armed with two sharp reversible blades for quick and efficient processing.





### The Heart of Reliable High-Torque Garden Machinery LONCIN G270FD

- ✓ 270 cc High-Torque Output
- ✓ Stable & Durable Operation
- ✓ Smooth Start, Long Service Life

## YOUR GARDEN CLEANUP ASSISTANT

Our powerful chipper shredder turns branches and leaves into nutrient-rich mulch, saving you time and effort while keeping your yard tidy and healthy.

-  **Flexible Cutting Specifications**  
70 mm / 75 mm / 90 mm / 120 mm
-  **High-Performance Engine**  
270 cc / 420 cc / 212 cc
-  **Efficient Production Capacity**  
5 m<sup>3</sup> / 10m<sup>3</sup>
-  **High Rotating Speed**  
2800 rpm / 2850 rpm / 3600 rpm



## Key Applications



Residential Lawns



Tree Maintenance



Commercial Landscaping



Mulching & Composting

## TECHNICAL SPECIFICATIONS

### Wood Chipper

| Model                     | CH7                                | CS1200/1200 Pro                     | CS750/750 Pro                      | CS500 Pro                          |
|---------------------------|------------------------------------|-------------------------------------|------------------------------------|------------------------------------|
| <b>Engine &amp; Power</b> |                                    |                                     |                                    |                                    |
| Engine                    | LONCIN 270cc                       | LONCIN G420FCD DH420                | LONCIN / DH212                     | LONCIN G270FD                      |
| Displacement              | 270 cc                             | 420 cc                              | 212 cc                             | 270 cc                             |
| Fuel Capacity             | 6.0 L                              | 6.5 L                               | 3.6 L                              | 6 L                                |
| Certification             | CE/EPA                             | CE/EPA                              | CE/EPA                             | CE/EPA                             |
| <b>Deck</b>               |                                    |                                     |                                    |                                    |
| Number of Blades          | 2 PRO +1 counter knife             | 2 PRO +1 counter knife              | 2 PRO +1 counter knife             | 2 PRO +1 counter knife             |
| Cutting Drum Speed        | 2850 RPM                           | 2800 RPM                            | 2800 RPM                           | 3600 RPM                           |
| Cutting Drum Weight       | 12.5 kg                            | 34 kg                               | 18.52 kg                           | 10.8 kg                            |
| Max Capacity              | 90 mm                              | 120 mm                              | 75 mm                              | 70 mm                              |
| <b>Drive System</b>       |                                    |                                     |                                    |                                    |
| Start Type                | Recoil Start                       | Recoil Start/Electric Start         | Recoil Start/Electric Start        | Recoil Start                       |
| Capacity per Hour         | 3 m <sup>3</sup> -5 m <sup>3</sup> | 6 m <sup>3</sup> -10 m <sup>3</sup> | 3 m <sup>3</sup> -5 m <sup>3</sup> | 3 m <sup>3</sup> -5 m <sup>3</sup> |
| <b>Dimensions</b>         |                                    |                                     |                                    |                                    |
| Wheel Size                | 330 mm pneumatic                   | 16×8-7                              | 260 mm                             | 330 mm pneumatic                   |
| Package Size              | 1150×500×810mm                     | 945×670×1180 mm                     | 955×455×870 mm                     | 1000×750×560 mm                    |
| Gross Weight              | 121 kg                             | 198 kg / 213 kg                     | 117 / 123 kg                       | 102.5 kg                           |
| Container Load            | 40HQ: 132 pcs<br>20GP: 50 pcs      | 40HQ: 82 pcs<br>20GP: 40 pcs        | 40HQ: 180 pcs<br>20GP: 60 pcs      | 40HQ: 140 pcs<br>20GP: 68 pcs      |
| <b>Features</b>           |                                    |                                     |                                    |                                    |
| Rotatable Output Chute    | //                                 | No / Yes                            | No / Yes                           | No                                 |



# SOIL, TURF & GROUNDS CARE

This range of garden equipment is engineered to improve efficiency, ensure effective operation, and promote turf health. Together, these tools provide a comprehensive, integrated solution for maintaining healthy lawns in both residential and commercial environments.



**Euro 5**



## Lawn Aerator

Provides lightweight aeration to revitalize roots, ideal for regular lawn maintenance.

| Depth        | Width         | Spacing      |
|--------------|---------------|--------------|
| <b>90 mm</b> | <b>410 mm</b> | <b>95 mm</b> |

### B&S XR950

Tackles both hard and soft terrain, delivering uniform coring for efficient operation in an all-in-one lawn care solution.



Efficient & Easy to Operate



Healthier Turf, Cleaner Finish



All-in-One Lawn Maintenance



## Efficient Care Lawn Revitalized

Equipped with easy-steer technology for flexible and efficient operation in landscaped areas.



| Depth        | Width         | Spacing         |
|--------------|---------------|-----------------|
| <b>70 mm</b> | <b>673 mm</b> | <b>42 tines</b> |

### B&S XR950

With its high-performance engine and easy-steer design, it delivers efficient, stable, and smooth lawn aeration on any terrain.



### Professional Powertrain

Its 6.5 HP engine delivers a stable 4.9 kW output for reliable performance.



### Highly Efficient Deep Aeration

The 19 mm hollow tines penetrate 70 mm deep to loosen soil and boost root growth.



### Compact & Maneuverable

Its 902 mm body enables easy access to tight spaces for precise operation.



ALL-ROUND  
LAWN AERATOR

## High-Efficiency Lawn Aerator

Sturdy steel body for long-lasting durability  
— an ideal choice for professional lawn care.

**90 mm 6.5 HP 95 dB(A)**

B&S XR950

Tackles both hard and soft terrains, delivers uniform  
coring for efficient operation, and achieves all-in-one  
lawn care.



Large 3.1 L Fuel Tank



Storage Box



4 Hardened Steel Tines



Effortless Control Lever

| Model                       | LA-18                                                                                                                        |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>Engine &amp; Power</b>   |                                                                                                                              |
| Engine                      | B&S XR950                                                                                                                    |
| Motor                       | 4-stroke, single-cylinder OHV gasoline engine, Cylinder tilted at 25° fitted with a horizontal shaft and a 6:1 speed reducer |
| Performance                 | 6.5 HP                                                                                                                       |
| Power                       | 4.9 kW                                                                                                                       |
| Displacement                | 208 cc                                                                                                                       |
| Fuel Capacity               | 3.1 L                                                                                                                        |
| Certificate                 | CE/EPA/Euro5                                                                                                                 |
| <b>Tine</b>                 |                                                                                                                              |
| Cutting Teeth Number        | 4                                                                                                                            |
| Maximum Core Drilling Depth | 3.54 in (90 mm)                                                                                                              |
| Drilling Width              | 16.14 in (410 mm)                                                                                                            |
| Core Spacing                | 3.74 in (95 mm)                                                                                                              |
| Maximum Operating Slope     | 20°                                                                                                                          |
| Sound Level                 | 95 dB(A)                                                                                                                     |
| <b>Drive System</b>         |                                                                                                                              |
| Start Type                  | Hand Start                                                                                                                   |
| Drive Type                  | Belt-Driven                                                                                                                  |
| Work Efficiency             | 2500 m <sup>2</sup> /h                                                                                                       |
| <b>Dimensions</b>           |                                                                                                                              |
| Package Size                | 960 × 725 × 705 mm                                                                                                           |
| Container Load              | 40HQ: 108 pcs / 20GP: 54 pcs                                                                                                 |

## TECHNICAL SPECIFICATIONS

### Lawn Aerator

| Model                     | LA-726                                                                                                                        |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <b>Engine &amp; Power</b> |                                                                                                                               |
| Engine                    | B&S XR950                                                                                                                     |
| Motor                     | 4-stroke, single-cylinder OHV gasoline engine, Cylinder tilted at 25°, fitted with a horizontal shaft and a 6:1 speed reducer |
| Performance               | 6.5 HP                                                                                                                        |
| Power                     | 4.9 kW                                                                                                                        |
| Displacement              | 208 cc                                                                                                                        |
| Fuel capacity             | 3.1 L                                                                                                                         |
| Certificate               | CE/EPA/Euro5                                                                                                                  |
| <b>Tine</b>               |                                                                                                                               |
| Tine & Drum               | Single #40 nickel plated chain                                                                                                |
| Tines                     | 0.75 in (19 mm) diameter coning-type, formed from 0.08 in (2 mm) hollow, hardened alloy steel                                 |
| Number of sharp teeth     | 42 Tines per Aerator                                                                                                          |
| Lubrication               | Grease fittings on the wheels, tine wheels and idler pivot/oil chain                                                          |
| Coring Depth              | 2.75 in (70 mm)                                                                                                               |
| Core Diameter             | 0.75 in (19 mm)                                                                                                               |
| Aeration Pattern          | 3.75 in × 7 in (95 mm × 178 mm)                                                                                               |
| Aeration Width            | 26.5 in (673 mm)                                                                                                              |
| <b>Drive System</b>       |                                                                                                                               |
| Primary                   | A-type belt                                                                                                                   |
| Clutch                    | Belt tightener                                                                                                                |
| Productivity              | Aerates up to 40,000 sq ft/hr (3,716 m <sup>2</sup> /hr) at 3.5 mph (2.8 × 2.25 semi-pneumatic with ball bearings)            |
| <b>Dimensions</b>         |                                                                                                                               |
| Tires                     | (2)8x2.25 semi-pneumatic with ball bearings                                                                                   |
| Package Size              | 1015 × 900 × 800 mm ( 902 × 1359 × 1232 mm)                                                                                   |
| Weight                    | 113 kg (Weight: Wet) / 132 kg (With wet weight) / 156 kg (Wet W: W + Drum Water)                                              |
| Container Load            | 40HQ: 78 pcs<br>20GP: 24 pcs                                                                                                  |



## Power in Every Direction

Efficient lawn edger designed for precise, clean trimming and defined lawn edges.



**Multiple Cutting Heights**  
-60 mm ~ +80 mm



**High-Performance Engine**  
ZONSEN NH 130 132 cc



**Stable Power Output**  
Gas Powered



**Adapt to Working Length**  
9.45 in 240 mm



## Multi-Function Lawn Comber

High-density comb knife reduces lawn density and increases ventilation.



**Multiple Cutting Heights**  
(-12 mm to +12 mm)/5



**High-Performance Engine**  
Loncin G200FD 4.1 kW 196 cc



**Stable Power Output**  
Belt Drive



**Adapt to Working Width**  
20 in / 510 mm







# CYLINDER MOWER

Designed for a variety of gardens, this series operates quietly and efficiently, making it especially suitable for flat, stone-free, uniform lawns to achieve precise cutting of low-growing turf. In this way, you can preserve the natural character of your garden while minimizing environmental impact.



# CYLINDER MOWER



## Control Armrest

Simple operation, easy to use.



## Fuel Tank

Features a large-capacity fuel tank to reduce refueling frequency and enhance mowing efficiency.

## Engine

A powerful high-performance engine that takes mower power to a new level.

**Z30 // Z25 // Z20 // S20 // S17**

Cylindrical lawn mower for healthier turf and easier soil care. Durable cutting system and stable frame provide efficient penetration to relieve soil compaction and improve airflow, water, and nutrient absorption.



## ✓ Durable & Reliable

Built with robust components for consistent performance and a long service life in daily professional use.

## ✓ Precision Trimming

Allows for accurate mowing around obstacles, edges, and in narrow passages.

## ✓ Compact & Maneuverable

Its small footprint and agile design enable smooth operation in tight spaces and along borders.

## Striped Effect

The cylinder mower employs a set of sharp, rotating blades to create a striped effect.



## Durable Gearing

Provides long life and first-class durability. The gearing is lubricated for life.





## Precise Scissor Cutting

The helical hob and fixed blade work together for continuous cutting, ensuring neat grass blades. This results in uniform lawns with less tissue damage, reduced tearing, and healthier grass growth.

## Crafting Lawn Perfection with Every Pass

**Z30 NEW**



Precision cutting for a perfect lawn every time.

**765 mm 196 cc 5.8 HP**

Precision scissor-cutting protects grass blades.



Built-in roller creates professional lawn stripes.



Low noise, eco-friendly, and promotes healthy lawn growth.



**Z20/25**



**510 / 655 mm**  
**4.8 HP**  
**163 cc**  
**7.5 in (191 mm)**

- Honda GX160 engine
- Chain drive
- Recoil

**S17/20**



**432 / 510 mm**  
**7.5 HP**  
**195 cc**  
**7.5 in (191 mm)**

- ZONSEN GT200 engine
- Chain drive
- Recoil

## TECHNICAL SPECIFICATIONS

Cylinder Mower

| Model                                     | Z30                                 | Z25                               | Z20                               | S20                               | S17                               |
|-------------------------------------------|-------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <b>Engine &amp; Power</b>                 |                                     |                                   |                                   |                                   |                                   |
| Engine Type                               | Honda GX200                         | Honda GX160                       | Honda GX160                       | ZONSEN GT200                      | ZONSEN GT200                      |
| Displacement                              | 196 cc                              | 163 cc                            | 163 cc                            | 195 cc                            | 195 cc                            |
| Power                                     | 4.3 kW / 5.8 HP                     | 3.6 kW / 4.8 HP                   | 3.6 kW / 4.8 HP                   | 4.4 kW / 7.5 HP                   | 4.4 kW / 7.5 HP                   |
| Transmission Type                         | Chain drive                         | Chain drive                       | Chain drive                       | Chain drive                       | Chain drive                       |
| Power Source                              | Gas Powered                         | Gas Powered                       | Gas Powered                       | Gas Powered                       | Gas Powered                       |
| Start Type                                | Recoil                              | Recoil                            | Recoil                            | Recoil                            | Recoil                            |
| <b>Deck</b>                               |                                     |                                   |                                   |                                   |                                   |
| Cutting Width                             | 765 mm                              | 655 mm                            | 510 mm                            | 510 mm                            | 432 mm                            |
| <b>Dimensions</b>                         |                                     |                                   |                                   |                                   |                                   |
| Wheel                                     | 7.5 in / 191mm                      | 7.5 in / 191mm                    | 7.5 in / 191mm                    | 7.5 in / 191mm                    | 7.5 in / 191mm                    |
| Machine Weight                            | 110 kg                              | 98 kg                             | 88 kg                             | 73 kg                             | 78 kg                             |
| Package Dimensions (LxWxH)                | 1020*830*700 mm/<br>1020*830*610 mm | 890*820*700 mm/<br>890*820*600 mm | 740*820*700 mm/<br>740*820*600 mm | 810*730*710 mm/<br>810*730*600 mm | 720*664*710 mm/<br>720*664*600 mm |
| Wooden Crate Weight (With/Without Pallet) | 21 kg / 15.5 kg                     | 19 kg / 14 kg                     | 15 kg / 12.3 kg                   | 3 kg                              | 3 kg                              |
| Container Load 40HQ                       | 112 pcs                             | 112 pcs                           | 176 pcs                           | 176 pcs                           | 216 pcs                           |
| <b>Safety Certification</b>               |                                     |                                   |                                   |                                   |                                   |
| Safety certification                      | CE                                  | CE                                | CE                                | CE                                | CE                                |



Timeless design, precision engineering, all-steel construction protected by wear-resistant powder coating, cutting width 305 mm to 508 mm.



## Optional Attachments



### Trailer

A rugged trailer for hauling mulch, tools, and yard debris.

**Designed for LT-32/36/40/42R**

Heavy-Duty / Universal Hitch / Large Capacity



### Snow Plow

Clears snow from driveways and paths efficiently, extending mower use into winter.

**Designed for Lawn Tractor / Stand-On Mower**

Universal Hitch / Winter Use / Quick install



### Aluminum Grass Catcher

A durable, lightweight catcher that collects clippings cleanly and efficiently.

**Designed for Stand-On Mowers**

Stand-On Compatible / Durable / Easy Storage



### Sun Shade

Provides shade and protection during mowing sessions.

**Designed for Zero-Turn Mowers**

UV Protection / Adjustable / Quick Installation



### Forage Collector

Collects grass clippings on the go for a instantly clean lawn.

**Designed for Zero-Turn Mowers**

Quick Installation / Easy Dumping / Durable

## Optional Parts



### Lawn-Friendly Wheels

**Designed for Lawn Mowers**

These wide turf tires reduce ground pressure, protect grass, and provide stable performance on wet or uneven terrain.



### Standard Flat Blade

**Designed for Zero-Turn Mowers**

Provides reliable, clean cutting for everyday lawn maintenance.



### Mulching Blade

**Designed for Stand-On Mowers**

Finely chops clippings to return nutrients to the lawn while improving cut quality.



### Tractor Blade

**Designed for Lawn Mowers**

A heavy-duty blade designed for high-performance cutting on large lawns and in professional applications.



### Spark Plug

**Designed for Lawn Mowers**

Delivers dependable ignition for smooth engine starts and reliable performance.



### Electric Clutch

**Designed for Lawn Mowers**

Provides smooth and precise blade engagement for efficient cutting and easy control.



### Drive Belt

**Designed for Lawn Mowers**

Ensures reliable power transmission for continuous operation on commercial properties.



### Air Filter

**Designed for Lawn Mowers**

Protects the engine from dust and debris while maintaining optimal airflow for reliable performance.



### Air Cleaner Element

**Designed for Lawn Mowers**

An easily replaceable element that ensures continuous clean airflow and extends engine life.





## IMPORTANT NOTICE

The product images, specifications, and related information presented in this catalog are for reference purposes only. As our products are undergoing rapid iteration and continuous improvement, details may have been updated or modified since publication.

To ensure accuracy and suitability for your needs, please always consult and confirm the latest product details with your assigned sales representative before making a purchase.

Thank you for your understanding and support!



Farm infrastructure and equipment for farmers across Southern Africa. Est. 2026.

For the most up-to-date product information, contact Andrivo on WhatsApp +27 79 519 8131.

## Get in touch

WhatsApp +27 79 519 8131

Email [andrivo.sales@outlook.com](mailto:andrivo.sales@outlook.com)

Direct from factory to farms across Southern Africa.  
Every quote shows the factory price, freight and duties,  
transport and our fee, laid out separately.