
Roboteam

ATP For
ROCU10 CONTROLLER
OEM00356

Approvals				
	Title	Name	Date	Signature
Written by	QA Engineer	May Swisa	26/08/2026	
Approved By	Engineering Team Leader	Roi Akva	26/08/2026	
List of changes				
Rev	Description	Name	Role	Date
000	First release	May Swisa	QA Engineer	26/08/2026

1. Goal:

To verify the quality of the ROCU10.

2. Relevant Documents:

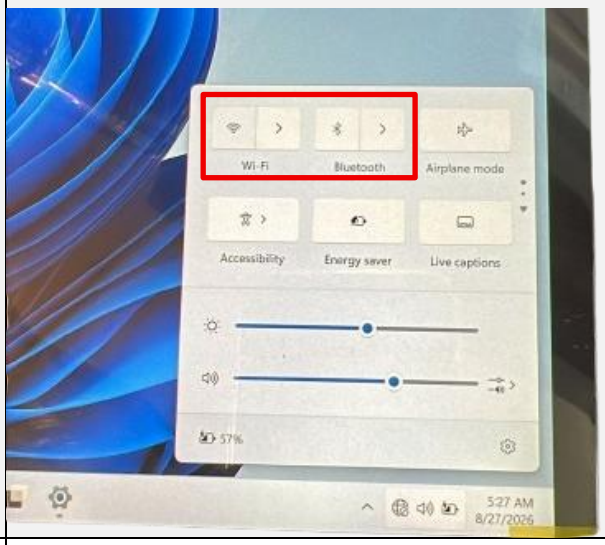
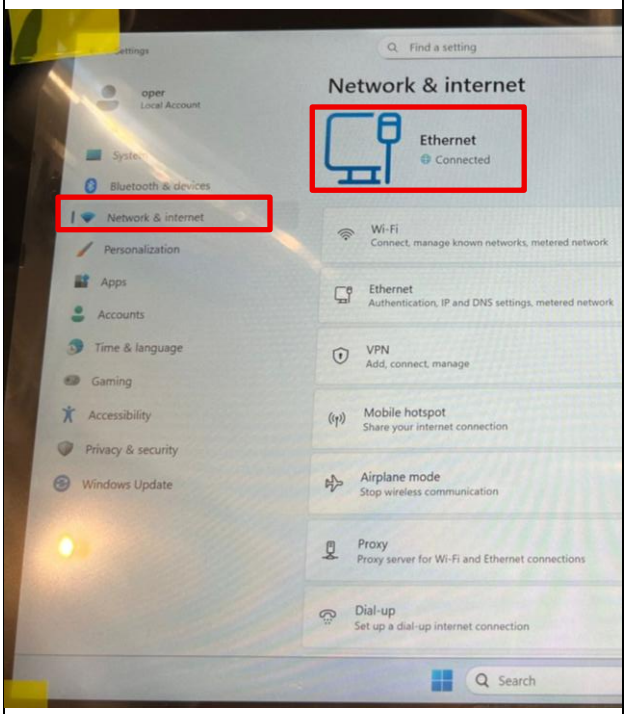
3. Products/Tools:

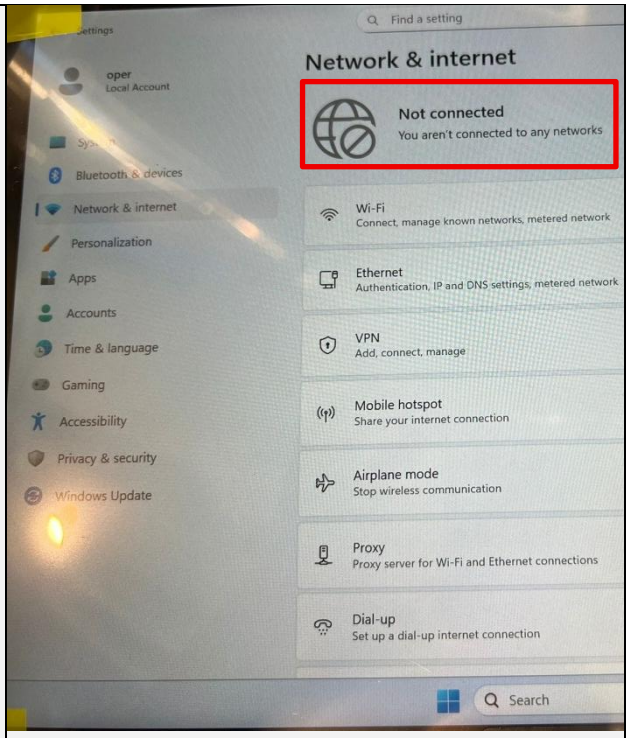
Products/Tools		Description
1	M10 PWR IN Cable	CBL01377-A
2	M10 ETH Cable	CBL01378-A

4. Procedure:

Step	Description	P/F	Note
	VISUAL INSPECTION		
1	**Shake** the ROCU and ensure that there are no foreign parts inside.		
2	**Check** that there are no cracks and paint issues on the body and no scratches on the screen.		
3	**Check** that there are 10 screws at the back.		
4	**Check** that there are 4 screws holding the brackets at the front.		

5	**Check** that battery is mounted into the ROCU.		
FUNCTIONAL TEST			
6	**Connect** CBL01377-A and CBL01378-A to the ROCU.		Verify that the connectors are matched according to the color markings: red to red for the power cable and white to white for the ETH cable.
7	**Verify** that the connectors can be connected and disconnected easily and without any issues.		
8	**Connect** CBL01377-A to power outlet and CBL01378-A to ETH cable.		
9	**Turn on** the ROCU and verify that the screen turns on.		Log in with: User name: user Password: password
10	**Verify** that the colors are correct, the image is not distorted, and the screen brightness is functioning properly.		
11	**Verify** that the touchscreen works well.		
12	**Verify** that the ROCU is charging using CBL01377.		
13	**Disconnect** CBL01377 and see it stopped charging.		

14	**Verify** that Wi-Fi and Bluetooth are disabled.		
15	**Verify** that there is ETH connection by going to Settings – Network & Internet. It needs to show "Ethernet Connected".		

16	**Disconnect** CBL01378 and see that "Connected" changed to "Not Connected".		
17	**Verify** that all buttons can be pressed smoothly and that the joysticks move freely without any issues.		
18	**Verify** that the buttons have green light and that they can be turned off.		

Results Mentions Comments