

S10 PRO USER'S GUIDE



TRIPLE SCREEN

LAPTOP SCREEN EXTENDER

Friendly Reminders:

1. Ensure a secure connection of the Type-C data cable to the device interface.
2. This product seamlessly supports all Type-C functions, including charging and video, through a single integrated cable. In the event of screen power issues or restart difficulties, kindly provide external power of 5V, 2A.

Windows

Mac

Android

Product Introduction

S10 PRO is a multi-function plug and play dual-screen laptop monitor that is portable, foldable, It can help quickly build a personal mobile studio. Provide a perfect solution for laptop users with multi-screen synchronous display and multi-screen separate display, which can improve your work efficiency by up to 50% and achieve efficient multi-tasking. It supports the same screen display of some models of Samsung, Huawei and others. It also supports the computer mode of the smart phone system as well as audio and video transmission, etc.

The S10 PRO stand is easy to use. Simply pull it open gently, clip it to the top of the laptop screen, and it will be securely fixed without falling off. It supports laptop cases from 13.3 inches to 17.3 inches, and the screen comes with a built-in stand that can be adjusted to different angles, providing a different experience for professionals, office workers, gamers, stock traders, entrepreneurs, programmers, and students.

The S10 PRO screen allows you to adjust brightness, sound, contrast, and other parameters. It is equipped with a full-function Type-C and PD power supply interface, enabling various video and data expansion without the need for a docking station. As long as the laptop's Type-C interface supports signal and power transmission, seamless connection and display can be achieved. Additionally, devices with HDMI output interfaces (such as desktop computers, laptops, mini PCs, set-top boxes, game consoles, etc.) can also be connected directly. However, note that the screen requires an external power supply to light up (use the supplied custom HDMI to Type-C cable to connect the display to the computer).

Finally, the S10 PRO screen supports a 180-degree rotation for single-screen use, allowing you to freely adjust to the best viewing angle based on your needs, offering an ultimate visual experience.

Contents of Instruction

Product Attributes

1. Product host	1
2. Accessories	1
3. Parameters	1

Installation and stowing Mode

1. Opening mode	2
2. Outrigger stretch	2
3. Fixing mode of device	2
4. Opening mode when it is working	3
5. Stowing of dual screen	3

Key Definitions	3
-----------------------	---

Connection Mode

1. Connect S10 PRO With Laptop	4
2. Device power supply connection mode	5

Audio Settings

1. Change sound settings of Windows 10 / Windows 11	6
2. Change sound settings of MAC OS PC	7


Display Mode

1. Windows 10 / Windows 11 Display Settings and Configuration	8
2. MacOS 13 Ventura Display Settings and Configuration	9

Transportation, Storage and Safety Information	10
--	----

Product Attributes

1. Product host

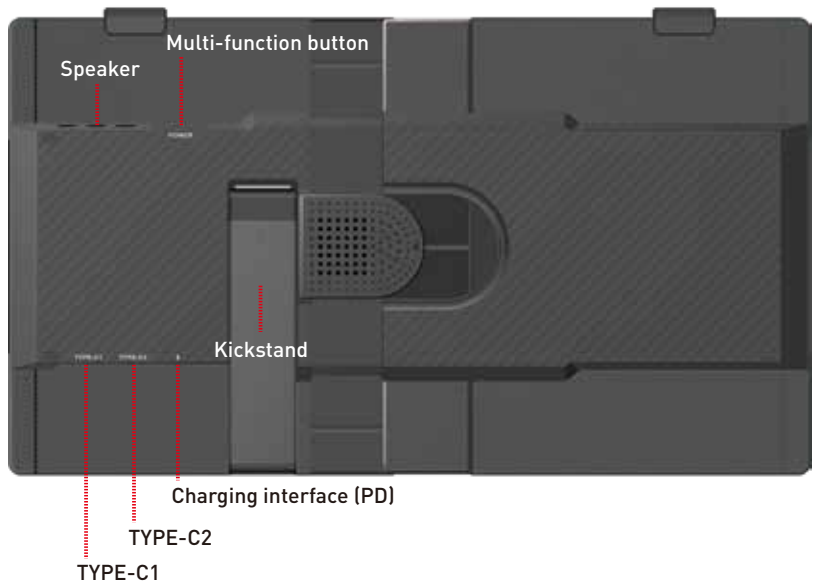

2. Accessories




Monitor



USB-A to USB-C *1



USB-C to USB-C *2



HDMI to TYPE-C *1


3. Parameters

Weight:	1.53Kg	Screen Size:	14 Inches
Size:	357.5×207.7×27.7mm	Average Brightness:	300cd/m ²
Refresh Rate:	60Hz	Type-C Input:	5V-20V / 5A Max
Resolution:	1920x1080	Type-C Output:	5V-20V / 4.25A Max
Speaker:	1	Ports:	TYPE-C*2+TYPE-C(PD Power Supply)


Installation and Stowing Mode

1. Opening mode

The screen is facing up

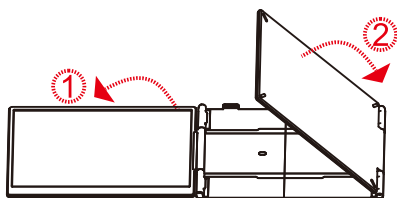


Opening Sequence: Slowly open the left screen first, then slowly open the right screen. The screen supports a maximum folding angle of 180 degrees.

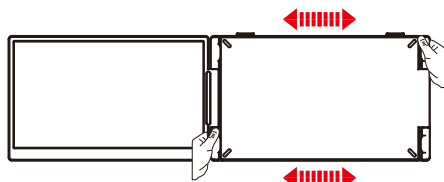

Hold the lower left corner of the bracket with your left hand and the upper right corner with your right hand. Pull outward on both sides to open the right screen.


2. Outrigger stretch

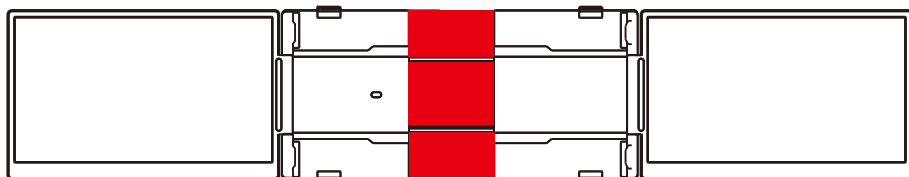


Compatible with 13.3 to 17.3 inch laptops

3. Fixing mode of device

Adjust the kickstand




1. First open the support rod, and then stretch the support to the appropriate size;
2. The support rod only supports clockwise rotation of 90 degrees;
3. The maximum opening angle of the support rod is 90 degrees, and excessive folding will damage the support rod.

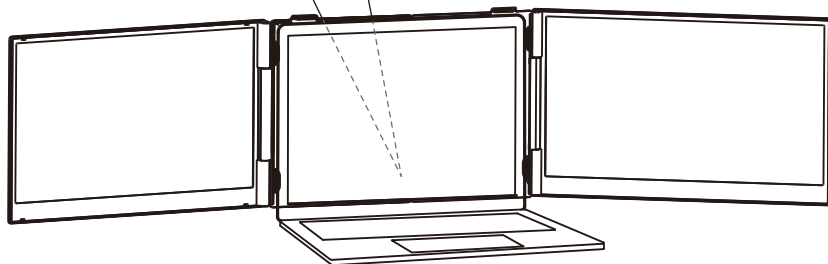



Installation and Storage

4. Opening Sequence

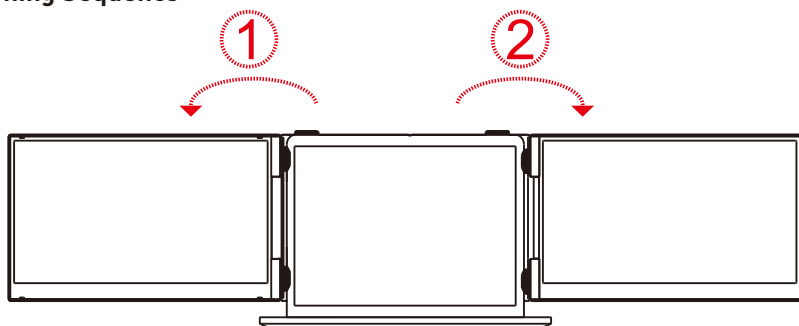

Note: Please follow the sequence of opening and closing to avoid damage of the device.

5. Closing Sequence

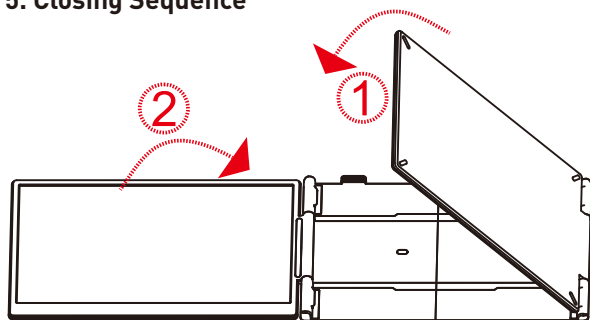

Closing Sequence: Slowly close the right screen first, then slowly close the left one.


*NOTE: Please follow the direction to expand the monitor to avoid damage.

Key Definitions

Menu/Selection/Confirmation Button

Press and hold for 2 seconds to return

Press and hold for 3 seconds to shut down

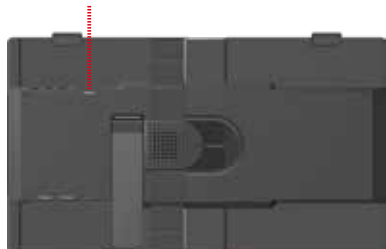


Toggle right "Plus"

Volume Adjustment

Toggle left "Minus"

Backlight Adjustment

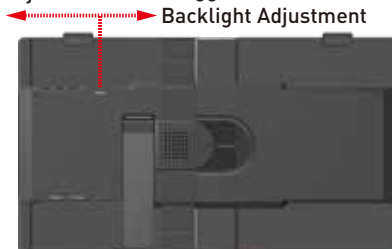

Connection Mode

1. Connect S10 PRO with Laptop


To start, determine how many video output ports your laptop has. It is important to note that only full-featured USB Type-C and HDMI ports are compatible with this setup. Full-featured Type-C ports can transfer power, video, and data simultaneously. Below are the available options based on your laptop's ports:

1.1 Two Full-Featured Type-C Connection:

Please note that two USB-C to USB-C cables will be required.




Hoe type terminal head, connected in the direction shown in the figure.

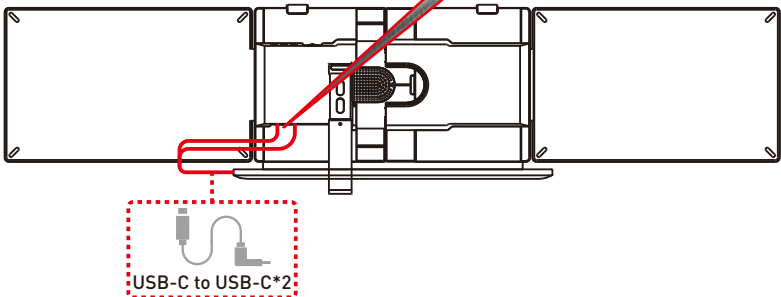

1.2 One Full-Featured Type-C and One HDMI Connection:

Please note that you will need one USB-C to USB-C cable and one HDMI cable.

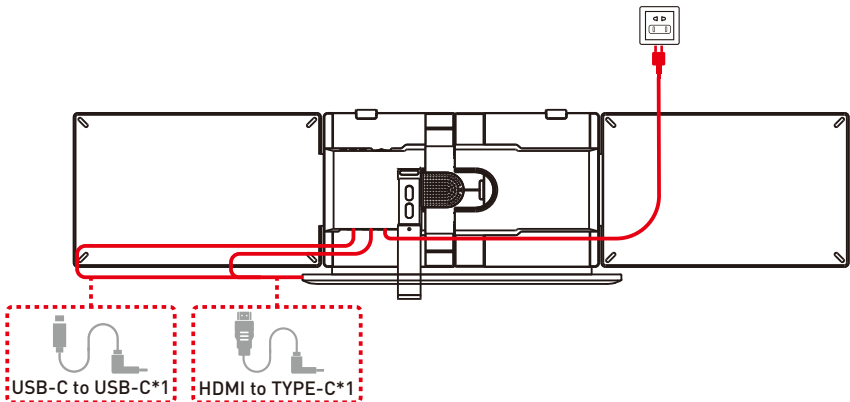


Note:


1. If the product does not function properly or the brightness is insufficient during use, please connect a 5V/2A or higher adapter to the power supply interface of the product. (The adapter is not included in the product package.)
2. If you need to power your laptop through the S10 PRO screen extender during use, please connect an external PD adapter 65W or higher (not included) to the S10 PRO's power port and connect S10 PRO to the Type-C port of your laptop using a USB-C to USB-C cable.

Connection Mode

2. Connect S10 PRO with Mobile Phone with Other Devices

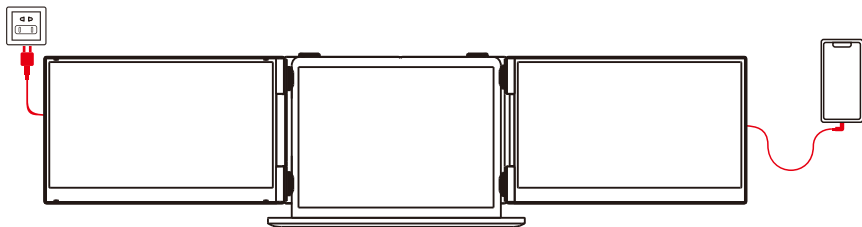

Mobile phone connection mode
(External power supply required)

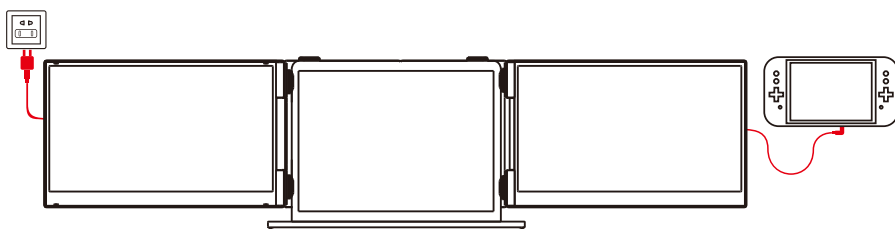


Switch connection mode
(External power supply required)

Audio Settings

1. Change sound settings of Windows 10 / Windows 11

1.1 Right click the loudspeaker icon located in the bottom-right corner.




1.2 Select "switch on sound " in pop-up dialog box.

1.3 Left click "turn on sound settings" and pop-up the box as provided.

Here users can set about sound

1. Master volume;
2. Select output device: { S10 PRO / Speaker };
3. Device attributes.

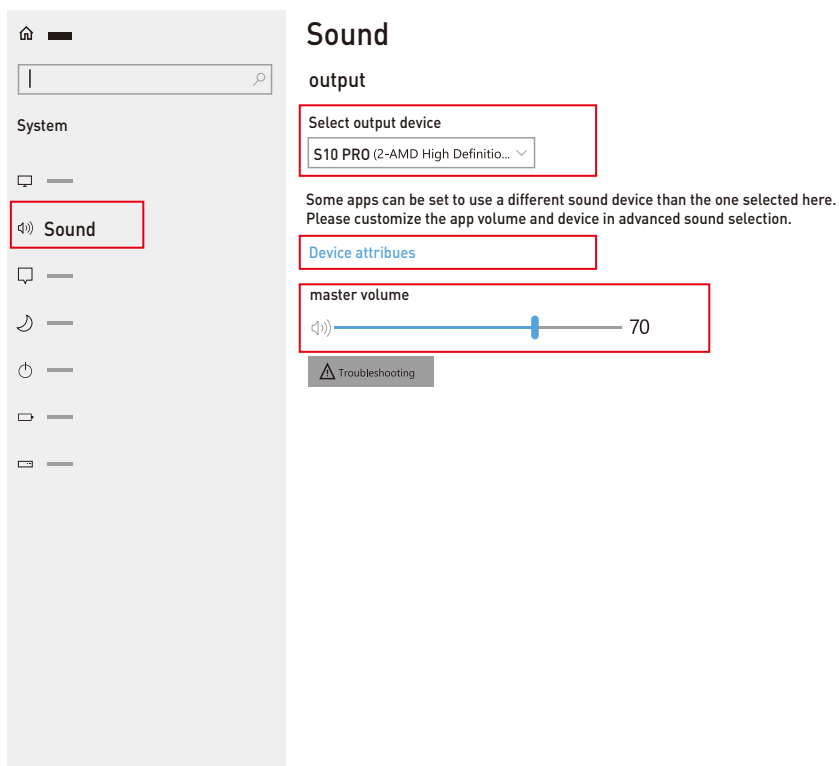

Audio Settings


2. Change sound settings of MAC OS PC

2.1. Choose Apple menu > System Settings



2.2. Click on "Output" and then choose the desired device from the list of available sound output options.


Output devices: (S10 PRO / Speaker)

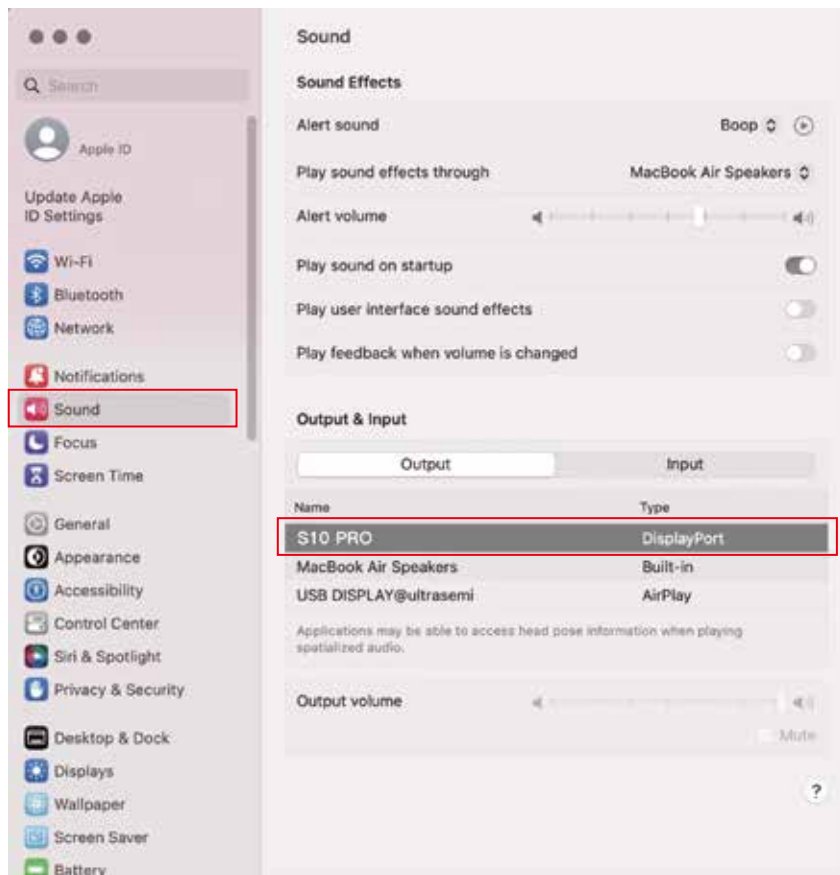

1. Windows 10 / Windows 11 Display Settings

1.1 Right-click a blank area of the desktop. Select 'Display Settings' from the pop-up dialogue box.

Left click "Display Settings" to open the settings dialogue box, shown in the figure:

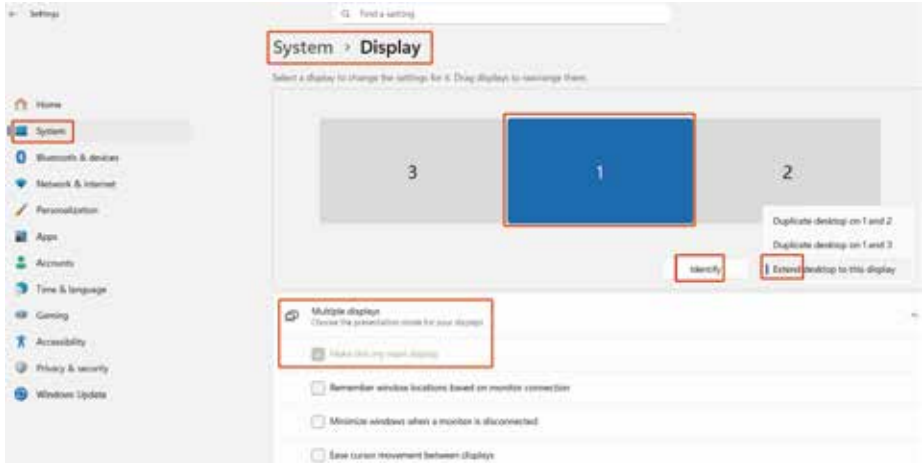

1.2 Under the "Rearrange displays" section, drag and drop each display to rearrange them according to their physical layout of your desktop. Scroll down to the bottom of the page to further configure the display for extended or mirrored mode.

Display Mode


2. MacOS 13 Ventura Display Settings

2.1 Enter the "System Preferences" menu



2.2 Configure your monitor

In this menu, you can set the resolution and mirror/extend the display you want.

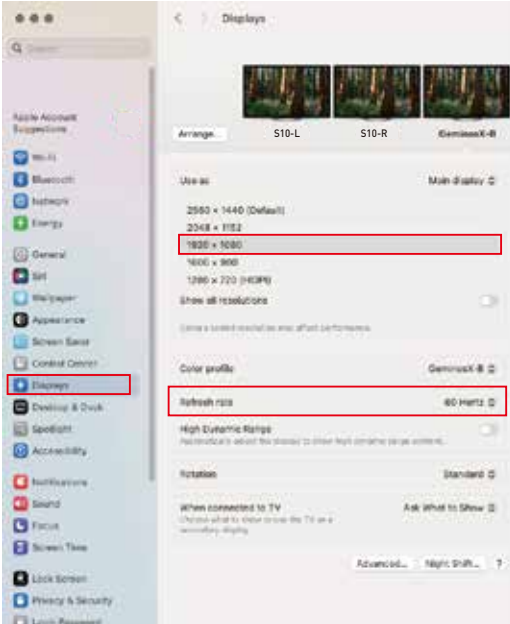

2.3 Arrange Displays

To rearrange displays, drag them to the desired position.

To mirror displays, hold Option key while dragging them on top of each other.

To relocate the menu bar, drag it to a different display.



Transportation, Storage and Safety Information

To ensure the safe and proper use of this product and prevent accidents such as electric shock or fire, please read and understand all use requirements and operation procedures before using.

Please adhere strictly to the following guidelines:

1. Before use, remove the protective film from the screen surface.
2. This product requires a DC power supply through an AC/DC power adapter. Ensure that the adapter is placed away from heat sources in a well-ventilated location. The AC power socket and AC power line should be adequately grounded to handle the current demands.
3. The DC power input required for this product is $5V-20V \pm 2V$.
4. Take precautions to prevent excessive humidity and dust accumulation, as they can lead to circuit corrosion and malfunction.
5. Avoid subjecting the screen surface to external forces or impacts.
6. Do not use sharp tools that may damage the screen surface.
7. This product is suitable for general business and domestic use, and it is recommended to operate it within an ambient temperature range of -20°C to 60°C . Please turn off the power when you stop using produce.
8. Remember to power off the device by disconnecting the power source when not in use.

