






常州市长兴电器科技有限公司

CHANGZHOU CHANGXING MOTION TECH CO.,LTD.

SLA01

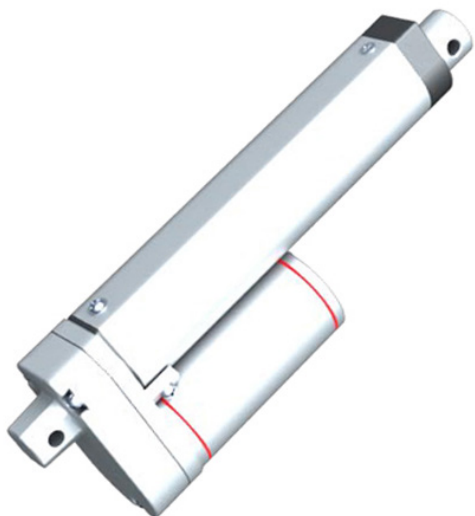

With Potentiometer

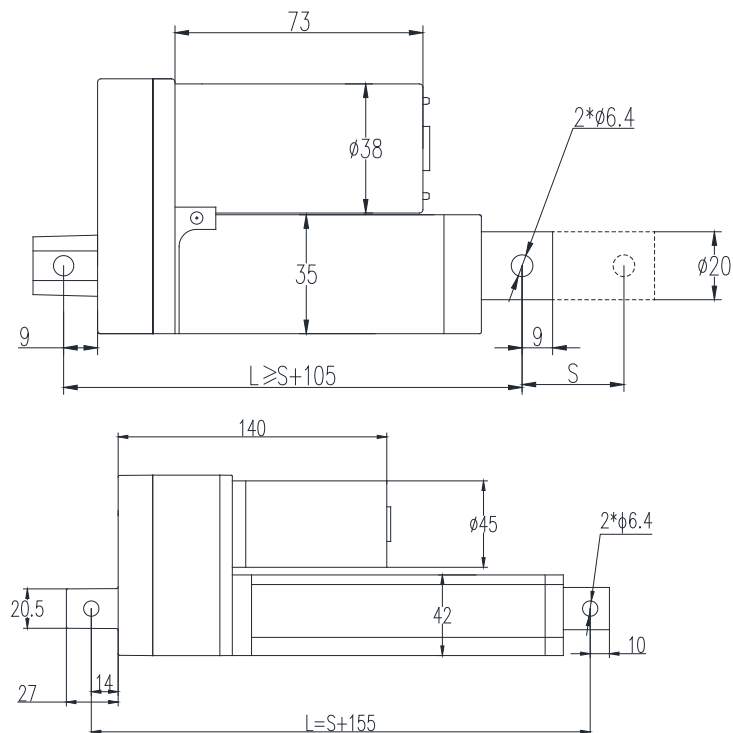

Introduction

Type: SLA01

Stroke: 20 mm - 800mm customized

Max Speed: 80mm/s

Max Load : 900N

Current on No-Load: 1A

Current on Full-Load: 4A (12v) / 2A(24v)

Input voltage: 12v/24v/36v/48v

Rated Power consumption: 30W

Limit Switch : Built-in

Feedback Option: Potentiometer (10K / 5K) or Encoder

IP grade: IP54

waterproof accesory: Rubber cover

Cable Lenght: 1M (or required length)

Mounting Bracket: MB01 (see Bracket catalogue)

code	Gear Ratio	screw	Speed vs Load		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	30 : 1	ACME	5mm/s	900N	2.3	2.1	1.6	1.2	IP54
B	30 : 1	ACME	13mm/s	700N	2.3	2.1	1.5	1.2	
C	30 : 1	ACME	15mm/s	600N	2.1	1.7	1.5	1	
D	20 : 1	ACME	20mm/s	400N	1.8	1.6	1.4	1	
E	20 : 1	ACME	26mm/s	300N	1.8	1.6	1.3	1	
F	10 : 1	ACME	40mm/s	100N	1.5	1.4	1.3	1	
G	10 : 1	ACME	80mm/s	50N	1.5	1.4	1.2	1	

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址: 江苏省常州市新北区汉江西路 91 号



Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886

web: www.cx-motiontech.com

SLA02

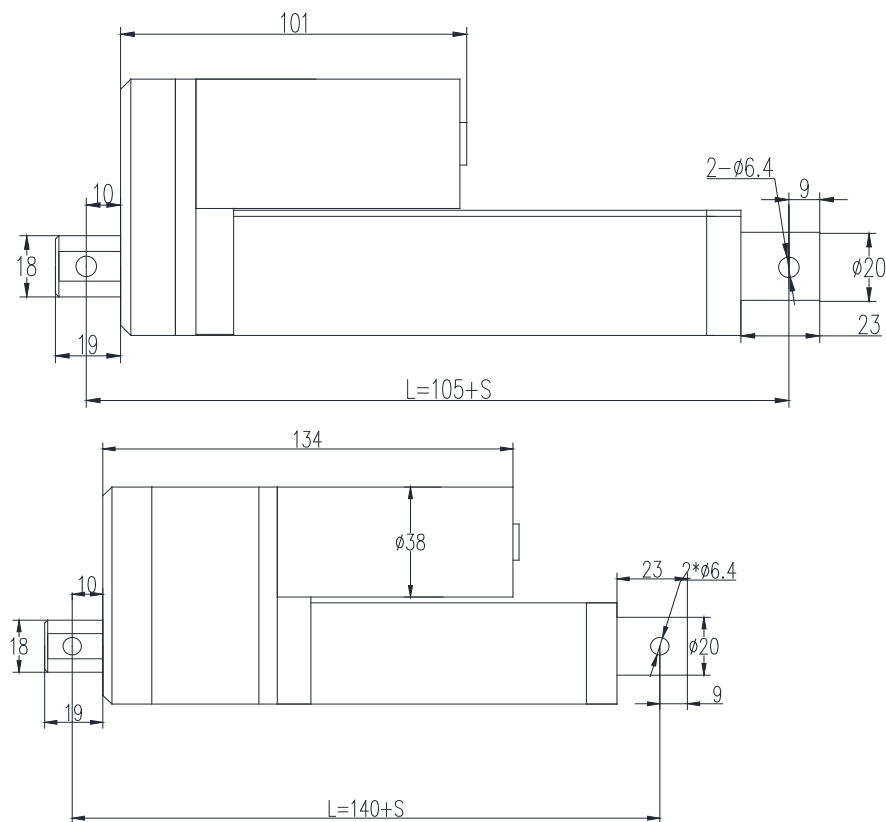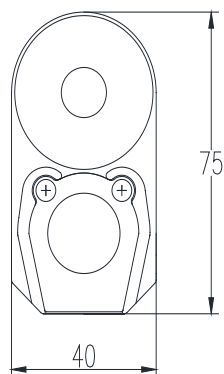

With Potentiometer

Introduction

Type: SLA02

Stroke: 20 mm - 800mm customized

Max Speed: 20mm/s

Max Load : 1500N

Current on No-Load: 1A

Current on Full-Load: 6A (12v) / 3A(24v)

Input voltage:12v/24v/36v/48v

Rated Power consumption: 40W

Limit Switch : Built-in

Feedback Option: Potentiometer (10K / 5K)

IP grade: IP54

Screw type: ACME screw

Cable Lenght: 1M (or required length)

Mounting Bracket: MB01 (see Bracket catalogue)

code	Gear ratio	screw	Speed vs Load mm/s N		Full load current				IP grade
					12v	24v	36v	48v	
A	35 : 1	ACME	5	1500	2.5	2.2	1.6	1.2	IP54
B	35 : 1	ACME	13	1000	2.5	2.2	1.6	1.2	
C	35 : 1	ACME	17	900	2.1	2.0	1.5	1	
D	35 : 1	ACME	20	700	2.1	2.0	1.2	1	

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址: 江苏省常州市新北区汉江西路 91 号

Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886


web: www.cx-motiontech.com

SLA03



Introduction


Type: SLA03
 Stroke: 20 mm - 800mm customized
 Max Speed: 29mm/s
 Max Load : 6000N
 Input: 12v /24v / 36v / 48v
 Current on No-Load: 1A
 Current on Full-Load: 3A
 Rated Power consumption: 40W
 Limit Switch : Built-in
 Feedback Option: Hall sensors
 IP grade: IP54
 Screw type: ACME screw
 Cable Lenght: 1M (or required length)
 Mounting Bracket: see Bracket catalogue

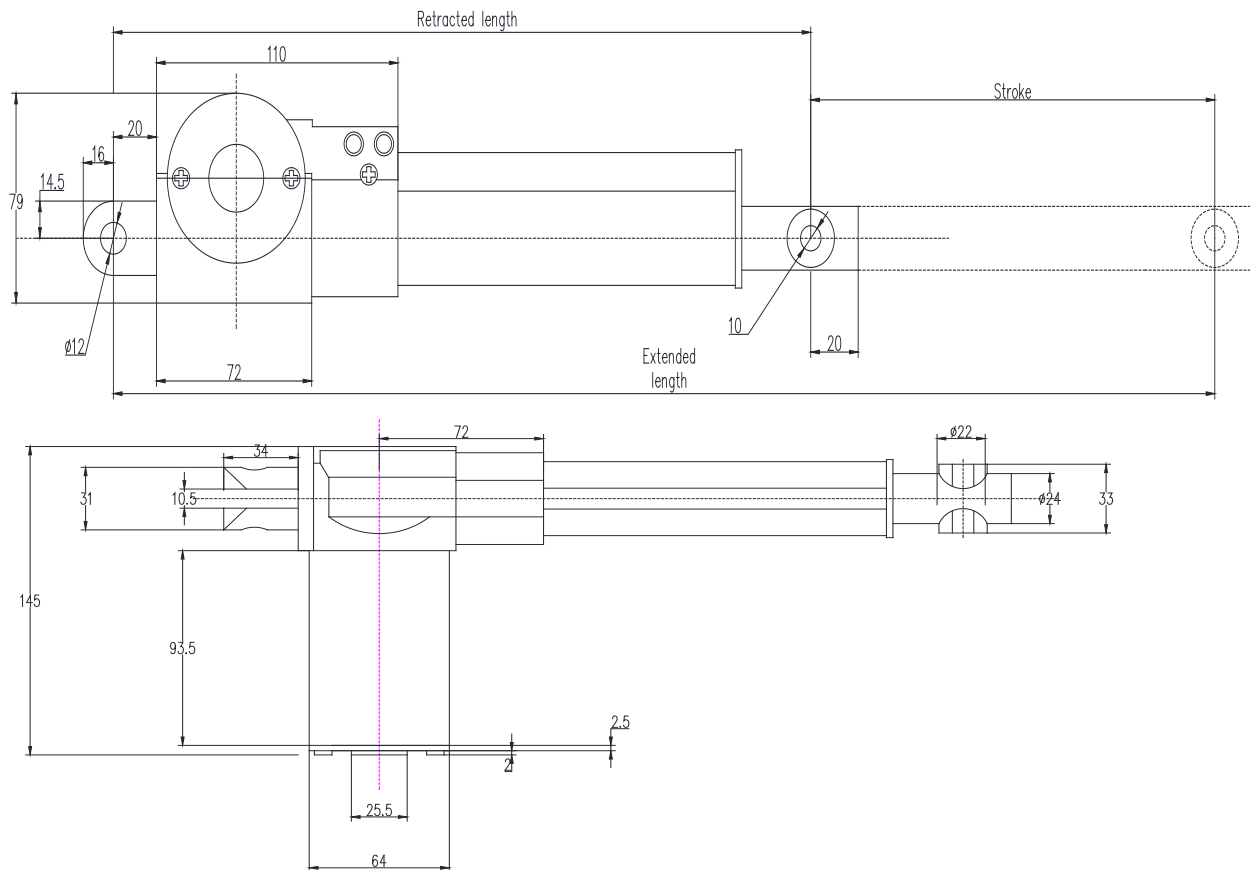


code	Gear ratio	screw	Speed vs Load mm/s N		Full load current (A)				IP grade
					12v	24v	29v	36v	
A	35 : 1	ACME	4	6000	1	0.6	0.5		IP54
B	33: 1	ACME	6	5000	1	0.6	0.5		
C	27 : 1	ACME	8	4000	1	0.6	0.5		
D	20 : 1	ACME	15	2000	1	0.6	0.5		
E	15: 1	ACME	29	750	1	0.6	0.5		

SLA04

Plastic Tail

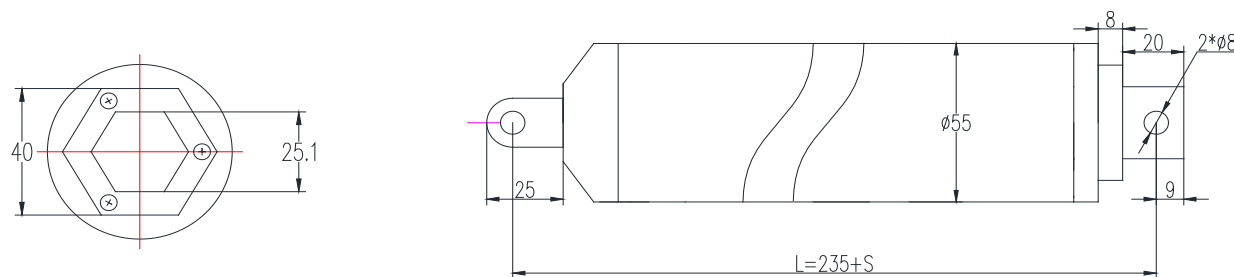

Aluminium Tail

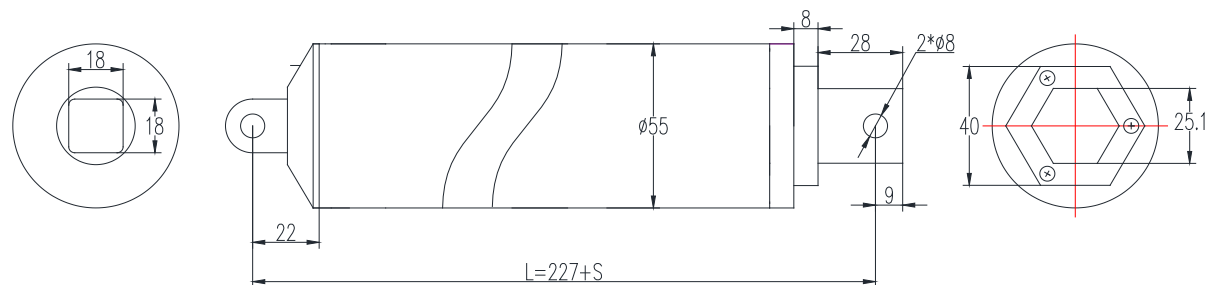

Introduction

Type: SLA04

Stroke: 20 mm - 800mm customized

Max Speed: 230mm/s

Max Load : 200N

Input: 12v /24v / 36v / 48v

Current on No-Load: 1A

Current on Full-Load: 4A

Rated Power consumption: 40W

Limit Switch : Built-in

Feedback Option: Hall sensors

IP grade: IP54

Screw type: ACME screw

Cable Lenght: 1M (or required length)

code	Gear ratio	screw	Speed vs Load		Full load current				IP grade
					12v	24v	36v	48v	
A	1 : 10	ACME	45mm/s	200N	3	2.6	1.5	1	IP54
B	1 : 10	ACME	80mm/s	100N	3	2.6	1.5	1	
C	1 : 5	ACME	140mm/s	50N	2.5	2.2	1.1	0.8	
D	1 : 5	ACME	230mm/s	20N	2.5	2.2	1.1	0.8	

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址: 江苏省常州市新北区汉江西路 91 号


Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886

web: www.cx-motiontech.com

SLA05

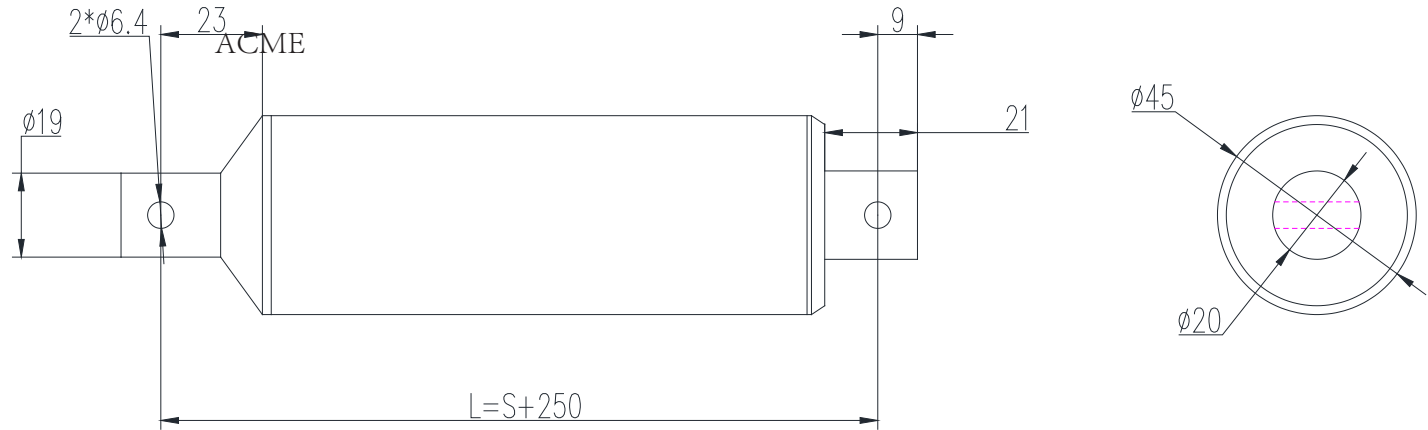

Introduction

Type: SLA05

Stroke: 20 mm - 800mm customized

Max Speed: 150mm/s

Max Load : 1000N

Input: 12v /24v / 36v / 48v

Current on No-Load: 1A

Current on Full-Load: 3.5A

Rated Power consumption: 40W

Limit Switch : Built-in

Feedback Option: Hall sensors

IP grade: IP54

Screw type: ACME screw

Cable Lenght: 1M (or required length)

Mounting Bracket: see Bracket catalogue

code	Gear ratio	screw	Speed vs Load mm/s N		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	52 : 1	ACME	5	1000	3.5	2.5	1.5	1.1	IP54
B	52 : 1	ACME	7	800	3.5	2.5	1.5	1.1	
C	52 : 1	ACME	12	400	3.1	2.0	1.2	0.9	
D	52 : 1	ACME	15	300	3.0	2.0	1.2	0.9	
E	5 : 1	ACME	50	120	2.8	1.7	1.1	0.8	
F	5 : 1	ACME	130	20	2.7	1.6	1.1	0.8	
E	5 : 1	ACME	150	10	2.5	1.6	1.0	0.7	

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址: 江苏省常州市新北区汉江西路 91 号


Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886

web: www.cx-motiontech.com

SLA06S

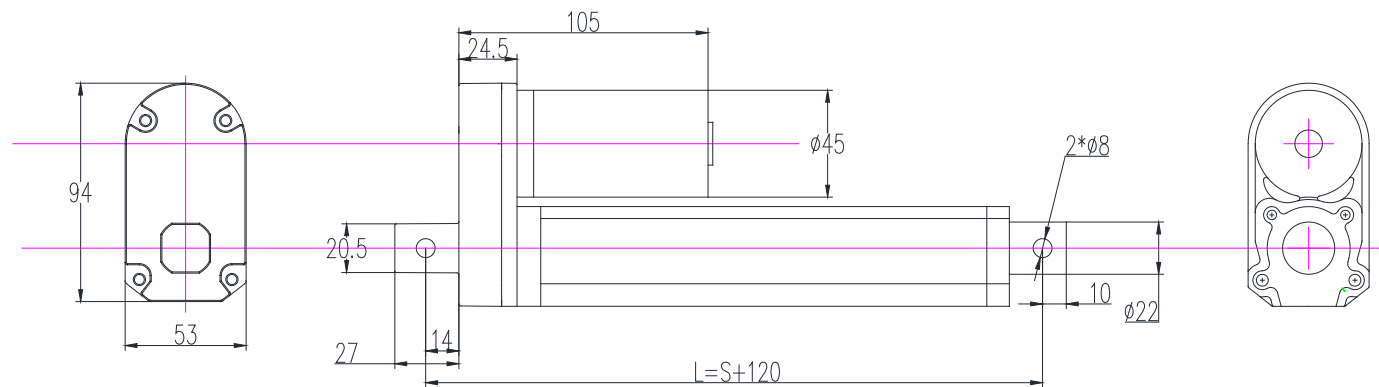

Introduction

Type: SLA06S

Stroke: 20 mm - 800mm customized

Max Speed: 170mm/s

Max Load : 3500N

Input: 12v /24v / 36v / 48v

Current on No-Load: 1.5A

Current on Full-Load: 5 A

Rated Power consumption: 60W

Limit Switch : Built-in

Feedback Option: Hall sensors / Potentiometer

IP grade: IP54

Screw type: ACME screw

Cable Lenght: 1M (or required length)

code	Gear ratio	screw	Speed vs Load		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	48 : 1	ACME	3	3500	5	3.8	2.5	1.5	IP54
B	48 : 1	ACME	5	3000	5	3.8	2.5	1.5	
C	48 : 1	ACME	8	2500	4.5	3.5	2.2	1.2	
D	48 : 1	ACME	20	1000	3.5	3.1	2.1	1.1	
E	27 : 1	ACME	10	2500	4.5	3.7	2.2	1.5	
F	27 : 1	ACME	15	1500	4	3.5	2.1	1.3	
G	27 : 1	ACME	30	500	3	3.5	2.0	1.1	
H	5.8 : 1	ACME	28	750	3.2	2.5	2.0	1.1	
I	5.8 : 1	ACME	45	400	2.8	2.5	1.8	1.2	
J	5.8 : 1	ACME	70	200	2.5	2.0	1.5	1.4	
K	5.8 : 1	ACME	110	100	2.1	1.5	1.2	1.3	
L	5.8 : 1	ACME	170	50	2.0	1.5	1.2	1.1	

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址：江苏省常州市新北区汉江西路 91 号


Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886

web: www.cx-motiontech.com

SLA07

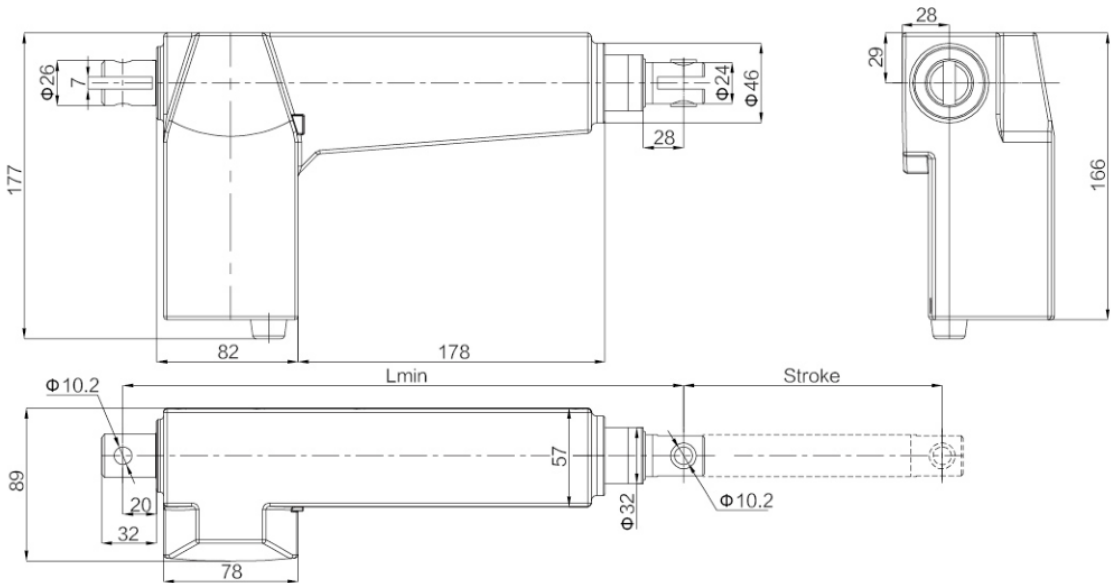

Introduction

Type: SLA07
Stroke: 20 mm - 800mm customized
Max Speed: 8mm/s
Max Load : 8000N
Input: 12v /24v / 36v / 48v
Current on No-Load: 1A
Current on Full-Load: 4A
Rated Power consumption: 60W
Limit Switch : Built-in
IP grade: IP54
Screw type: ACME screw
Cable Lenght: 1M (or required length)


安装尺寸 | Installation Dimension

行	程 Stroke (mm)	S ≤ 130	S > 130
最小安装距	Lmin (mm)	305	S+175

Lmin=Minimal mounting distance

code	Gear ratio	screw	Speed vs Load		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	40 : 1	ACME	8mm/s	8000N	4	2.5			IP54

SLA07S

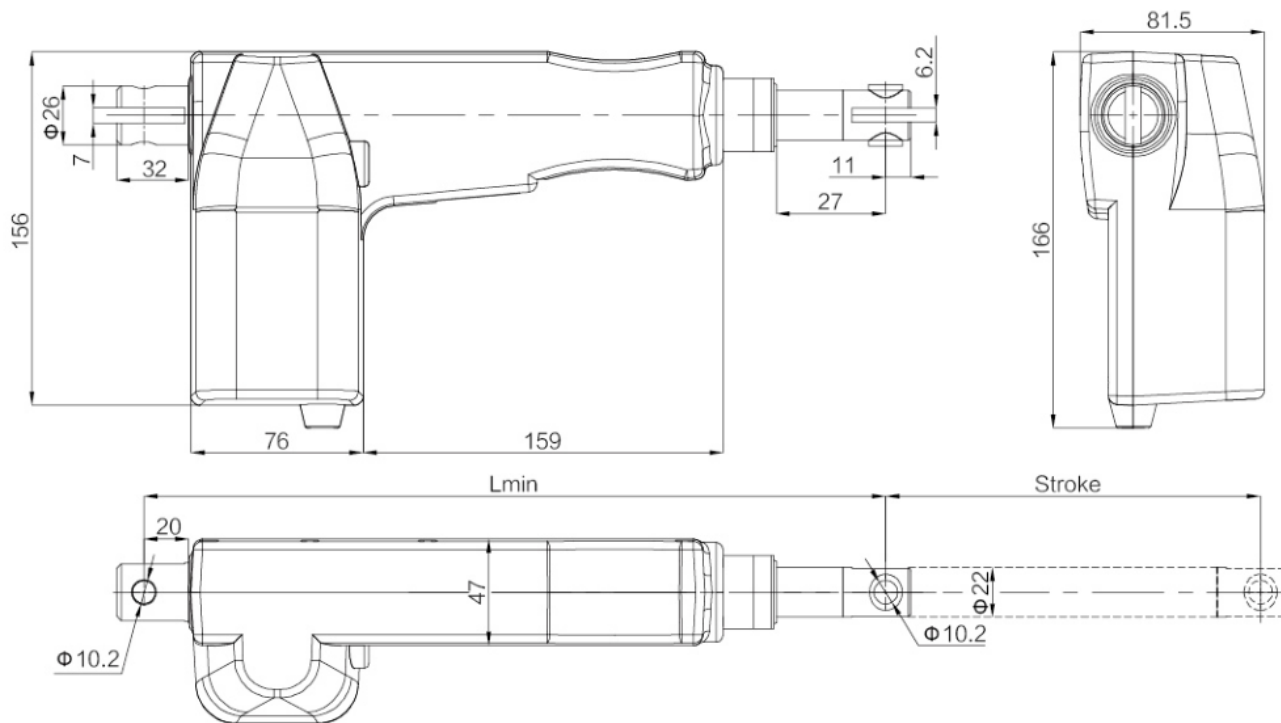

安装尺寸 | Installation Dimension

行程 Stroke (mm)	S ≤ 100	S > 100
最小安装距 Lmin (mm)	283	S+175

Lmin=Minimal mounting distance

code	Gear ratio	screw	Speed vs Load		Full load current(A)				IP grade
					12v	24v	36v	48v	
A	40 : 1	ACME	5mm/s	6000N	3.5	2.5			IP54
B	27 : 1	ACME	10mm/s	3000N	2.5	2			IP54

Introduction

Type: SLA07S

Stroke: 20 mm - 800mm customized

Max Speed: 10mm/s

Max Load : 6000N

Input: 12v /24v / 36v / 48v

Current on No-Load: 1A

Current on Full-Load: 3.5A

Rated Power consumption: 50W

Limit Switch : Built-in

IP grade: IP54

Screw type: ACME screw

Cable Lenght: 1M (or required length)

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址: 江苏省常州市新北区汉江西路 91 号


Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886

web: www.cx-motiontech.com

SLA08

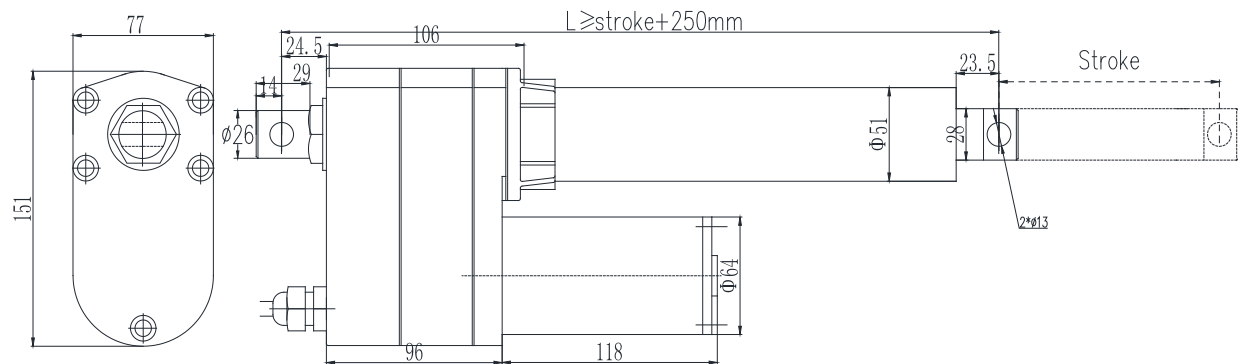


Introduction

Type: SLA08
Stroke: 20 mm - 800mm customized
Max Speed: 80 mm/s
Max Load : 10000N
Input: 12v /24v / 36v / 48v
Current on No-Load: 1A
Current on Full-Load: 22A
Rated Power consumption: 120W
Limit Switch : Built-in
Feedback Option: Potentiometer
IP grade: IP65
Screw type: ACME screw or Ball screw
Cable Lenght: 1M (or required length)

Code	Gear ratio	Pitch	Full load speed(mm/s)	Max load (N)	Full load current(A)			IP Grade
					12V	24V	48V	
A	41.3/1	5	2.5	10000	22	14	6	IP65
B	15.5/1		9	4000	20	12	4	
C	5/1		25	2000	18	10	3	
D	41.3/1	4	3.5	10000	22	14	6	
E	15.5/1		12	4000	20	12	4	
F	5/1		30	2000	18	13	3.5	
G	41.3/1	5 (P2.5)	5	9000	22	14	6	
H	15.5/1		14	3000	20	13	5	
I	5/1		30	2000	20	12	6	
J	41.3/1	2.5(P2.5)	9	7000	22	12	6	
K	15.5/1		20	2000	20	10	4	
L	5/1		65	1500	20	12	5	
M	41.3/1	12(P4)	18	4000	18	12	5	
N	15.5/1		30	2000	20	13	6	
O	5/1		80	1000	20	13	6	

SLA09

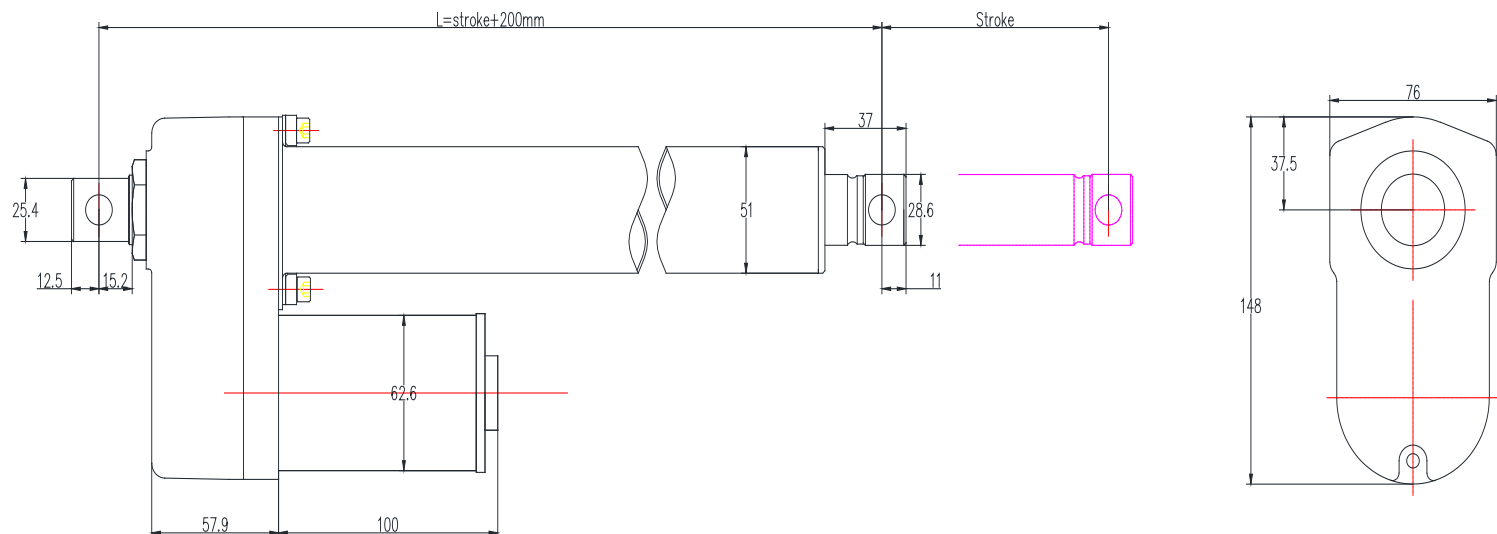

Introduction

Type: SLA09
Stroke: 50mm - 600mm customized
Max Speed: 60mm/s
Max Load : 8000N
Input: 12v / 24v / 36v / 48v
Current on No-Load: 1A
Current on Full-Load: 10A
Rated Power consumption: 120W
Brake : Built-in
IP grade: IP65
Screw type: Ball screw
Cable Lenght: 1M (or required length)

code	Gear ratio	screw	Speed vs Load		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	1:40	Ball screw	15mm/s	8000	10	5	3.5	2.5	IP65
B	1:20	Ball screw	30mm/s	4500	9	4	3.5	2.5	
C	1:10	Ball screw	60mm/s	1500	9	4	3.1	2.5	

A 3D rendering of a silver, cylindrical mechanical component, likely a linear actuator or solenoid, shown at an angle. The component has a cylindrical body with a flange at one end and a threaded rod extending from the other. The background is a light blue gradient.



Mounting Bracket: see Bracket catalogue

web: www.cx-motiontech.com



Technical drawing of the 1000 Series Hydraulic Cylinder showing side and end views with dimensions.

Side View Dimensions:

- Overall length: 155
- Stroke length: Stroke + 145
- Mounting eye diameter: $\Phi 8$
- Mounting eye radius: R11
- Mounting eye offset: 15
- Distance from mounting eye to cylinder body: 74
- Cylinder body diameter: $\Phi 20$
- Distance from cylinder body to mounting eye: 10
- Distance from cylinder body to mounting eye: 9
- Distance from cylinder body to mounting eye: 36.4

End View Dimensions:

- Overall diameter: $\Phi 20$
- Mounting eye diameter: $\Phi 8$
- Mounting eye radius: R11
- Mounting eye offset: 15
- Distance from mounting eye to cylinder body: 74
- Cylinder body diameter: $\Phi 20$
- Distance from cylinder body to mounting eye: 10
- Distance from cylinder body to mounting eye: 9
- Distance from cylinder body to mounting eye: 36.4

Type: SLA019
Stroke: 50mm - 800mm customized
Max Speed: 60mm/s
Max Load : 2500N
Input: 12v/24v/36v/48vdc
Current on No-Load: 0.5A
Current on Full-Load: 4A
Rated Power consumption: 40W
Limit switch : Built-in
Feedback: Potentiometer or Hall sensors
IP grade: IP66
Screw type: ACME screw
Duty Cycle: 20%
Mounting Bracket: see Bracket catalogue

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)
地址: 江苏省常州市新北区汉江西路 91 号
Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email: w.laureus@foxmail.com
Tel: +86 18015001886
web: www.cx-motiontech.com



Duty Cycle: 20%

web: www.cx-motiontech.com

SLA023



Introduction

Type: SLA023

Stroke: 50mm - 400mm customized

Max Speed: 23mm/s

Max Load : 3000N

Input: 12v /24vdc

Current on No-Load: 0.5A

Current on Full-Load:4.5A


Rated Power consumption: 60W

Limit switch : Built-in

IP grade: IP69

Screw type: ACME screw

Duty Cycle: 20%

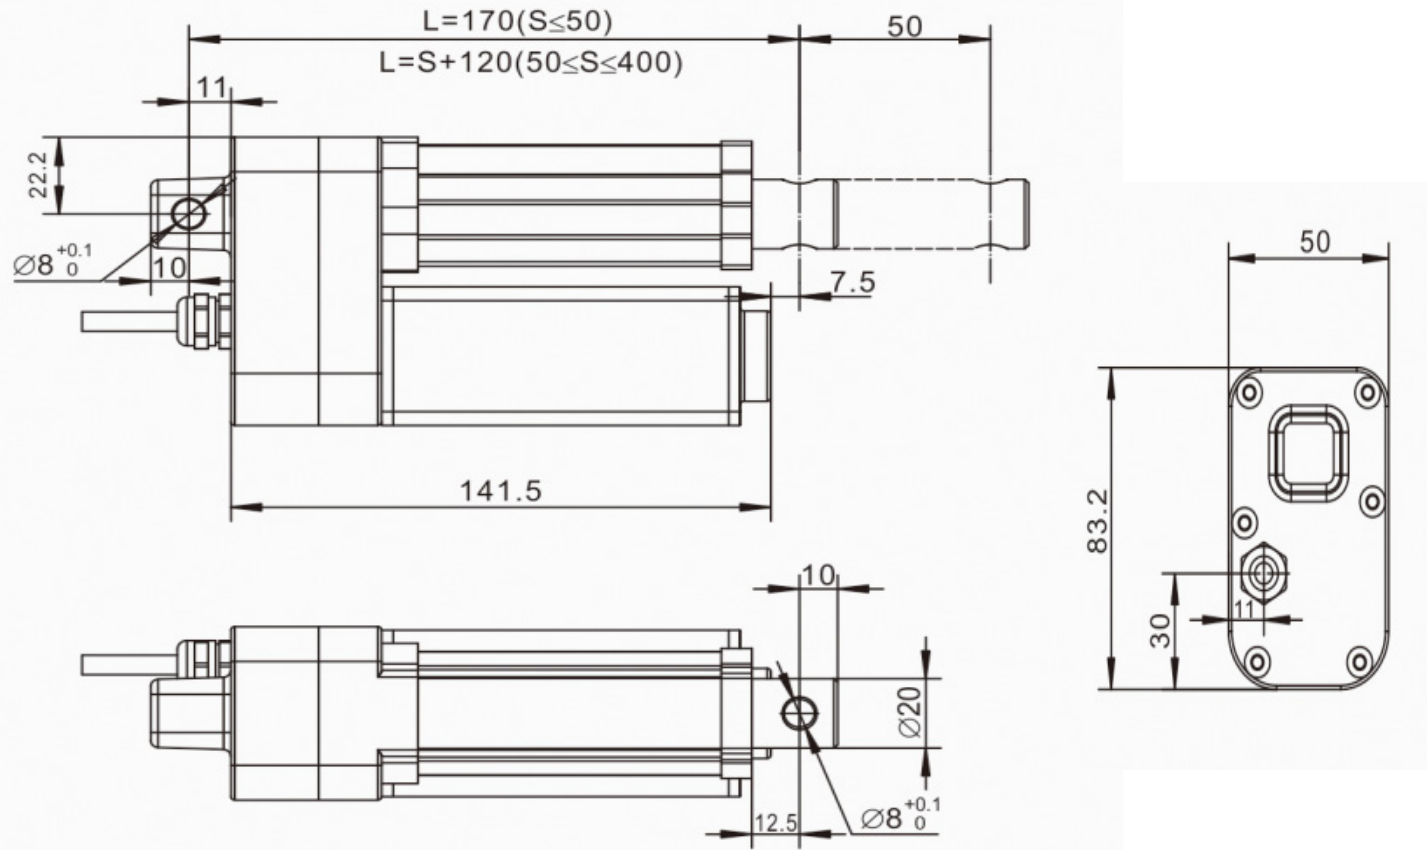

code	Gear ratio	screw	Speed vs Load		Full load current				IP grade
					12v	24v	36v	48v	
A	40 : 1	ACME	10mm/s	3000N		4.5A			IP69
B	27: 1	ACME	15mm/s	2000N	4.5 A	4 A			
C	15: 1	ACME	23mm/s	1000N		3.5 A			

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址: 江苏省常州市新北区汉江西路 91 号


Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886

web: www.cx-motiontech.com

SLA-12K

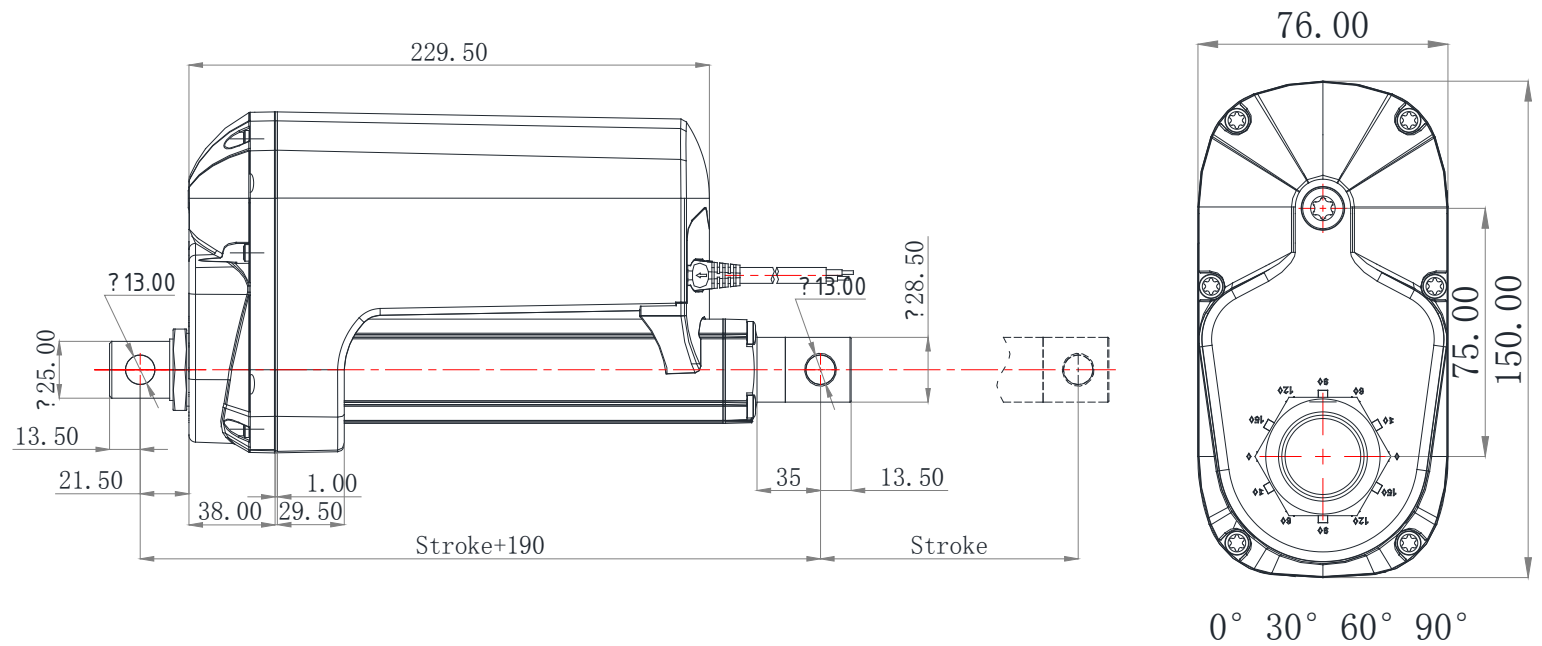


Introduction

Type: SLA-12K
 Stroke: 100mm - 800mm customized
 Max Speed: 20mm/s
 Max Load : 12000N
 Input: 12v /24v/36v/48vdc
 Current on No-Load: 4A
 Current on Full-Load: 10A
 Rated Power consumption: 80W
 Limit switch : Built-in
 IP grade: IP66
 Screw type: ACME screw or Ball screw
 Duty Cycle: 20%

Code	Gear ratie	Pitch	Full load speed mm/s	Max load (N)	Full load current (A)				IP grade
					12V	24V	24v	36v	
A	40/1	4	2.5-3	12000	20	10.5			IP65
B	30/1		5-6	11000	20	10.5			
C	20/1		6-9	7500	20	10.5			
D	40/1	8	3-7	10000	20	10.5			
E	30/1		7.5-9.5	7000	20	10.5			
F	20/1		14	5000	20	10.5			
G	40/1	12	11	6500	20	10.5			
H	30/1		13	4500	20	10.5			
I	20/1		24	3200	20	10.5			
J	41.3/1	20	15	4000	20	10.5			
K	15.5/1		20	3000	20	10.5			
L	1/5		20	2000	20	10.5			

SLA-15K


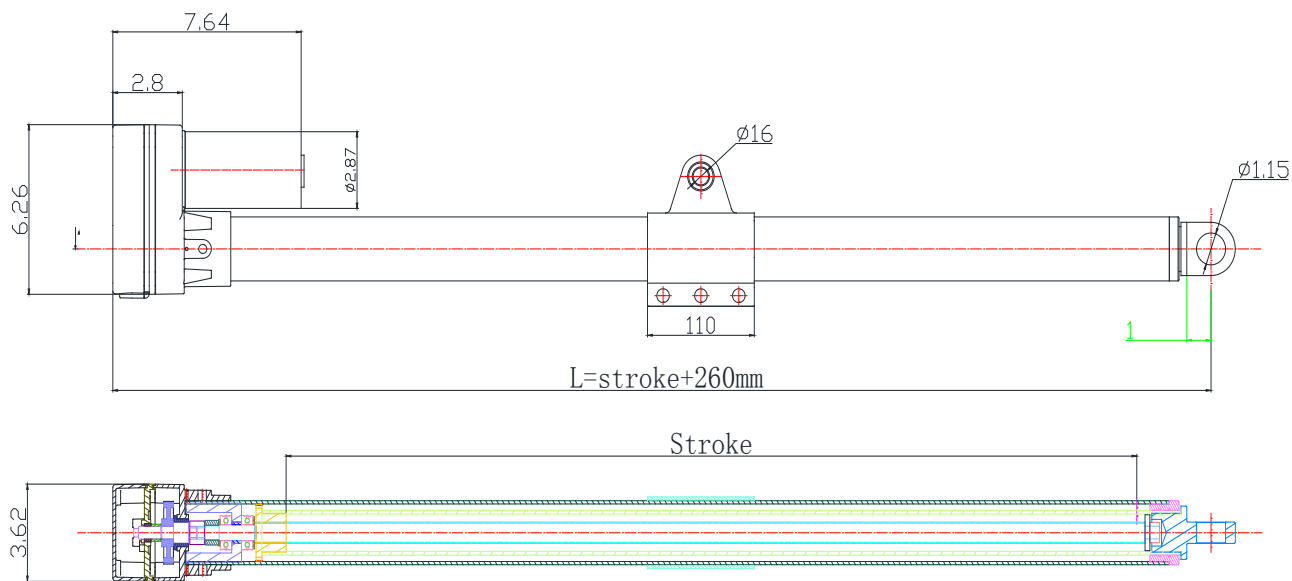


Introduction

Type: SLA-15K
Stroke: 100mm - 1000mm customized
Max Speed: 3mm/s
Max Load : 15000N
Input: 12v /24v/36v/48vdc
Current on No-Load: 5A
Current on Full-Load: 15A
Rated Power consumption: 120W
Limit switch : Built-in
Feedback: Hall sensors
IP grade: IP66
Screw type: ACME screw
Duty Cycle: 20%

code	Gear ratio	screw	Speed vs Load		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	1: 40	ACME	3mm/s	15000N	20	10	8	5	IP66
B	1: 40	ACME	3mm/s	10000N	20	10	8	5	

Introduction

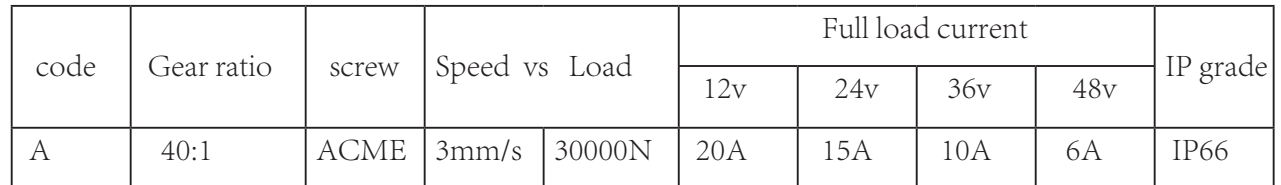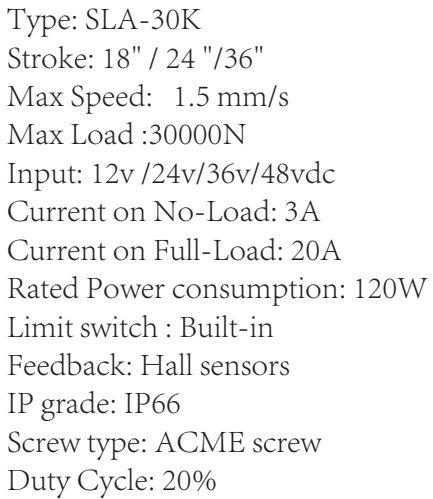


SLA-03B




Introduction

Type: SLA-03B
Stroke: 50mm - 800mm customized
Max Speed: 15mm/s
Max Load : 6000N
Input: 12v /24v / 36v / 48v
Current on No-Load: 0.5A
Current on Full-Load: 4A
Rated Power consumption: 50W
Limit switch : Built-in
IP grade: IP65
Screw type: ACME screw
Cable Lenght: 1M (or required length)

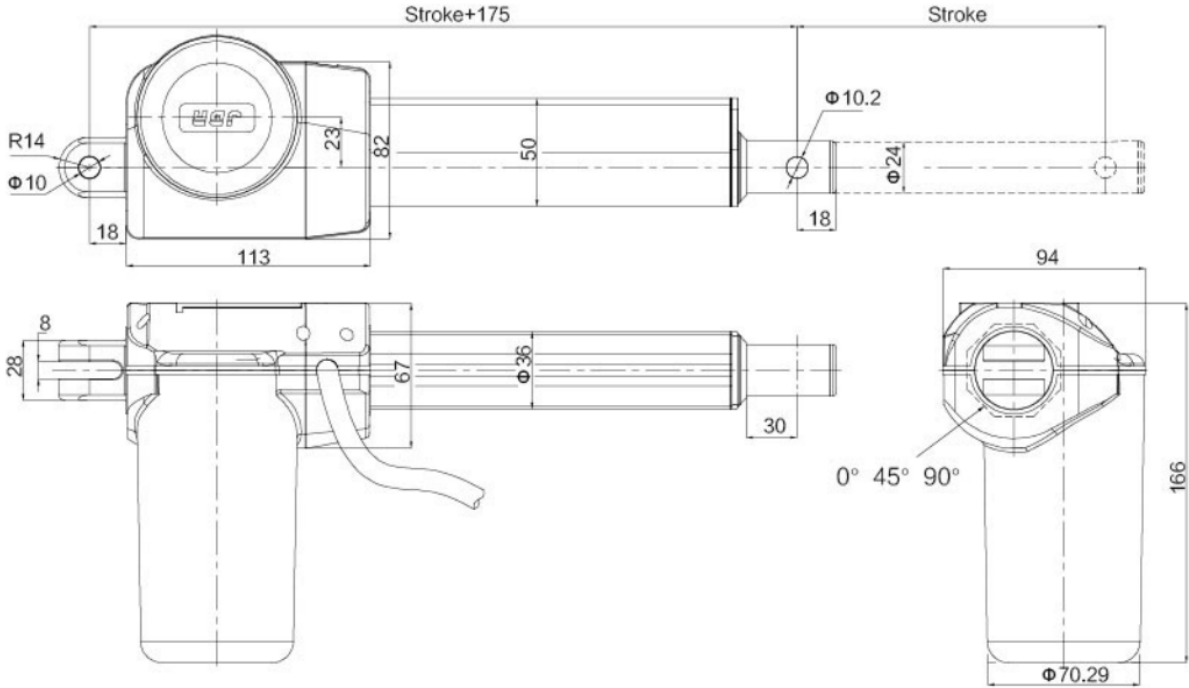

code	Gear ratio	screw	Speed vs Load		Full load current				IP grade
					12v	24v	36v	48v	
A	39:1	ACME	4mm/s	6000N	1	0.6			IP65
B	27:1	ACME	8mm/s	4000N	1	0.6			
C	21: 1	ACME	15mm/s	2000N	1	0.6			

SLA-03C

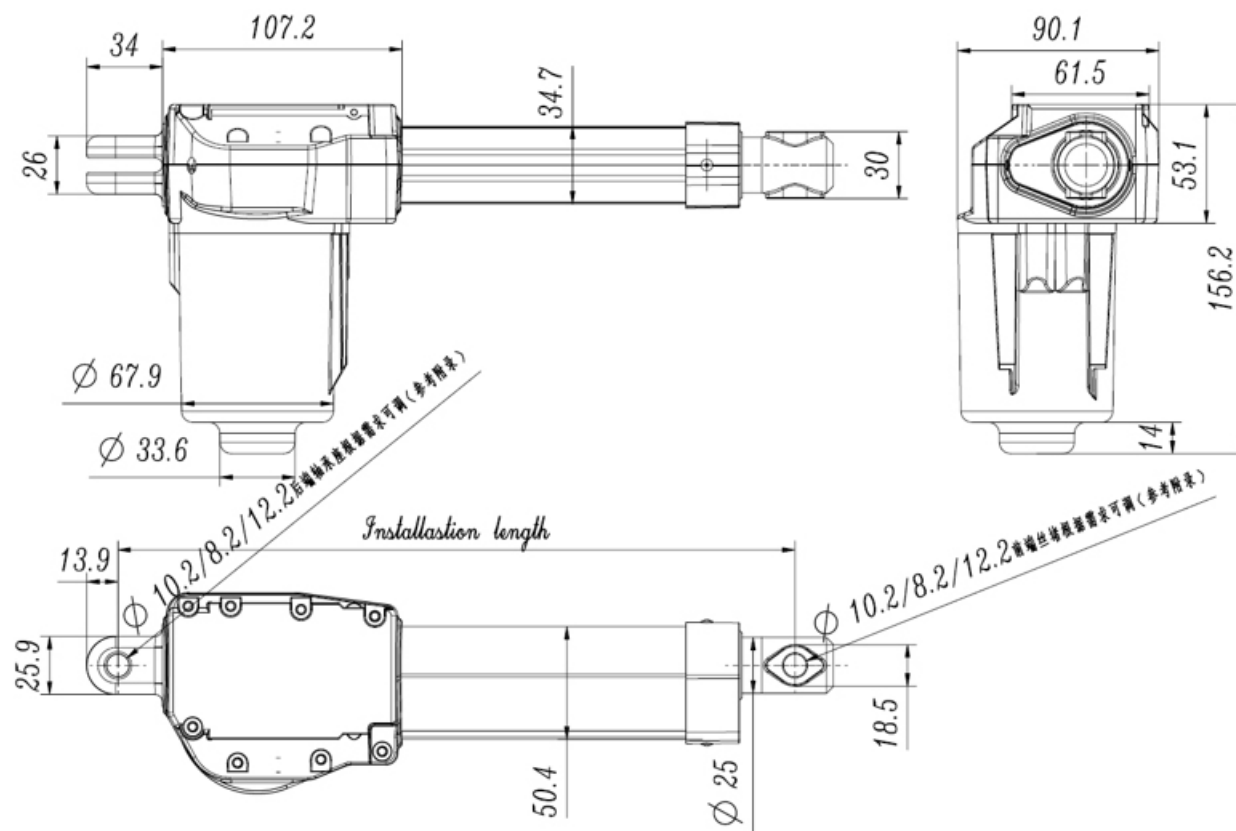

Introduction

Type: SLA-03C

Stroke: 50mm - 800mm customized

Max Speed: 30mm/s

Max Load : 6000N

Input: 12v /24vdc

Current on No-Load: 0.5A

Current on Full-Load: 7A

Rated Power consumption: 60W

Limit switch : Built-in

Feedback: Hall sensors

IP grade: IP54

Screw type: ACME screw

Cable Lenght: 1M (or required length)

code	Gear ratio	screw	Speed vs Load mm/s N		Full load current (A)				IP grade
					12v	24v	29v	36v	
A	40 : 1	ACME	6	6000	6.2	4	3		IP54
B	40: 1	ACME	8	4000	6.2	4	3		
C	27 : 1	ACME	12	2000	5.5	3.5	2.5		
D	15 : 1	ACME	30	1000	4.7	2.7	2.2		

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址: 江苏省常州市新北区汉江西路 91 号


Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886

web: www.cx-motiontech.com

SLA-03D

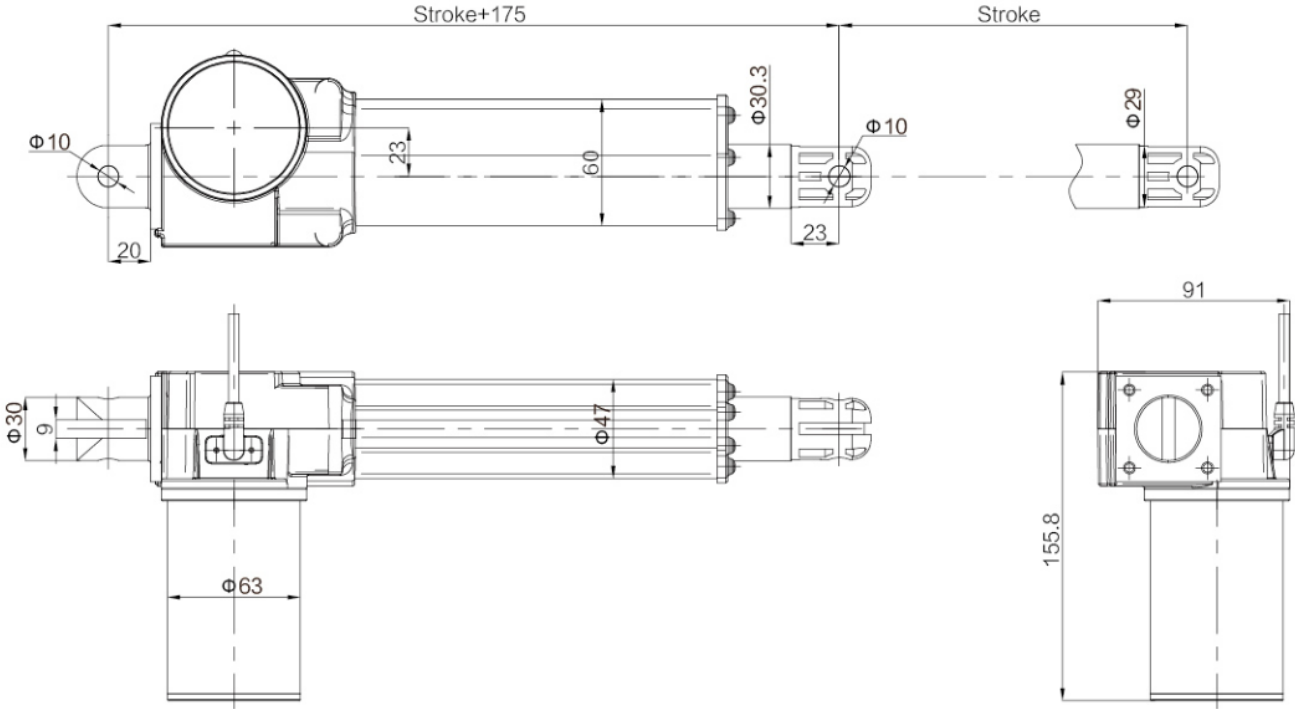


Introduction

Type: SLA-03D
Stroke: 50mm - 800mm customized
Max Speed: 36mm/s
Max Load : 8000N
Input: 12v /24vdc
Current on No-Load: 1A
Current on Full-Load: 6A
Rated Power consumption: 60W
Limit switch : Built-in
IP grade: IP66
Screw type: ACME screw
Cable Lenght: 1M (or required length)

code	Gear ratio	screw	Speed vs Load mm/s N		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	1 : 39	ACME	6	8000N	6	5	3	1.5	IP66
B	1: 39	ACME	8	6000N	5	4	2.4	1.4	
C	1: 27	ACME	10	4000N	4.5	3.5	2.2	1.2	
D	1 : 27	ACME	15	2000N	3.5	3.1	2.1	1.1	
E	1 : 20	ACME	36	1000N	3	2.5	1.8	0.8	

SLA-PT01

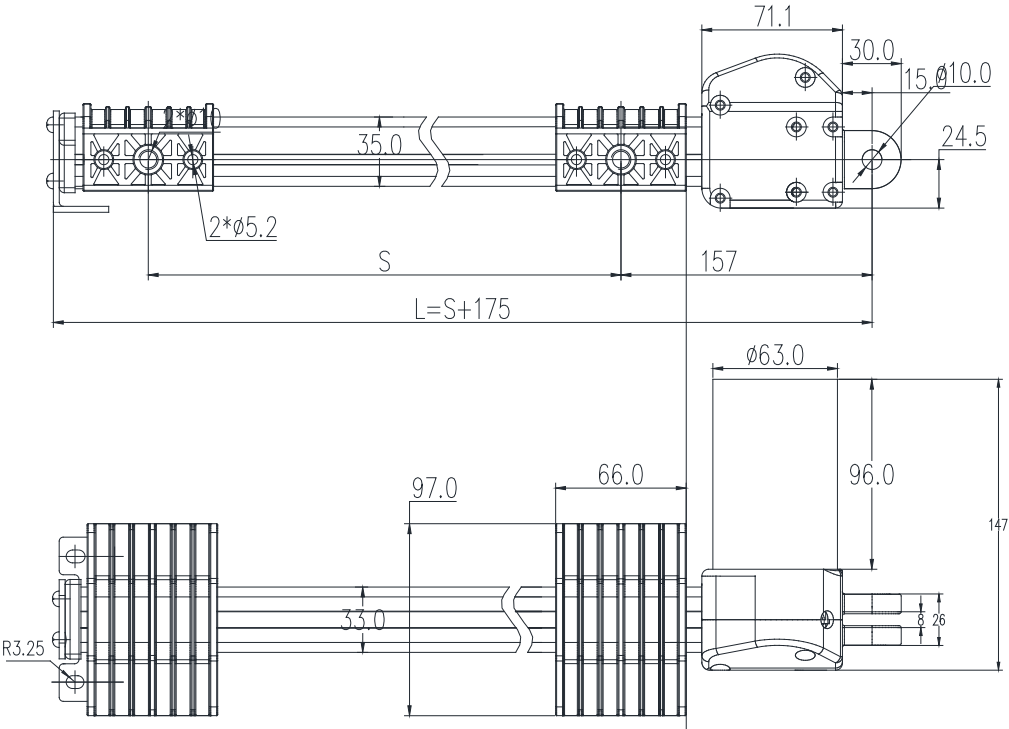


Introduction

Type: SLA-PT01
Stroke: 50mm - 600mm customized
Max Speed: 36mm/s
Max Load : 4000N
Input: 12v /24v/36v/48vdc
Current on No-Load: 0.5A
Current on Full-Load: 2.5A
Rated Power consumption: 30W
Limit switch : Built-in
Feedback: Hall sensors
IP grade: IP20
Screw type: ACME screw
Duty Cycle: 20%

code	Gear ratio	screw	Speed vs Load mm/s N		Full load current				IP grade
					12v	24v	29v	36v	
A	1 : 39	ACME	8	4000	4.2	2.8	2.5		IP30
B	1 : 39	ACME	12	3000	4.1	2.7	2.5		
C	1 : 27	ACME	20	2000	3.7	2.2	2.1		
D	1 : 27	ACME	16	1500	3.5	2.1	2.1		
E	1 : 27	ACME	24	1000	3.1	2.1	1.8		
F	1 : 21	ACME	36	800	3.1	1.9	1.5		

SLA-PT02


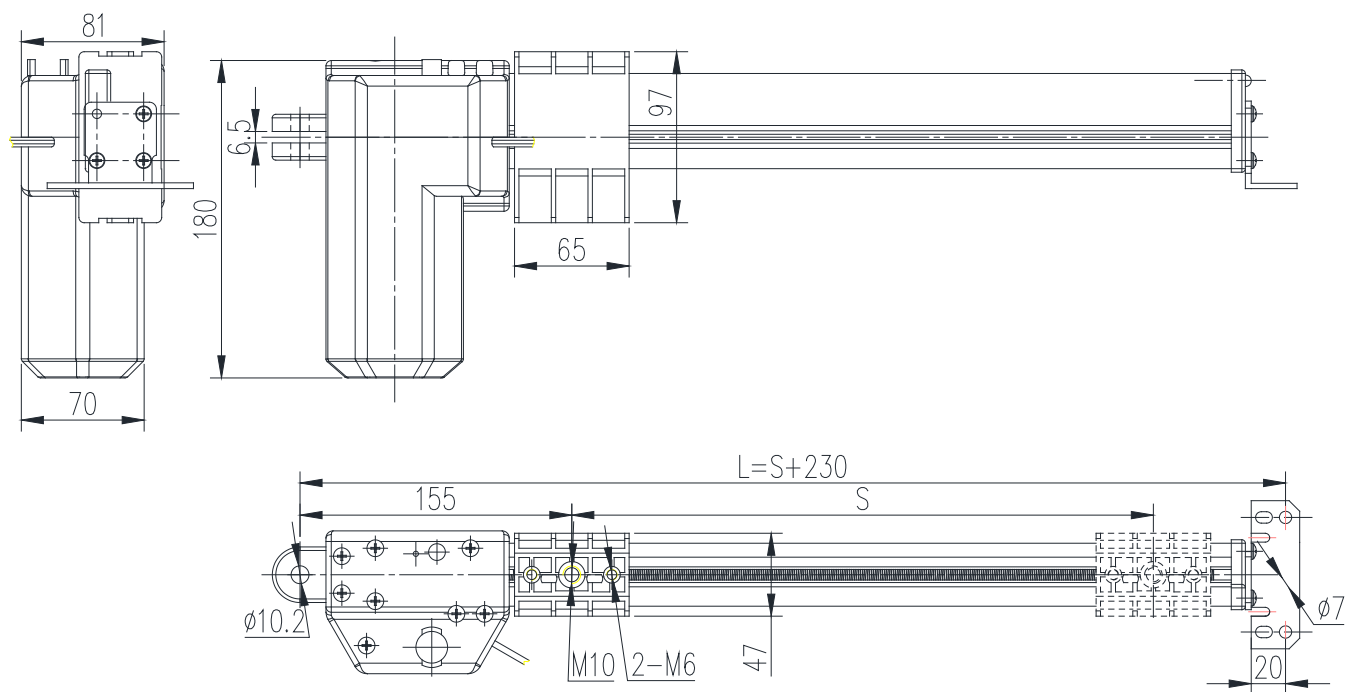


Introduction

Type: SLA-PT02
Stroke: 50mm - 600mm customized
Max Speed: 35mm/s
Max Load : 4000N
Input: 12v /24v/36v/48vdc
Current on No-Load: 0.5A
Current on Full-Load: 2.5A
Rated Power consumption: 40W
Limit switch : Built-in
Feedback: Hall sensors
IP grade: IP20
Screw type: ACME screw
Duty Cycle: 20%

code	Gear ratio	screw	Speed vs Load mm/s N	Full load current (A)				IP grade
				12v	24v	36v	48v	
A	1: 40	ACME	8	4000N	4.1	2.5		IP30
B	1: 27	ACME	18	1500N	3.5	2.0		
C	1 : 21	ACME	35	750N	2.8	1.5		

SLA-LC01

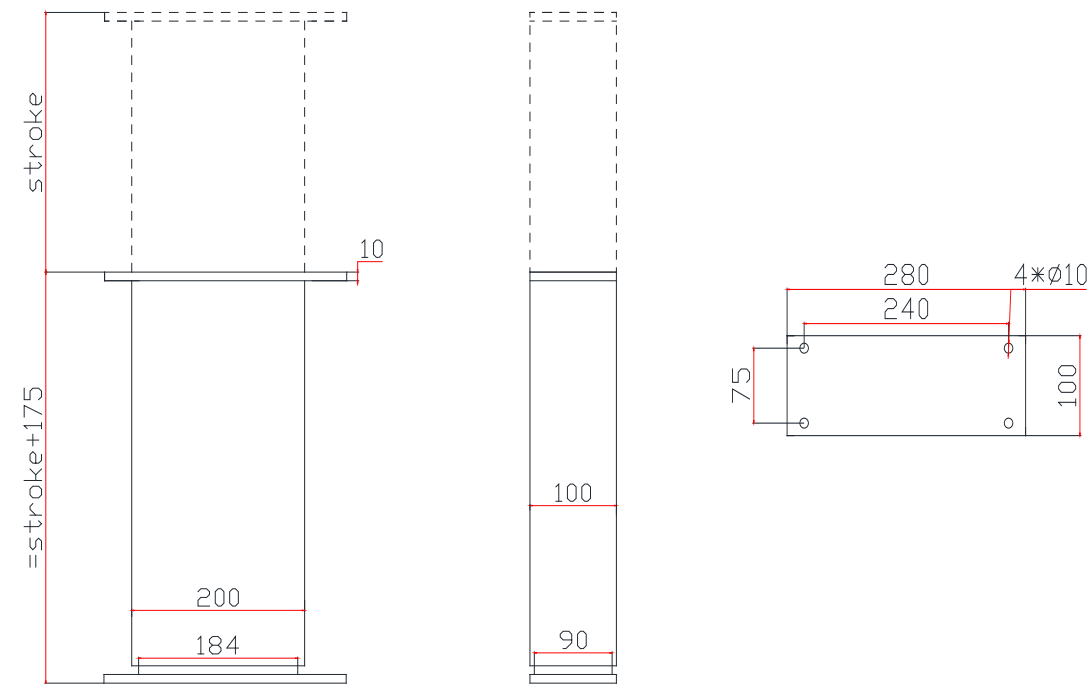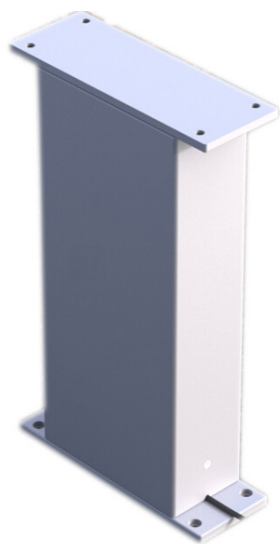


Introduction

Type: SLA-LC01
Stroke: 50mm - 1000mm customized
Max Speed: 29mm/s
Max Load : 6000N
Input: 12v /24v/36v/48vdc
Current on No-Load: 1A
Current on Full-Load: 5A
Rated Power consumption: 40W
Limit switch : Built-in
Feedback: Hall sensors
IP grade: IP54
Screw type: ACME screw
Duty Cycle: 20%

code	Gear ratio	screw	Speed vs Load mm/s N		Full load current (A)				IP grade
					12v	24v	29v	36v	
A	35 : 1	ACME	4	6000	1	0.6	0.5		IP54
B	33: 1	ACME	6	5000	1	0.6	0.5		
C	27 : 1	ACME	8	4000	1	0.6	0.5		
D	20 : 1	ACME	15	2000	1	0.6	0.5		
E	15: 1	ACME	29	750	1	0.6	0.5		

SLA-LC02

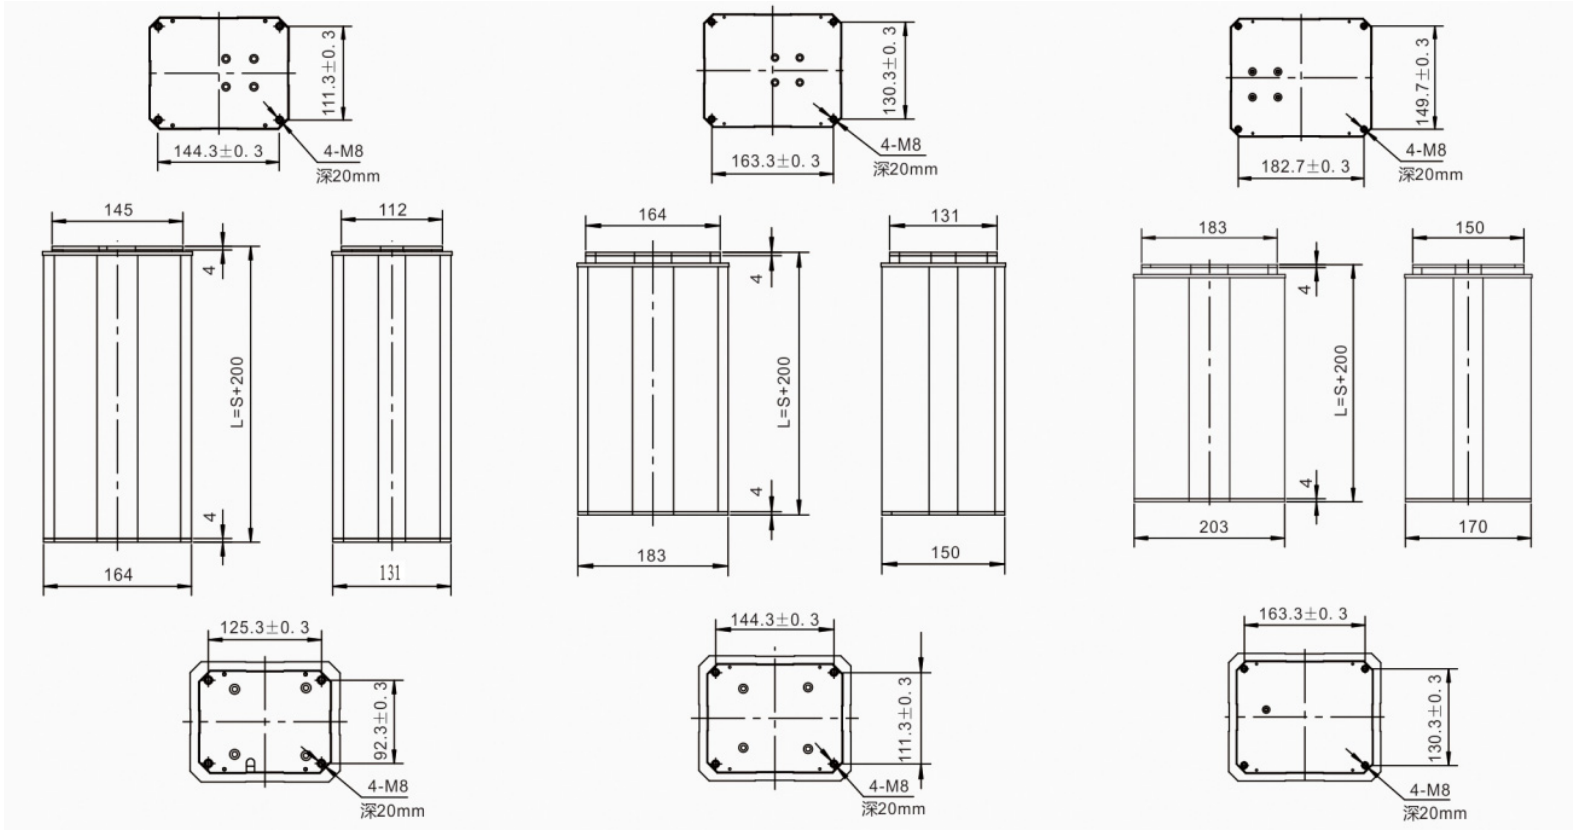


Introduction

Type: SLA-LC02
 Stroke:100mm -600mm
 Max Speed: 9mm/s
 Max Load : 6000N
 Input: 12v /24v/36v/48vdc
 Current on No-Load: 1.5A
 Current on Full-Load: 7A
 Rated Power consumption: 40W
 Limit switch : Built-in
 Feedback: Hall sensors
 IP grade: IP54
 Screw type: ACME screw
 Duty Cycle: 20%

code	Gear ratio	screw	Speed vs Load		Full load current				IP grade
					12v	24v	36v	48v	
A	1 : 41	ACME	3mm/s	6000N		4.5A			IP54
B	1: 41	ACME	4mm/s	4000N		4 A			
C	1 : 27	ACME	9mm/s	2000N		4.5 A			

SLA-LC03

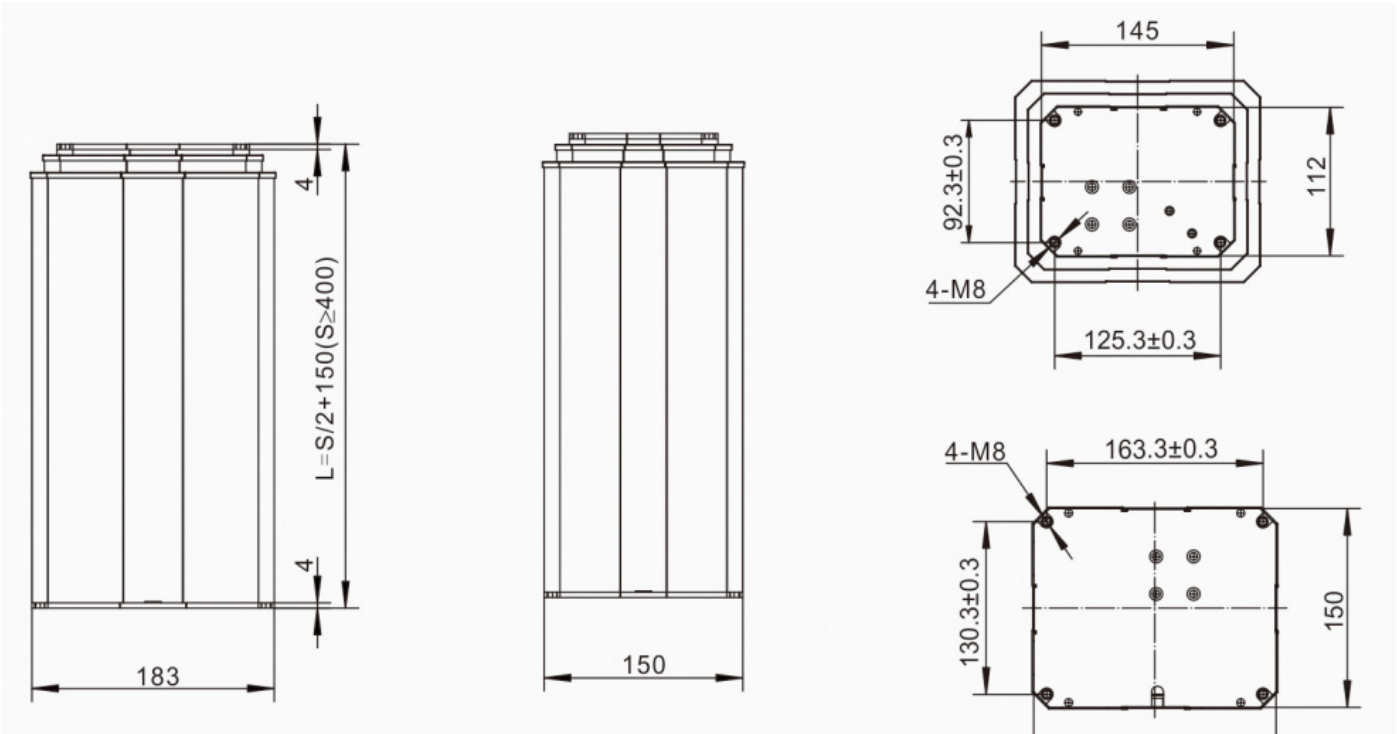


Introduction

Type: SLA-LC03
Stroke:100mm -400mm
Max Speed: 12mm/s
Max Load : 6000N
Input: 12v /24v/36v/48vdc
Current on No-Load: 1.5A
Current on Full-Load: 7A
Rated Power consumption: 60W
Limit switch : Built-in
Feedback: Hall sensors
IP grade: IP54
Screw type: ACME screw
Duty Cycle: 20%

code	Gear ratio	screw	Speed vs Load		Full load current				IP grade
					12v	24v	36v	48v	
A	1 : 40	ACME	5.5	6000		7 A			IP54
B	1 : 40	ACME	9	4000		6.5 A			
C	1 : 40	ACME	12	2000		5 A			

SLA-T01

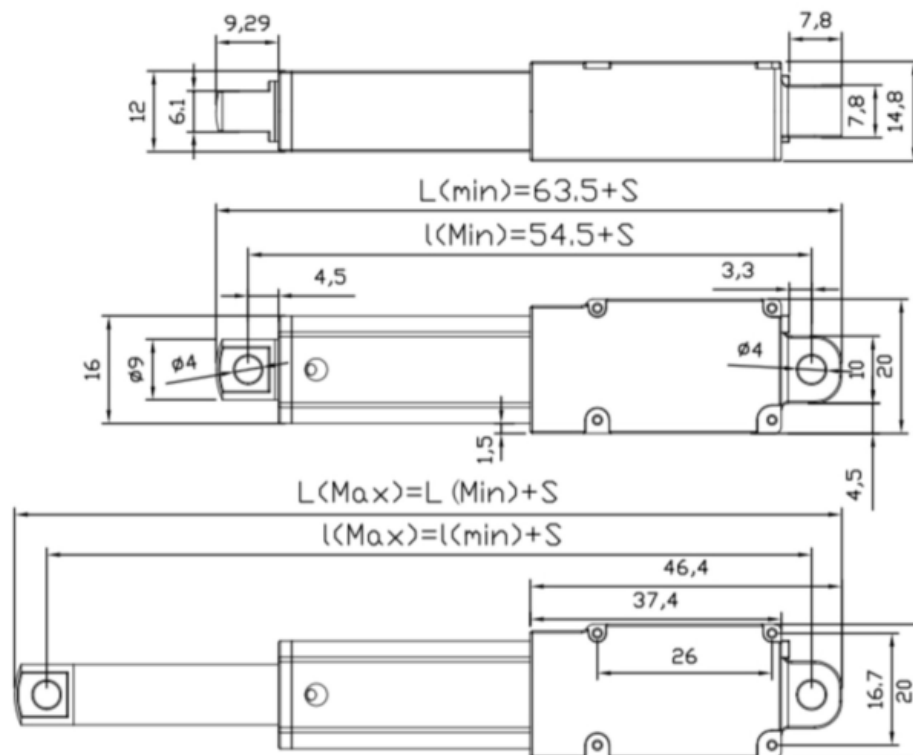


Introduction

Type: SLA-T01
 Stroke:10 / 30 / 50 / 100mm
 Max Speed: 150mm/s
 Max Load : 188N
 Input: 6v / 12v
 Rated Power consumption: 10W
 Limit switch : Built-in
 Feedback: Resistance signal
 IP grade: IP54
 Screw type: ACME screw
 Duty Cycle: 20%

Type	Load: N	Static load: N	Unload speed:MM/S	Duty cycle:%	Max Current 6V	Max current 12V
SLA-T01-5	188	235	5	10	3.0	1.5
SLA-T01-7	128	160	7	10	3.2	1.6
SLA-T01-9.5	96	120	9.5	10	2.8	1.4
SLA-T01-15	64	80	15	10	3.0	1.5
SLA-T01-30	32	40	30	10	3.0	1.5
SLA-T01-50	19.2	24	50	10	3.2	1.6
SLA-T01-150	6.4	8	150	10	3.0	1.5

SLA-T20

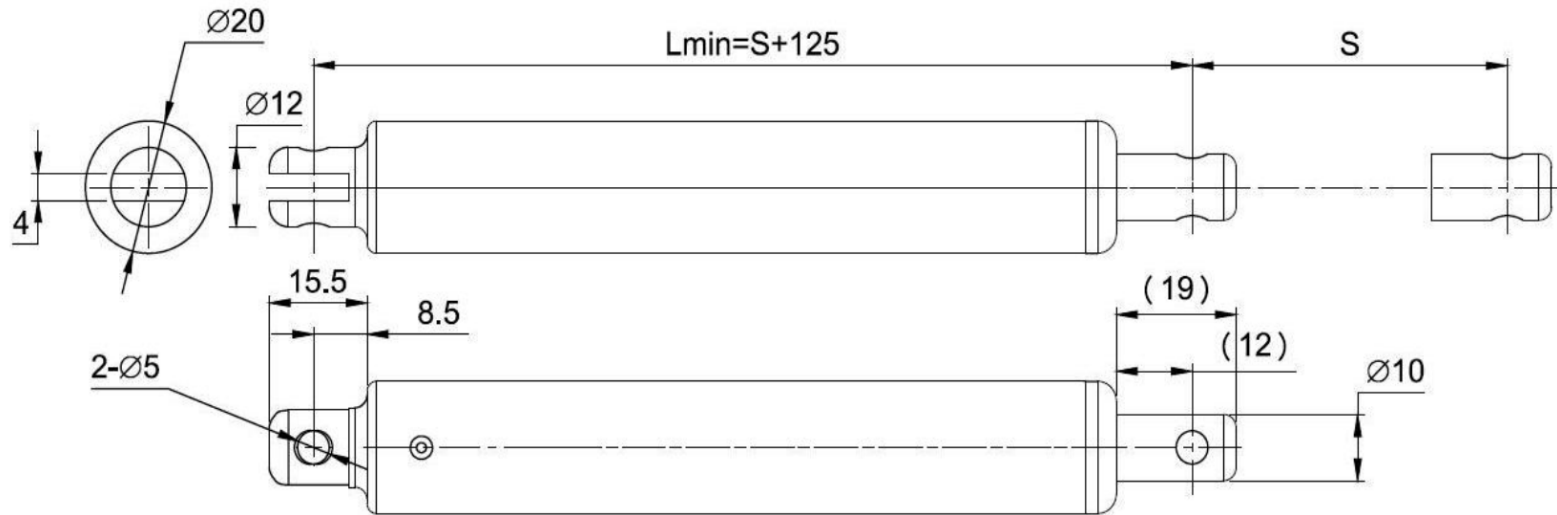


Introduction

Type: SLA-T20
Stroke: 10mm - 300mm
Max Speed: 16mm/s
Max Load : 120N
Input: 12v /24v
Rated Power consumption: 10W
Limit switch : Built-in
IP grade: IP54
Screw type: ACME screw
Duty Cycle: 20%
Woking temperature: -25℃ to + 65℃

行程 (S)	30-200	201-300
长度 (L)	S+125	S+155

code	Gear ratio	screw	Speed vs Load		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	1 : 39	ACME	8mm/s	120N	0.4	0.25			IP54
B	1: 27	ACME	16mm/s	30N	0.4	0.25			

SLA-T25

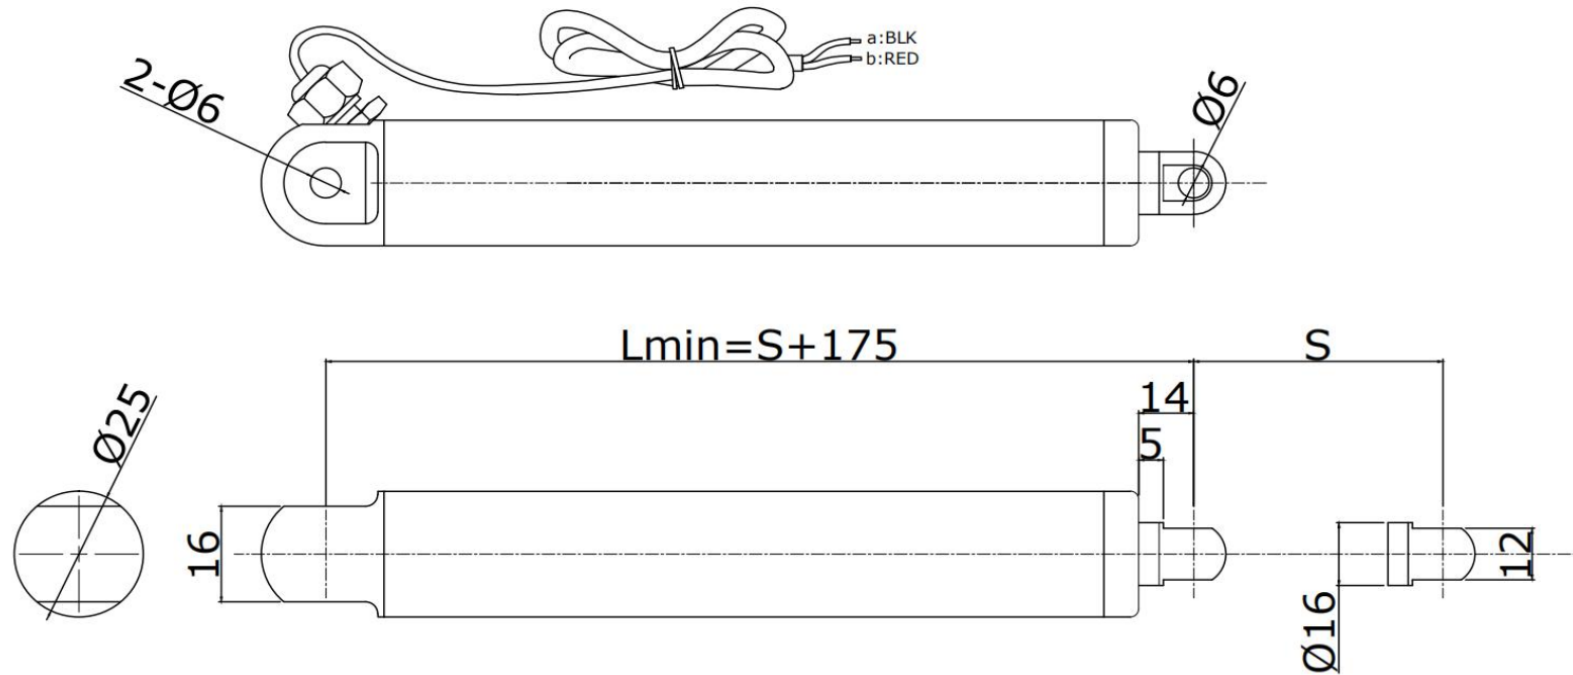


Introduction

Type: SLA-T26
 Stroke: 30mm - 500mm
 Max Speed: 10mm/s
 Max Load : 500N
 Input: 12v /24v
 Rated Power consumption: 20W
 Limit switch : Built-in
 Feedback: Hall sensors
 IP grade: IP54
 Screw type: ACME screw
 Duty Cycle: 20%
 Color : Silver or Black
 Woking temperature: -25℃ to + 65℃

Stroke	30-200	201-300	301-500
Length	S+175	S+195	S+205

code	Gear ratio	screw	Speed vs Load		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	1 : 39	ACME	7mm/s	300N	1.5	0.8			IP54
B	1: 27	ACME	10mm/s	500N	1.5	0.7			

SLA-T36

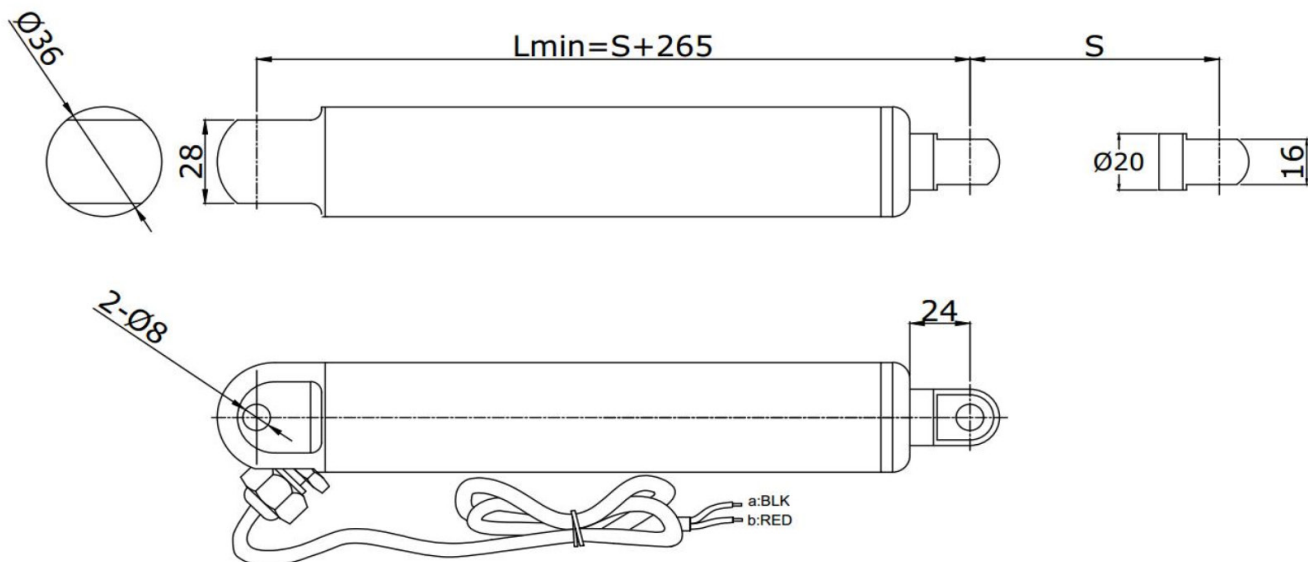


Stroke	50-300	301-400	401-600
Length	S+265	S+295	S+325

Introduction

Type: SLA-T36
Stroke: 50 - 600mm
Max Speed: 20mm/s
Max Load : 1500N
Input: 12v /24v
Rated Power consumption: 40W
Limit switch : Built-in
IP grade: IP65
Screw type: ACME screw
Duty Cycle: 20%
Working temperature: -25℃ to + 65℃

code	Gear ratio	screw	Speed vs Load mm/s N		Full load current (A)				IP grade
					12v	24v	36v	48v	
A	1 : 41	ACME	5	1500	2.8	1.8			IP65
B	1: 41	ACME	6	1000	2.6	1.5			
C	1 : 27	ACME	10	750	2.5	1.5			
D	1 : 27	ACME	15	300	2.5	1.5			
E	1 : 20	ACME	20	150	2.5	1.5			

SLA-T50

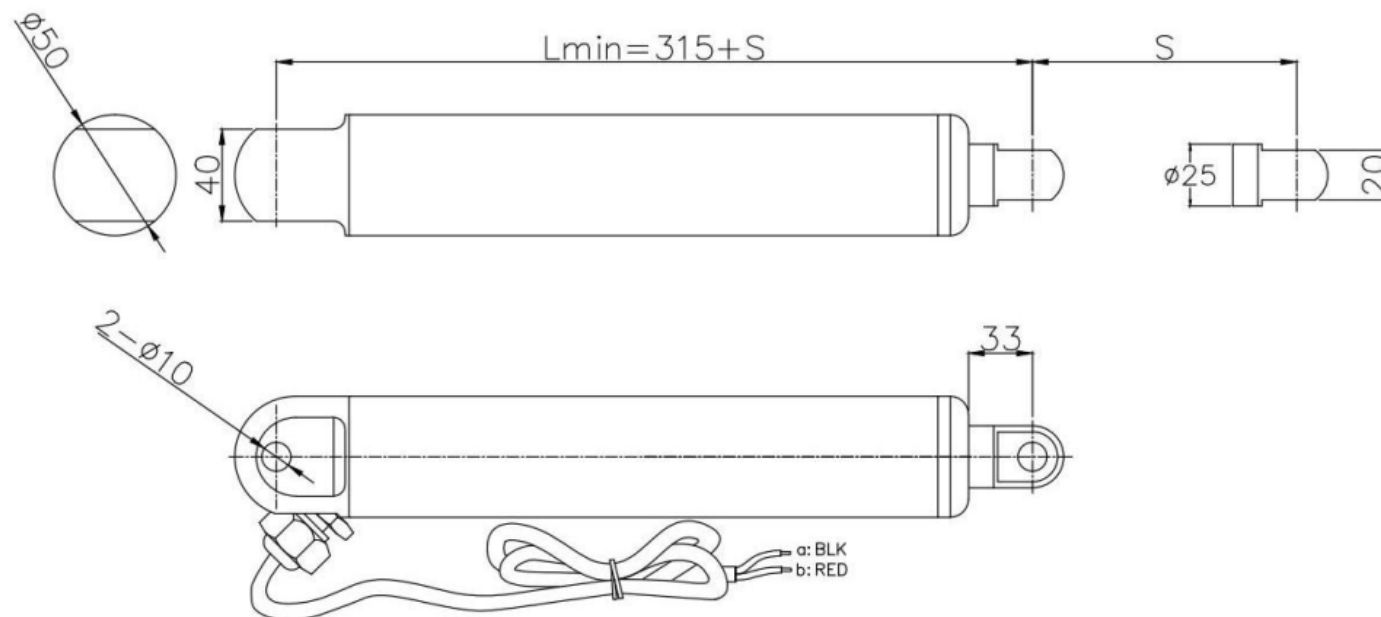

Introduction

Type: SLA-T50

Stroke: 25 - 1000mm

Max Speed: 18mm/s

Max Load : 5000N

Input: 12v /24v

Rated Power consumption: 70W

Limit switch : Built-in

Feedback: Hall sensors

IP grade: IP66

Screw type: ACME screw

Duty Cycle: 20%

Color : Silver or Black

Working temperature: -25℃ to + 65℃

Stroke	25-400	401-700	701-1000
Length	S+315	S+365	S+415

code	Gear ratio	screw	Speed vs Load		Full load current				IP grade
					12v	24v	36v	48v	
A	1 : 51	ACME	2.5	5000	4.2	2.4			IP66
B	1 : 40	ACME	5	3000	4	2.2			
C	1 : 27	ACME	12	1500	4	2			
D	1 : 27	ACME	18	750	4	2			

常州市长兴电器科技有限公司 (Changzhou Changxing Motion Tech Co.,ltd)

地址: 江苏省常州市新北区汉江西路 91 号

Add.: No.91 Hanjiang West Road xinbei dist. Changzhou city, Jiangsu Province, China

Email:w.laureus@foxmail.com

Tel: +86 18015001886

web: www.cx-motiontech.com

**We are here to provide free
mechanical and electrical support
Please feel free to contact us.**

