


CEILINGS

	Exposed Deck - Exposed floor or roof deck no applied finish	
	Exposed Painted Deck with Acoustic Absorber - Exposed floor deck with applied paint finish unless other noted - colour TBC. Class 'A' acoustic absorber to soffit in accordance with Acoustic Report - Heradesign superfine 1200x600x25mm AK-01 directly fixed to CD channel with Acoustic backfill	
	Exposed Deck - Exposed roof deck painted matt black finish	
	MF plasterboard - MF plasterboard system with access panels to suit M+E	
	MR MF plasterboard - Moisture resistant MF plasterboard system with access panels to suit M+E	
	Acoustic Suspended Ceiling - 600X600 mineral fibre suspended acoustic tile ceiling system, Class 'C' sound absorption. - Armstrong Bioguard Acoustic tiles, Tegular edge. 24mm grid and perimeter trim.. Shadow batten painted 9010 to perimeters of all suspended ceilings.	

	Laboratory Suspended Ceiling - 600X600 mineral fibre hygenic, acoustic suspended tile system, Class 'C' sound absorption. Armstrong Bioguard Acoustic tiles, Tegular edge. 24mm grid and perimeter trim.. Shadow batten painted 9010 to perimeters of all suspended ceilings.	
	Catering Suspended Ceiling - 600X600 mineral fibre hygenic suspended tile system. Armstrong Bioguard Acoustic tiles, Board (square) edge. Non-corrosive 24mm grid and perimeter trim.	
	40 dB EMC (Electro Magnetic) shielding ceiling by specialist EMC specialist fit out contractor) refer to Outline Specification.	
	100 dB EMC (Electro Magnetic) shielding ceiling by specialist EMC specialist fit out contractor) refer to Outline Specification.	
	Plenum - MF plasterboard lining to form sealed plenum under lecture theatre - refer to acoustic report.	
	Lecture Theatre Ceiling - Suspended MF acoustic ceiling rafts with return edge. Refer to Acoustic Report. Three separate zone rafts (see section). Reflective zone - Knauf Regula solid board Class 'A' zone - Heradesign Superfine 1200x600x25mm AK-01 directly fixed to CD-Channel with Acoustic backfill. Return edge profile to Heradesign boards. Colour TBC Class 'C' zone - Heradesign Superfine 1200x600x25mm AK-01 directly fixed to CD-Channel. Return edge profile to Heradesign boards. Colour TBC	

Replacement Ceiling subject to client confirmation Acoustic Suspended Ceiling - 600X600 mineral fibre suspended acoustic tile ceiling system, Class 'C' sound absorption. - Armstrong Bioguard Acoustic tiles, Tegular edge. 24mm grid and perimeter trim.. Shadow batten painted 9010 to perimeters of all suspended ceilings.		
Anechoic - anechoic foam lined chamber by specialist fitout contractor		
Existing - No additional works to existing ceiling .		
Perforated plasterboard - perforated plasterboard system rated class C with access panels to suit M+E 80 % of ceiling area		
rev	date	comment
P08	19.08.16	Updated to lay-in grid to WCs. Ceilings updated to reflect VE
P07	09.11.15	Updated to perforated plaster board treatment. Key updated
P06	14.10.15	Updated to show acoustic panel treatment. Key updated
P05	13.10.15	Updated to reflect revised planning application. Key updated.
P04	04.08.15	Amended Stage 3+ information
P03	14.08.15	Updated to reflect updated plans
P02	08.06.15	Employers requirement issue
P01	10.04.15	Drawing created
project ECM, University of Lincoln		
drawing number 2400 EC-MA-00-01-DR-A-35046		
drawing name / status / revision Phase 2 First Floor Ceiling Finishes- S2-P08		
scale 1:200 @ A1		
architecture / interiors / landscape Email - info@maber.co.uk Tel - 0115 3415555 maber.co.uk Issuing office Nottingham		
do not scale from this drawing- dimensions and levels to be checked on site by the contractor- all dimensions in millimetres unless otherwise noted - all levels in metres unless otherwise noted		
The title, copyright and confidential information in this document belongs to Maber Associates Limited. Copyright. All rights reserved. You may not reproduce this document or disclose it to others without the consent of Maber Associates Limited		

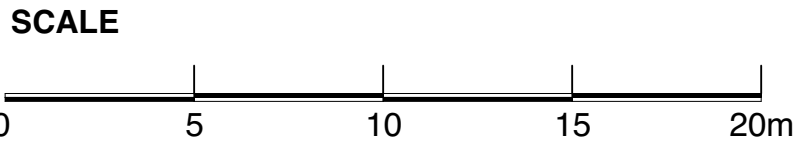

PHASE 2