

**a-Si TFT LCD Single Chip Driver with
320RGBx480 Resolution and 262K color**

Preliminary
Application Notes

Version: Preliminary V0.6

Date: Aug. 16st 2011

ILI TECHNOLOGY CORP.

8F., No.38, Taiyuan St., Jhubei City, Hsinchu County 302, Taiwan (R.O.C.)


Tel.886-3-5600099; Fax.886-3-5600055

<http://www.ilitek.com>

1. CPT 3.5 INCH PANEL.....	3
1.1. APPLICATION CIRCUIT.....	3
1.2 CPT 3.5 INCH INITIAL CODE.....	4
2. HSD 3.5 inch Panel	7
2.1. application circuit.....	7
2.2 initial code.....	8
3. TM 3.2 inch Panel	11
3.1. application circuit.....	12
3.2 initial code.....	15
4. WTK 3.5 inch Panel.....	16
4.1. application circuit.....	13
4.2 initial ode.....	14
2.REVISION HISTORY.....	19

1. CPT 3.5 Inch Panel

1.1 Application circuit

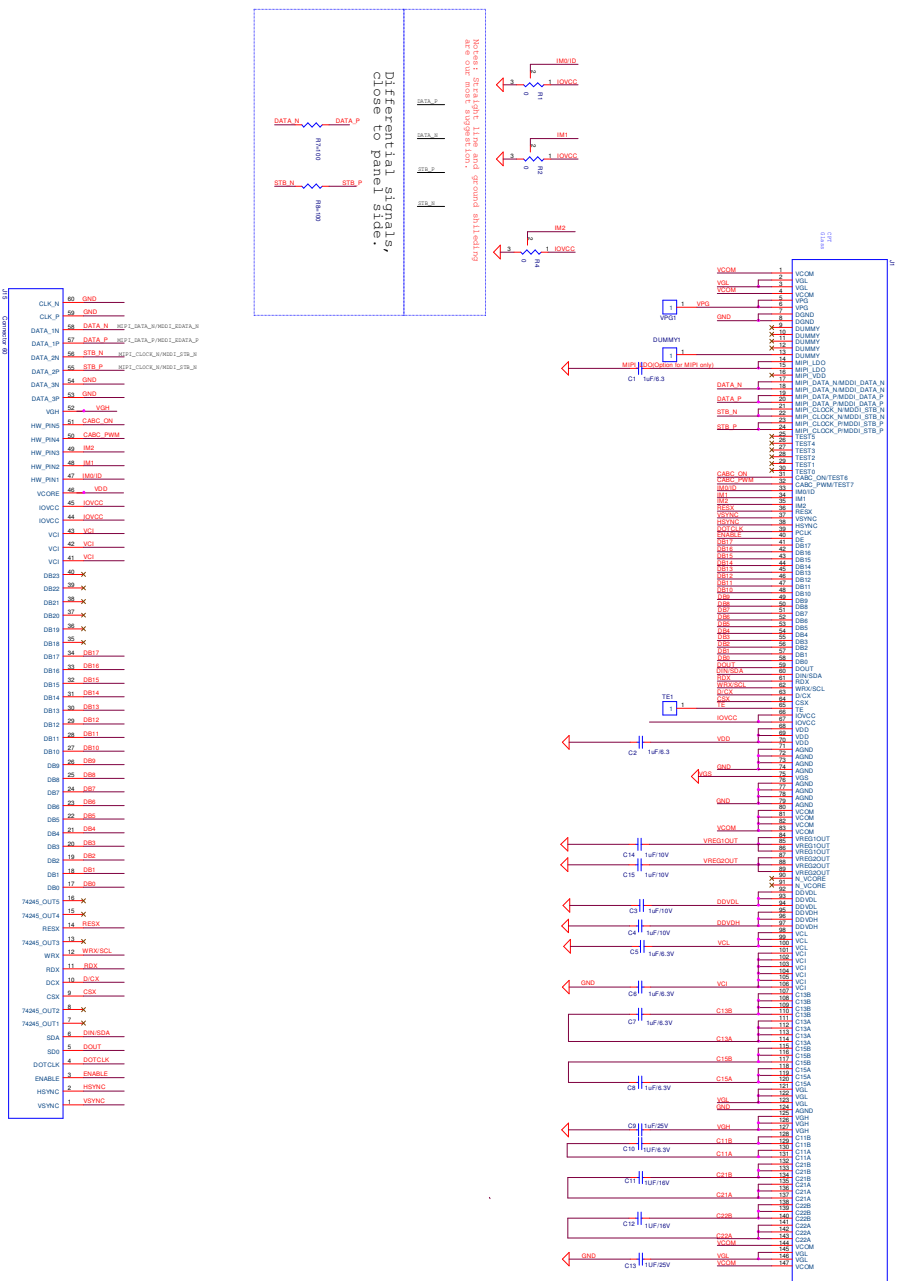

1.2CPT 3.5 Inch Initial Code

Void ILI9486_CPT_Initial_Code(void)

```
{// VCI=2.8V
//***** Reset LCD Driver *****//
LCD_nRESET = 1;
Delayms(1); // Delay 1ms
LCD_nRESET = 0;
Delayms(10); // Delay 10ms // This delay time is necessary
LCD_nRESET = 1;
Delayms(120); // Delay 120 ms
//***** Start Initial Sequence *****//
LCD_ILI9486_CMD(0XF2);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0xA3);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0XB2);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0xFF);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0XF8);
LCD_ILI9486_INDEX(0x21);
LCD_ILI9486_INDEX(0x04);

LCD_ILI9486_CMD(0XF9);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0x36);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0xB4);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0xC1);
LCD_ILI9486_INDEX(0x41);
```

The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.

LCD_ILI9486_CMD(0xC5);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x53);
LCD_ILI9486_CMD(0xE0);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x1B);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0x0B);
LCD_ILI9486_INDEX(0x0E);
LCD_ILI9486_INDEX(0x09);
LCD_ILI9486_INDEX(0x47);
LCD_ILI9486_INDEX(0x94);
LCD_ILI9486_INDEX(0x35);
LCD_ILI9486_INDEX(0x0A);
LCD_ILI9486_INDEX(0x13);
LCD_ILI9486_INDEX(0x05);
LCD_ILI9486_INDEX(0x08);
LCD_ILI9486_INDEX(0x03);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0xE1);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x3A);
LCD_ILI9486_INDEX(0x37);
LCD_ILI9486_INDEX(0x0B);
LCD_ILI9486_INDEX(0x0C);
LCD_ILI9486_INDEX(0x05);
LCD_ILI9486_INDEX(0x4A);
LCD_ILI9486_INDEX(0x24);
LCD_ILI9486_INDEX(0x39);
LCD_ILI9486_INDEX(0x07);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x04);
LCD_ILI9486_INDEX(0x27);
LCD_ILI9486_INDEX(0x25);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0x11);

```
Delaysms(120);  
LCD_ILI9486_CMD(0x29);  
}
```

Void ILI9486_EnterSleep_Code(void)

```
{  
LCD_ILI9486_CMD(0x28)  
Delaysms(10);  
LCD_ILI9486_CMD(0x10); // Set_address_mode  
Delaysms(120);  
}
```

Void ILI9486_ExitSleep_Code(void)

```
{  
LCD_ILI9486_CMD(0x11); // Set_address_mode  
Delaysms(120);  
LCD_ILI9486_CMD(0x29)  
}
```


2.2 HSD 3.5 Inch Initial Code

Void ILI9486_HSD_Initial_Code(void)

```
{// VCI=2.8V
//***** Reset LCD Driver *****//
LCD_nRESET = 1;
Delayms(1); // Delay 1ms
LCD_nRESET = 0;
Delayms(10); // Delay 10ms // This delay time is necessary
LCD_nRESET = 1;
Delayms(120); // Delay 120 ms

//***** Start Initial Sequence *****//
LCD_ILI9486_CMD(0XF2);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0xA3);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0XB2);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0xFF);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0XF8);
LCD_ILI9486_INDEX(0x21);
LCD_ILI9486_INDEX(0x04);

LCD_ILI9486_CMD(0XF9);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0x36);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0xB4);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0xB6);
LCD_ILI9486_INDEX(0x02);
```

The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.

LCD_ILI9486_INDEX(0x22);

LCD_ILI9486_CMD(0xC1);

LCD_ILI9486_INDEX(0x41);

LCD_ILI9486_CMD(0xC5);

LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_INDEX(0x18);

LCD_ILI9486_CMD(0xE0);

LCD_ILI9486_INDEX(0x0F);

LCD_ILI9486_INDEX(0x1F);

LCD_ILI9486_INDEX(0x1C);

LCD_ILI9486_INDEX(0x0C);

LCD_ILI9486_INDEX(0x0F);

LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_INDEX(0x48);

LCD_ILI9486_INDEX(0x98);

LCD_ILI9486_INDEX(0x37);

LCD_ILI9486_INDEX(0x0A);

LCD_ILI9486_INDEX(0x13);

LCD_ILI9486_INDEX(0x04);

LCD_ILI9486_INDEX(0x11);

LCD_ILI9486_INDEX(0x0D);

LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0xE1);

LCD_ILI9486_INDEX(0x0F);

LCD_ILI9486_INDEX(0x32);

LCD_ILI9486_INDEX(0x2E);

LCD_ILI9486_INDEX(0x0B);

LCD_ILI9486_INDEX(0x0D);

LCD_ILI9486_INDEX(0x05);

LCD_ILI9486_INDEX(0x47);

LCD_ILI9486_INDEX(0x75);

LCD_ILI9486_INDEX(0x37);

LCD_ILI9486_INDEX(0x06);

LCD_ILI9486_INDEX(0x10);

LCD_ILI9486_INDEX(0x03);

```
LCD_ILI9486_INDEX(0x24);  
LCD_ILI9486_INDEX(0x20);  
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0x11);  
Delaysms(120);  
LCD_ILI9486_CMD(0x29);  
}
```


Void ILI9486_EnterSleep_Code(void)

```
{  
LCD_ILI9486_CMD(0x28)  
Delaysms(10);  
LCD_ILI9486_CMD(0x10);  
Delaysms(120);  
}
```

Void ILI9486_ExitSleep_Code(void)

```
{  
LCD_ILI9486_CMD(0x11);  
Delaysms(120);  
LCD_ILI9486_CMD(0x29)  
}
```

3.1TM 3.2 INCH FPC Circuit

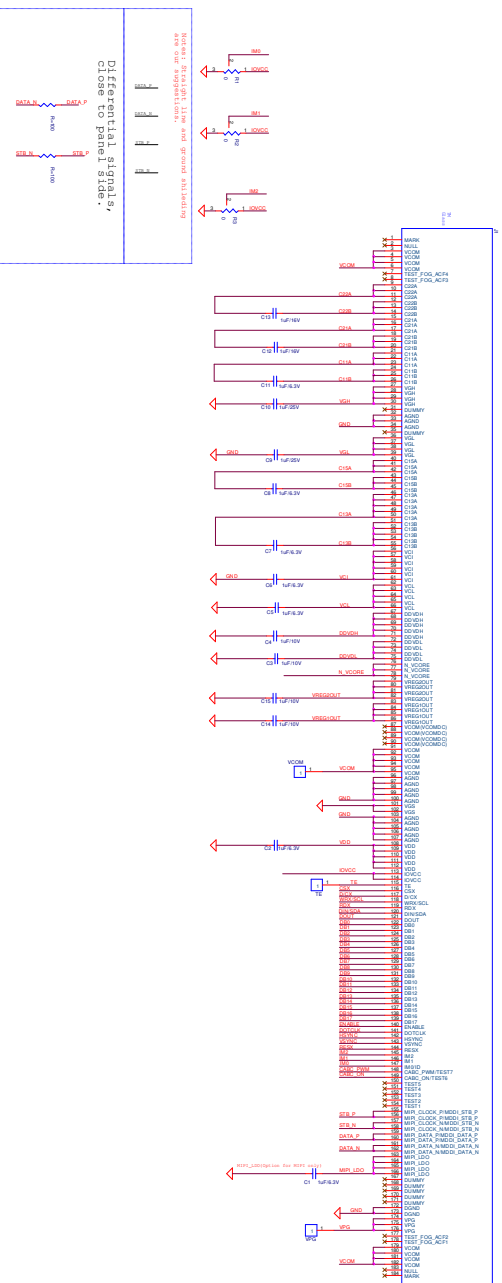

LED	28	LED
TE	28	TE
TS	28	TS
DATA_N	28	DATA_N
DATA_P	28	DATA_P
STR_N	28	STR_N
STR_P	28	STR_P
CARB_ON	28	CARB_ON
CARB_PWM	28	CARB_PWM
KNOX	28	KNOX
VC1	28	VC1
VC2	28	VC2
DB16	28	DB16
DB17	28	DB17
DB18	28	DB18
DB19	28	DB19
DB20	28	DB20
DB21	28	DB21
DB22	28	DB22
DB23	28	DB23
DB24	28	DB24
DB25	28	DB25
DB26	28	DB26
DB27	28	DB27
DB28	28	DB28
DB29	28	DB29
DB30	28	DB30
DB31	28	DB31
DB32	28	DB32
DB33	28	DB33
DB34	28	DB34
DB35	28	DB35
DB36	28	DB36
DB37	28	DB37
DB38	28	DB38
DB39	28	DB39
DB40	28	DB40
DB41	28	DB41
DB42	28	DB42
DB43	28	DB43
DB44	28	DB44
DB45	28	DB45
DB46	28	DB46
DB47	28	DB47
DB48	28	DB48
DB49	28	DB49
DB50	28	DB50
DB51	28	DB51
DB52	28	DB52
DB53	28	DB53
DB54	28	DB54
DB55	28	DB55
DB56	28	DB56
DB57	28	DB57
DB58	28	DB58
DB59	28	DB59
DB60	28	DB60
DB61	28	DB61
DB62	28	DB62
DB63	28	DB63
DB64	28	DB64
DB65	28	DB65
DB66	28	DB66
DB67	28	DB67
DB68	28	DB68
DB69	28	DB69
DB70	28	DB70
DB71	28	DB71
DB72	28	DB72
DB73	28	DB73
DB74	28	DB74
DB75	28	DB75
DB76	28	DB76
DB77	28	DB77
DB78	28	DB78
DB79	28	DB79
DB80	28	DB80
DB81	28	DB81
DB82	28	DB82
DB83	28	DB83
DB84	28	DB84
DB85	28	DB85
DB86	28	DB86
DB87	28	DB87
DB88	28	DB88
DB89	28	DB89
DB90	28	DB90
DB91	28	DB91
DB92	28	DB92
DB93	28	DB93
DB94	28	DB94
DB95	28	DB95
DB96	28	DB96
DB97	28	DB97
DB98	28	DB98
DB99	28	DB99
DB100	28	DB100
DB101	28	DB101
DB102	28	DB102
DB103	28	DB103
DB104	28	DB104
DB105	28	DB105
DB106	28	DB106
DB107	28	DB107
DB108	28	DB108
DB109	28	DB109
DB110	28	DB110
DB111	28	DB111
DB112	28	DB112
DB113	28	DB113
DB114	28	DB114
DB115	28	DB115
DB116	28	DB116
DB117	28	DB117
DB118	28	DB118
DB119	28	DB119
DB120	28	DB120
DB121	28	DB121
DB122	28	DB122
DB123	28	DB123
DB124	28	DB124
DB125	28	DB125
DB126	28	DB126
DB127	28	DB127
DB128	28	DB128
DB129	28	DB129
DB130	28	DB130
DB131	28	DB131
DB132	28	DB132
DB133	28	DB133
DB134	28	DB134
DB135	28	DB135
DB136	28	DB136
DB137	28	DB137
DB138	28	DB138
DB139	28	DB139
DB140	28	DB140
DB141	28	DB141
DB142	28	DB142
DB143	28	DB143
DB144	28	DB144
DB145	28	DB145
DB146	28	DB146
DB147	28	DB147
DB148	28	DB148
DB149	28	DB149
DB150	28	DB150
DB151	28	DB151
DB152	28	DB152
DB153	28	DB153
DB154	28	DB154
DB155	28	DB155
DB156	28	DB156
DB157	28	DB157
DB158	28	DB158
DB159	28	DB159
DB160	28	DB160
DB161	28	DB161
DB162	28	DB162
DB163	28	DB163
DB164	28	DB164
DB165	28	DB165
DB166	28	DB166
DB167	28	DB167
DB168	28	DB168
DB169	28	DB169
DB170	28	DB170
DB171	28	DB171
DB172	28	DB172
DB173	28	DB173
DB174	28	DB174
DB175	28	DB175
DB176	28	DB176
DB177	28	DB177
DB178	28	DB178
DB179	28	DB179
DB180	28	DB180
DB181	28	DB181
DB182	28	DB182
DB183	28	DB183
DB184	28	DB184
DB185	28	DB185
DB186	28	DB186
DB187	28	DB187
DB188	28	DB188
DB189	28	DB189
DB190	28	DB190
DB191	28	DB191
DB192	28	DB192
DB193	28	DB193
DB194	28	DB194
DB195	28	DB195
DB196	28	DB196
DB197	28	DB197
DB198	28	DB198
DB199	28	DB199
DB200	28	DB200
DB201	28	DB201
DB202	28	DB202
DB203	28	DB203
DB204	28	DB204
DB205	28	DB205
DB206	28	DB206
DB207	28	DB207
DB208	28	DB208
DB209	28	DB209
DB210	28	DB210
DB211	28	DB211
DB212	28	DB212
DB213	28	DB213
DB214	28	DB214
DB215	28	DB215
DB216	28	DB216
DB217	28	DB217
DB218	28	DB218
DB219	28	DB219
DB220	28	DB220
DB221	28	DB221
DB222	28	DB222
DB223	28	DB223
DB224	28	DB224
DB225	28	DB225
DB226	28	DB226
DB227	28	DB227
DB228	28	DB228
DB229	28	DB229
DB230	28	DB230
DB231	28	DB231
DB232	28	DB232
DB233	28	DB233
DB234	28	DB234
DB235	28	DB235
DB236	28	DB236
DB237	28	DB237
DB238	28	DB238
DB239	28	DB239
DB240	28	DB240
DB241	28	DB241
DB242	28	DB242
DB243	28	DB243
DB244	28	DB244
DB245	28	DB245
DB246	28	DB246
DB247	28	DB247
DB248	28	DB248
DB249	28	DB249
DB250	28	DB250
DB251	28	DB251
DB252	28	DB252
DB253	28	DB253
DB254	28	DB254
DB255	28	DB255
DB256	28	DB256
DB257	28	DB257
DB258	28	DB258
DB259	28	DB259
DB260	28	DB260
DB261	28	DB261
DB262	28	DB262
DB263	28	DB263
DB264	28	DB264
DB265	28	DB265
DB266	28	DB266
DB267	28	DB267
DB268	28	DB268
DB269	28	DB269
DB270	28	DB270
DB271	28	DB271
DB272	28	DB272
DB273	28	DB273
DB274	28	DB274
DB275	28	DB275
DB276	28	DB276
DB277	28	DB277
DB278	28	DB278
DB279	28	DB279
DB280	28	DB280
DB281	28	DB281
DB282	28	DB282
DB283	28	DB283
DB284	28	DB284
DB285	28	DB285
DB286	28	DB286
DB287	28	DB287
DB288	28	DB288
DB289	28	DB289
DB290	28	DB290
DB291	28	DB291
DB292	28	DB292
DB293	28	DB293
DB294	28	DB294
DB295	28	DB295
DB296	28	DB296
DB297	28	DB297
DB298	28	DB298
DB299	28	DB299
DB300	28	DB300
DB301	28	DB301
DB302	28	DB302
DB303	28	DB303
DB304	28	DB304
DB305	28	DB305
DB306	28	DB306
DB307	28	DB307
DB308	28	DB308
DB309	28	DB309
DB310	28	DB310
DB311	28	DB311
DB312	28	DB312
DB313	28	DB313
DB314	28	DB314
DB315	28	DB315
DB316	28	DB316
DB317	28	DB317
DB318	28	DB318
DB319	28	DB319
DB320	28	DB320
DB321	28	DB321
DB322	28	DB322
DB323	28	DB323
DB324	28	DB324
DB325	28	DB325
DB326	28	DB326
DB327	28	DB327
DB328	28	DB328
DB329	28	DB329
DB330	28	DB330
DB331	28	DB331
DB332	28	DB332
DB333	28	DB333
DB334	28	DB334
DB335	28	DB335
DB336	28	DB336
DB337	28	DB337
DB338	28	DB338
DB339	28	DB339
DB340	28	DB340
DB341	28	DB341
DB342	28	DB342
DB343	28	DB343
DB344	28	DB344
DB345	28	DB345
DB346	28	DB346
DB347	28	DB347
DB348	28	DB348
DB349	28	DB349
DB350	28	DB350
DB351	28	DB351
DB352	28	DB352
DB353	28	DB353
DB354	28	DB354
DB355	28	DB355
DB356	28	DB356
DB357	28	DB357
DB358	28	DB358
DB359	28	DB359
DB360	28	DB360
DB361	28	DB361
DB362	28	DB362
DB363	28	DB363
DB364	28	DB364
DB365	28	DB365
DB366	28	DB366
DB367	28	DB367
DB368	28	DB368
DB369	28	DB369
DB370	28	DB370
DB371	28	DB371
DB372	28	DB372
DB373	28	DB373
DB374	28	DB374
DB375	28	DB375
DB376	28	DB376
DB377	28	DB377
DB378	28	DB378
DB379	28	DB379
DB380	28	DB380
DB381	28	DB381
DB382	28	DB382
DB383	28	DB383
DB384	28	DB384
DB385	28	DB385
DB386	28	DB386
DB387	28	DB387
DB388	28	DB388
DB389	28	DB389
DB390	28	DB390
DB391	28	DB391
DB392	28	DB392
DB393	28	DB393
DB394	28	DB394
DB395	28	DB395
DB396	28	DB396
DB397	28	DB397
DB398	28	DB398
DB399	28	DB399
DB400	28	DB400
DB401	28	DB401
DB402	28	DB402
DB403	28	DB403
DB404	28	DB404
DB405	28	DB405
DB406	28	DB406
DB407	28	DB407
DB408	28	DB408
DB409	28	DB409
DB410	28	DB410
DB411	28	DB411
DB412	28	DB412
DB413	28	DB413
DB414	28	DB414
DB415	28	DB415
DB416	28	DB416
DB417	28	DB417
DB418	28	DB418
DB419	28	DB419
DB420	28	DB420
DB421	28	DB421
DB422	28	DB422
DB423	28	DB423
DB424	28	DB424
DB425	28	DB425
DB426	28	DB426
DB427	28	DB427
DB428	28	DB428
DB429	28	DB429
DB430	28	DB430
DB431	28	DB431
DB432	28	DB432
DB433	28	DB433
DB434	28	DB434
DB435	28	DB435
DB436	28	DB436
DB437	28	DB437
DB438	28	

3.2 TM 3.2 Inch Initial Code

Void ILI9486_TM_Initial_Code(void)

```
{// VCI=2.8V
//***** Reset LCD Driver *****//
LCD_nRESET = 1;
Delayms(1); // Delay 1ms
LCD_nRESET = 0;
Delayms(10); // Delay 10ms // This delay time is necessary
LCD_nRESET = 1;
Delayms(120); // Delay 120 ms

//***** Start Initial Sequence *****//
LCD_ILI9486_CMD(0XF2);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0xA3);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0XB2);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0xFF);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0XF8);
LCD_ILI9486_INDEX(0x21);
LCD_ILI9486_INDEX(0x04);

LCD_ILI9486_CMD(0XF9);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0x36);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0xB4);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0xB6);
```

LCD_ILI9486_INDEX(0x02);

LCD_ILI9486_INDEX(0x22);

LCD_ILI9486_CMD(0xC1);

LCD_ILI9486_INDEX(0x41);

LCD_ILI9486_CMD(0xC5);

LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_INDEX(0x55);

LCD_ILI9486_CMD(0xE0);

LCD_ILI9486_INDEX(0x0F);

LCD_ILI9486_INDEX(0x21);

LCD_ILI9486_INDEX(0x1C);

LCD_ILI9486_INDEX(0x0B);

LCD_ILI9486_INDEX(0x0E);

LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_INDEX(0x49);

LCD_ILI9486_INDEX(0x98);

LCD_ILI9486_INDEX(0x38);

LCD_ILI9486_INDEX(0x09);

LCD_ILI9486_INDEX(0x11);

LCD_ILI9486_INDEX(0x03);

LCD_ILI9486_INDEX(0x14);

LCD_ILI9486_INDEX(0x10);

LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0xE1);

LCD_ILI9486_INDEX(0x0F);

LCD_ILI9486_INDEX(0x2F);

LCD_ILI9486_INDEX(0x2B);

LCD_ILI9486_INDEX(0x0C);

LCD_ILI9486_INDEX(0x0E);

LCD_ILI9486_INDEX(0x06);

LCD_ILI9486_INDEX(0x47);

LCD_ILI9486_INDEX(0x76);

LCD_ILI9486_INDEX(0x37);

LCD_ILI9486_INDEX(0x07);

```
LCD_ILI9486_INDEX(0x11);  
LCD_ILI9486_INDEX(0x04);  
LCD_ILI9486_INDEX(0x23);  
LCD_ILI9486_INDEX(0x1E);  
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0x11);  
Delaysms(120);  
LCD_ILI9486_CMD(0x29);  
}
```


Void ILI9486_EnterSleep_Code(void)

```
{  
LCD_ILI9486_CMD(0x28)  
Delaysms(10);  
LCD_ILI9486_CMD(0x10);  
Delaysms(120);  
}
```

Void ILI9486_ExitSleep_Code(void)

```
{  
LCD_ILI9486_CMD(0x11);  
Delaysms(120);  
LCD_ILI9486_CMD(0x29)  
}
```

4.1 FPC CIRCUIT

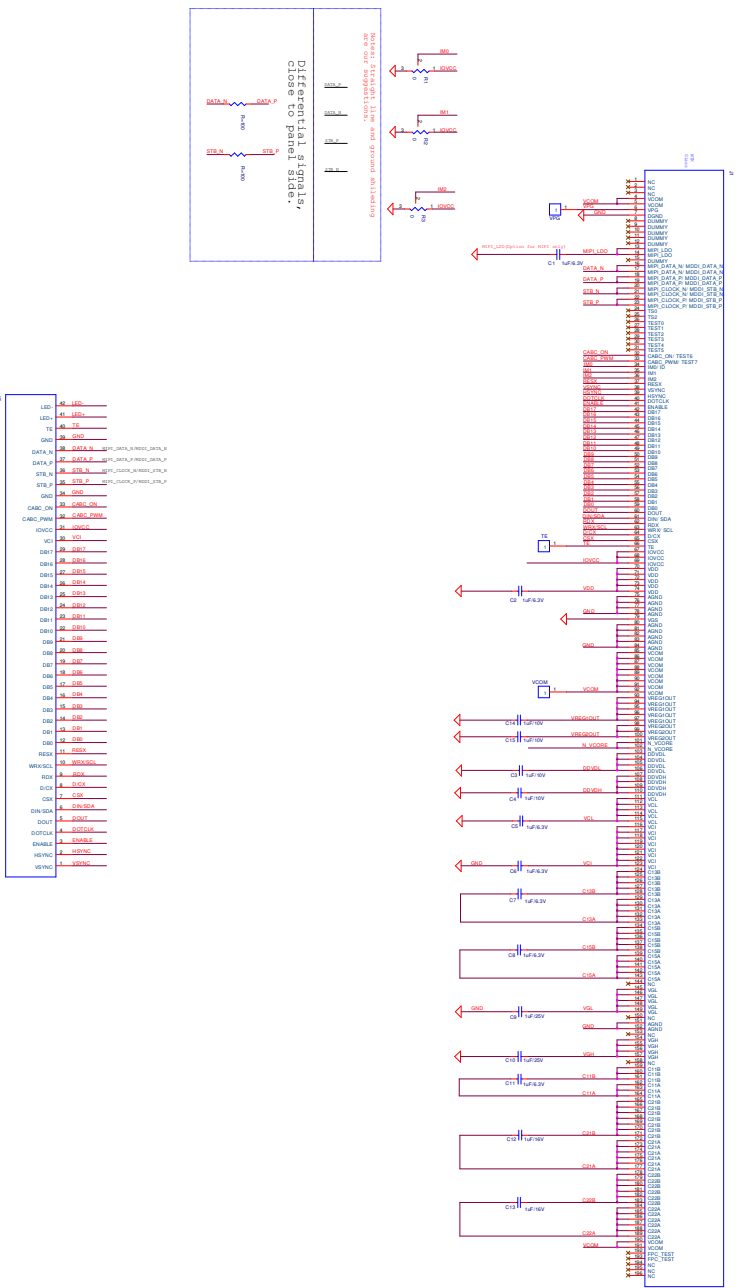

The information contained herein is the exclusive property of ILL Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILL Technology Corp.

4.2 WTK 3.5 Inch Initial Code

Void ILI9486_WTK_Initial_Code(void)

```
{// VCI=2.8V
//***** Reset LCD Driver *****//
LCD_nRESET = 1;
Delayms(1); // Delay 1ms
LCD_nRESET = 0;
Delayms(10); // Delay 10ms // This delay time is necessary
LCD_nRESET = 1;
Delayms(120); // Delay 120 ms

//***** Start Initial Sequence *****//
LCD_ILI9486_CMD(0XF2);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0xA3);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0XB2);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0xFF);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0XF8);
LCD_ILI9486_INDEX(0x21);
LCD_ILI9486_INDEX(0x04);

LCD_ILI9486_CMD(0XF9);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0x21);

LCD_ILI9486_CMD(0x36);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0xB4);
LCD_ILI9486_INDEX(0x00);
```

LCD_ILI9486_CMD(0xB6);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0x22);

LCD_ILI9486_CMD(0xC1);
LCD_ILI9486_INDEX(0x41);

LCD_ILI9486_CMD(0xC5);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x53);

LCD_ILI9486_CMD(0xE0);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x08);
LCD_ILI9486_INDEX(0x05);
LCD_ILI9486_INDEX(0x09);
LCD_ILI9486_INDEX(0x05);
LCD_ILI9486_INDEX(0x37);
LCD_ILI9486_INDEX(0x98);
LCD_ILI9486_INDEX(0x26);
LCD_ILI9486_INDEX(0x07);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0x09);
LCD_ILI9486_INDEX(0x07);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0xE1);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x38);
LCD_ILI9486_INDEX(0x36);
LCD_ILI9486_INDEX(0x0D);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x08);
LCD_ILI9486_INDEX(0x59);
LCD_ILI9486_INDEX(0x76);
LCD_ILI9486_INDEX(0x48);
LCD_ILI9486_INDEX(0x0A);
LCD_ILI9486_INDEX(0x16);

```
LCD_ILI9486_INDEX(0x0A);  
LCD_ILI9486_INDEX(0x37);  
LCD_ILI9486_INDEX(0x2F);  
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0x11);  
Delayms(120);  
LCD_ILI9486_CMD(0x29);  
}
```

Void ILI9486_EnterSleep_Code(void)

```
{  
LCD_ILI9486_CMD(0x28)  
Delayms(10);  
LCD_ILI9486_CMD(0x10);  
Delayms(120);  
}
```

Void ILI9486_ExitSleep_Code(void)

```
{  
LCD_ILI9486_CMD(0x11);  
Delayms(120);  
LCD_ILI9486_CMD(0x29)  
}
```

2.Revision History

Revision History

Version No.	Date	Page	Description
V0.1	2011/02/23		New creation
V0.2	2011/03/02		Add external component spec.
V0.3	2011/06/02		Add WTK TM HSD FPC and initial code
V0.4	2011/07/01		Add Vreg1out and Vreg2out capacitor
V0.5	2011/07/07		Suggest set to column inversion
V0.6	2011/08/16		Add F9 register for SRAM timing adjuster