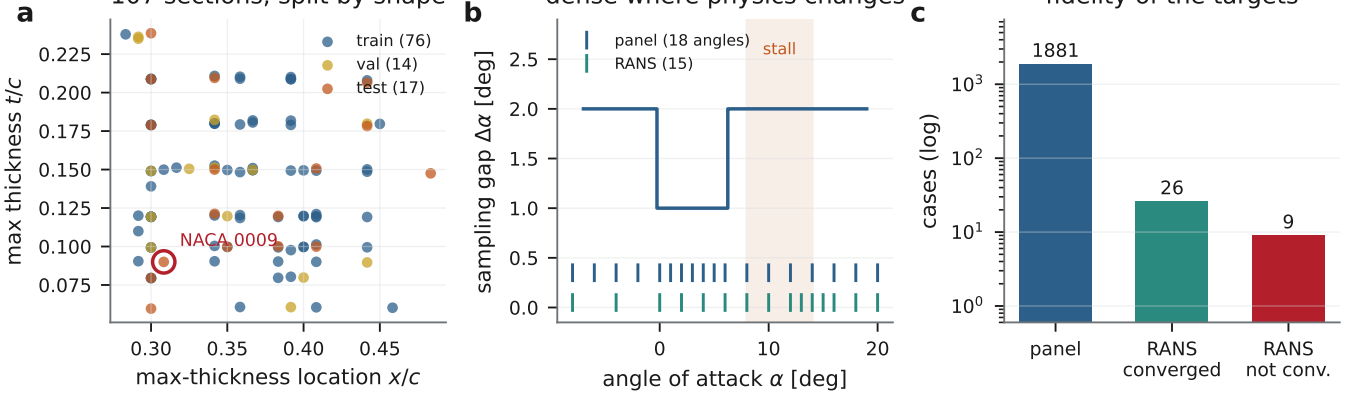
a
107 sections, split by shape
train (76)
val (14)
test (17)
NACA 0009
max thickness t/c
max-thickness location x/c
0.225
0.200
0.175
0.150
0.125
0.100
0.075
0.30
0.35
0.40
0.45
b
dense where physics changes
panel (18 angles)
RANS (15)
stall
sampling gap Δα [deg]
angle of attack α [deg]
2.5
2.0
1.5
1.0
0.5
0.0
0
10
20
c
fidelity of the targets
cases (log)
1881
26
9
panel
RANS converged
RANS not conv.