

FLASHNET

Potential Builders PBX System

PREPARED BY: Ayaan Jamal

DATE: 21TH February 2026

1.1 Introduction

This deployment consists of a Yeastar S20 IP PBX connected directly to a ZLT X25 Max2 router. The Yealink W70B DECT base station is also directly connected to the same router.

The router provides:

- Internet connectivity (LTE via Airtel)
- DHCP services
- Local LAN communication between PBX and base station

1.2 Device Information

System Components:

- IP Phone: **Yealink W71H**
- Base Station: **Yealink W70B**
- PBX: **Yeastar S20**
- Internet Router: **ZLT X25 Max2** (Airtel Home Wi-Fi)



Fig 1.1 Airtel Home Wi-Fi Router



Fig 1.2 Yealink W70B



Fig 1.3 Yealink S20



Fig 1.4 Yealink W71H

2. IP Addressing Scheme

All the devices obtain connectivity directly from the router.

2.1 Recommended Configuration

Device	IP Method	Recommended IP	Username	Password
Router	Default	192.168.1.1	Admin	Admin
Yeastar S20	Static	192.168.1.69	admin	Admin@2026
W70B Base	Static	192.168.1.70	admin	Admin@123
DHCP Pool	Automatic	192.168.1.100-200		

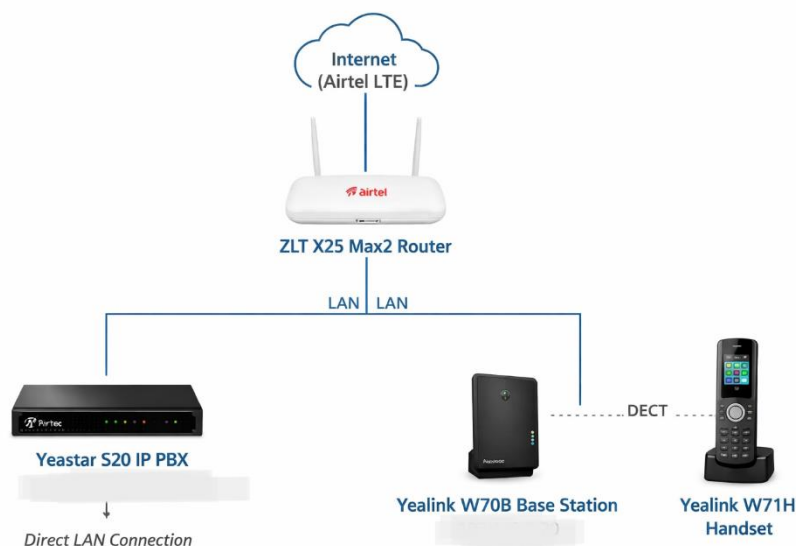


Fig 1.5 Topology of the System

2.2 Installing Active Directory Domain Services

Log into router (<http://192.168.1.1>).

Confirm internet and both LANS are active.

Enable DHCP.

5. Yeastar S20 Configuration

5.1 Access PBX

Connect to LAN.

Access via browser:

<http://192.168.1.10>

Change default admin password immediately.

5.2 Create SIP Extension

Navigate to:

PBX → Extensions → Add

Example:

Field	Value
Extension	101
Type	SIP
Password	Strong Password

Save and apply.



Repeat for additional users.

5.3 Access Web Interface


- Find IP via router DHCP list.
- Access:

<http://192.168.1.69>

- Login.

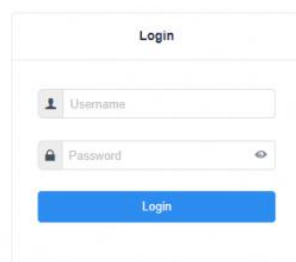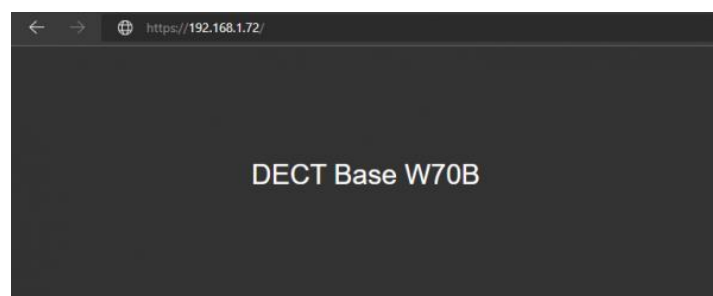

1.6 Login Page for W70B

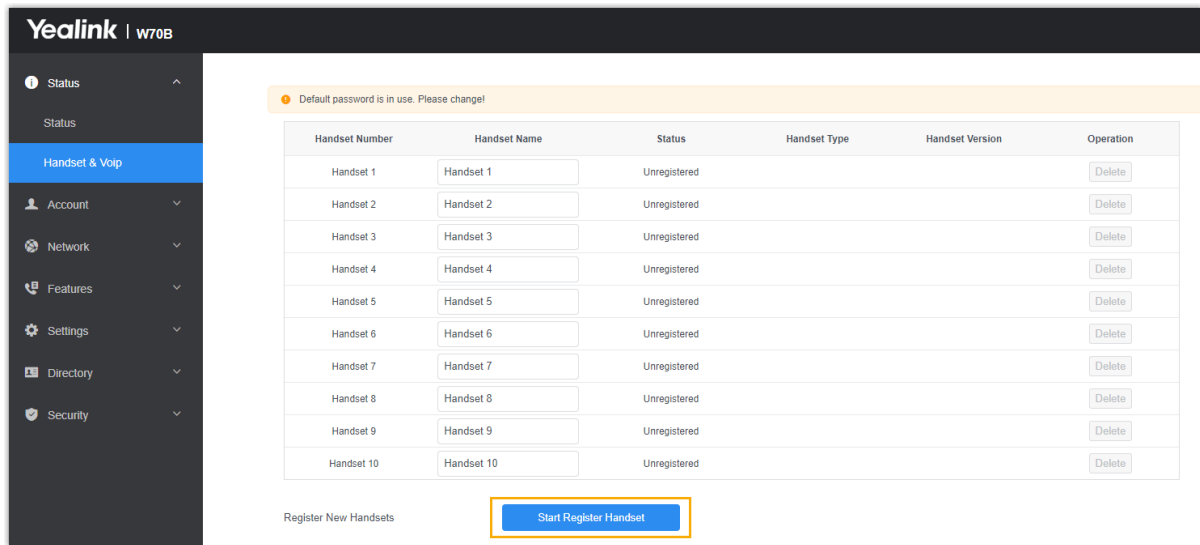

1.7 Registering Wireless Handsets W71H


Register Base to PBX

Go to: Account → Register

Field	Value
Register Name	500
Username	500
Password	Extension Password
SIP Server	192.168.1.10

Confirm registration.

Status must show: **Registered**

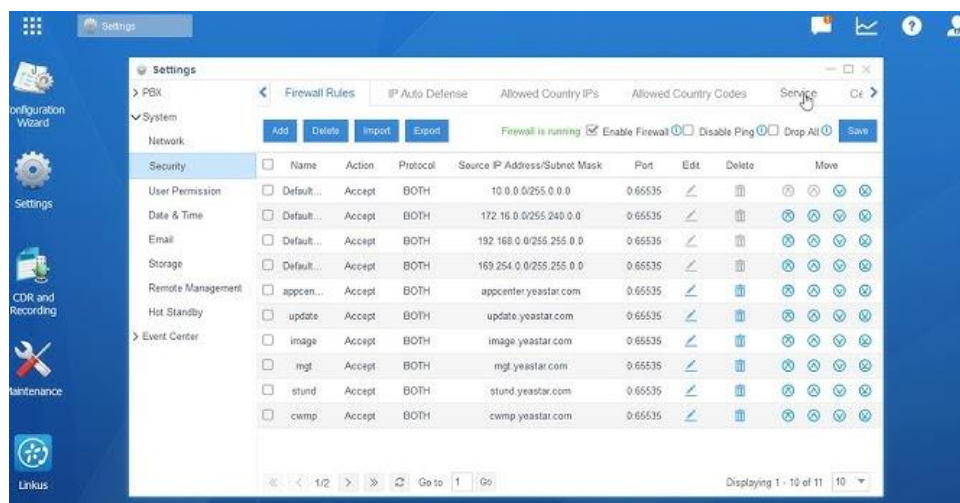

1.8 PBX Menu for Configuration of Extensions and to Connect to Base

Customer Support Contacts



An **ISO 9001 : 2015** Certified Company

Email	cs@flashnet.co.tz, support@flashnet.co.tz
Call/WhatsApp	+255 22 2113687 (Call), +255-777- 988-883 (WhatsApp)