DRIVE POWER (rev C): 19.5V laptop adapter –> chassis 5.5x2.5 jack –> J4

Q1 is a high–side switch driven by GP18 through Q2. R23 keeps the drive OFF while
GP18 floats (reset, BOOTSEL, unpowered Pico). GP18 also drives U3/U4 ON/OFF (DRV_EN): rails stop at once, Q1 the
U3 LM2678T–12 / U4 LM2676T–5.0 discrete bucks + LC post–filter (sheet bottom right).
12V_DRV / 5V_DRV feed ONLY the drive Molex (J5 screw terminal, 1=+12V 4=+5V). Logic side stays on VBUS / 3V3

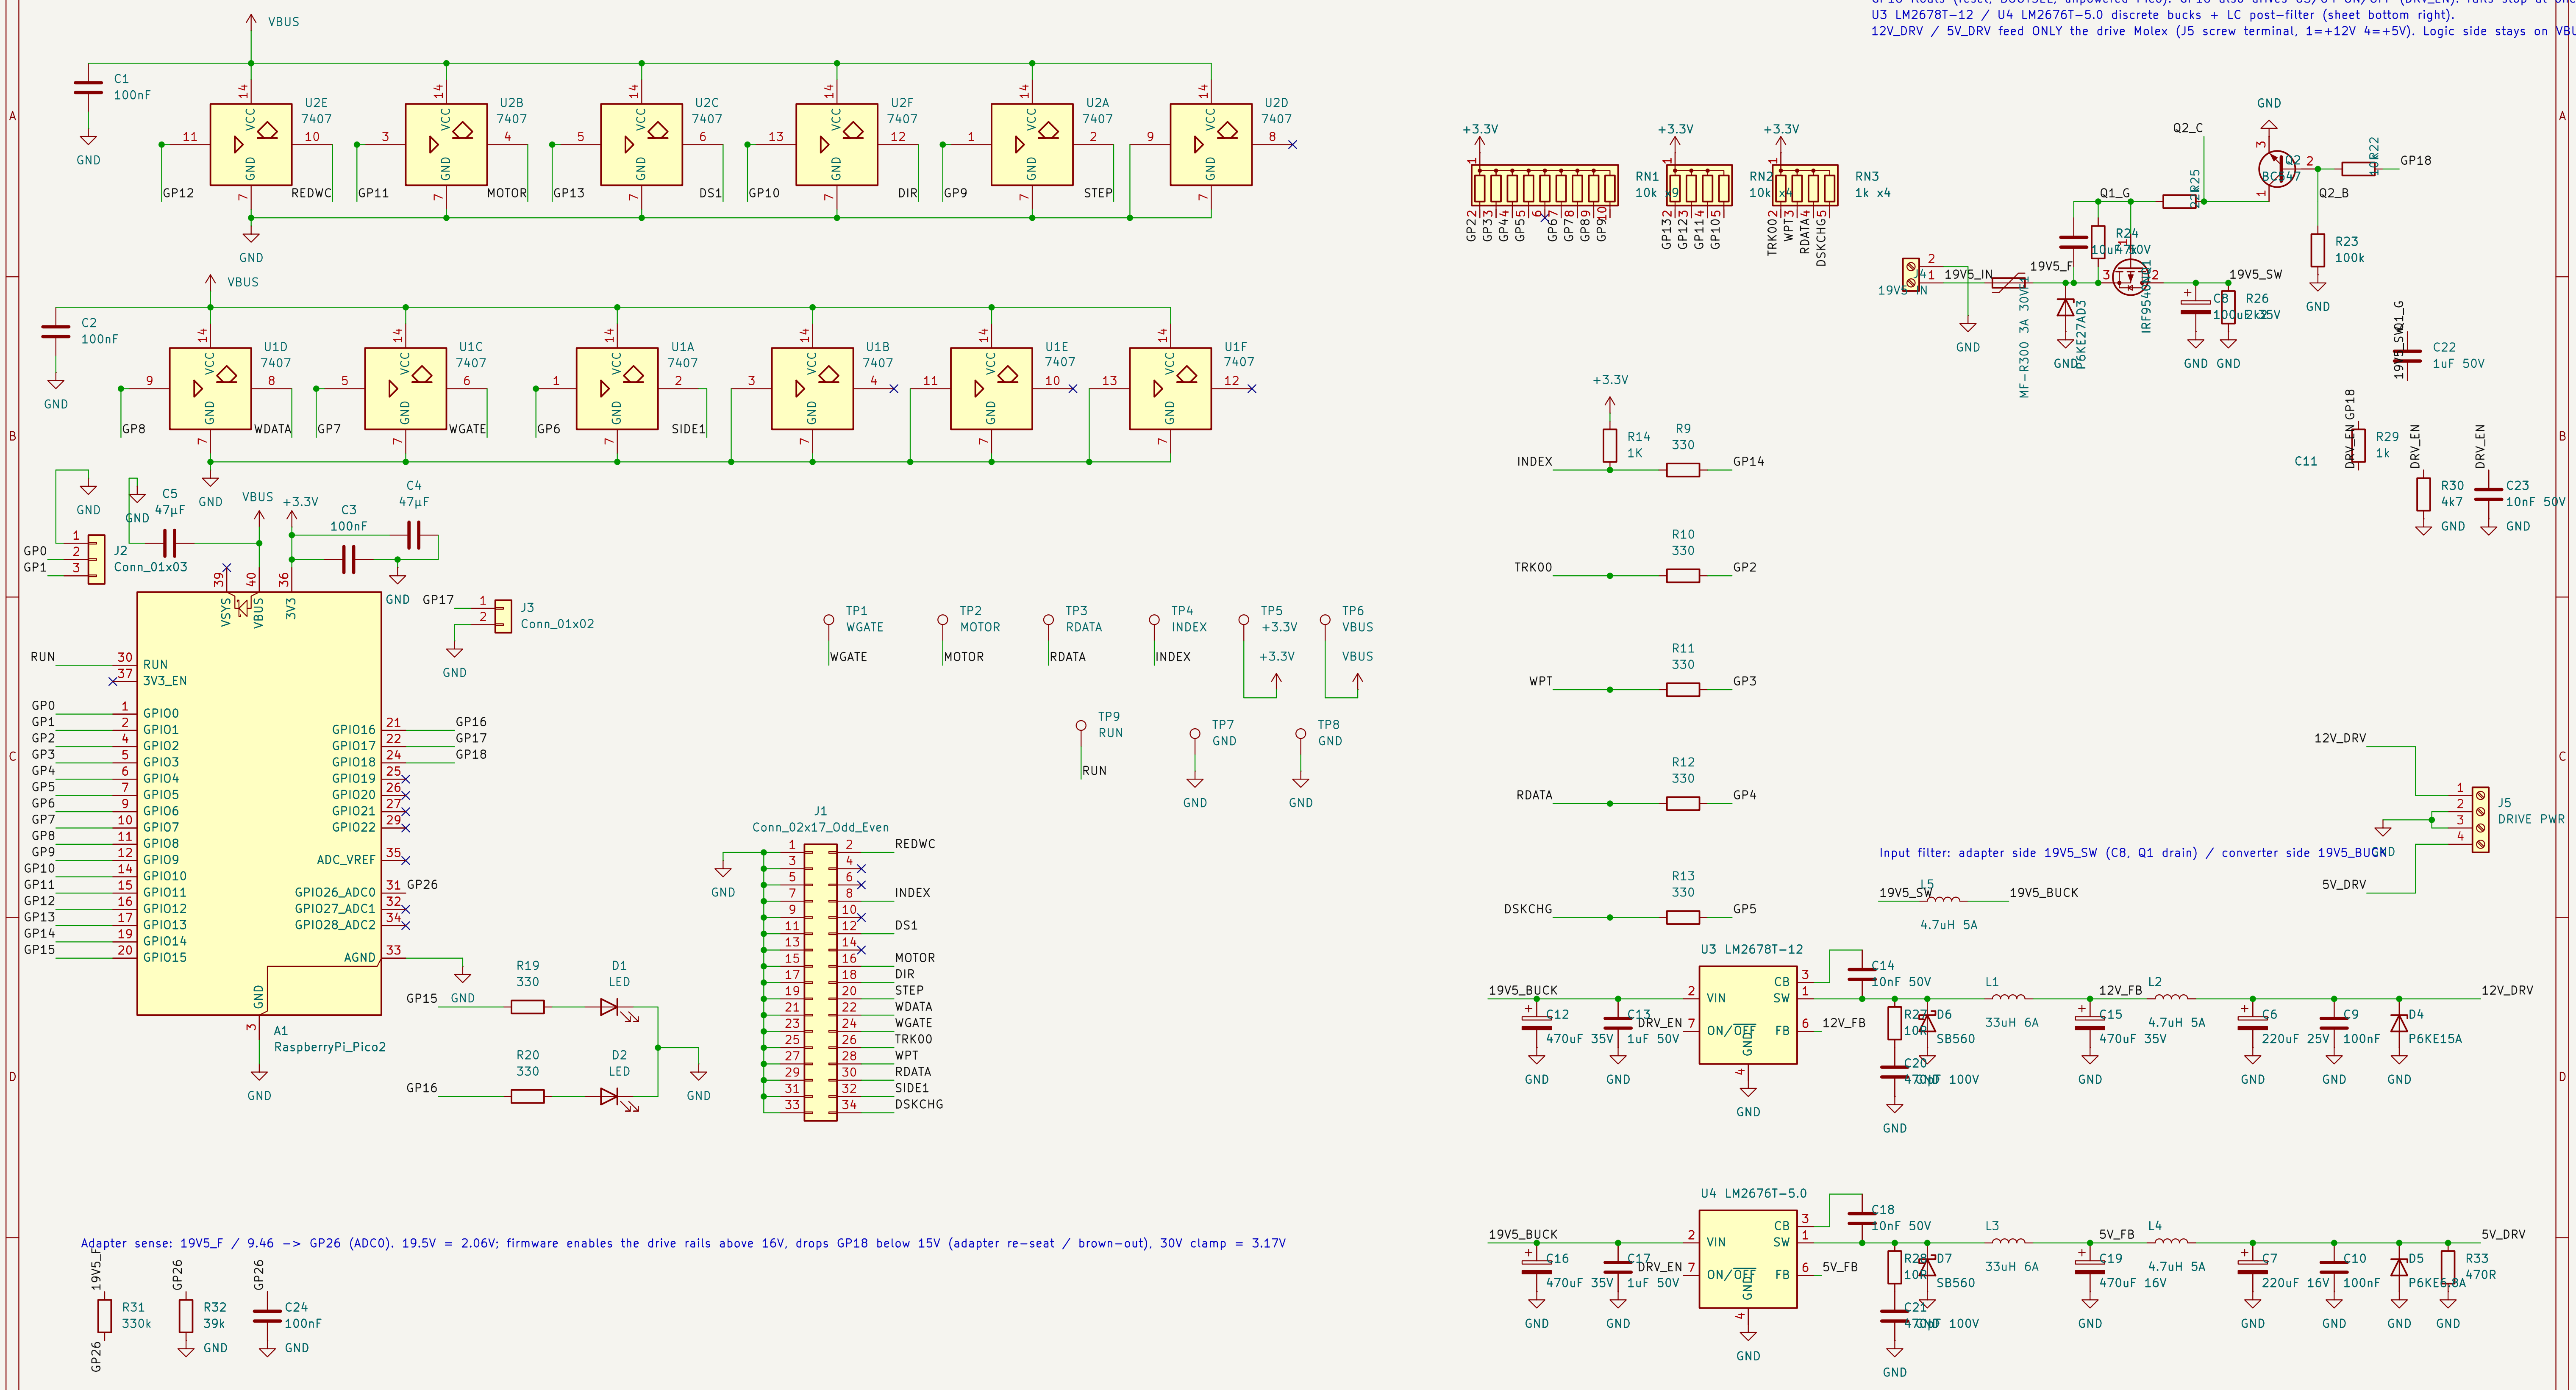

Input filter: adapter side 19V5_SW (C8, Q1 drain) / converter side 19V5_BUCK

Adapter sense: 19V5_F / 9.46 –> GP26 (ADC0). 19.5V = 2.06V; firmware enables the drive rails above 16V, drops GP18 below 15V (adapter re–seat / brown–out), 30V clamp = 3.17V

CERN–OHL–P–2.0

Study project, provided as is

Sheet: /
File: floppy–revival.kicad_sch

Title: Floppy Revival – Pico 2 to 5.25in drive interface

Size: A3 | Date: | **Rev: C.1**
KiCad E.D.A. 10.0.0 | Id: 1/1