



AudioCodes & FreePBX Configuration Guide

6.1 Initial Setup Wizard

Login to Audiocode SBC (Make changes, Save and after setup completed Do Graceful restart)

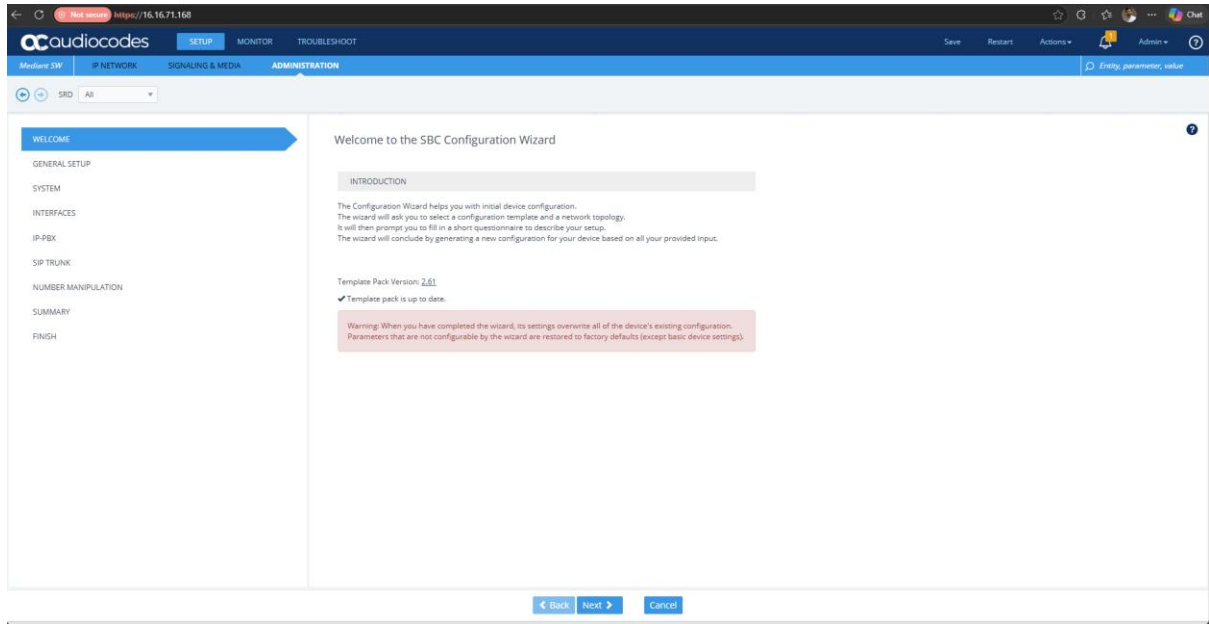

The screenshot shows the Audiocode SBC Configuration Wizard's 'WELCOME' screen. The interface includes a top navigation bar with 'ocaudiocodes' logo, 'SETUP', 'MONITOR', and 'TROUBLESHOOT' tabs. Below this is a sub-navigation bar with 'Mediant SW', 'IP NETWORK', 'SIGNALING & MEDIA', and 'ADMINISTRATION' tabs. The left sidebar lists the wizard steps: WELCOME, GENERAL SETUP, SYSTEM, INTERFACES, IP-PBX, SIP TRUNK, NUMBER MANIPULATION, SUMMARY, and FINISH. The main content area is titled 'Welcome to the SBC Configuration Wizard' and contains an 'INTRODUCTION' section. It explains that the wizard helps with initial device configuration and asks for a configuration template and network topology. It mentions that the wizard will generate a new configuration based on the provided input. A 'Template Pack Version 2.61' is noted, and a checkmark indicates the template pack is up to date. A warning box states: 'Warning: When you have completed the wizard, its settings overwrite all of the device's existing configuration. Parameters that are not configurable by the wizard are restored to factory defaults (except basic device settings).' At the bottom, there are 'Back', 'Next', and 'Cancel' buttons.

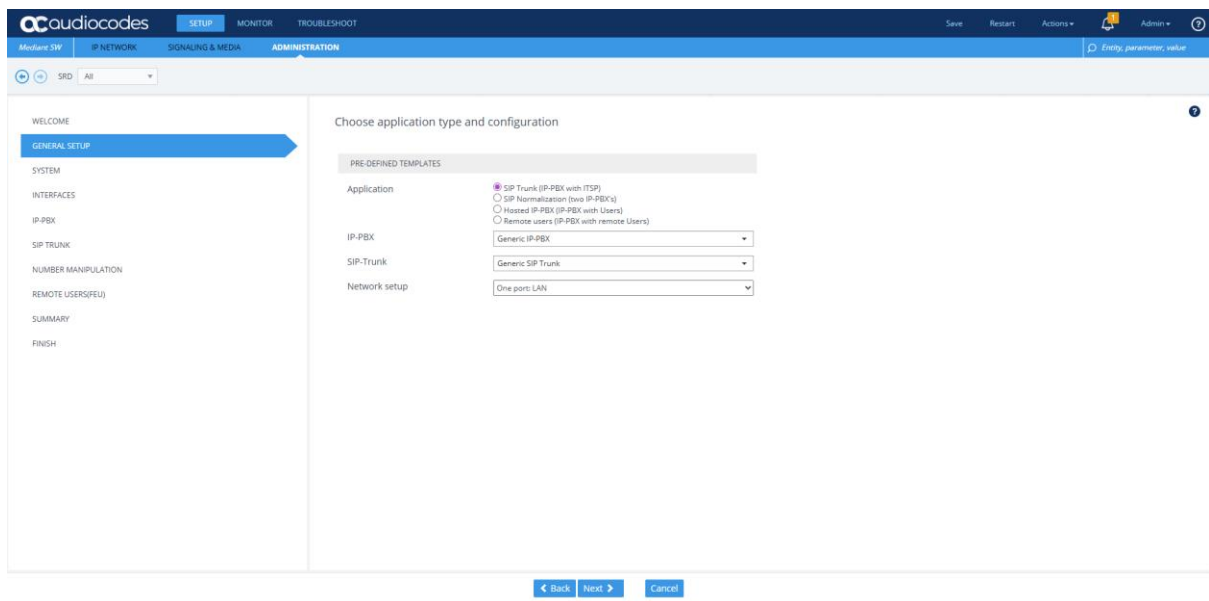

The screenshot shows the Audiocode SBC Configuration Wizard's 'Choose application type and configuration' screen. The interface is similar to the previous screen, with the same top and sub-navigation bars. The left sidebar is the same, but 'GENERAL SETUP' is now highlighted. The main content area is titled 'Choose application type and configuration' and contains a 'PRE-DEFINED TEMPLATES' section. Under 'Application', there are four radio button options: 'SIP Trunk (IP-PBX with ITSP)' (selected), 'SIP Normalisation (two IP-PBX's)', 'Hosted IP-PBX (IP-PBX with Users)', and 'Remote users (IP-PBX with remote Users)'. Below these are three dropdown menus: 'IP-PBX' (set to 'Generic IP-PBX'), 'SIP-Trunk' (set to 'Generic SIP Trunk'), and 'Network setup' (set to 'One port LAN'). At the bottom, there are 'Back', 'Next', and 'Cancel' buttons.

audiocodes

Mediant SW

IP NETWORK

SIGNALING & MEDIA

ADMINISTRATION

SaveRestartActionsAdmin

Empty, parameter, value

SRDAll

WELCOME

GENERAL SETUP

SYSTEM

INTERFACES

IP-PBX

SIP TRUNK

NUMBER MANIPULATION

REMOTE USERS(FEU)

SUMMARY

FINISH

Configure system parameters

MANAGEMENT

Web InterfaceHTTPS

CLI InterfaceSSH

Enable Syslog

Syslog IP0.0.0.0

LOCAL DNS TABLE

Enable

TIME AND DATE

Time ZoneGMT +5

Primary NTP Serverpool.ntp.org

Secondary NTP Servertime.google.com

BackNextCancel

audiocodes

Mediant SW

IP NETWORK

SIGNALING & MEDIA

ADMINISTRATION

SaveRestartActionsAdmin

Empty, parameter, value

SRDAll

WELCOME

GENERAL SETUP

SYSTEM

INTERFACES

IP-PBX

SIP TRUNK

NUMBER MANIPULATION

REMOTE USERS(FEU)

SUMMARY

FINISH

Configure interfaces

LAN INTERFACE - DISABLED

Physical PortGROUP_1 (GE_1)

VLAN Tagging

VLAN IDUntagged

IP Address172.31.9.171

Subnet Mask255.255.240.0

Default Gateway172.31.0.1

Primary DNS172.31.0.2

Secondary DNS0.0.0.0

NAT Public IP0.0.0.0

MANAGEMENT INTERFACE

OAM interfaceLAN

BackNextCancel

audiocodes

Mediant SW

IP NETWORK

SIGNALING & MEDIA

ADMINISTRATION

SaveRestartActionsAdmin

Empty, parameter, value

SRDAll

WELCOME

GENERAL SETUP

SYSTEM

INTERFACES

IP-PBX

SIP TRUNK

NUMBER MANIPULATION

REMOTE USERS(FEU)

SUMMARY

FINISH

IP-PBX configuration

NETWORK INTERFACE

Network TypeLAN

IP-PBX

Address10.15.9.11

Backup Address0.0.0.0 or domain.com

SIP Domain0.0.0.0 or domain.com

Keep Alive

SIP INTERFACE

Transport TypeUDP

Destination Port5060

Listening Port5060

MEDIA PORTS (REALM)

Media ProtocolRTP

Base Port6000

Number Of Sessions100

BackNextCancel

audiocodes

Mediant SW

IP NETWORK

SIGNALING & MEDIA

ADMINISTRATION

Save

Restart

Actions

Admin

Empty parameter, value

SRD

All

WELCOME

GENERAL SETUP

SYSTEM

INTERFACES

IP-PBX

SIP TRUNK

NUMBER MANIPULATION

REMOTE USERS(FEJ)

SUMMARY

FINISH

SIP Trunk configuration

NETWORK INTERFACE

Network Type

LAN

SIP TRUNK

Address

213.148.136.2

Backup Address

0.0.0.0 or domain.com

SIP Domain

0.0.0.0 or domain.com

Keep Alive

☐

SIP ACCOUNT

Account Type

None

Trunk Main Line

Username

Password

NAT

NAT Public IP

SIP INTERFACE

Transport Type

UDP

Destination Port

5060

Listening Port

5060

MEDIA PORTS (REALM)

Media Protocol

RTP

Base Port

7000

Number Of Sessions

100

Back

Next

Cancel

audiocodes

Mediant SW

IP NETWORK

SIGNALING & MEDIA

ADMINISTRATION

Save

Restart

Actions

Admin

Empty parameter, value

SRD

All

WELCOME

GENERAL SETUP

SYSTEM

INTERFACES

IP-PBX

SIP TRUNK

NUMBER MANIPULATION

REMOTE USERS(FEJ)

SUMMARY

FINISH

Number Manipulation configuration

OUTBOUND CALLS (IP-PBX → SIP TRUNK)

Destination Number Manipulation

Prefix

+972

Remove

4

Add

0

Source Number Manipulation

☐

ADVANCED ROUTING MANAGER

Use ARM for call routing

☐

INBOUND CALLS (SIP TRUNK → IP-PBX)

Destination Number Manipulation

Prefix

0

Remove

1

Add

+972




Source Number Manipulation

☐


Back

Next

Cancel

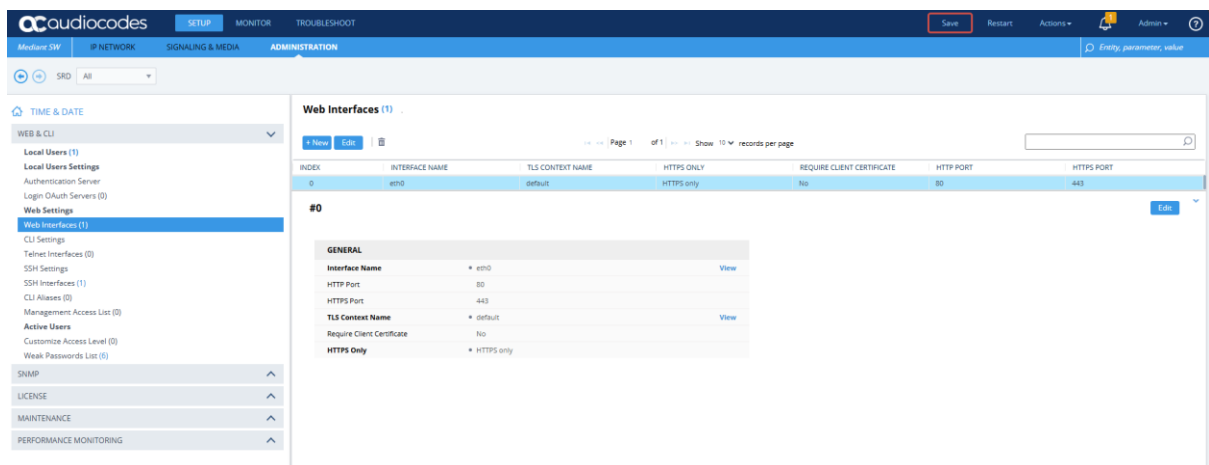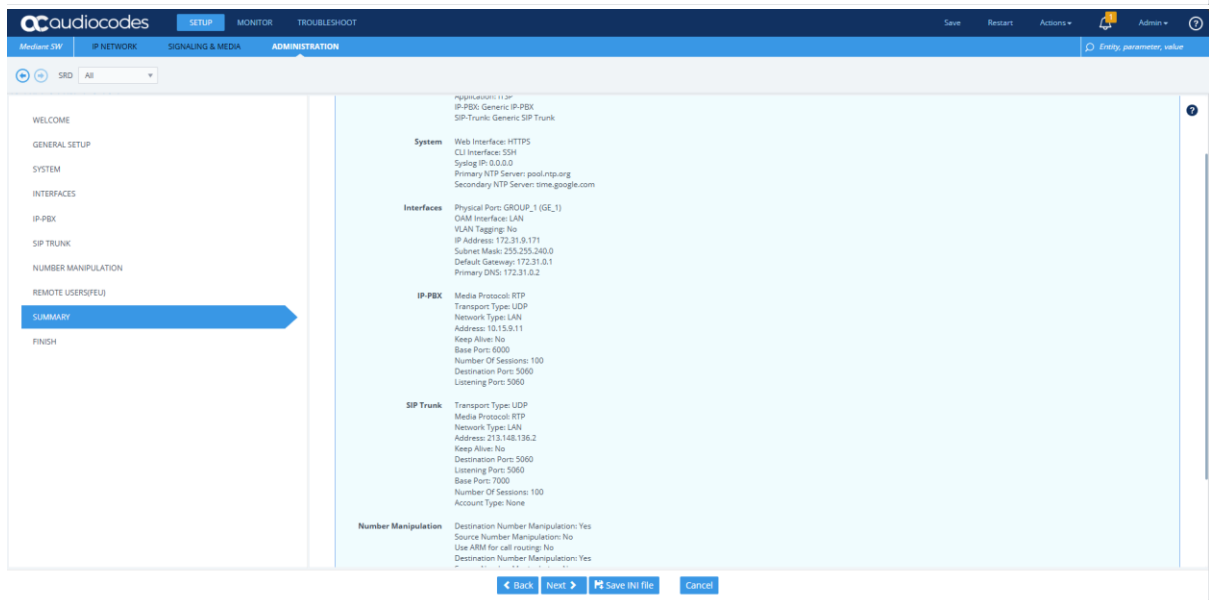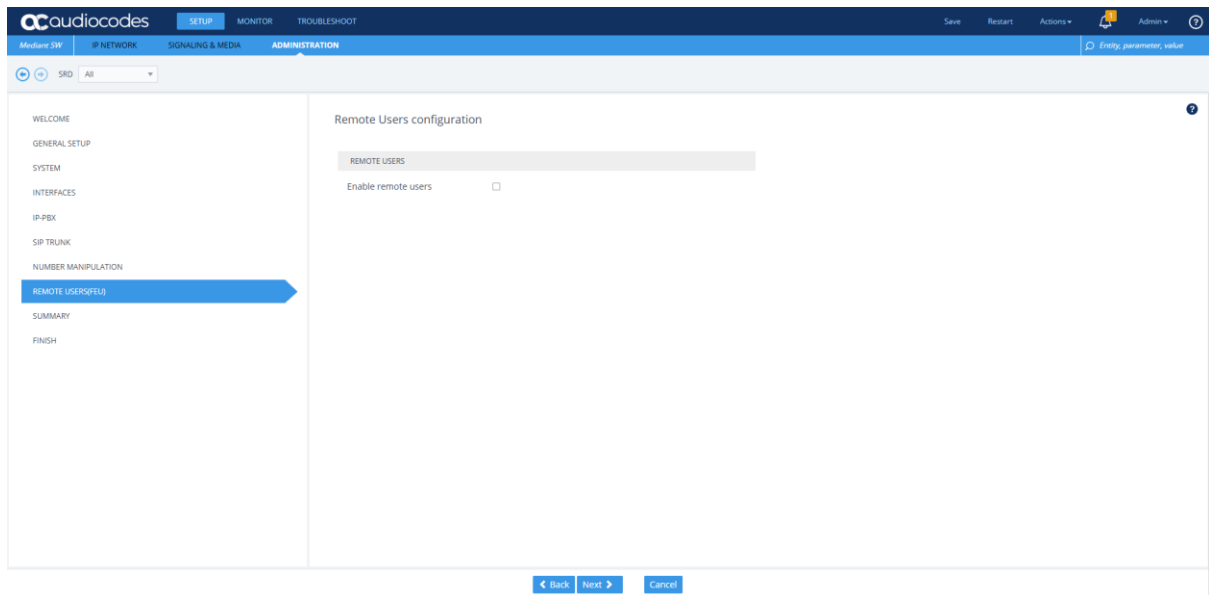

6.2 IP Network Interface(This is only editable in Config Wizard)

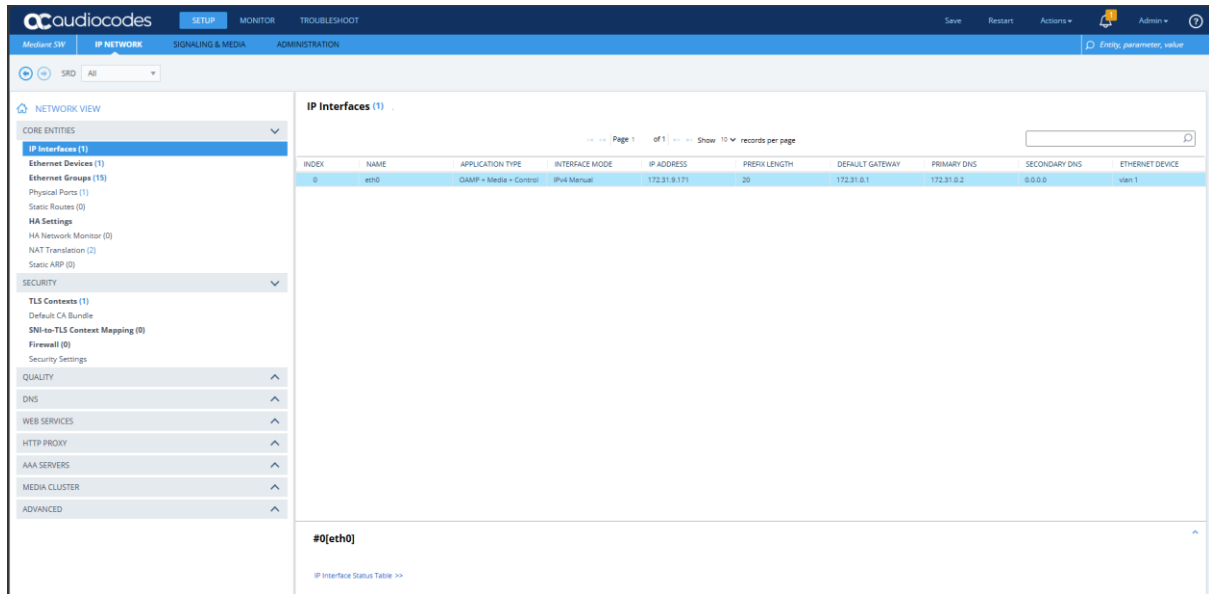


The screenshot shows the Audiocodes configuration interface. The top navigation bar includes 'ccaudiocodes', 'SETUP', 'MONITOR', and 'TROUBLESHOOT'. Below this, there are tabs for 'Module SW', 'IP NETWORK', 'SIGNALING & MEDIA', and 'ADMINISTRATION'. The 'IP NETWORK' tab is selected. On the left, a 'NETWORK VIEW' sidebar lists various configuration categories. The main area displays 'IP Interfaces (1)' with a table showing one interface.

INDEX	NAME	APPLICATION TYPE	INTERFACE MODE	IP ADDRESS	PREFIX LENGTH	DEFAULT GATEWAY	PRIMARY DNS	SECONDARY DNS	ETHERNET DEVICE
0	eth0	QAMF + Media + Control	IPv4 Manual	172.31.9.171	20	172.31.0.1	172.31.0.2	0.0.0.0	vlan1

Below the table, there is a section for '#0[eth0]' and a link to 'IP Interface Status Table >>'.

6.3 NAT Translation

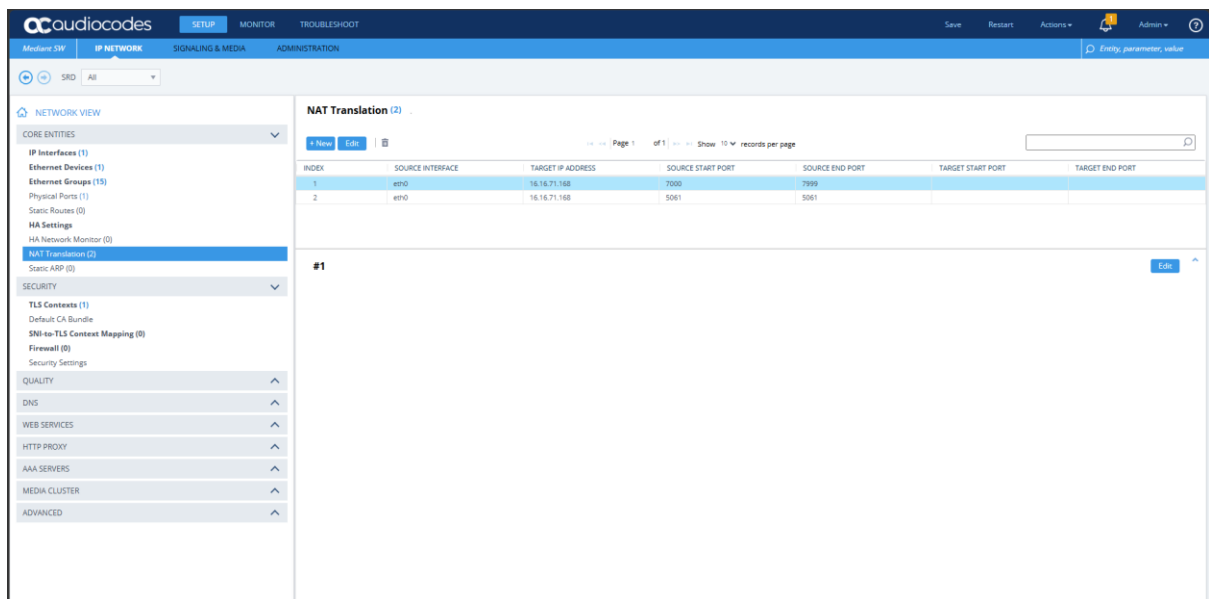

The screenshot shows the Audiocodes configuration interface. The top navigation bar includes 'ccaudiocodes', 'SETUP', 'MONITOR', and 'TROUBLESHOOT'. Below this, there are tabs for 'Module SW', 'IP NETWORK', 'SIGNALING & MEDIA', and 'ADMINISTRATION'. The 'IP NETWORK' tab is selected. On the left, a 'NETWORK VIEW' sidebar lists various configuration categories. The main area displays 'NAT Translation (2)' with a table showing two translation rules.

INDEX	SOURCE INTERFACE	TARGET IP ADDRESS	SOURCE START PORT	SOURCE END PORT	TARGET START PORT	TARGET END PORT
1	eth0	16.16.71.168	7000	7999		
2	eth0	16.16.71.168	5061	5061		

Below the table, there is a section for '#1' and an 'Edit' button.

6.4 Upload TLS Certificate (Process is mentioned in the Readme file)

The screenshot shows the Audiocodes SIP Manager interface. The left sidebar contains a navigation menu with categories like NETWORK VIEW, CORE ENTITIES, IP Interfaces, Ethernet Devices, Ethernet Groups, Physical Ports, Static Routes, HA Settings, SECURITY, QUALITY, DNS, WEB SERVICES, HTTP PROXY, AAA SERVERS, MEDIA CLUSTER, and ADVANCED. The main panel displays the 'TLS Contexts (1)' configuration page. At the top, there are buttons for 'New', 'Edit', and 'Delete'. Below this is a table with columns: INDEX, NAME, TLS VERSION, DTLS VERSION, and CIPHER SERVER. The table contains one entry with INDEX 0, NAME default, TLS VERSION TLSv1.2 and TLSv1.3, DTLS VERSION DTLSv1.0 and DTLSv1.2, and CIPHER SERVER DEFAULT. Below the table, there is a section for '#0[default]' with an 'Edit' button. At the bottom, there are three links: 'Certificate Information >>', 'Change Certificate >>', and 'Trusted Root Certificates >>'. The 'Change Certificate' and 'Trusted Root Certificates' links are circled in red.

The screenshot shows the Audiocodes SIP Manager interface, specifically the 'Generate New Private Key' and 'Upload Certificate Files from Your Computer' sections. The 'Generate New Private Key' section includes fields for 'Private Key Format' (set to RSA) and 'Private Key Size' (set to 2048), with a 'Generate Private Key' button. The 'Upload Certificate Files from Your Computer' section includes a 'Private key pass-phrase (optional)' field and a 'Load Private Key File' button. Below this, there is a note: 'Note: Replacing the private key is not recommended but if it's done, it should be over a physically-secure network link.' followed by a 'Load Device Certificate File' button. The 'Load Private Key File' and 'Load Device Certificate File' buttons are circled in red.

6.5 Transport Settings

The screenshot shows the Audiocodes SIP Manager interface, specifically the 'Transport Settings' configuration page. The left sidebar contains a navigation menu with categories like IP Group Set, Manipulation, Inbound Manipulations, Outbound Manipulations, SBC General Settings, Call Admission Control Profile, Malicious Signature, External Media Source, SIP DEFINITIONS, Accounts, SIP Definitions General Settings, Message Structure, Transport Settings, Proxy & Registration, Priority and Emergency, Call Setup Rules, Least Cost Routing, Cost Groups, Dial Plan, Push Notification Servers, MESSAGE MANIPULATION, MEDIA, and Media Security. The main panel displays the 'Transport Settings' configuration page. It is divided into several sections: GENERAL, TCP CONNECTION, RETRANSMISSION, and SBC SETTINGS. The GENERAL section includes fields for SIP NAT Detection (Enable), SIPs (Enable), SIP Transport Type (TLS), ENUM Resolution (e164Large), SIP 408 Response upon non-INVITE (Enable), DNS Query Type (A-Record), SIP Destination Port (5061), Remove SIPs from Non-Secured Transport (Enable), and Report Support (Disable). The TCP CONNECTION section includes fields for TCP/TLS Connection Reuse (Enable), TCP Timeout (0), Reliable Connection Persistent Mode (Disable), and Fake TCP Alias (Disable). The RETRANSMISSION section includes fields for SIP T1 Retransmission Timer [msec] (500), SIP T2 Retransmission Timer [msec] (4000), and SIP Maximum RTX (7). The SBC SETTINGS section includes a field for Websocket Keep-Alive Period [sec] (0). The 'Save' button at the top right is circled in red.

6.6 SIP Interface

For Teams:

The screenshot displays the Audiocodes Mediant SW configuration interface. The left sidebar shows the 'TOPOLOGY VIEW' with a tree structure of entities. The main panel shows the configuration for the '#1[Teams sip Interface]' under the 'defaultSRD' profile. The configuration is divided into three sections: GENERAL, MEDIA, and SECURITY.

INDEX	NAME	SRD	NETWORK INTERFACE	APPLICATION TYPE	UDP PORT	TCP PORT	TLS PORT	ENCAPSULATING PROTOCOL	MEDIA REALM
0	FreePBX SIP Interface	defaultSRD (#1)	eth0	SBC	5066	5066	0	No encapsulation	--
1	Teams sip Interface	defaultSRD (#1)	eth0	SBC	5060	5060	5061	No encapsulation	--

#1[Teams sip Interface] defaultSRD

GENERAL

- Name: Teams sip Interface
- Topology Location: Up
- Network Interface: eth0
- Application Type: SBC
- UDP Port: 5060
- TCP Port: 5060
- TLS Port: 5061
- SCTP Port: 0
- SCTP Secondary Network Inter...: --
- Additional UDP Ports Mode: Always Open
- Encapsulating Protocol: No encapsulation
- Enable TCP Keepalive: Disable
- Used By Routing Server: Not Used
- Pre-Parsing Manipulation Set: --
- CAC Profile: --

MEDIA

- Media Realm: --
- Direct Media: Disable
- MSRP TCP Port: 0
- MSRP TLS Port: 0

SECURITY

- TLS Context Name: default
- TLS Mutual Authentication: Enable
- Message Policy: --
- User Security Mode: Not Configured
- Enable Un-Authenticated Registra...: Not configured
- Max. Number of Registered Users: -1

CLASSIFICATION

- Classification Failure Response Type: 500
- Pre-classification Manipulation Set...: -1
- Call Setup Rules Set ID: -1

For FreePBX:

The screenshot displays the Audiocodes Mediant SW configuration interface. The left sidebar shows the 'TOPOLOGY VIEW' with a tree structure of entities. The main panel shows the configuration for the '#0[FreePBX SIP Interface]' under the 'defaultSRD' profile. The configuration is divided into three sections: GENERAL, MEDIA, and SECURITY.

INDEX	NAME	SRD	NETWORK INTERFACE	APPLICATION TYPE	UDP PORT	TCP PORT	TLS PORT	ENCAPSULATING PROTOCOL	MEDIA REALM
0	FreePBX SIP Interface	defaultSRD (#1)	eth0	SBC	5066	5066	0	No encapsulation	--
1	Teams sip Interface	defaultSRD (#1)	eth0	SBC	5060	5060	5061	No encapsulation	--

#0[FreePBX SIP Interface] defaultSRD

GENERAL

- Name: FreePBX SIP Interface
- Topology Location: Up
- Network Interface: eth0
- Application Type: SBC
- UDP Port: 5066
- TCP Port: 5066
- TLS Port: 0
- SCTP Port: 0
- SCTP Secondary Network Inter...: --
- Additional UDP Ports Mode: Always Open
- Encapsulating Protocol: No encapsulation
- Enable TCP Keepalive: Disable
- Used By Routing Server: Not Used
- Pre-Parsing Manipulation Set: --
- CAC Profile: --

MEDIA

- Media Realm: --
- Direct Media: Disable
- MSRP TCP Port: 0
- MSRP TLS Port: 0

SECURITY

- TLS Context Name: default
- TLS Mutual Authentication: --
- Message Policy: --
- User Security Mode: Not Configured
- Enable Un-Authenticated Registra...: Not configured
- Max. Number of Registered Users: -1

CLASSIFICATION

- Classification Failure Response Type: 500
- Pre-classification Manipulation Set...: -1
- Call Setup Rules Set ID: -1

6.7 Media Realms:

For Teams:

The screenshot shows the Audiocodes SIP Manager interface. The left sidebar contains a navigation menu with categories like CORE ENTITIES, SIP INTERFACES, CODERS & PROFILES, and SIP DEFINITIONS. The main panel displays the 'Media Realms (2)' configuration page. A table lists two realms: 'FreePBX Media Realms' and 'Teams media Realms'. The 'Teams media Realms' row is selected, and its details are shown in the right pane. The details include a 'GENERAL' section with fields like Name, Topology Location, IP4 Interface Name, UDP Port Range Start, Number Of Media Session Legs, UDP Port Range End, Default Media Realm, and Used By Routing Server. A 'QUALITY OF EXPERIENCE' section shows QoS Profile and Bandwidth Profile. The bottom of the page has links for 'Media Realm Extension' and 'Remote Media Subnet'.

INDEX	NAME	IPV4 INTERFACE NAME	UDP PORT RANGE START	NUMBER OF MEDIA SESSION LEGS	UDP PORT RANGE END	DEFAULT MEDIA REALM
0	FreePBX Media Realms	eth0	8000	14353	65531	No
2	Teams media Realms	eth0	7000	100	7399	No

#2[Teams media Realms]

GENERAL

- Name: Teams media Realms
- Topology Location: Up
- IP4 Interface Name: eth0
- UDP Port Range Start: 7000
- Number Of Media Session Legs: 100
- UDP Port Range End: 7399
- Default Media Realm: No
- Used By Routing Server: Not Used

QUALITY OF EXPERIENCE

- QoS Profile: --
- Bandwidth Profile: --

Media Realm Extension 0 items >> Remote Media Subnet 0 items >>

For FreePBX:

The screenshot shows the Audiocodes SIP Manager interface. The left sidebar contains a navigation menu with categories like CORE ENTITIES, SIP INTERFACES, CODERS & PROFILES, and SIP DEFINITIONS. The main panel displays the 'Media Realms (2)' configuration page. A table lists two realms: 'FreePBX Media Realms' and 'Teams media Realms'. The 'FreePBX Media Realms' row is selected, and its details are shown in the right pane. The details include a 'GENERAL' section with fields like Name, Topology Location, IP4 Interface Name, UDP Port Range Start, Number Of Media Session Legs, UDP Port Range End, Default Media Realm, and Used By Routing Server. A 'QUALITY OF EXPERIENCE' section shows QoS Profile and Bandwidth Profile. The bottom of the page has links for 'Media Realm Extension' and 'Remote Media Subnet'.

INDEX	NAME	IPV4 INTERFACE NAME	UDP PORT RANGE START	NUMBER OF MEDIA SESSION LEGS	UDP PORT RANGE END	DEFAULT MEDIA REALM
0	FreePBX Media Realms	eth0	8000	14353	65531	No
2	Teams media Realms	eth0	7000	100	7399	No

#0[FreePBX Media Realms]

GENERAL

- Name: FreePBX Media Realms
- Topology Location: Down
- IP4 Interface Name: eth0
- UDP Port Range Start: 8000
- Number Of Media Session Legs: 14353
- UDP Port Range End: 65531
- Default Media Realm: No
- Used By Routing Server: Not Used

QUALITY OF EXPERIENCE

- QoS Profile: --
- Bandwidth Profile: --

Media Realm Extension 0 items >> Remote Media Subnet 0 items >>

6.8 Proxy Sets

For Teams:

ccaudiocodes

SETUPMONITORTROUBLESHOOT

SaveRestartActionsAdmin

Entity, parameter, value

Mediant SWIP NETWORKSIGNALING & MEDIAADMINISTRATION

SRDAll

TOPOLOGY VIEW

CORE ENTITIES

SRDs (1)

SIP Interfaces (2)

Media Realms (2)

Proxy Sets (2)

IP Groups (2)

Voice AI Connectors (0)

CODERS & PROFILES

SBC

Classification (2)

Routing

SBC Routing Policies (1)

IP-to-IP Routing (4)

Alternative Reasons Set (0)

IP Group Set (0)

Manipulation

SBC General Settings

Call Admission Control Profile (0)

Malicious Signature (14)

External Media Source (0)

SIP DEFINITIONS

Accounts (0)

SIP Definitions General Settings

Message Structure

Transport Settings

Proxy & Registration

Priority and Emergency

Call Setup Rules (0)

Least Cost Routing

Dial Plan (0)

Block Modification Extension (0)

Proxy Sets (2)

Page 1 of 1

Show 10 records per page

INDEX	NAME	SRD	SBC IPV4 SIP INTERFACE	PROXY KEEP-ALIVE TIME (SEC)	REDUNDANCY MODE	PROXY HOT SWAP MODE
0	FreePBX proxyset	defaultSRD (#1)	FreePBX SIP Interface	60		Disable
2	Teams Proxy Set	defaultSRD (#1)	Teams sip interface	60	Homing	Enable

#2[Teams Proxy Set] defaultSRD

GENERAL

NameTeams Proxy Set

SBC IPV4 SIP InterfaceTeams sip interfaceView

TLS Context NamedefaultView

KEEP ALIVE

Proxy Keep-AliveUsing OPTIONS

Proxy Keep-Alive Time (sec)60

Keep-Alive Failure Responses

Success Detection Retries1

Success Detection Interval10

Failure Detection Retransmissions-1

REDUNDANCY

Redundancy ModeHoming

Proxy Hot Swap ModeEnable

Proxy Load Balancing MethodRandom Weights

Min. Active Servers for Load Ba...1

ADVANCED

Classification InputIP Address only

DNS Resolve Method

Accept DHCP Proxy ListDisable

TLS Remote Subject Namesip.pstnhub.microsoft.com

Peer Host Name Verification ModeUse Global Settings

In-Call Route ModeDisable

Reliable Connection Failure RetryDisable

PROXY ADDRESS

TYPE

sip.pstnhub.microsoft.com:5061TLS

sp2.pstnhub.microsoft.com:5061TLS

sp3.pstnhub.microsoft.com:5061TLS

ccaudiocodes

SETUPMONITORTROUBLESHOOT

SaveRestartActionsAdmin

Entity, parameter, value

Mediant SWIP NETWORKSIGNALING & MEDIAADMINISTRATION

SRDAll

TOPOLOGY VIEW

CORE ENTITIES

SRDs (1)

SIP Interfaces (2)

Media Realms (2)

Proxy Sets (2)

IP Groups (2)

Voice AI Connectors (0)

CODERS & PROFILES

SBC

Classification (2)

Routing

SBC Routing Policies (1)

IP-to-IP Routing (4)

Alternative Reasons Set (0)

IP Group Set (0)

Manipulation

SBC General Settings

Call Admission Control Profile (0)

Malicious Signature (14)

External Media Source (0)

SIP DEFINITIONS

Accounts (0)

SIP Definitions General Settings

Message Structure

Transport Settings

Proxy & Registration

Priority and Emergency

Call Setup Rules (0)

Least Cost Routing

Dial Plan (0)

Block Modification Extension (0)

Proxy Sets [#2] > Proxy Address (3)

Page 1 of 1

Show 10 records per page

INDEX	PROXY ADDRESS	TRANSPORT TYPE
0	sip.pstnhub.microsoft.com:5061	TLS
1	sp2.pstnhub.microsoft.com:5061	TLS
2	sp3.pstnhub.microsoft.com:5061	TLS

#0

GENERAL

Proxy Addresssip.pstnhub.microsoft.com:5061

Transport Typesip.pstnhub.microsoft.com:5061

Proxy Priority1

Proxy Random Weight1

For FreePBX:

ccaudiocodes

SETUPMONITORTROUBLESHOOT

SaveRestartActionsAdmin

Media SWIP NETWORKSIGNALING & MEDIAADMINISTRATION

SRDAll

TOPOLOGY VIEW

CORE ENTITIES

SRDs (1)

SIP Interfaces (2)

Media Realms (2)

Proxy Sets (2)

IP Groups (2)

Voice AI Connectors (0)

CODERS & PROFILES

SBC

Classification (2)

Routing

SBC Routing Policies (1)

IP-to-IP Routing (4)

Alternative Reasons Set (0)

IP Group Set (0)

Manipulation

SBC General Settings

Call Admission Control Profile (0)

Malicious Signature (14)

External Media Source (0)

SIP DEFINITIONS

Accounts (0)

SIP Definitions General Settings

Message Structure

Transport Settings

Proxy & Registration

Priority and Emergency

Call Setup Rules (0)

Least Cost Routing

Dial Plan (0)

Block Modification Extension (0)

Proxy Sets (2)

1 NewEdit

Page 1 of 1Show 10 records per page

INDEX	NAME	SRD	SBC IPV4 SIP INTERFACE	PROXY KEEP-ALIVE TIME [SEC]	REDUNDANCY MODE	PROXY HOT SWAP MODE
0	FreePBX proxyset	defaultSRD (#1)	FreePBX SIP Interface	60		Disable
2	Teams Proxy Set	defaultSRD (#1)	Teams sip Interface	60	HotSwing	Enable

#0[FreePBX proxyset] defaultSRDEdit

GENERAL

NameFreePBX proxyset

SBC IPv4 SIP InterfaceFreePBX SIP InterfaceView

TLS Context Name--View

KEEP ALIVE

Proxy Keep-AliveUsing OPTIONS

Proxy Keep-Alive Time [sec]60

Keep-Alive Failure Responses

Success Detection Retries1

Success Detection Interval10

Failure Detection Retransmissions-1

REDUNDANCY

Redundancy Mode

Proxy Hot Swap ModeDisable

Proxy Load Balancing MethodDisable

Min. Active Servers for Load Ba...1

ADVANCED

Classification InputIP Address only

DNS Resolve Method

Accept DHCP Proxy ListDisable

TLS Remote Subject Name

Peer Host Name Verification ModeUse Global Settings

In-Call Route ModeDisable

Reliable Connection Failure RetryDisable

PROXY ADDRESS

TYPE

172.31.4.212:5060UDP

Proxy Address 1 items >>

ccaudiocodes

SETUPMONITORTROUBLESHOOT

SaveRestartActionsAdmin

Media SWIP NETWORKSIGNALING & MEDIAADMINISTRATION

SRDAll

TOPOLOGY VIEW

CORE ENTITIES

SRDs (1)

SIP Interfaces (2)

Media Realms (2)

Proxy Sets (2)

IP Groups (2)

Voice AI Connectors (0)

CODERS & PROFILES

SBC

Classification (2)

Routing

SBC Routing Policies (1)

IP-to-IP Routing (4)

Alternative Reasons Set (0)

IP Group Set (0)

Manipulation

SBC General Settings

Call Admission Control Profile (0)

Malicious Signature (14)

External Media Source (0)

SIP DEFINITIONS

Accounts (0)

SIP Definitions General Settings

Message Structure

Transport Settings

Proxy & Registration

Priority and Emergency

Call Setup Rules (0)

Least Cost Routing

Dial Plan (0)

Block Modification Extension (0)

Proxy Sets [0] > Proxy Address (1)

1 NewEdit

Page 1 of 1Show 10 records per page

INDEX	PROXY ADDRESS	TRANSPORT TYPE
0	172.31.4.212:5060	UDP

#0Edit

GENERAL

Proxy Address172.31.4.212:5060

Transport TypeUDP

Proxy Priority0

Proxy Random Weight0

6.9 IP Groups

For Teams:

IP Groups (2)

INDEX	NAME	SRD	TYPE	SBC OPERATION MODE	PROXY SET	IP PROFILE	MEDIA REALM	SIP GROUP NAME	CLASSIFY BY PROXY SET	INBOUND MESSAGE MANIPULATION SET	OUTBOUND MESSAGE MANIPULATION SET
0	FreePBX IP Group	defaultSRD (01)	Server	Not Configured	FreePBX proxyset	FreePBX IP Profile	FreePBX Media Realm	mylab-sbc.dnss.net	Enable	-1	-3
2	Teams IP Group	defaultSRD (01)	Server	Not Configured	Teams Proxy Set	Teams IP Profile	Teams media Realms	mylab-sbc.dnss.net	Enable	-3	4

#2[Teams IP Group] defaultSRD

GENERAL

- Name: Teams IP Group
- Topology Location: Up
- Type: Server
- Proxy Set: Teams Proxy Set
- IP Profile: Teams IP Profile
- Media Realm: Teams media Realms
- Internal Media Realm: --
- Contact User: mylab-sbc.dnss.net
- SIP Group Name: No
- Created By Routing Server: Not Used
- Proxy Set Connectivity: Connected

QUALITY OF EXPERIENCE

- QoS Profile: --
- Bandwidth Profile: --
- User Voice Quality Report: Disable

MESSAGE MANIPULATION

- Inbound Message Manipulation: -1
- Outbound Message Manipulation: 4
- Message Manipulation User-Def: --
- Message Manipulation User-Def: --
- Proxy Keep-Alive using IP Group s: Enable

SBC REGISTRATION AND AUTHENTICATION

- Max. Number of Registered Users: -1
- Registration Mode: User Initiates Registration
- Dedicated Connection Mode: Disable
- User Stickiness: Disable
- User UDP Port Assignment: Disable
- Authentication Mode: User Authenticates
- Authentication Method List: --

CAC Profile

- SIP Source Host Name: --

ADVANCED

- Local Host Name: mylab-sbc.dnss.net
- URI Format: Disable
- Always Use Src Address: Yes

SBC ADVANCED

- Source URI Input: --
- Destination URI Input: --
- SIP Connect: No
- SBC PSAP Mode: Disable
- Route Using Request URI Port: Disable
- Media TLS Content: default
- Keep Original Call-ID: No
- Dial Plan: --
- Call Setup Rules Set ID: -1
- Tags: --
- SBC Alternative Routing Reason: --
- Teams Local Media Optimization: None
- Teams Local Media Optimization L: Internal
- Teams Local Media Optimization S: --
- Teams Direct Routing Mode: Enable
- Voice AI Connector: --
- Metering Remote Type: Regular
- Report Metering: Enable

GW GROUP STATUS

- GW Group Registered IP Address: NA
- GW Group Registered Status: NA

For FreePBX:

The screenshot displays the Audiocodes SIP Manager interface, specifically the 'SIP GROUPS' section. The left sidebar shows a navigation menu with categories like 'CORE ENTITIES', 'SIP INTERFACES', 'MEDIA REALMS', 'PROXY SETS', 'VOICE AI CONNECTORS', 'CODERS & PROFILES', 'SBC', 'CLASSIFICATION', 'ROUTING', 'MANIPULATION', 'SIP DEFINITIONS', and 'ACCOUNTS'. The main content area is titled 'IP Groups (2)' and shows a table with two entries:

INDEX	NAME	SID	TYPE	SBC OPERATION MODE	PROXY SET	IP PROFILE	MEDIA REALM	SIP GROUP NAME	CLASSIFY BY PROXY SET	INBOUND MESSAGE MANIPULATION SET	OUTBOUND MESSAGE MANIPULATION SET
0	FreePBX IP Group	defaultSRD (81)	Server	Not Configured	FreePBX proxyset	FreePBX IP Profile	FreePBX Media Realm	mylab-sbc.dnss.net	Enable	-1	-1
2	Teams IP Group	defaultSRD (81)	Server	Not Configured	Teams Proxy Set	Teams IP Profile	Teams media Realm	mylab-sbc.dnss.net	Enable	-1	-1

Below the table, the configuration details for the selected 'FreePBX IP Group' are shown. The 'GENERAL' section includes fields for Name, Topology Location, Type, Proxy Set, IP Profile, Media Realm, Internal Media Realm, Contact User, SIP Group Name, Created By Routing Server, Used By Routing Server, and Proxy Set Connectivity. The 'SBC GENERAL' section includes fields for Classify By Proxy Set, Validate Source IP, SBC Operation Mode, SBC Client Forking Mode, and CAC Profile. The 'QUALITY OF EXPERIENCE' section includes fields for QoS Profile, Bandwidth Profile, and User Voice Quality Report. The 'MESSAGE MANIPULATION' section includes fields for Inbound Message Manipulation, Outbound Message Manipulation, Message Manipulation User-Def., Message Manipulation User-Def., and Proxy Keep-Alive using IP Group s... The 'SBC REGISTRATION AND AUTHENTICATION' section includes fields for Max. Number of Registered Users, Registration Mode, User Indicates Registration, Dedicated Connection Mode, User Stickiness, User UDP Port Assignment, Authentication Mode, and Authentication Method List.

The screenshot displays the Audiocodes SIP Manager interface, specifically the 'SIP GROUPS' section. The left sidebar shows a navigation menu with categories like 'CORE ENTITIES', 'SIP INTERFACES', 'MEDIA REALMS', 'PROXY SETS', 'VOICE AI CONNECTORS', 'CODERS & PROFILES', 'SBC', 'CLASSIFICATION', 'ROUTING', 'MANIPULATION', 'SIP DEFINITIONS', and 'ACCOUNTS'. The main content area is titled 'IP Groups (2)' and shows a table with two entries:

INDEX	NAME	SID	TYPE	SBC OPERATION MODE	PROXY SET	IP PROFILE	MEDIA REALM	SIP GROUP NAME	CLASSIFY BY PROXY SET	INBOUND MESSAGE MANIPULATION SET	OUTBOUND MESSAGE MANIPULATION SET
0	FreePBX IP Group	defaultSRD (81)	Server	Not Configured	FreePBX proxyset	FreePBX IP Profile	FreePBX Media Realm	mylab-sbc.dnss.net	Enable	-1	-1
2	Teams IP Group	defaultSRD (81)	Server	Not Configured	Teams Proxy Set	Teams IP Profile	Teams media Realm	mylab-sbc.dnss.net	Enable	-1	-1

Below the table, the configuration details for the selected 'FreePBX IP Group' are shown. The 'GENERAL' section includes fields for Name, Topology Location, Type, Proxy Set, IP Profile, Media Realm, Internal Media Realm, Contact User, SIP Group Name, Created By Routing Server, Used By Routing Server, and Proxy Set Connectivity. The 'SBC GENERAL' section includes fields for Classify By Proxy Set, Validate Source IP, SBC Operation Mode, SBC Client Forking Mode, and CAC Profile. The 'QUALITY OF EXPERIENCE' section includes fields for QoS Profile, Bandwidth Profile, and User Voice Quality Report. The 'MESSAGE MANIPULATION' section includes fields for Inbound Message Manipulation, Outbound Message Manipulation, Message Manipulation User-Def., Message Manipulation User-Def., and Proxy Keep-Alive using IP Group s... The 'SBC REGISTRATION AND AUTHENTICATION' section includes fields for Max. Number of Registered Users, Registration Mode, User Indicates Registration, Dedicated Connection Mode, User Stickiness, User UDP Port Assignment, Authentication Mode, and Authentication Method List.

6.10 IP Profiles:

For Teams:

The screenshot shows the Audiocodes Mediant SW interface for configuring the #2[Teams IP Profile]. The left sidebar contains navigation menus: TOPOLOGY VIEW, CORE ENTITIES (SRDs, SIP Interfaces, Media Realms, Proxy Sets, IP Groups, Voice AI Connectors), CODERS & PROFILES (IP Profiles, Coders Settings, Coders Groups, Allowed Audio Coders Groups, Allowed Video Coders Groups), SBC (Classification, Routing, Manipulation), and SIP DEFINITIONS (Accounts, SIP Definitions General Settings, Message Structure, Transport Settings, Proxy & Registration). The main configuration area is divided into four sections:

- GENERAL**: Name (Teams IP Profile), Created by Routing Server (No), Used By Routing Server (Not Used).
- MEDIA SECURITY**: SBC Media Security Mode (Secured), Symmetric MMS (Disable), MMS Size (0), SBC Enforce MMS Size (Don't enforce), SBC Media Security Method (SDS), SBC SRTP Upon Re-key (Only if Required), SBC Remove SRTP Keys Mode (No), SBC Remove Crypto Lifetime in SDP (No), SBC Remove Unknown Crypto (No), Crypto Suites Group (View), Encryption on RTP Packets (As Is).
- SBC EARLY MEDIA**: Remote Early Media (Supported), Remote Multiple 18x (Supported), Remote Early Media Response Type (Transparent), Remote Multiple Early Dialogs (According to Operation Mode).
- SBC SIGNALING**: PRACK Mode (Transparent), P-Asserted-Identity Header Mode (As Is), Diversion Header Mode (As Is), History-Info Header Mode (As Is), Session Expires Mode (Transparent), SIP UPDATE Support (Not Supported), Remote re-INVITE (Not Supported), Remote Delayed Offer Support (Supported only with SDP), MSRP re-INVITE Support (Supported), MSRP Offer Setup Role (Accept), MSRP Offer Setup Format (Default), Remote Representation Mode (According to Operation Mode), Keep Incoming Via Headers (According to Operation Mode), Keep Incoming Routing Headers (According to Operation Mode), Keep User-Agent Header (According to Operation Mode), Use Initial Incoming INVITE for Re... (Disable), Handle X-Detect (No), SIP Body Handling (Transparent), SIP Variant (Inv2), Max Call Duration [min] (0), Broken Signaling Connection M... (Ignore).

The screenshot continues the configuration for the #2[Teams IP Profile]. The main configuration area is divided into five sections:

- SBC REMOTE REGISTRATION**: Remote Multiple Answers Mode (Disable), Remote Early Media RTP Detect... (By Media), Remote RFC 3960 Support (Not Supported), Remote Can Play Ringback (Yes), Generate RTP (None).
- SBC MEDIA**: SDP Subsequent Responses Mode (Handle All), Mediation Mode (ETP Mediation), Extension Coders Group (AudioCodersGroups_0), Allowed Audio Coders (View), Allowed Coders Mode (Restriction), Allowed Video Coders (View), Allowed Media Types (View), Direct Media Tag (View), RFC 2833 Mode (As Is), RFC 2833 DTMF Payload Type (0), Alternative DTMF Method (As Is), Send Multiple DTMF Methods (Disable), Receive Multiple DTMF Methods (Disable), Adapt RFC2833 BN to Voice coder... (Disabled), SDP Prime Answer (Remote Answer), Preferred PTTime (0), Use Silence Suppression (Transparent), RTP Redundancy Mode (As Is), RTCP Mode (Transparent), Jitter Compensation (Disable), ICE Mode (Lite), SDP Handle RTCP (Don't Care), RTCP Mux (Not Supported), RTCP Feedback (Feedback Off).
- SBC FORWARD AND TRANSFER**: Remote REFER Mode (Regular), Remote Replaces Mode (Standard), Play RBT To Transferee (No), Remote 3xx Mode (Transparent), Send Header for Transfer (None).
- SBC HOLD**: Remote Hold Format (Transparent), Reliable Held Tone Source (Yes), Play Held Tone (No).
- SBC FAX**: Fax Coders Group (View), Fax Mode (As Is), Fax Offer Mode (All coders), Fax Answer Mode (Single coder), Remote Renegotiate on Fax Deta... (Transparent), Fax Renouting Mode (Disable).
- MEDIA**: Broken Connection Mode (Disconnect), Media IP Version Preference (Only IPv4), RTP Redundancy Depth (Disable).

audiocodes SETUP MONITOR TROUBLESHOOT Save Restart Actions Admin

Media SW IP NETWORK **SIGNALING & MEDIA** ADMINISTRATION Empty, parameter, value

SRD All

TOPOLOGY VIEW

CORE ENTITIES

- SRDs (1)
- SIP Interfaces (2)
- Media Realms (2)
- Proxy Sets (2)
- IP Groups (2)
- Voice AI Connectors (0)

CODERS & PROFILES

- IP Profiles (2)**
- Coder Settings
- Coders Groups (1)
- Allowed Audio Coders Groups (0)
- Allowed Video Coders Groups (0)

SBC

- Classification (2)
- Routing
 - SBC Routing Policies (1)
 - IP-to-IP Routing (4)
 - Alternative Reasons Set (0)
 - IP Group Set (0)
- Manipulation
 - SBC General Settings
 - Call Admission Control Profile (0)
 - Malicious Signature (14)
 - External Media Source (0)

SIP DEFINITIONS

- Accounts (0)
- SIP Definitions General Settings
- Message Structure
- Transport Settings
- Proxy & Registration

RTCP Feedback

Feedback Off	Disable
Re-number MID	Disable
Voice Quality Enhancement	Disable
Switch Coder Upon Voice Quality	Disable
Max Opus Bandwidth	0
Generate No-Op Packets	Disable
Enhanced PLC	Disable
SBC Multiple Coders	Not Supported
SBC Allow Only Integrated PT	Disable
Remove CSRC	Disable
SBC Precondition	Not Supported
Remove EXTMAP	Disable

ANSWER MACHINE DETECTION

AMD Mode	Don't Disconnect
AMD Sensitivity Parameter Suite	0
AMD Sensitivity Level	8
AMD Max Greeting Time	300
AMD Max Post Silence Greeting T...	400

LOCAL TONES

Local Ringback Tone Index	-1
Local Held Tone Index	-1

QUALITY OF SERVICE

RTP IP Diffserv	46
RTP Video Diffserv	-1
Signaling Diffserv	24
Data Diffserv	0

JITTER BUFFER

Dynamic Jitter Buffer Minimum De...	10
Dynamic Jitter Buffer Optimization...	10
Jitter Buffer Max Delay [msec]	300

VOICE

Echo Canceller	Line
Input Gain (-32 to 31 dB)	0
Voice Volume (-32 to 31 dB)	0

For FreePBX:

audiocodes SETUP MONITOR TROUBLESHOOT Save Restart Actions Admin

Media SW IP NETWORK **SIGNALING & MEDIA** ADMINISTRATION Empty, parameter, value

SRD All

TOPOLOGY VIEW

CORE ENTITIES

- SRDs (1)
- SIP Interfaces (2)
- Media Realms (2)
- Proxy Sets (2)
- IP Groups (2)
- Voice AI Connectors (0)

CODERS & PROFILES

- IP Profiles (2)**
- Coder Settings
- Coders Groups (1)
- Allowed Audio Coders Groups (0)
- Allowed Video Coders Groups (0)

SBC

- Classification (2)
- Routing
 - SBC Routing Policies (1)
 - IP-to-IP Routing (4)
 - Alternative Reasons Set (0)
 - IP Group Set (0)
- Manipulation
 - SBC General Settings
 - Call Admission Control Profile (0)
 - Malicious Signature (14)
 - External Media Source (0)

SIP DEFINITIONS

- Accounts (0)
- SIP Definitions General Settings
- Message Structure
- Transport Settings
- Proxy & Registration

FreePBX IP Profile

INDEX	NAME
0	FreePBX IP Profile
2	Teams IP Profile

#0[FreePBX IP Profile]

GENERAL

Name	FreePBX IP Profile
Created by Routing Server	No
Used By Routing Server	Not Used

MEDIA SECURITY

SBC Media Security Mode	Not Secured
Symmetric MKI	Disable
MKI Size	0
SBC Enforce MKI Size	Don't enforce
SBC Media Security Method	SDS
Reset SRTP Upon Re-key	Disable
Generate SRTP Keys Mode	Only if Required
SBC Remove Crypto Lifetime in SDP	No
SBC Remove Unknown Crypto	No
Crypto Suites Group	...
Encryption on RTP Packets	As Is

SBC SIGNALING

PRACK Mode	Transparent
P-Asserted-Identity Header Mode	Add
Diversion Header Mode	As Is
History-Info Header Mode	As Is
Session Expires Mode	Transparent
SIP UPDATE Support	Supported
Remote re-INVITE	Supported
Remote Delayed Offer Support	Supported
MSRP re-INVITE/UPDATE	Supported
MSRP Offer Setup Role	Accept
MSRP Empty Message Format	Default
Remote Representation Mode	According to Operation Mode
Keep Incoming Via Headers	According to Operation Mode
Keep Incoming Routing Headers	According to Operation Mode
Keep User-Agent Header	According to Operation Mode
Use Initial Incoming INVITE for Re...	Disable
Handle X-Detect	No
SIP Body Handling	Transparent
SIP Variant	ts/62
Max Call Duration [min]	60
Broken Signaling Connection M...	Ignore

SBC EARLY MEDIA

Remote Early Media	Supported
Remote Multiple 18x	Supported
Remote Early Media Response Type	Transparent
Remote Multiple Early Dialogs	According to Operation Mode

audiocodes

SETUPMONITORTROUBLESHOOT

SaveRestartActionsAdmin

Media SWIP NETWORKSIGNALING & MEDIAADMINISTRATION

SRDAll

TOPOLOGY VIEW

CORE ENTITIES

SRDs (1)

SIP Interfaces (2)

Media Realms (2)

Proxy Sets (2)

IP Groups (2)

Voice AI Connectors (0)

CODERS & PROFILES

IP Profiles (2)

Coder Settings

Coders Groups (1)

Allowed Audio Coders Groups (0)

Allowed Video Coders Groups (0)

SBC

Classification (2)

Routing

SBC Routing Policies (1)

IP-to-IP Routing (4)

Alternative Reasons Set (0)

IP Group Set (0)

Manipulation

SBC General Settings

Call Admission Control Profile (0)

Malicious Signature (14)

External Media Source (0)

SIP DEFINITIONS

Accounts (0)

SIP Definitions General Settings

Message Structure

Transport Settings

Proxy & Registration

Remote Multiple Answers Mode

Disable

Remote Early Media RTP Detect...

By Signaling

Remote RFC 3960 Support

Not Supported

Remote Can Play Ringback

Yes

Generate RTP

None

SBC MEDIA

SDP Subsequent Responses Mode

Handle All

Mediation Mode

RTP Mediation

Extension Coders Group

--

View

Allowed Audio Coders

--

View

Allowed Video Coders

Restriction

View

Allowed Media Types

--

Direct Media Tag

--

RFC 2833 Mode

As Is

RFC 2833 DTMF Payload Type

0

Alternative DTMF Method

As Is

Send Multiple DTMF Methods

Disable

Receive Multiple DTMF Methods

Disable

Adapt RFC2833 BW to Voice coder ...

Disabled

SDP Prime Answer

Remote Answer

Preferred PTMIME

0

Use Silence Suppression

Transparent

RTP Redundancy Mode

As Is

RTCP Mode

Transparent

Jitter Compensation

Disable

ICE Mode

Disable

SDP Hand RTP

Don't Care

RTCP Mux

Not Supported

RTCP Feedback

Feedback Off

JBL REGISTER/REGISTER

User Registration Time

0

NAT UDP Registration Time

-1

NAT TCP Registration Time

-1

Unregister on WebSocket Discon...

Enable

SBC FORWARD AND TRANSFER

Remote REFER Mode

Handle Locally

Remote Replaces Mode

Handle Locally

Play RST To Transferee

No

Remote Jax Mode

Handle Locally

Send Header for Transfer

None

SBC HOLD

Remote Hold Format

Transparent

Reliable Held Tone Source

Yes

Play Held Tone

No

SBC FAX

Fax Coders Group

--

View

Fax Mode

As Is

Fax Offer Mode

All coders

Fax Answer Mode

Single coder

Remote Renegotiate on Fax Desc...

Transparent

Fax Routing Mode

Disable

MEDIA

Broken Connection Mode

Disconnect

Media IP Version Preference

Only IPv4

RTP Redundancy Depth

Disable

audiocodes

SETUPMONITORTROUBLESHOOT

SaveRestartActionsAdmin

Media SWIP NETWORKSIGNALING & MEDIAADMINISTRATION

SRDAll

TOPOLOGY VIEW

CORE ENTITIES

SRDs (1)

SIP Interfaces (2)

Media Realms (2)

Proxy Sets (2)

IP Groups (2)

Voice AI Connectors (0)

CODERS & PROFILES

IP Profiles (2)

Coder Settings

Coders Groups (1)

Allowed Audio Coders Groups (0)

Allowed Video Coders Groups (0)

SBC

Classification (2)

Routing

SBC Routing Policies (1)

IP-to-IP Routing (4)

Alternative Reasons Set (0)

IP Group Set (0)

Manipulation

SBC General Settings

Call Admission Control Profile (0)

Malicious Signature (14)

External Media Source (0)

SIP DEFINITIONS

Accounts (0)

SIP Definitions General Settings

Message Structure

Transport Settings

Proxy & Registration

RTCP Feedback

Feedback Off

Re-number MID

Disable

Voice Quality Enhancement

Disable

Switch Coder Upon Voice Quality

Disable

Max Opus Bandwidth

0

Generate No-Op Packets

Disable

Enhanced PLC

Disable

SBC Multiple Coders

Not Supported

SBC Allow Only Negotiated PT

Disable

Remove CSRC

Disable

SBC Precondition

Not Supported

Remove EXTMAP

Disable

QUALITY OF SERVICE

RTP IP Diffserv

46

RTP Video Diffserv

-1

Signaling Diffserv

24

Data Diffserv

0

JITTER BUFFER

Dynamic Jitter Buffer Minimum De...

10

Dynamic Jitter Buffer Optimization...

10

Jitter Buffer Max Delay [msec]

300

VOICE

Echo Canceller

Line

Input Gain (-32 to 31 dB)

0

Voice Volume (-32 to 31 dB)

0

RTP redundancy support

Disable

ANSWER MACHINE DETECTION

AMD Mode

Don't Disconnect

AMD Sensitivity Parameter Suite

0

AMD Sensitivity Level

8

AMD Max Greeting Time

300

AMD Max Post Silence Greeting TL...

400

LOCAL TONES

Local Ringback Tone Index

-1

Local Held Tone Index

-1

6.11 Coder Groups:

The screenshot displays the Cisco UCaaS Admin interface. The top navigation bar includes tabs for SETUP, MONITOR, TROUBLESHOOT, Save, Restart, Actions, Admin, and a help icon. Below this, a secondary menu shows Modules SW, IP NETWORK, SIGNALING & MEDIA (selected), and ADMINISTRATION. A search bar at the top right contains the text "Entity, parameter, value".

The left sidebar lists various configuration categories under TOPOLOGY VIEW:

- CORE ENTITIES
 - SIDs (1)
 - SIP Interfaces (2)
 - Media Realms (2)
 - Proxy Sets (2)
 - IP Groups (2)
 - Voice AI Connectors (8)
- CODERS & PROFILES
 - IP Profiles (2)
 - Codec Settings
 - Audio Coders Groups (1)**
 - Allowed Audio Coders Groups (8)
 - Allowed Video Coders Groups (8)
- SBC
 - Classification (2)
 - Routing
 - SBC Routing Policies (1)
 - IP-to-IP Routing (4)
 - Alternative Reasons Set (8)
 - IP Group Set (8)
 - Manipulation
 - SBC General Settings
 - Call Admission Control Profile (8)
 - Malicious Signature (14)
 - External Media Source (8)
- SIP DEFINITIONS
 - Accounts (8)
 - SIP Definitions General Settings
 - Message Structure
 - Transport Settings
 - Proxy & Registration

The main content area is titled "Coders Groups (1)". It features a table with two columns: INDEX and NAME. The first row has INDEX "0" and NAME "AudioCodersGroups_0". Above the table are links for "+ New", "Edit", and a trash icon. To the right of the table is a search input field.

Below the table, there is a section header "#0[AudioCodersGroups_0]" followed by an "Edit" button. Underneath, a "GENERAL" tab is active, showing a form with a "Name" field containing the value "AudioCodersGroups_0". At the bottom left of this section, it says "Coders Table 2 items >>".

[illegible]

6.12 Classification

Teams Classification:

The screenshot displays the Audiocodes SIP Manager interface. The left sidebar shows the navigation menu with categories like CORE ENTITIES, CODERS & PROFILES, and SIP DEFINITIONS. The main content area is titled "Classification (2)" and shows a table of classifications. The table has columns for INDEX, NAME, SRD, SOURCE SIP INTERFACE, SOURCE USERNAME PATTERN, SOURCE HOST, DESTINATION USERNAME PATTERN, DESTINATION HOST, ACTION TYPE, and SOURCE IP GROUP. Two classifications are listed: Teams-Classification (index 0) and FreePBX-Classification (index 1). Below the table, the configuration details for #0[Teams-Classification] are shown, including MATCH and ACTION sections.

INDEX	NAME	SRD	SOURCE SIP INTERFACE	SOURCE USERNAME PATTERN	SOURCE HOST	DESTINATION USERNAME PATTERN	DESTINATION HOST	ACTION TYPE	SOURCE IP GROUP
0	Teams-Classification	defaultSRD (s1)	Teams sip interface	*	*	*	mylab-sbc.ddns.net	Allow	Teams IP Group
1	FreePBX-Classification	defaultSRD (s1)	FreePBX SIP interface	*	*	*	*	Allow	FreePBX IP Group

#0[Teams-Classification] defaultSRD

MATCH

- Name: Teams-Classification
- Source SIP Interface: Teams sip interface
- Source IP Address: 52.114.*
- Source Transport Type: TLS
- Source Port: 0
- Source Username Pattern: *
- Source Host: *
- Destination Username Pattern: *
- Destination Host: mylab-sbc.ddns.net
- Message Condition: Teams-contact
- TLS Remote Subject Name: *.gsmhub.microsoft.com

ACTION

- Action Type: Allow
- Destination Routing Policy: --
- IP Group Selection: Source IP Group
- Source IP Group: Teams IP Group
- IP Group Tag Name: default
- IP Profile: --

FreePBX Classification:

The screenshot displays the Audiocodes SIP Manager interface. The left sidebar shows the navigation menu. The main content area is titled "Classification (2)" and shows a table of classifications. The table has columns for INDEX, NAME, SRD, SOURCE SIP INTERFACE, SOURCE USERNAME PATTERN, SOURCE HOST, DESTINATION USERNAME PATTERN, DESTINATION HOST, ACTION TYPE, and SOURCE IP GROUP. Two classifications are listed: Teams-Classification (index 0) and FreePBX-Classification (index 1). Below the table, the configuration details for #1[FreePBX-Classification] are shown, including MATCH and ACTION sections.

INDEX	NAME	SRD	SOURCE SIP INTERFACE	SOURCE USERNAME PATTERN	SOURCE HOST	DESTINATION USERNAME PATTERN	DESTINATION HOST	ACTION TYPE	SOURCE IP GROUP
0	Teams-Classification	defaultSRD (s1)	Teams sip interface	*	*	*	mylab-sbc.ddns.net	Allow	Teams IP Group
1	FreePBX-Classification	defaultSRD (s1)	FreePBX SIP interface	*	*	*	*	Allow	FreePBX IP Group

#1[FreePBX-Classification] defaultSRD

MATCH

- Name: FreePBX-Classification
- Source SIP Interface: FreePBX SIP interface
- Source IP Address: 172.31.4.212
- Source Transport Type: Any
- Source Port: 0
- Source Username Pattern: *
- Source Host: *
- Destination Username Pattern: *
- Destination Host: *
- Message Condition: --
- TLS Remote Subject Name: --

ACTION

- Action Type: Allow
- Destination Routing Policy: --
- IP Group Selection: Source IP Group
- Source IP Group: FreePBX IP Group
- IP Group Tag Name: default
- IP Profile: --

6.13 IP-to-IP Routing

Terminate Options:

The screenshot displays the Audiocodes Mediant SW interface for IP-to-IP Routing configuration. The left sidebar shows the navigation menu with 'IP-to-IP Routing (4)' selected under the 'ROUTING' section. The main content area shows the configuration for the 'Terminate Options' route.

IP-to-IP Routing (4)

INDEX	NAME	ROUTING POLICY	ALTERNATIVE ROUTE OPTIONS	SOURCE IP GROUP	REQUEST TYPE	SOURCE USERNAME PATTERN	DESTINATION USERNAME PATTERN	DESTINATION TYPE	DESTINATION IP GROUP	DESTINATION SIP INTERFACE	DESTINATION ADDRESS
0	Terminate Options	defaultSBCRoutingPol	Route Row	Any	OPTIONS	*	*	Dest Address	--	--	Internal
1	Teams refer	defaultSBCRoutingPol	Route Row	Any	All	*	*	Request URI	Teams IP Group	--	--
2	Teams to FreePBX	defaultSBCRoutingPol	Route Row	Teams IP Group	All	*	*	IP Group	Teams IP Group	--	--
3	FreePBX to teams	defaultSBCRoutingPol	Route Row	FreePBX IP Group	All	*	*	IP Group	Teams IP Group	--	--

#0[Terminate Options]

GENERAL

Name: Terminate Options
Alternative Route Options: Route Row

MATCH

Source IP Group: Any
Request Type: OPTIONS
Source Username Pattern: *
Source Host: *
Source Tag: *
Destination Username Pattern: *
Destination Host: *
Destination Tag: *
Message Condition: --
Call Trigger: Any
ReRoute IP Group: Any

ACTION

Destination Type: Dest Address
Destination IP Group: --
Destination SIP Interface: --
Destination Address: --
Destination Port: 0
Destination Transport Type: --
IP Group Set: --
Pre Route Call Setup Rules Set ID: -1
Call Setup Rules Set ID: -1
Group Policy: Sequential
Cost Group: --
Routing Tag Name: default
Internal Action: --
Modified Destination User Name: --

Teams refer:

The screenshot displays the Audiocodes Mediant SW interface for IP-to-IP Routing configuration. The left sidebar shows the navigation menu with 'IP-to-IP Routing (4)' selected under the 'ROUTING' section. The main content area shows the configuration for the 'Teams refer' route.

IP-to-IP Routing (4)

INDEX	NAME	ROUTING POLICY	ALTERNATIVE ROUTE OPTIONS	SOURCE IP GROUP	REQUEST TYPE	SOURCE USERNAME PATTERN	DESTINATION USERNAME PATTERN	DESTINATION TYPE	DESTINATION IP GROUP	DESTINATION SIP INTERFACE	DESTINATION ADDRESS
0	Terminate Options	defaultSBCRoutingPol	Route Row	Any	OPTIONS	*	*	Dest Address	--	--	Internal
1	Teams refer	defaultSBCRoutingPol	Route Row	Any	All	*	*	Request URI	Teams IP Group	--	--
2	Teams to FreePBX	defaultSBCRoutingPol	Route Row	Teams IP Group	All	*	*	IP Group	Teams IP Group	--	--
3	FreePBX to teams	defaultSBCRoutingPol	Route Row	FreePBX IP Group	All	*	*	IP Group	Teams IP Group	--	--

#1[Teams refer]

GENERAL

Name: Teams refer
Alternative Route Options: Route Row

MATCH

Source IP Group: Any
Request Type: All
Source Username Pattern: *
Source Host: *
Source Tag: *
Destination Username Pattern: *
Destination Host: *
Destination Tag: *
Message Condition: --
Call Trigger: REFER
ReRoute IP Group: Any

ACTION

Destination Type: Request URI
Destination IP Group: Teams IP Group
Destination SIP Interface: --
Destination Address: --
Destination Port: 0
Destination Transport Type: --
IP Group Set: --
Pre Route Call Setup Rules Set ID: -1
Call Setup Rules Set ID: -1
Group Policy: Sequential
Cost Group: --
Routing Tag Name: default
Internal Action: --
Modified Destination User Name: --

Teams to FreePBX:

The screenshot shows the Audiocodes FreePBX interface with the 'SIGNALING & MEDIA' tab selected. The left sidebar contains a 'TOPOLOGY VIEW' menu with categories like CORE ENTITIES, SIP INTERFACES, and CODERS & PROFILES. The main content area displays the 'IP-to-IP Routing (4)' configuration page. A table lists four routing entries, with the third entry, 'FreePBX to teams', selected. Below the table, the configuration details for this entry are shown in two columns: GENERAL and ACTION. The GENERAL section includes fields for Name, Alternative Route Options, Source IP Group, Request Type, Source Username Pattern, Source Host, Source Tag, Destination Username Pattern, Destination Host, Destination Tag, Message Condition, Call Trigger, and ReRoute IP Group. The ACTION section includes fields for Destination Type, Destination IP Group, Destination SIP Interface, Destination Address, Destination Port, Destination Transport Type, IP Group Set, Pre Route Call Setup Rules Set ID, Call Setup Rules Set ID, Group Policy, Cost Group, Routing Tag Name, Internal Action, and Modified Destination User Name.

INDEX	NAME	ROUTING POLICY	ALTERNATIVE ROUTE OPTIONS	SOURCE IP GROUP	REQUEST TYPE	SOURCE USERNAME PATTERN	DESTINATION USERNAME PATTERN	DESTINATION TYPE	DESTINATION IP GROUP	DESTINATION SIP INTERFACE	DESTINATION ADDRESS
0	Terminate Options	defaultSBCRoutingPol	Route Row	Any	OPTIONS	*	*	Dest Address	--	--	Internal
1	Teams refer	defaultSBCRoutingPol	Route Row	Any	All	*	*	Request URI	Teams IP Group	--	--
2	Teams to FreePBX	defaultSBCRoutingPol	Route Row	Teams IP Group	INVITE	*	*	IP Group	FreePBX IP Group	--	--
3	FreePBX to teams	defaultSBCRoutingPol	Route Row	FreePBX IP Group	INVITE	*	*	IP Group	Teams IP Group	--	--

#3[Teams to FreePBX]

GENERAL

Name: Teams to FreePBX

Alternative Route Options: Route Row

MATCH

Source IP Group: Teams IP Group

Request Type: INVITE

Source Username Pattern: *

Source Host: *

Source Tag: *

Destination Username Pattern: *

Destination Host: *

Destination Tag: *

Message Condition: --

Call Trigger: Any

ReRoute IP Group: Any

ACTION

Destination Type: IP Group

Destination IP Group: FreePBX IP Group

Destination SIP Interface: --

Destination Address: --

Destination Port: 0

Destination Transport Type: --

IP Group Set: --

Pre Route Call Setup Rules Set ID: -1

Call Setup Rules Set ID: -1

Group Policy: Sequential

Cost Group: --

Routing Tag Name: default

Internal Action: --

Modified Destination User Name: --

FreePBX to Teams:

The screenshot shows the Audiocodes FreePBX interface with the 'SIGNALING & MEDIA' tab selected. The left sidebar contains a 'TOPOLOGY VIEW' menu with categories like CORE ENTITIES, SIP INTERFACES, and CODERS & PROFILES. The main content area displays the 'IP-to-IP Routing (4)' configuration page. A table lists four routing entries, with the third entry, 'FreePBX to teams', selected. Below the table, the configuration details for this entry are shown in two columns: GENERAL and ACTION. The GENERAL section includes fields for Name, Alternative Route Options, Source IP Group, Request Type, Source Username Pattern, Source Host, Source Tag, Destination Username Pattern, Destination Host, Destination Tag, Message Condition, Call Trigger, and ReRoute IP Group. The ACTION section includes fields for Destination Type, Destination IP Group, Destination SIP Interface, Destination Address, Destination Port, Destination Transport Type, IP Group Set, Pre Route Call Setup Rules Set ID, Call Setup Rules Set ID, Group Policy, Cost Group, Routing Tag Name, Internal Action, and Modified Destination User Name.

INDEX	NAME	ROUTING POLICY	ALTERNATIVE ROUTE OPTIONS	SOURCE IP GROUP	REQUEST TYPE	SOURCE USERNAME PATTERN	DESTINATION USERNAME PATTERN	DESTINATION TYPE	DESTINATION IP GROUP	DESTINATION SIP INTERFACE	DESTINATION ADDRESS
0	Terminate Options	defaultSBCRoutingPol	Route Row	Any	OPTIONS	*	*	Dest Address	--	--	Internal
1	Teams refer	defaultSBCRoutingPol	Route Row	Any	All	*	*	Request URI	Teams IP Group	--	--
2	Teams to FreePBX	defaultSBCRoutingPol	Route Row	Teams IP Group	All	*	*	IP Group	Teams IP Group	--	--
3	FreePBX to teams	defaultSBCRoutingPol	Route Row	FreePBX IP Group	All	*	*	IP Group	Teams IP Group	--	--

#3[FreePBX to teams]

GENERAL

Name: FreePBX to teams

Alternative Route Options: Route Row

MATCH

Source IP Group: FreePBX IP Group

Request Type: All

Source Username Pattern: *

Source Host: *

Source Tag: *

Destination Username Pattern: *

Destination Host: *

Destination Tag: *

Message Condition: --

Call Trigger: Any

ReRoute IP Group: Any

ACTION

Destination Type: IP Group

Destination IP Group: Teams IP Group

Destination SIP Interface: --

Destination Address: --

Destination Port: 0

Destination Transport Type: --

IP Group Set: --

Pre Route Call Setup Rules Set ID: -1

Call Setup Rules Set ID: -1

Group Policy: Sequential

Cost Group: --

Routing Tag Name: default

Internal Action: --

Modified Destination User Name: --

6.14 Message manipulation:

Remove PAI:

Use 'Action Subject': Header.P-Asserted-Identity

The screenshot shows the Audiocodes SIP Manager interface. The left sidebar contains a navigation menu with categories like SIP DEFINITIONS, MESSAGE MANIPULATION, MEDIA, and INTRUSION DETECTION. The 'Message Manipulations (4)' option is selected. The main area displays a table of message manipulations with columns: INDEX, NAME, MANIPULATION SET ID, MESSAGE TYPE, CONDITION, ACTION SUBJECT, ACTION TYPE, ACTION VALUE, and ROW ROLE. Below the table, there is a detailed view for the selected manipulation, showing GENERAL, ACTION, and MATCH sections.

INDEX	NAME	MANIPULATION SET ID	MESSAGE TYPE	CONDITION	ACTION SUBJECT	ACTION TYPE	ACTION VALUE	ROW ROLE
0	Remove PAI	1			Header.P-Asserted-Identity	Remove		Use Current Condition
1	Change RURI host to FreePBX	4	Any Request		Header.Request-URI.URL.Host	Modify	Param.Message.Address.Dst.IP	Use Current Condition
2	Remove Privacy Header	4		Header.Privacy exists and Head	Header.Privacy	Remove		Use Current Condition
3	Remove HistoryInfo	4		Header.History-Info.1 exists	Header.History-Info.1	Remove		Use Current Condition

#0[Remove PAI]

GENERAL

- Name: Remove PAI
- Manipulation Set ID: 1
- Row Role: Use Current Condition

ACTION

- Action Subject: Header.P-Asserted-Identity
- Action Type: Remove
- Action Value:

MATCH

- Message Type:
- Condition:

Change RURI host to FreePBX:

Use 'Action Subject': Header.Request-URI.URL.Host

Use 'Action Value': Param.Message.Address.Dst.IP

The screenshot shows the Audiocodes SIP Manager interface. The left sidebar contains a navigation menu with categories like SIP DEFINITIONS, MESSAGE MANIPULATION, MEDIA, and INTRUSION DETECTION. The 'Message Manipulations (4)' option is selected. The main area displays a table of message manipulations with columns: INDEX, NAME, MANIPULATION SET ID, MESSAGE TYPE, CONDITION, ACTION SUBJECT, ACTION TYPE, ACTION VALUE, and ROW ROLE. Below the table, there is a detailed view for the selected manipulation, showing GENERAL, ACTION, and MATCH sections.

INDEX	NAME	MANIPULATION SET ID	MESSAGE TYPE	CONDITION	ACTION SUBJECT	ACTION TYPE	ACTION VALUE	ROW ROLE
0	Remove PAI	1			Header.P-Asserted-Identity	Remove		Use Current Condition
1	Change RURI host to FreePBX	4	Any Request		Header.Request-URI.URL.Host	Modify	Param.Message.Address.Dst.IP	Use Current Condition
2	Remove Privacy Header	4		Header.Privacy exists and Head	Header.Privacy	Remove		Use Current Condition
3	Remove HistoryInfo	4		Header.History-Info.1 exists	Header.History-Info.1	Remove		Use Current Condition

#1[Change RURI host to FreePBX]

GENERAL

- Name: Change RURI host to FreePBX
- Manipulation Set ID: 4
- Row Role: Use Current Condition

ACTION

- Action Subject: Header.Request-URI.URL.Host
- Action Type: Modify
- Action Value: Param.Message.Address.Dst.IP

MATCH

- Message Type: Any Request
- Condition:

Remove Privacy Header:

Use 'Action Subject': Header.Privacy

Use 'Condition': Header.Privacy exists and Header.from.URL !contains 'anonymous'

Message Manipulations (4)

INDEX	NAME	MANIPULATION SET ID	MESSAGE TYPE	CONDITION	ACTION SUBJECT	ACTION TYPE	ACTION VALUE	ROW ROLE
0	Remove PAI	1			Header:P-Asserted-Identity	Remove		Use Current Condition
1	Change RURI host to FreePBX	4		Any Request	Header:Request-URI.URL.Host	Modify	Param:Message.Address.Out.R	Use Current Condition
2	Remove Privacy Header	4		Header:Privacy exists and Hea	Header:Privacy	Remove		Use Current Condition
3	Remove HistoryInfo	4		Header:History-Info.1 exists	Header:History-Info.1	Remove		Use Current Condition

#2[Remove Privacy Header]

GENERAL

Name: Remove Privacy Header

Manipulation Set ID: 4

Row Role: Use Current Condition

ACTION

Action Subject: Header:Privacy

Action Type: Remove

Action Value:

MATCH

Message Type:

Condition: Header:Privacy exists and Header:From.URL contains 'anonymous'

Remove HistoryInfo:

Use 'Action Subject': Header.Privacy

Use 'Condition': Header.History-Info.1 exists

Message Manipulations (4)

INDEX	NAME	MANIPULATION SET ID	MESSAGE TYPE	CONDITION	ACTION SUBJECT	ACTION TYPE	ACTION VALUE	ROW ROLE
0	Remove PAI	1			Header:P-Asserted-Identity	Remove		Use Current Condition
1	Change RURI host to FreePBX	4		Any Request	Header:Request-URI.URL.Host	Modify	Param:Message.Address.Out.R	Use Current Condition
2	Remove Privacy Header	4		Header:Privacy exists and Hea	Header:Privacy	Remove		Use Current Condition
3	Remove HistoryInfo	4		Header:History-Info.1 exists	Header:History-Info.1	Remove		Use Current Condition

#3[Remove HistoryInfo]

GENERAL

Name: Remove HistoryInfo

Manipulation Set ID: 4

Row Role: Use Current Condition

ACTION

Action Subject: Header:History-Info.1

Action Type: Remove

Action Value:

MATCH

Message Type:

Condition: Header:History-Info.1 exists

6.15 Message Conditions:

Use Conditions: Header.Contact.URL.Host contains 'pstnhub.microsoft.com'

The screenshot shows the Audiocodes SIP Manager interface. The left sidebar contains a navigation menu with categories like SIP DEFINITIONS, MESSAGE MANIPULATION, and MEDIA. The main content area is titled 'Message Conditions (1)' and displays a table with one entry: 'Teams-contact' with the condition 'Header:Contact.URL.Host contains 'pstnhub.microsoft.com''. Below the table, there is a detailed view for the selected condition, showing its name and the specific condition logic.

INDEX	NAME	CONDITION
0	Teams-contact	Header:Contact.URL.Host contains 'pstnhub.microsoft.com'

#0[Teams-contact]

GENERAL

- Name: Teams-contact
- Condition: Header:Contact.URL.Host contains 'pstnhub.microsoft.com'

6.16 Media Security

The screenshot shows the Audiocodes SIP Manager interface with the 'Media Security' configuration page. The left sidebar shows the navigation menu. The main content area is titled 'Media Security' and contains two sections: 'GENERAL' and 'AUTHENTICATION & ENCRYPTION'. The 'GENERAL' section includes settings for 'Media Security' (Enable), 'Media Security Behavior' (Mandatory), 'Offered SRTP Cipher Suites' (All), and 'ARIA Protocol Support' (Disable). The 'AUTHENTICATION & ENCRYPTION' section includes settings for 'Authentication on Transmitted RTP Packets' (Active), 'Encryption on Transmitted RTP Packets' (Active), 'Encryption on Transmitted RTCP Packets' (Active), 'SRTP Tunneling Authentication for RTP' (Disable), and 'SRTP Tunneling Authentication for RTCP' (Disable). The 'MASTER KEY IDENTIFIER' section includes settings for 'Master Key Identifier (MKI) Size' (0) and 'Symmetric MKI' (Disable).

Media Security

GENERAL

- Media Security: Enable
- Media Security Behavior: Mandatory
- Offered SRTP Cipher Suites: All
- ARIA Protocol Support: Disable

MASTER KEY IDENTIFIER

- Master Key Identifier (MKI) Size: 0
- Symmetric MKI: Disable

AUTHENTICATION & ENCRYPTION

- Authentication on Transmitted RTP Packets: Active
- Encryption on Transmitted RTP Packets: Active
- Encryption on Transmitted RTCP Packets: Active
- SRTP Tunneling Authentication for RTP: Disable
- SRTP Tunneling Authentication for RTCP: Disable

6.17 Number Manipulation (Additional)

Inbound Manipulations:

The screenshot displays the Audiocodes Mediant SW interface for configuring Inbound Manipulations. The left sidebar shows the navigation menu with 'Inbound Manipulations (1)' selected under the 'Manipulation' section. The main panel shows a table of Inbound Manipulations with one entry: 'Teams to FreePBX'. Below the table, the configuration details for this manipulation are shown, including General, Match, and Action sections.

INDEX	NAME	ROUTING POLICY	ADDITIONAL MANIPULATION	MANIPULATION PURPOSE	SOURCE IP GROUP	SOURCE USERNAME PATTERN	DESTINATION USERNAME PATTERN	MANIPULATED ITEM	REMOVE FROM LEFT	REMOVE FROM RIGHT	LEAVE FROM RIGHT	PREFIX TO ADD	SUFFIX TO ADD
0	Teams to FreePBX	defaultSBCRouting	No	Normal	Teams IP Group	*	*	Destination	1	0	255		

#0[Teams to FreePBX]

GENERAL

- Name: Teams to FreePBX
- Additional Manipulation: No
- Manipulation Purpose: Normal

MATCH

- Request Type: All
- Source IP Group: Teams IP Group
- Source Username Pattern: *
- Source Host: *
- Destination Username Pattern: *
- Destination Host: *

ACTION

- Manipulated Item: Destination
- Remove From Left: 1
- Remove From Right: 0
- Leave From Right: 255
- Prefix to Add:
- Suffix to Add:

Outbound Manipulations:

The screenshot displays the Audiocodes Mediant SW interface for configuring Outbound Manipulations. The left sidebar shows the navigation menu with 'Outbound Manipulations (1)' selected under the 'Manipulation' section. The main panel shows a table of Outbound Manipulations with one entry: 'Teams to FreePBX'. Below the table, the configuration details for this manipulation are shown, including General, Match, and Action sections.

INDEX	NAME	ROUTING POLICY	ADDITIONAL MANIPULATION	SOURCE IP GROUP	DESTINATION IP GROUP	SOURCE USERNAME PATTERN	DESTINATION USERNAME PATTERN	MANIPULATED ITEM	REMOVE FROM LEFT	REMOVE FROM RIGHT	LEAVE FROM RIGHT	PREFIX TO ADD	SUFFIX TO ADD
0	Teams to FreePBX	defaultSBCRouting	No	Teams IP Group	FreePBX IP Group	*	*	Destination URI	2	0	255		

#0[Teams to FreePBX]

GENERAL

- Name: Teams to FreePBX
- Additional Manipulation: No
- Call Trigger: Any


MATCH

- Request Type: All
- Source IP Group: Teams IP Group
- Destination IP Group: FreePBX IP Group
- Source Username Pattern: *
- Source Host: *
- Source Tags:
- Destination Username Pattern: *
- Destination Host: *
- Destination Tags:
- Calling Name Pattern: *
- Message Condition: --
- ReRoute IP Group: Any

ACTION

- Manipulated Item: Destination URI
- Remove From Left: 2
- Remove From Right: 0
- Leave From Right: 255
- Prefix to Add:
- Suffix to Add:
- Privacy Restriction Mode: Transparent

Topology View

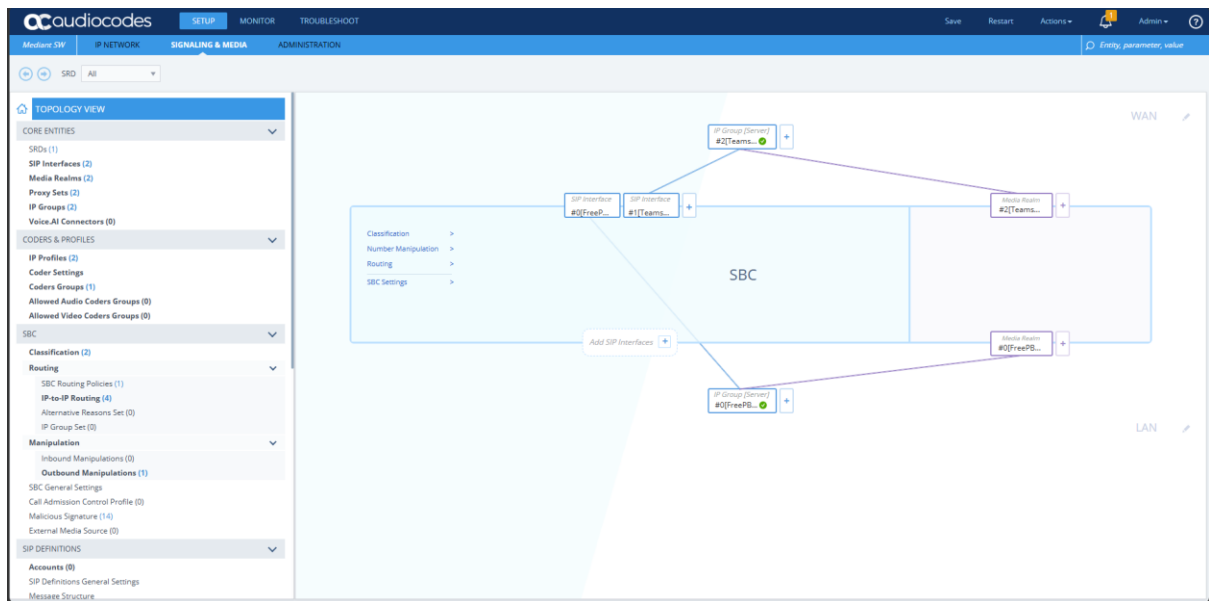

FreePBX Configuration:

Login to FreePBX Admin UI → **Admin** → **Module Admin**

Ensure these are installed and enabled:

- SIP Settings ✓
- Trunks ✓
- Inbound Routes ✓
- Outbound Routes ✓
- Extensions ✓

After making changes in each page, Submit and Apply config.

7.1 Asterisk SIP Settings:

Settings -> Asterisk SIP Settings

AdminApplicationsConnectivityDashboardReportsSettingsUCP

SIP Settings

SIP driver informations

General SIP SettingsSIP Settings (chan_pjsip)

Security Settings

Allow Anonymous Inbound SIP Calls

YesNo

Allow SIP Guests

YesNo

Default TLS Port Assignment

Chan SIPPJSIP

NAT Settings

External Address

13.50.110.130

Detect Network Settings

Local Networks

172.31.0.0 / 16

Add Local Network Field

RTP Settings

RTP Port Ranges

Start: 8000

End: 20000

RTP Checksums

YesNo

Strict RTP

YesNo

RTP Timeout

30

RTP Hold Timeout

300

RTP Keep Alive

0

Media Transport Settings

> SubmitReset

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Media Transport Settings

STUN Server Address

TURN Server Address

TURN Server Username

TURN Server Password

ICE Blacklist

What is ICE Blacklist?

IP Addresses

Add Address

ICE Host Candidates

What is ICE Host Candidates?

Candidates

Add Address

WebRTC Settings

STUN Server Address

TURN Server Address

TURN Server Username

TURN Server Password

Audio Codecs

T38 Pass-Through

No

> SubmitReset

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Audio Codecs

T38 Pass-Through

No

Codecs

Helpful Information

☒ alaw

☒ ulaw

☒ gsm

☒ g726

☒ g722

☐ g723

☒ speex

☐ speex16

☐ speex32

☒ slin32

☐ adpcm

☒ slin8

☐ slin12

☐ slin16

☐ slin24

☐ ...

SubmitReset

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Video Codecs

Video Support

EnabledDisabled

☐ alin16

☐ alin24

☐ alin32

☐ alin44

☐ alin48

☐ alin96

☐ alin192

☐ h264

☐ none

☐ h265

☐ h266

☐ h267

☐ h268

☐ h269

☐ h270

☐ h271

☐ h272

☐ h273

☐ h274

☐ h275

☐ h276

☐ h277

☐ h278

☐ h279

☐ h280

☐ h281

☐ h282

☐ h283

☐ h284

☐ h285

☐ h286

☐ h287

☐ h288

☐ h289

☐ h290

☐ h291

☐ h292

☐ h293

☐ h294

☐ h295

☐ h296

☐ h297

☐ h298

☐ h299

☐ h300

☐ h301

☐ h302

☐ h303

☐ h304

☐ h305

☐ h306

☐ h307

☐ h308

☐ h309

☐ h310

☐ h311

☐ h312

☐ h313

☐ h314

☐ h315

☐ h316

☐ h317

☐ h318

☐ h319

☐ h320

☐ h321

☐ h322

☐ h323

☐ h324

☐ h325

☐ h326

☐ h327

☐ h328

☐ h329

☐ h330

☐ h331

☐ h332

☐ h333

☐ h334

☐ h335

☐ h336

☐ h337

☐ h338

☐ h339

☐ h340

☐ h341

☐ h342

☐ h343

☐ h344

☐ h345

☐ h346

☐ h347

☐ h348

☐ h349

☐ h350

☐ h351

☐ h352

☐ h353

☐ h354

☐ h355

☐ h356

☐ h357

☐ h358

☐ h359

☐ h360

☐ h361

☐ h362

☐ h363

☐ h364

☐ h365

☐ h366

☐ h367

☐ h368

☐ h369

☐ h370

☐ h371

☐ h372

☐ h373

☐ h374

☐ h375

☐ h376

☐ h377

☐ h378

☐ h379

☐ h380

☐ h381

☐ h382

☐ h383

☐ h384

☐ h385

☐ h386

☐ h387

☐ h388

☐ h389

☐ h390

☐ h391

☐ h392

☐ h393

☐ h394

☐ h395

☐ h396

☐ h397

☐ h398

☐ h399

☐ h400

☐ h401

☐ h402

☐ h403

☐ h404

☐ h405

☐ h406

☐ h407

☐ h408

☐ h409

☐ h410

☐ h411

☐ h412

☐ h413

☐ h414

☐ h415

☐ h416

☐ h417

☐ h418

☐ h419

☐ h420

☐ h421

☐ h422

☐ h423

☐ h424

☐ h425

☐ h426

☐ h427

☐ h428

☐ h429

☐ h430

☐ h431

☐ h432

☐ h433

☐ h434

☐ h435

☐ h436

☐ h437

☐ h438

☐ h439

☐ h440

☐ h441

☐ h442

☐ h443

☐ h444

☐ h445

☐ h446

☐ h447

☐ h448

☐ h449

☐ h450

☐ h451

☐ h452

☐ h453

☐ h454

☐ h455

☐ h456

☐ h457

☐ h458

☐ h459

☐ h460

☐ h461

☐ h462

☐ h463

☐ h464

☐ h465

☐ h466

☐ h467

☐ h468

☐ h469

☐ h470

☐ h471

☐ h472

☐ h473

☐ h474

☐ h475

☐ h476

☐ h477

☐ h478

☐ h479

☐ h480

☐ h481

☐ h482

☐ h483

☐ h484

☐ h485

☐ h486

☐ h487

☐ h488

☐ h489

☐ h490

☐ h491

☐ h492

☐ h493

☐ h494

☐ h495

☐ h496

☐ h497

☐ h498

☐ h499

☐ h500

☐ h501

☐ h502

☐ h503

☐ h504

☐ h505

☐ h506

☐ h507

☐ h508

☐ h509

☐ h510

☐ h511

☐ h512

☐ h513

☐ h514

☐ h515

☐ h516

☐ h517

☐ h518

☐ h519

☐ h520

☐ h521

☐ h522

☐ h523

☐ h524

☐ h525

☐ h526

☐ h527

☐ h528

☐ h529

☐ h530

☐ h531

☐ h532

☐ h533

☐ h534

☐ h535

☐ h536

☐ h537

☐ h538

☐ h539

☐ h540

☐ h541

☐ h542

☐ h543

☐ h544

☐ h545

☐ h546

☐ h547

☐ h548

☐ h549

☐ h550

☐ h551

☐ h552

☐ h553

☐ h554

☐ h555

☐ h556

☐ h557

☐ h558

☐ h559

☐ h560

☐ h561

☐ h562

☐ h563

☐ h564

☐ h565

☐ h566

☐ h567

☐ h568

☐ h569

☐ h570

☐ h571

☐ h572

☐ h573

☐ h574

☐ h575

☐ h576

☐ h577

☐ h578

☐ h579

☐ h580

☐ h581

☐ h582

☐ h583

☐ h584

☐ h585

☐ h586

☐ h587

☐ h588

☐ h589

☐ h590

☐ h591

☐ h592

☐ h593

☐ h594

☐ h595

☐ h596

☐ h597

☐ h598

☐ h599

☐ h600

☐ h601

☐ h602

☐ h603

☐ h604

☐ h605

☐ h606

☐ h607

☐ h608

☐ h609

☐ h610

☐ h611

☐ h612

☐ h613

☐ h614

☐ h615

☐ h616

☐ h617

☐ h618

☐ h619

☐ h620

☐ h621

☐ h622

☐ h623

☐ h624

☐ h625

☐ h626

☐ h627

☐ h628

☐ h629

☐ h630

☐ h631

☐ h632

☐ h633

☐ h634

☐ h635

☐ h636

☐ h637

☐ h638

☐ h639

☐ h640

☐ h641

☐ h642

☐ h643

☐ h644

☐ h645

☐ h646

☐ h647

☐ h648

☐ h649

☐ h650

☐ h651

☐ h652

☐ h653

☐ h654

☐ h655

☐ h656

☐ h657

☐ h658

☐ h659

☐ h660

☐ h661

☐ h662

☐ h663

☐ h664

☐ h665

☐ h666

☐ h667

☐ h668

☐ h669

☐ h670

☐ h671

☐ h672

☐ h673

☐ h674

☐ h675

☐ h676

☐ h677

☐ h678

☐ h679

☐ h680

☐ h681

☐ h682

☐ h683

☐ h684

☐ h685

☐ h686

☐ h687

☐ h688

☐ h689

☐ h690

☐ h691

☐ h692

☐ h693

☐ h694

☐ h695

☐ h696

☐ h697

☐ h698

☐ h699

☐ h700

☐ h701

☐ h702

☐ h703

☐ h704

☐ h705

☐ h706

☐ h707

☐ h708

☐ h709

☐ h710

☐ h711

☐ h712

☐ h713

☐ h714

☐ h715

☐ h716

☐ h717

☐ h718

☐ h719

☐ h720

☐ h721

☐ h722

☐ h723

☐ h724

☐ h725

☐ h726

☐ h727

☐ h728

☐ h729

☐ h730

☐ h731

☐ h732

☐ h733

☐ h734

☐ h735

☐ h736

☐ h737

☐ h738

☐ h739

☐ h740

☐ h741

☐ h742

☐ h743

☐ h744

☐ h745

☐ h746

☐ h747

☐ h748

☐ h749

☐ h750

☐ h751

☐ h752

☐ h753

☐ h754

☐ h755

☐ h756

☐ h757

☐ h758

☐ h759

☐ h760

☐ h761

☐ h762

☐ h763

☐ h764

☐ h765

☐ h766

☐ h767

☐ h768

☐ h769

☐ h770

☐ h771

☐ h772

☐ h773

☐ h774

☐ h775

☐ h776

☐ h777

☐ h778

☐ h779

☐ h780

☐ h781

☐ h782

☐ h783

☐ h784

☐ h785

☐ h786

☐ h787

☐ h788

☐ h789

☐ h790

☐ h791

☐ h792

☐ h793

☐ h794

☐ h795

☐ h796

☐ h797

☐ h798

☐ h799

☐ h800

☐ h801

☐ h802

☐ h803

☐ h804

☐ h805

☐ h806

☐ h807

☐ h808

☐ h809

☐ h810

☐ h811

☐ h812

☐ h813

☐ h814

☐ h815

☐ h816

☐ h817

☐ h818

☐ h819

☐ h820

☐ h821

☐ h822

☐ h823

☐ h824

☐ h825

☐ h826

☐ h827

☐ h828

☐ h829

☐ h830

☐ h831

☐ h832

☐ h833

☐ h834

☐ h835

☐ h836

☐ h837

☐ h838

☐ h839

☐ h840

☐ h841

☐ h842

☐ h843

☐ h844

☐ h845

☐ h846

☐ h847

☐ h848

☐ h849

☐ h850

☐ h851

☐ h852

☐ h853

☐ h854

☐ h855

☐ h856

☐ h857

☐ h858

☐ h859

☐ h860

☐ h861

☐ h862

☐ h863

☐ h864

☐ h865

☐ h866

☐ h867

☐ h868

☐ h869

☐ h870

☐ h871

☐ h872

☐ h873

☐ h874

☐ h875

☐ h876

☐ h877

☐ h878

☐ h879

☐ h880

☐ h881

☐ h882

☐ h883

☐ h884

☐ h885

☐ h886

☐ h887

☐ h888

☐ h889

☐ h890

☐ h891

☐ h892

☐ h893

☐ h894

☐ h895

☐ h896

☐ h897

☐ h898

☐ h899

☐ h900

☐ h901

☐ h902

☐ h903

☐ h904

☐ h905

☐ h906

☐ h907

☐ h908

☐ h909

☐ h910

☐ h911

☐ h912

☐ h913

☐ h914

☐ h915

☐ h916

☐ h917

☐ h918

☐ h919

☐ h920

☐ h921

☐ h922

☐ h923

☐ h924

☐ h925

☐ h926

☐ h927

☐ h928

☐ h929

☐ h930

☐ h931

☐ h932

☐ h933

☐ h934

☐ h935

☐ h936

☐ h937

☐ h938

☐ h939

☐ h940

☐ h941

☐ h942

☐ h943

☐ h944

☐ h945

☐ h946

☐ h947

☐ h948

☐ h949

☐ h950

☐ h951

☐ h952

☐ h953

☐ h954

☐ h955

☐ h956

☐ h957

☐ h958

☐ h959

☐ h960

☐ h961

☐ h962

☐ h963

☐ h964

☐ h965

☐ h966

☐ h967

☐ h968

☐ h969

☐ h970

☐ h971

☐ h972

☐ h973

☐ h974

☐ h975

☐ h976

☐ h977

☐ h978

☐ h979

☐ h980

☐ h981

☐ h982

☐ h983

☐ h984

☐ h985

☐ h986

☐ h987

☐ h988

☐ h989

☐ h990

☐ h991

☐ h992

☐ h993

☐ h994

☐ h995

☐ h996

☐ h997

☐ h998

☐ h999

☐ h1000

☐ h1001

☐ h1002

☐ h1003

☐ h1004

☐ h1005

☐ h1006

☐ h1007

☐ h1008

☐ h1009

☐ h1010

☐ h1011

☐ h1012

☐ h1013

☐ h1014

☐ h1015

☐ h1016

☐ h1017

☐ h1018

☐ h1019

☐ h1020

☐ h1021

☐ h1022

☐ h1023

☐ h1024

☐ h1025

☐ h1026

☐ h1027

☐ h1028

☐ h1029

☐ h1030

☐ h1031

☐ h1032

☐ h1033

☐ h1034

☐ h1035

☐ h1036

☐ h1037

☐ h1038

☐ h1039

☐ h1040

☐ h1041

☐ h1042

☐ h1043

☐ h1044

☐ h1045

☐ h1046

☐ h1047

☐ h1048

☐ h1049

☐ h1050

☐ h1051

☐ h1052

☐ h1053

☐ h1054

☐ h1055

☐ h1056

☐ h1057

☐ h1058

☐ h1059

☐ h1060

☐ h1061

☐ h1062

☐ h1063

☐ h1064

☐ h1065

☐ h1066

☐ h1067

☐ h1068

☐ h1069

☐ h1070

☐ h1071

☐ h1072

☐ h1073

☐ h1074

☐ h1075

☐ h1076

☐ h1077

☐ h1078

☐ h1079

☐ h1080

☐ h1081

☐ h1082

☐ h1083

☐ h1084

☐ h1085

☐ h1086

☐ h1087

☐ h1088

☐ h1089

☐ h1090

☐ h1091

☐ h1092

☐ h1093

☐ h1094

☐ h1095

☐ h1096

☐ h1097

☐ h1098

☐ h1099

☐ h1100

☐ h1101

☐ h1102

☐ h1103

☐ h1104

☐ h1

Admin
Applications
Connectivity
Dashboard
Reports
Settings
UCP

udp

udp - 0.0.0.0 - All

YesNo

udp - 172.31.2.162 - ens5

YesNo

tcp

tcp - 0.0.0.0 - All

YesNo

tcp - 172.31.2.162 - ens5

YesNo

tls

tls - 0.0.0.0 - All

YesNo

tls - 172.31.2.162 - ens5

YesNo

ws

ws - 0.0.0.0 - All

YesNo

ws - 172.31.2.162 - ens5

YesNo

wss

wss - 0.0.0.0 - All

YesNo

wss - 172.31.2.162 - ens5

YesNo

0.0.0.0 (udp)

Port to Listen On

5060

Domain the transport comes from

mylab-sbc.ddns.net

External IP Address

External Signaling Port

Local network

172.31.0.0/16

Submit

Reset

7.2 Add Trunk:

Go to Connectivity → Trunks → Add Trunk → Add SIP (chan_pjsip) Trunk

Admin
Applications
Connectivity
Dashboard
Reports
Settings
UCP

Edit Trunk

In use by 1 route

General

Dialed Number Manipulation Rules

pjsip Settings

Trunk Name

AudioCodes-SBC

Hide CallerID

YesNo

Outbound CallerID

CID Options

Allow Any CID

Block Foreign CIDs

Remove CNAM

Force Trunk CID

Maximum Channels

Asterisk Trunk Dial Options

T

OverrideSystem

Continue if Busy

YesNo

Disable Trunk

YesNo

Monitor Trunk Failures

YesNo

Submit

Duplicate

Reset

Delete

freePBX

FreePBX is a registered trademark of Sangoma Technologies Inc.
FreePBX 15.0.40 is licensed under the GPL.
Copyright© 2007-2016

Sangoma

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Q⚙

Edit Trunk

In use by 1 route

GeneralDial Number Manipulation RulespjSIP Settings

Dial Number Manipulation Rules

These rules can manipulate the dialed number before sending it out this trunk. If no rule applies, the number is not changed. The original dialed number is passed down from the route where some manipulation may have already occurred. This trunk has the option to further manipulate the number. If the number matches the combined values in the **prefix** plus the **match pattern** boxes, the rule will be applied and all subsequent rules ignored. Upon a match, the **prefix**, if defined, will be stripped. Next the **prepend** will be inserted in front of the **match pattern** and the resulting number will be sent to the trunk. All fields are optional.

Rules:
X matches any digit from 0-9
Z matches any digit from 1-9
N matches any digit from 2-9
[1237-9] matches any digit or letter in the brackets (in this example, 1,2,3,7,8,9)
- wildcard, matches one or more characters (not allowed before a | or +)

Dial patterns wizard

prepend

prefix

match pattern

+⊞

Outbound Dial Prefix

SubmitDuplicateResetDelete

freePBX

FreePBX is a registered trademark of Sangoma Technologies Inc.
FreePBX 16.0.0 is licensed under the GPL.
Copyright© 2007-2026

Sangoma

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Q⚙

Edit Trunk

In use by 1 route

GeneralDial Number Manipulation RulespjSIP Settings

PjSIP Settings

GeneralAdvancedCodecs

Username

Auth username

Secret

Authentication

Registration

Language Code

SIP Server

SIP Server Port

Context

Transport

Authentication Disabled

Authentication Disabled

Authentication Disabled

OutboundInboundBothNone

SendReceiveNone

Default

172.31.9.171

5066

from-trunk

0.0.0.0-udp

SubmitDuplicateResetDelete

freePBX

FreePBX is a registered trademark of Sangoma Technologies Inc.
FreePBX 16.0.0 is licensed under the GPL.
Copyright© 2007-2026

Sangoma

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Q⚙

Edit Trunk

In use by 1 route

GeneralDial Number Manipulation RulespjSIP Settings

PjSIP Settings

GeneralAdvancedCodecs

DTMF Mode

Send Line in Registration

Send Connected Line

Permanent Auth Rejection

Forbidden Retry Interval

Fatal Retry Interval

General Retry Interval

Expiration

Max Retries

Qualify Frequency

Outbound Proxy

User = Phone

Contact User

From Domain

From User

Auto

YesNo

YesNo

YesNo

30Seconds

30Seconds

60Seconds

3600Seconds

10000

60Seconds

YesNo

172.31.9.171

SubmitDuplicateResetDelete

freePBX

FreePBX is a registered trademark of Sangoma Technologies Inc.
FreePBX 16.0.0 is licensed under the GPL.
Copyright© 2007-2026

Sangoma

AdminApplicationsConnectivityDashboardReportsSettingsUCP

From User

Client URI

Server URI

Media Address

AOR

AOR Contact

Match (Permit)

Support Path

Support T.38 UDPTL

T.38 UDPTL Error Correction

T.38 UDPTL NAT

T.38 UDPTL MAXDATAGRAM

Fax Detect

Trust RPID/PAI

Send RPID/PAI

Send Private CallerID Information

Match Inbound Authentication

Inband Progress

Direct Media

Rewrite Contact

YesNo

YesNo

NoneForwardRedundancy

YesNo

YesNo

YesNo

NoSend Remote-Party-ID headerSend P-Asserted-identity headerBoth

YesNo

Default

YesNo

YesNo

YesNo

>

Submit

Duplicate

Reset

Delete

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Match (Permit)

Support Path

Support T.38 UDPTL

T.38 UDPTL Error Correction

T.38 UDPTL NAT

T.38 UDPTL MAXDATAGRAM

Fax Detect

Trust RPID/PAI

Send RPID/PAI

Send Private CallerID Information

Match Inbound Authentication

Inband Progress

Direct Media

Rewrite Contact

RTP Symmetric

Media Encryption

Force rport

Message Context

NoneForwardRedundancy

YesNo

YesNo

YesNo

NoSend Remote-Party-ID headerSend P-Asserted-identity headerBoth

YesNo

Default

YesNo

YesNo

YesNo

YesNo

None

YesNo

>

Submit

Duplicate

Reset

Delete

freePBX

FreePBX is a registered trademark of Sangoma Technologies Inc. FreePBX 16.0.45 is licensed under the GPL. Copyright© 2007-2026

Sangoma

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Trunks

This page is used to manage various system trunks

+ Add Trunk

Search

Name	Tech	CallerID	Status	Actions
AudioCodes-SBC	pjsip		Enabled	

Showing 1 to 1 of 1 rows

freePBX

FreePBX is a registered trademark of Sangoma Technologies Inc. FreePBX 16.0.45 is licensed under the GPL. Copyright© 2007-2026

Sangoma

7.3 Create Extensions for Testing

Go to Applications → Extensions → Add Extension → Add New SIP [chan_pjsip] Extension:

Extension 101:

Field	Value
-------	-------

User Extension 101

Display Name Test User 1

Secret password123

Extension 102:

Field	Value
-------	-------

User Extension 102

Display Name Test User 2

Secret password456

The screenshot shows the Asterisk SIP Extension configuration interface for Extension 101. The interface is divided into several sections: General, Voicemail, Find Me/Follow Me, Advanced, Pin Sets, and Other. The General section is active and contains the following fields: Display Name (Test User 1), Outbound CID (empty), Emergency CID (empty), and Secret (password123). The Language section shows Language Code set to Default. The User Manager Settings section shows Linked to User 101, Select User Directory (PBX Internal Directory), Link to a Different Default User (101 (Linked)), Username (empty), Password For New User (2b7d44a349980a73c3889c7b72af37), and Groups (All Users). The interface also includes a Submit button, a Reset button, and a Delete button.

Field	Value
Display Name	Test User 1
Outbound CID	
Emergency CID	
Secret	password123
Language Code	Default
Select User Directory	PBX Internal Directory
Link to a Different Default User	101 (Linked)
Username	
Password For New User	2b7d44a349980a73c3889c7b72af37
Groups	All Users

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Extension: 101

GeneralVoicemailFind Me/Follow MeAdvancedPin SetsOther

Assigned DID/CID

DID Description

Add Inbound DID

Add Inbound CID

+15550101 (From-SBC)

Edit Extension

Change To CHAN_SIP Driver

DTMF Signaling

Default User

Trust RPID

Send Connected Line

user = Phone

Send RPID

Qualify Frequency

Transport

Enable AVPF

Enable ICE Support

Enable rtcp Mux

Call Groups

Changing SIP Driver unavailable

RFC 4733

NoYes

NoYes

NoYes

Send P-Asserted-identity header

60

0.0.0.0-udp

NoYes

NoYes

NoYes

SubmitResetDelete

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Pickup Groups

Disallowed Codecs

Allowed Codecs

Dial

Mailbox

Voicemail Extension

Account Code

Max Contacts

Remove Existing

Media Use Received Transport

RTP Symmetric

Rewrite Contact

Force rport

MWI Subscription Type

Aggregate MWI

Enable WebRTC defaults

Max audio streams

Max video streams

Media Encryption

Session Timers

pjsip101

1

YesNo

YesNo

YesNo

YesNo

YesNo

AutoUnsolicitedSolicited

NoYes

NoYes

1

1

None

Yes

SubmitResetDelete

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Session Timers

Timer Expiration Period

Direct Media

Media Address

Allow Non-Encrypted Media (Opportunistic SRTP)

Refer Blind Progress

Device State Busy at

Match (Permit)

Maximum Expiration

Minimum Expiration

RTP Timeout

RTP Hold Timeout

Outbound Proxy

Outbound Auth

Messages Context

Custom Context

CID Num Alias

SIP Alias

Yes

90

NoYes

NoYes

NoYes

0

7200

60

0

0

NoYes

ALLOW ALL (Default)

Extension Options

Asterisk Dial Options

SubmitResetDelete

Admin Applications Connectivity Dashboard Reports Settings UCP

Extension Options

Asterisk Dial Options ☐ Override

Ring Time

Ring Volume Override

Call Forward Ring Time

Outbound Concurrency Limit

Call Waiting

Call Waiting Tone

Call Screening

Internal Auto Answer

Intercom Mode

Queue State Detection

Recording Options

Inbound External Calls

Outbound External Calls

Inbound Internal Calls

Outbound Internal Calls

On Demand Recording

Record Priority Policy

Dictation Services

> Submit Reset Delete

Admin Applications Connectivity Dashboard Reports Settings UCP

Dictation Services

Dictation Service

Dictation Format

Email Address

From Address

Default Group Inclusion

Default Directory

DTLS

Enable DTLS

Auto Generate Certificate

Use Certificate

DTLS Verify

DTLS Setup

DTLS Rekey Interval

Optional Destinations

No Answer

CID Prefix

Busy

CID Prefix

Not Reachable

> Submit Reset Delete

Same with Exten: 102

Admin Applications Connectivity Dashboard Reports Settings UCP

Extension: 102

General Voicemail Find Me/Follow Me Advanced Pin Sets Other

Edit Extension

This device uses **PJSIP** technology listening on Port 5066 (UDP)

Display Name

Outbound CID

Emergency CID

Secret

Language

Language Code

User Manager Settings

Linked to User 102

Select User Directory:

Link to a Different Default User:

Username ☐ Use Custom Username

Password For New User

Groups

> Submit Reset Delete

freePBX FreePBX is a registered trademark of Sangoma Technologies Inc. Sangoma

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Security Warning

Details

(What Does this Mean?)

Inbound Routes

+ Add Inbound Route

Search

DID	CID	Description	Destination	Actions
Any	Any	From-SBC	Trunks: AudioCodes-SBC (pjsip)	

Showing 1 to 1 of 1 rows

freePBX

FreePBX is a registered trademark of Sangoma Technologies Inc. FreePBX 16.0.42 is licensed under the GPL. Copyright© 2007-2026

Sangoma

7.5 Create Outbound Route (FreePBX → SBC)

Go to Connectivity → Outbound Routes → Add Outbound Route:

AdminApplicationsConnectivityDashboardReportsSettingsUCP

Outbound Routes

Edit Route: To-Teams-via-SBC; To-Teams-via-SBC

Route Settings

Dial Patterns

Import/Export Patterns

Notifications

Additional Settings

Route Name

To-Teams-via-SBC

Route CID

Override Extension

Yes

No

Route Password

Route Type

Emergency

Intra-Company

Music On Hold?

default

Time Match Time Zone:

Use System Timezone

Time Match Time Group

—Permanent Route—

Trunk Sequence for Matched Routes

+ AudioCodes-SBC

+

Optional Destination on Congestion

Normal Congestion

>

Submit

Duplicate

Reset

Delete

freePBX

FreePBX is a registered trademark of Sangoma Technologies Inc. FreePBX 16.0.42 is licensed under the GPL. Copyright© 2007-2026

Sangoma

Admin Applications Connectivity Dashboard Reports Settings UCP

Outbound Routes

Edit Route: To-Teams-via-SBC: To-Teams-via-SBC

Route Settings **Dial Patterns** Import/Export Patterns Notifications Additional Settings

Dial Patterns that will use this Route

Pattern Help +

Dial patterns wizards

prepend	prefix	+N00000000000000000000	/	CallerID	+ @
prepend	prefix	+X	/	CallerID	+ @
prepend	prefix	1N00000000000000000000	/	CallerID	+ @
prepend	prefix	N00000000000000000000	/	CallerID	+ @
prepend	prefix	match pattern	/	CallerID	+ @

> Submit Duplicate Reset Delete

freePBX Sangoma

FreePBX is a registered trademark of Sangoma Technologies Inc.
FreePBX 16.0.0 is licensed under the GPL.
Copyright 2007-2024

Admin Applications Connectivity Dashboard Reports Settings UCP

Asterisk Info

This page supplies various information about Asterisk

Current Asterisk Version: 18.26.4

Channels

▼ Status Clean Filter Search

Status	Tech	Resource	Channel Count
📞	PJSIP	1001	0
📞	PJSIP	1002	0
📞	PJSIP	AudioCodes-SBC	0
📞	PJSIP	102	0
📞	PJSIP	101	0

Showing 1 to 5 of 5 rows

Conferences

Conference Bridge Info

Conference	Bridge Name	Users	Marked	Locked	Muted

FreePBX Firewall (Critical for AWS)

Use Basic firewall and if it is not there in FreePBX Module admin page using below comments

```
sudo apt install ufw -y
```

```
sudo ufw default deny incoming
```

```
sudo ufw default allow outgoing
```

then,

```
ubuntu@ip-172-31-4-212:~$ sudo ufw allow from 172.31.9.171 to any port 5060 proto udp
```

Rule added

ubuntu@ip-172-31-4-212:~\$ sudo ufw allow 22/tcp

Rule added

ubuntu@ip-172-31-4-212:~\$ sudo ufw allow 80/tcp

Rule added

ubuntu@ip-172-31-4-212:~\$ sudo ufw allow 443/tcp

Rule added

ubuntu@ip-172-31-4-212:~\$ sudo ufw allow from 172.31.9.171 to any port 5067 proto udp

Rule added

ubuntu@ip-172-31-4-212:~\$ sudo ufw allow from 172.31.9.171 to any port 5066 proto udp

Rule added

ubuntu@ip-172-31-4-212:~\$ sudo ufw allow from 172.31.9.171 to any port 10000:20000 proto udp

Rule added

ubuntu@ip-172-31-4-212:~\$ sudo ufw reload

Firewall reloaded

ubuntu@ip-172-31-4-212:~\$ sudo ufw status

Status: active

To	Action	From
--	-----	----
22/tcp	ALLOW	Anywhere
80/tcp	ALLOW	Anywhere
10000:20000/udp	ALLOW	Anywhere
5060/udp	ALLOW	16.16.71.168
5060/udp	ALLOW	172.31.9.171
5067/udp	ALLOW	172.31.9.171
10000:20000/udp	ALLOW	172.31.9.171
5066/udp	ALLOW	Anywhere
Anywhere	ALLOW	172.31.9.171
22/tcp (v6)	ALLOW	Anywhere (v6)
80/tcp (v6)	ALLOW	Anywhere (v6)
10000:20000/udp (v6)	ALLOW	Anywhere (v6)
5066/udp (v6)	ALLOW	Anywhere (v6)

ubuntu@ip-172-31-4-212:~\$ sudo ufw reload

Firewall reloaded

ubuntu@ip-172-31-4-212:~\$ sudo nano /etc/asterisk/pjsip_endpoint_custom_post.conf

Add:

[AudioCodes-SBC](+)

allow_unauthenticated_options=yes

Save it.

ubuntu@ip-172-31-4-212:~\$ sudo asterisk -rx "pjsip reload"

ubuntu@ip-172-31-4-212:~\$ sudo asterisk -rx "pjsip show contacts"

Contact: <Aor/ContactUri.....> <Hash....> <Status> <RTT(ms)..>

=====

Contact: AudioCodes-SBC/sip:172.31.9.171:5066 66d55e4749 Avail 24.185

Objects found: 1

ccaudiocodes SETUPMONITORTROUBLESHOOT SaveRestartActions+ Admin+										
Module SWMONITOREmpty parameter, value										
SRDAll										
MONITOR										
SUMMARY										
Device Information										
Active Alarms										
Alarms History										
Activity Log										
PERFORMANCE MONITORING										
VOIP STATUS										
SBC Registered Users										
Proxy Sets Status										
Registration Status										
SBC CDR History										
NETWORK STATUS										
IP Interface Status										
Ethernet Device Status										
Ethernet Port Information										
Static Routes Status										
IDS Active Blocked List										
Proxy Sets Status										
This page refreshes every 60 seconds										
PROXY SET ID	NAME	MODE	KEEP ALIVE	ADDRESS	PRIORITY	WEIGHT	SUCCESS COUNT	FAILURE COUNT	STATUS	
0	FreePBX proxyset	Parking	Enabled	172.31.4.212(*)	-	-	85	0	ONLINE	
2	Teams Proxy Set	Load Balancing	Enabled	sip.pstnhub.microsoft.com(52.114.75.240:5061)*	1	1.00	88	0	ONLINE	
				sip2.pstnhub.microsoft.com(52.114.132.48:5061)	2	1.00	88	0	ONLINE	
				sip3.pstnhub.microsoft.com(52.114.32.169:5061)	3	1.00	87	0	ONLINE	

16.16.71.168 - d19100:14:815 - SIP Flow Diagram

Device
16.16.71.168

Teams sip Interface
52.114.32.169

22:07:52

OPTIONS

200 OK

#	SID	Type	Time	From	To
1	d19100:14:815	OPTIONS	22:07:52	172.31.9.171	mylab-sbc.ddns.net
2	d19100:14:816	OPTIONS	22:07:54	sip-du-a-...	172.31.9.171
3	d19100:14:817	OPTIONS	22:08:03	172.31.9.171	mylab-sbc.ddns.net
4	d19100:14:818	OPTIONS	22:08:08	AudioCodes-...	172.31.9.171

<< Find >> Export Refresh Show: All Calls: 0 Other: 4

[22:07:52.675] ---- Outgoing SIP Message to 52.114.32.169:5061 from SIPInterface #:
OPTIONS sips:52.114.32.169 SIP/2.0
Via: SIP/2.0/TLS mylab-sbc.ddns.net:5061;alias;branch=z9hG4bKac732080033
Max-Forwards: 20
From: <sips:172.31.9.171>;tag=1c1178683467
To: <sips:mylab-sbc.ddns.net>
Call-ID: 1068944790154202622752@mylab-sbc.ddns.net
CSeq: 1 OPTIONS
Contact: <sips:mylab-sbc.ddns.net:5061;transport=tls>
Allow: REGISTER,OPTIONS,INVITE,ACK,CANCEL,BYE,NOTIFY,PRACK,REFER,INFO,SUBSCRIBE,UPDATE
User-Agent: Mediant SW/v.7.40A.502.574
Accept: application/sdp, application/simple-message-summary, message/sipfrag
X-MS-SBC: Audiocodes/Virtual Edition SBC/7.40A.502
Content-Length: 0

16.16.71.168 - d19100:14:816 - SIP Flow Diagram

Teams sip Interface
52.114.32.169

Device
16.16.71.168

22:07:54

OPTIONS

200 OK

#	SID	Type	Time	From	To
1	d19100:14:815	OPTIONS	22:07:52	172.31.9.171	mylab-sbc.ddns.net
2	d19100:14:816	OPTIONS	22:07:54	sip-du-a-...	172.31.9.171
3	d19100:14:817	OPTIONS	22:08:03	172.31.9.171	mylab-sbc.ddns.net
4	d19100:14:818	OPTIONS	22:08:08	AudioCodes-...	172.31.9.171

<< Find >> Export Refresh Show: All Calls: 0 Other: 4

[22:07:54.107] ---- Incoming SIP Message from 52.114.32.169:33005 to SIPInterface #:
OPTIONS sips:mylab-sbc.ddns.net:5061;transport=Tls SIP/2.0
From: <sip:sip-du-a-as.pstnhub.microsoft.com:5061>;tag=d3c21959-bc4f-4b4e-9139-0250
To: <sips:172.31.9.171>
Via: SIP/2.0/TLS 52.114.32.169:5061;branch=z9hG4bK3e4219cd
CSeq: 1 OPTIONS
Call-ID: f9802a44-abfe-4c5c-9d41-b247bea57433
Max-Forwards: 70
Allow: INVITE,ACK,OPTIONS,CANCEL,BYE,NOTIFY
Contact: <sip:sip-du-a-as.pstnhub.microsoft.com:5061>
Content-Length: 0
User-Agent: Microsoft.PSTNHub.SIPProxy v.2026.3.23.4 i.JAEA.2

