




US 20220125353A1

(19) **United States**(12) **Patent Application Publication**  
**Labrecque**(10) **Pub. No.: US 2022/0125353 A1**(43) **Pub. Date: Apr. 28, 2022**(54) **PULSE OXIMETER SENSOR****Publication Classification**(71) Applicant: **Michael Edward Labrecque**, Las Cruces, NM (US)(51) **Int. Cl.**  
**A61B 5/145** (2006.01)  
**A61B 5/00** (2006.01)(72) Inventor: **Michael Edward Labrecque**, Las Cruces, NM (US)(52) **U.S. Cl.**  
CPC ..... **A61B 5/14542** (2013.01); **A61B 5/6816** (2013.01); **A61B 2560/0214** (2013.01); **A61B 5/6898** (2013.01); **A61B 5/6838** (2013.01); **A61B 5/0004** (2013.01)(21) Appl. No.: **17/300,037**(22) Filed: **Feb. 19, 2021****Related U.S. Application Data**

(60) Provisional application No. 63/204,819, filed on Oct. 27, 2020.

(57) **ABSTRACT**

A pulse oximeter sensor with earhook assembly for placement along the outside of a person's ear supported by the ear flap and ear lobe into which is placed a sensors for receiving and transmitting human body's analytics such as pulse or blood oxygen saturation.

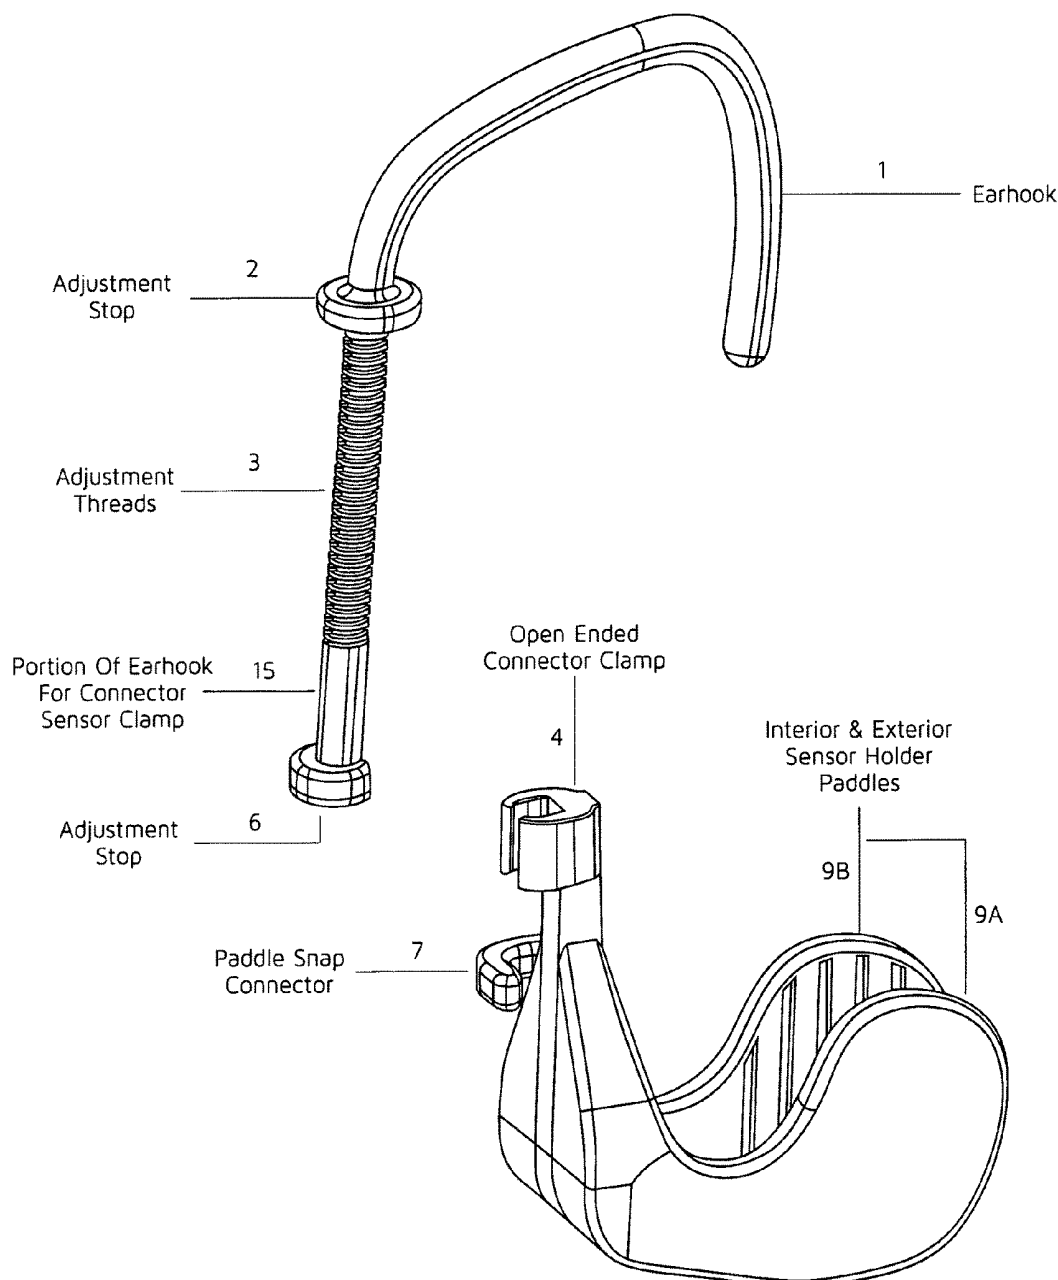



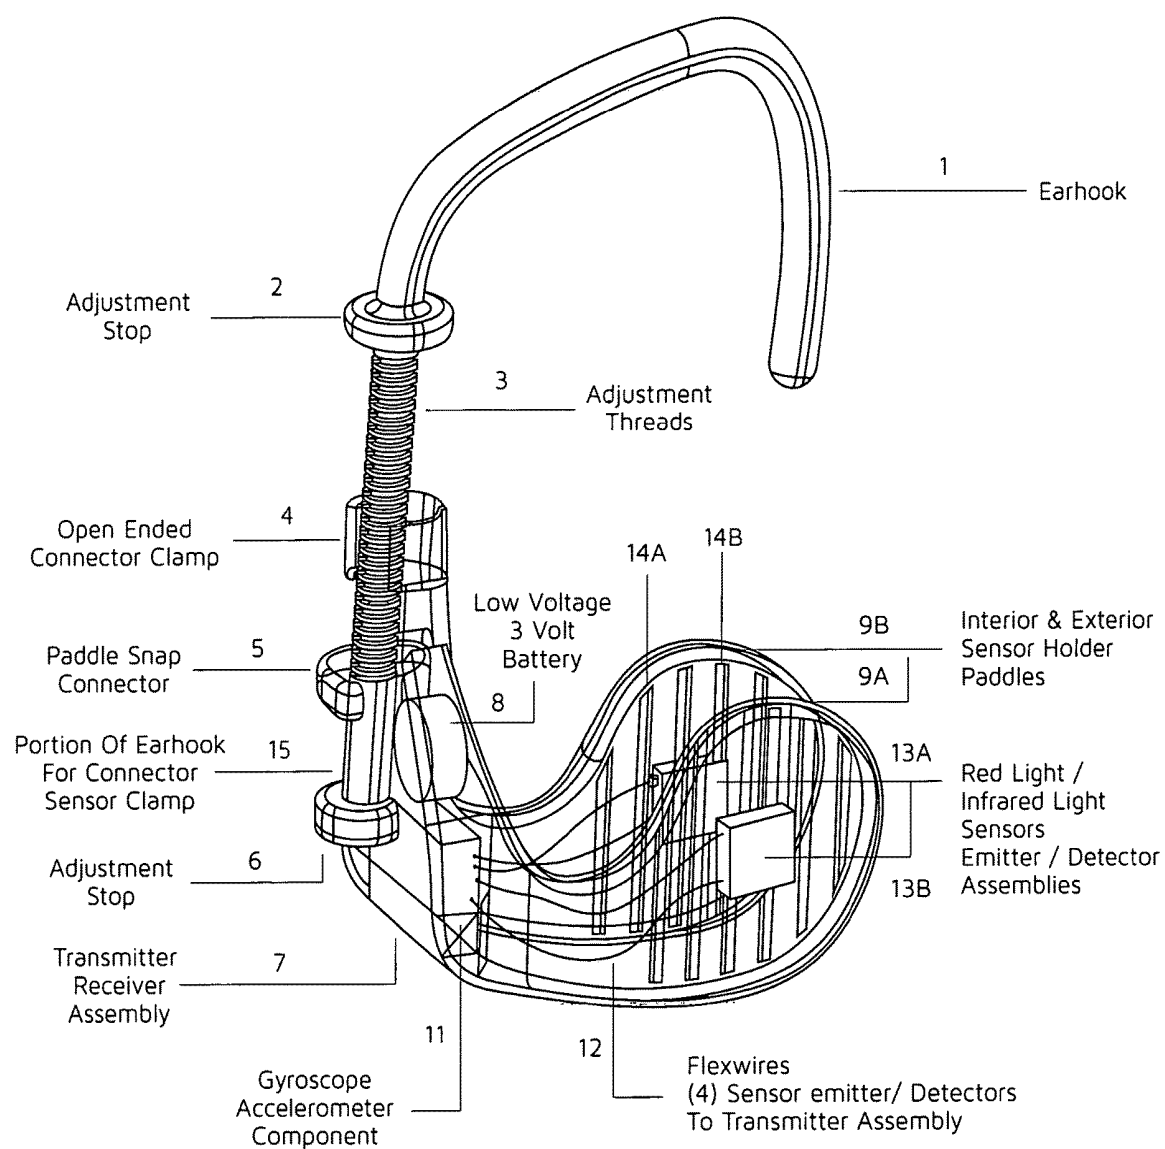


FIG. 1



**FIG. 2**

Fig. 3

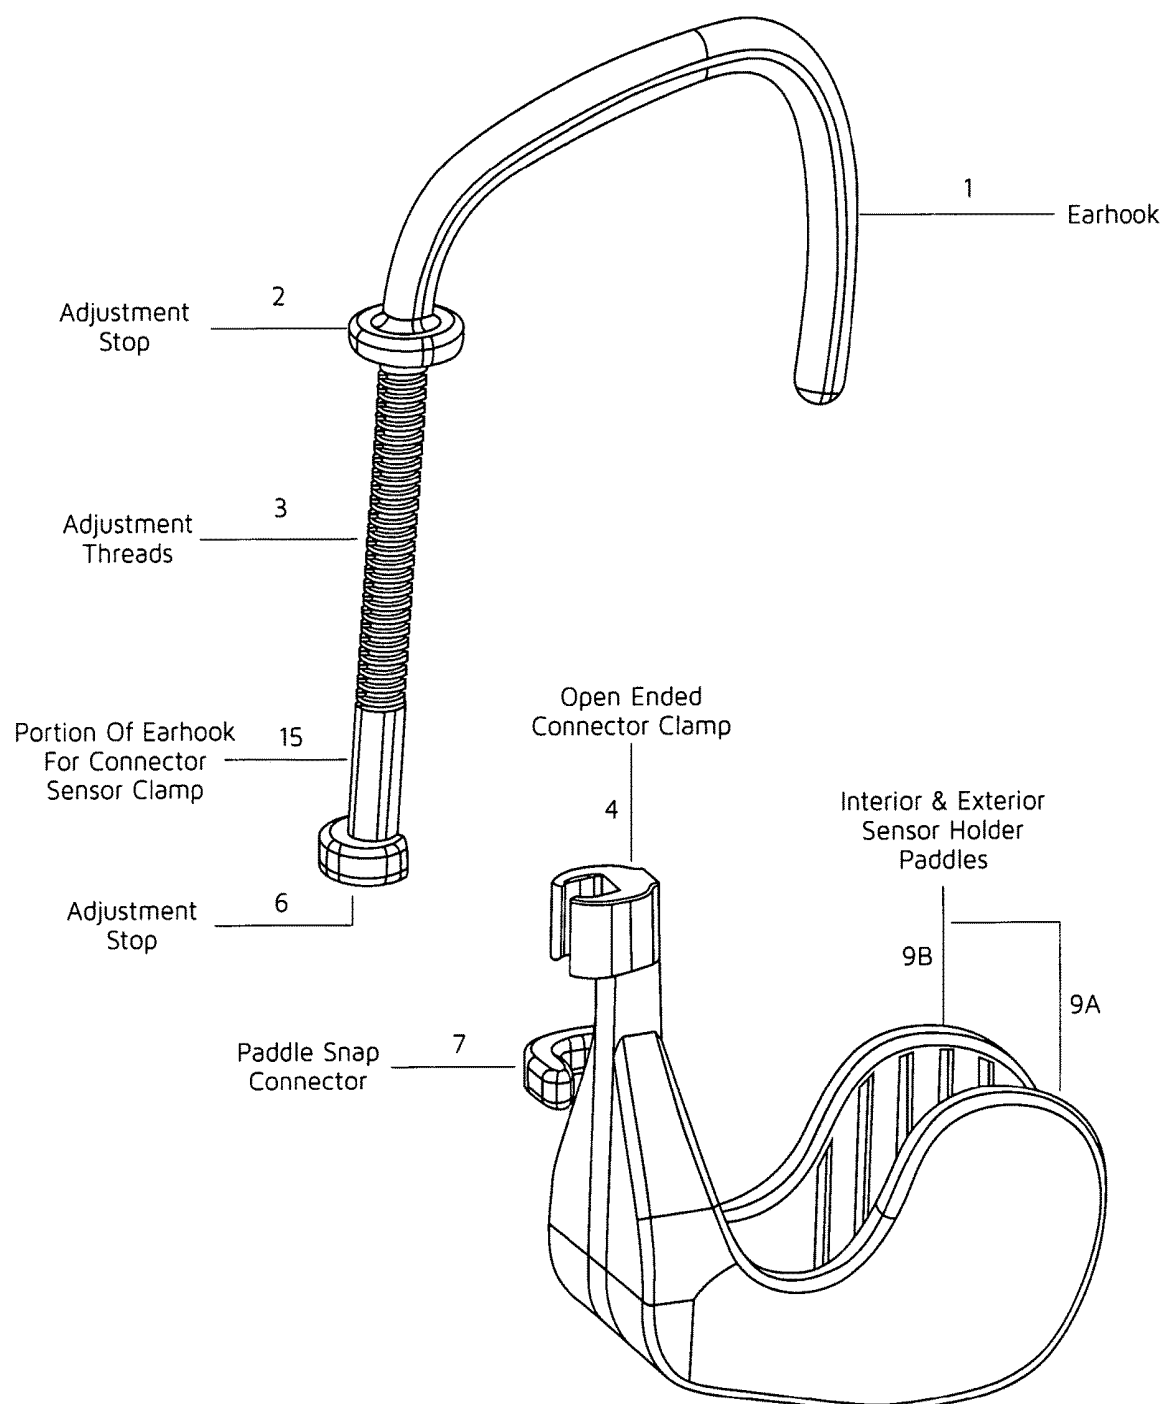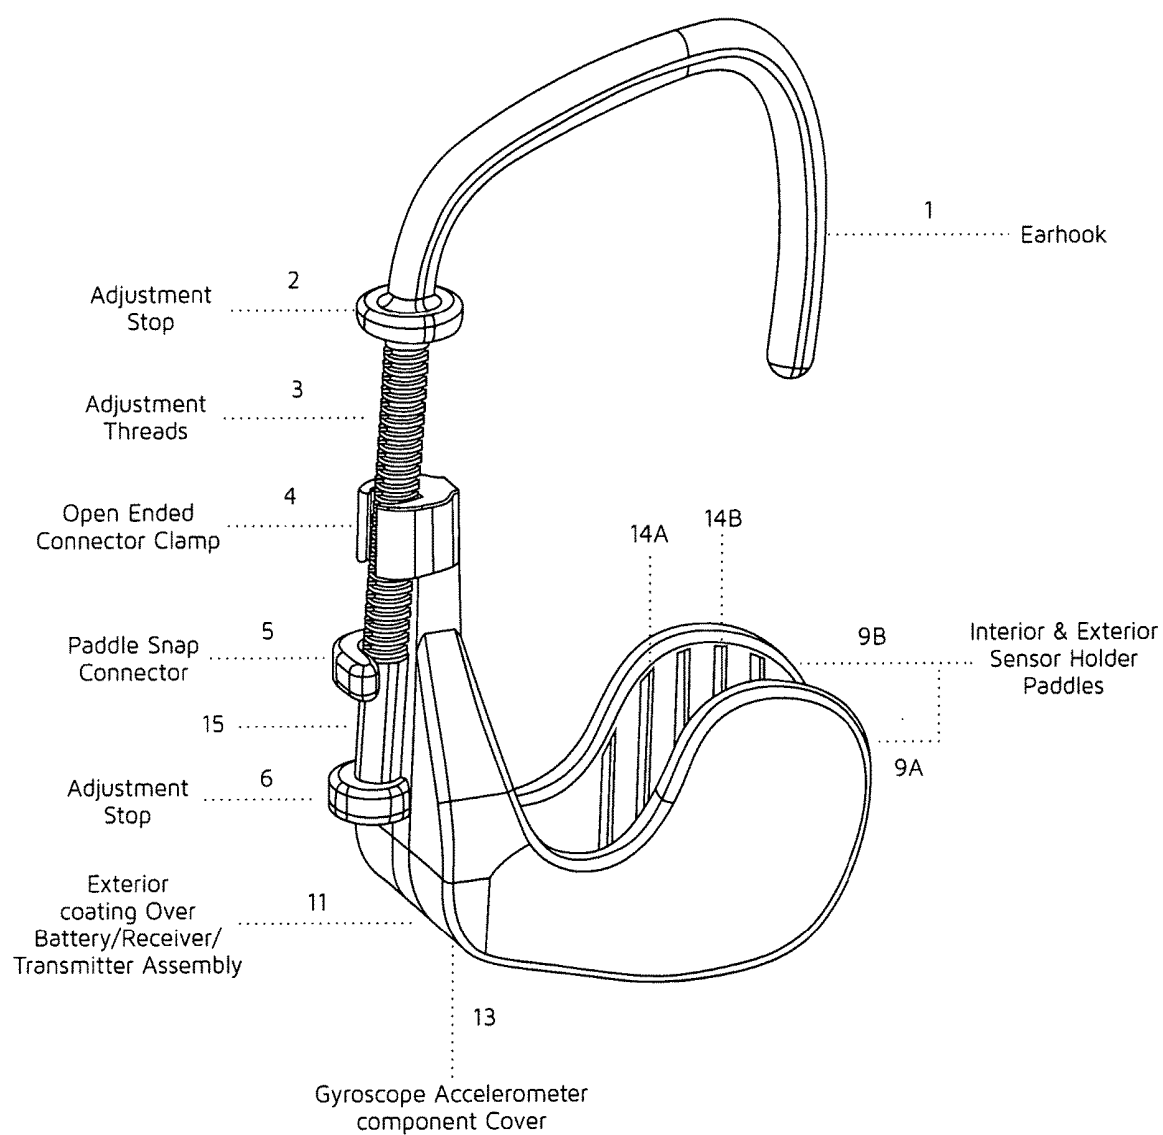

**PULSE OXIMETER SENSOR****PROVISIONAL PRIORITY DATE**

**[0001]** This application claims the benefit of an earlier filed provisional application, filed Oct. 27, 2020, Application Ser. No. 63/204,819.

**BACKGROUND OF THE INVENTION****1. Field of the Invention**

**[0002]** This invention relates to a pulse oximeter sensor.

**2. Description of the Prior Art**

**[0003]** Assemblies used to allow placement of devices next to a person's ear such as ear buds for listening to music are prevalent throughout modern culture. In the medical field, these assemblies allow receiving and transmission human body analytics such as pulse rate or blood oxygen saturation. Sensors used to gather medical information from a patient are fixed to a patient's ear using one of two methods; ones that fit within the ear canal and ones that are placed on the ear using the earlobe. US Patent Application 2004/0054291, Inventor Christian Schulze, et al, for Pulse Oximetry Ear Sensor, is an example of an earhook assembly in the medical field wherein the assembly is placed on the outside of the ear along the ear flap and earlobe. US Patent Application 2005/0033131, Inventor Yunqun Chen, et al, for Ear Sensor Assembly and US Patent Application 2014/0288447, Inventor Michael Edward Smith Luna, et al, for Ear Related Devices Implementing Sensors to Acquire Physiological Characteristics, are examples of assemblies that are placed into the ear canal. What all these examples have in common is that each is designed to house a permanent sensor. If the sensor fails, the earhook assembly is replaced. Additionally, these types of earhook assemblies generally result in an uncomfortable attachment to a person's ear for the reason that the sensors employed require tighter earlobe support resulting in a pinching of the ear lobe or are uncomfortable because they are placed into a person's ear canal.

**[0004]** Clearly it can be appreciated in the art that a single piece, ergonomic ear hook assembly with either a wired or wireless transmission of valuable health data from sensors to a receiver would be desired both from a cost as well as a ease of use approach.

**SUMMARY OF THE INVENTION**

**[0005]** It is, therefore, an object of the present invention to provide a pulse oximeter sensor with ear attachment that will receive and transmit human body analytics. Other objects and advantages of the present invention will become apparent from the following detailed description when viewed in conjunction with the accompanying drawings, which set forth certain embodiments of the invention.

**BRIEF DESCRIPTION OF THE DRAWINGS**

**[0006]** FIG. 1 is a side view of the present invention.

**[0007]** FIG. 2 depicts a side view of the present invention with ear hook detached from the sensor holder.

**[0008]** FIG. 3 is a side view of the present invention.

**DESCRIPTION OF THE PREFERRED EMBODIMENTS**

**[0009]** The detailed embodiments of the present invention are disclosed herein. It should be understood, however, that the disclosed embodiments are merely exemplary of the invention, which may be embodied in various forms. Therefore, the details disclosed herein are not to be interpreted as limiting, but merely as the basis for the claims and as a basis for teaching one skilled in the art how to make and/or use the invention.

**[0010]** The pulse oximeter sensor assembly of the present invention, depicted in FIGS. 1, 2 and 3, is made from any material of sufficient rigidity, flexibility and strength to be supported by the ergonomically designed earhook [1] along the top, inside edge of a person's upper ear. The earhook [1] is securely attached to an adjustment device comprising adjustment threads [3], a non-threaded portion [11] and adjustment stops [2 and 6]. Depicted in FIGS. 1, 2 and 3 is the earlobe assembly comprising sensor holder paddles [9A and 9B] which fit along the outside of the inner and outer earlobe. Although the earlobe assembly of the present invention is attached to the earhook [1] using at least two connector clamps shown in FIGS. 1, 2 and 3 as paddle snap connector [5] and open ended connector clamp [4], more than 2 connector clamps could be used. The adjustment threads [3] mate with and rotate through the open ended connector clamp [4]. As the threaded component [7] is rotated, the sensor holder paddles [9A and 9B] will move up or down on the adjustment threads [3] depending on the direction of the rotation. The paddle snap connector while not threaded, will travel up or down the non-threaded portion [15] in conjunction with movement of the adjustment threads [3] through the open ended connector clamp [4]. This movement allows adjustment of the earhook [1] to better fit a person's ear.

**[0011]** Although FIGS. 1, 2, and 3 illustrate a pulse oximeter sensor that transmits medical information of a patient using a wireless transmitter receiver [7] the transmitter could also be wired to a receiver. The pulse oximeter sensor must include a power source which is shown in FIGS. 1, 2 and 3 as a battery [8]. Other sources of power could also be used such as a hard wire connection to an electrical power source.

**[0012]** As shown in FIGS. 1, 2 and 3, the inside surfaces [14A and 14B] of the sensor holder paddles [9A and 9B] can be textured to form a more secure attachment. FIG. 2 illustrates that the inside surfaces [14A and 14B] of the sensor holder paddles [9A and 9B] include sensors [13A and 13B] for receiving and transmitting human body analytics such as movement (gyroscopic component), pulse and/or blood oxygen content. While two sensors [13A and 13B] are shown in FIG. 2, more than 2 sensor could be utilized depending on the need and function desired. Other body analytics can be measured using the sensors such as temperature and blood pressure depending on the type of sensor used. Information from sensors [13A and 13B] is transmitted from such sensors to the transmitter receiver assembly [7]. Transmission can be through wires [12] shown in FIGS. 1, 2, and 3 or wireless technology utilizing methods such as bluetooth or WIFI.

**[0013]** While the preferred embodiments have been shown and described, it will be understood that there is no intent to limit the invention by such disclosure, but rather, is intended

to cover all modifications and alternate constructions falling within the spirit and scope of the invention as defined in the appended claims.

1. A pulse oximeter sensor comprising an earhook ergonomically designed to fit along the top, inside edge of a person's ear flap; adjustment threads; two sensor holder paddles rotatably attached to the adjustment threads designed to fit on the inside and outside surfaces of a person's ear lobe; sensors which contact the inside and outside surfaces of a person's ear lobe located on the surface of each sensor holder paddles in contact with a person's ear lobe; an electrical power source; and a means to transmit human body analytic information from the sensors to a transmitter receiver assembly.

2. The pulse oximeter sensor of claim 1 wherein the human body analytic information is further transmitted from the transmitter receiver assembly to secondary receiver.

3. The pulse oximeter sensor of claim 1 wherein the means to transmit the human body analytic information from the transmitter receiver assembly to a secondary receiver is wireless.

4. The pulse oximeter sensor of claim 1 wherein the secondary receiver is a smart phone capable of utilizing the human body analytic information.

5. The pulse oximeter sensor of claim 1 wherein the electrical power source is a battery attached to the pulse oximeter sensor.

6. A pulse oximeter sensor comprising an earhook ergonomically designed to fit along the top, inside edge of a person's ear flap; adjustment threads with stop fittings with a non-threaded component; an open ended connector clamp which rotates along the adjustment threads; a paddle snap connector which slides up and down the non-threaded component; two sensor holder paddles designed to fit on the inside and outside surfaces of a person's ear lobe; sensors which contact the inside and outside surfaces of a person's ear lobe located on the surface of each sensor holder paddles in contact with a person's ear lobe; an electrical power source; and a means to transmit human body analytic information from the sensors to a transmitter receiver assembly.

7. The pulse oximeter sensor of claim 6 wherein the human body analytic information is further transmitted from the transmitter receiver assembly to secondary receiver.

8. The pulse oximeter sensor of claim 6 wherein the means to transmit the human body analytic information from the transmitter receiver assembly to a secondary receiver is wireless.

9. The pulse oximeter sensor of claim 6 wherein the secondary receiver is a smart phone capable of utilizing the human body analytic information.

10. The pulse oximeter sensor of claim 6 wherein the electrical power source is a battery attached to the pulse oximeter sensor.

\* \* \* \* \*