

# **Design and Implementation of a Real-Time Impedance Controller for a 7-DOF Collaborative Robot**

*Entwurf und Implementierung eines Echtzeit-Impedanzreglers für einen  
7-achsigen kollaborativen Roboter*

## **Master Thesis**

submitted for the degree of Master of Science (M.Sc.)

submitted at

Hochschule München

Faculty of Mechanical, Automotive and Aeronautical Engineering

submitted by

**Heykel Khadhraoui**

Study programme: Computational Engineering (M.Sc.)

Matriculation number: 41192924

Main supervisor: Prof. Norbert Nitzsche

Second supervisor: Prof. Ruth Otto

Issue date: 1 April 2026

Submission date: 30 September 2026



# Declaration of Authorship

I hereby declare that this master's thesis entitled

*“Design and Implementation of a Real-Time Impedance Controller for a 7-DOF  
Collaborative Robot”*

was written independently and without assistance from third parties. All sources, references, software tools, and other resources used have been cited accordingly. This work has not previously been submitted as an examination requirement in this or any other form.

## Verfassererklärung

Hiermit erkläre ich, dass ich die vorliegende Masterarbeit selbstständig und ohne fremde Hilfe angefertigt habe. Alle verwendeten Quellen, Hilfsmittel, Softwarewerkzeuge und sonstigen Ressourcen wurden entsprechend angegeben. Die Arbeit wurde bisher keiner anderen Prüfungsbehörde in gleicher oder ähnlicher Form vorgelegt.

Munich, 30.09.2026

Heykel Khadhraoui





# Colour-Coded Thesis Review

This copy is an editorial and evidential review of the thesis. It carries two kinds of mark. The first four colours appear as boxes and assess the section or subsection that follows the corresponding heading. They do not alter the thesis text, equations, tables, figures, or references.

**ORANGE** The argument and presentation are sufficient for the present thesis. Minor polishing may still be possible.

**YELLOW** The content is relevant, but the explanation is dense, repetitive, weakly supported, or harder to follow than necessary.

**RED** The passage retains a generic, templated, or textbook-restatement pattern that can read as machine-produced. This is a stylistic assessment, not a claim about authorship or an AI-detector result.

**GREY** A reasoning step, evidence link, validation, or required measurement is absent, uncertain, or inconsistent elsewhere.

Orange means sufficient, not perfect. A grey assessment does not make the reported data invalid; it identifies where the current evidence does not fully support the surrounding interpretation. Red is reserved for prose structure rather than technical correctness. Where a section contains both sound work and one important weakness, the more serious colour is used and the box names the exact concern.

The remaining two colours record the state of the text rather than an assessment of it, and are therefore applied to the words themselves.

**GREEN** The passage has been reviewed in the current editorial pass. It remains open to later correction.

**BLUE** New thesis text or an editorial comment.

Green is not a judgement that the passage is strong. It records only that the passage has been reviewed in the current pass. Later evidence, consistency checks, or editorial improvements may still require it to be changed.

An unresolved concern can be raised beside the text as

The clearance gate holds the pose reached by the tool until operator confirmation.

**comment:** “verify whether the same timing rule applies to the later gate”

A comment is a remark about the text, not a part of it. It appears only in this annotated copy and never in the submitted thesis.

Blue is used directly on new words or sentences and ends in a raised +. The two tints differ in hue so that the boundary survives greyscale printing.

The clean submission files remain `Thesis.pdf` and `Professor_Draft.pdf`. This annotated copy is generated separately as `Review_Draft.pdf`.

# Abstract

**ORANGE** — **sufficient.** The abstract states the problem, implemented mechanism, principal measured ordering, null-space result, and scope limits without overloading the reader with the full parameter matrix.

Angular misalignment between a grinding tool and a surface can cause edge-first contact. A rigidly controlled robot resists the resulting alignment motion and can therefore generate high contact forces and moments. This thesis investigates whether a torque-controlled collaborative robot can instead use contact itself to rotate the tool toward a planar surface.

A real-time Cartesian impedance controller was implemented for a seven-degree-of-freedom (DOF) Franka Emika Panda. The controller regulates translational and rotational compliance relative to the surface and allows the virtual centre of compliance to be displaced from the tool centre. This displacement introduces coupling between translation and rotation: when the robot presses the tool toward the surface, the resulting force can generate a moment that assists the alignment motion.

Experiments compared directional stiffness and different positions of the virtual compliance centre. The compliance-centre position produced the largest change in the measured alignment response. The assisting displacement lay in the surface plane and perpendicular to the required rotation direction. Reversing the initial angular misalignment also reversed the assisting displacement direction. The response was strongly direction-dependent: about one in-plane axis the robot already rotated substantially toward the surface without a displaced compliance centre, whereas about the orthogonal axis a selected 40 mm displacement changed the measured set-up rotation from  $-1.63^\circ$  to  $+4.43^\circ$ . Tests at intermediate in-plane directions supported the same geometric direction rule, although the exact best displacement magnitude remained dependent on the tested geometry and operating condition.

A complementary null-space study showed that projected damping reduced unnecessary redundant joint motion, while a conditioning term improved the robot configuration after a repeatable disturbance. The work demonstrates a real-time method for using a virtual compliance-centre displacement to convert normal contact loading into an alignment moment. The main experimental contribution is a simple geometric rule for choosing the direction and sign of this displacement from the required tool-alignment rotation.



# Kurzfassung

**ORANGE — sufficient.** The German summary remains aligned with the English abstract in structure, certainty, findings, and limitations.

Eine Winkelabweichung zwischen einem Schleifwerkzeug und einer Fläche kann zu Kantenkontakt führen. Ein starr geregelter Roboter behindert die daraus folgende ausrichtende Drehung und kann dadurch hohe Kontaktkräfte und -momente erzeugen. Diese Arbeit untersucht, ob ein drehmomentgeregelter kollaborativer Roboter stattdessen den Kontakt selbst nutzen kann, um das Werkzeug zu einer ebenen Fläche hin zu drehen.

Für einen 7-achsigen Franka Emika Panda wurde ein kartesischer Echtzeit-Impedanzregler implementiert. Der Regler stellt die translatorische und rotatorische Nachgiebigkeit relativ zur Fläche ein und erlaubt es, das virtuelle Nachgiebigkeitszentrum gegenüber dem Werkzeugmittelpunkt zu verschieben. Diese Verschiebung führt zu einer Kopplung zwischen Translation und Rotation: Drückt der Roboter das Werkzeug gegen die Fläche, so kann die resultierende Kraft ein Moment erzeugen, das die ausrichtende Drehung unterstützt.

Untersucht wurden richtungsabhängige Steifigkeit und verschiedene Lagen des virtuellen Nachgiebigkeitszentrums. Die Lage des Nachgiebigkeitszentrums bewirkte die größte Änderung der gemessenen Ausrichtungsreaktion. Die unterstützende Verschiebung lag in der Flächenebene und senkrecht zur erforderlichen Drehrichtung. Eine Umkehr der anfänglichen Winkelabweichung kehrte auch die Richtung der unterstützenden Verschiebung um. Die Reaktion war stark richtungsabhängig: Um die eine Achse in der Ebene drehte sich der Roboter bereits ohne verschobenes Nachgiebigkeitszentrum deutlich zur Fläche hin, während um die orthogonale Achse eine gewählte Verschiebung von 40 mm die gemessene Drehung beim Kontaktaufbau von  $-1,63^\circ$  auf  $+4,43^\circ$  änderte. Versuche in dazwischen liegenden Richtungen der Ebene stützten dieselbe geometrische Rich-

tungsregel; der genaue beste Betrag der Verschiebung blieb jedoch von der untersuchten Geometrie und den Betriebsbedingungen abhängig.

Eine ergänzende Nullraumuntersuchung zeigte, dass projizierte Dämpfung unnötige redundante Gelenkbewegung verringerte, während ein Konditionierungsterm die Roboterkonfiguration nach einer wiederholbaren Störung verbesserte. Die Arbeit zeigt ein Echtzeitverfahren, mit dem sich über eine virtuelle Verschiebung des Nachgiebigkeitszentrums eine normale Kontaktbelastung in ein ausrichtendes Moment umsetzen lässt. Der wesentliche experimentelle Beitrag ist eine einfache geometrische Regel, mit der Richtung und Vorzeichen dieser Verschiebung aus der erforderlichen Ausrichtungsdrehung des Werkzeugs bestimmt werden.

# Contents

|                                       |             |
|---------------------------------------|-------------|
| <b>Declaration of Authorship</b>      | <b>III</b>  |
| <b>Colour-Coded Thesis Review</b>     | <b>V</b>    |
| <b>Abstract</b>                       | <b>VII</b>  |
| <b>Kurzfassung</b>                    | <b>IX</b>   |
| <b>List of Figures</b>                | <b>XVII</b> |
| <b>List of Tables</b>                 | <b>XIX</b>  |
| <b>List of Abbreviations</b>          | <b>XXI</b>  |
| <b>List of Symbols</b>                | <b>XXII</b> |
| <br>                                  |             |
| <b>1 Introduction</b>                 | <b>1</b>    |
| 1.1 Motivation . . . . .              | 1           |
| 1.2 Related Work . . . . .            | 2           |
| 1.3 Problem Statement . . . . .       | 3           |
| 1.4 Scope and Contributions . . . . . | 4           |
| 1.5 Thesis Structure . . . . .        | 7           |
| <br>                                  |             |
| <b>2 Theoretical Background</b>       | <b>8</b>    |
| 2.1 Reference Frames . . . . .        | 8           |

|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| 2.2      | Rigid-Body Transformations . . . . .                     | 10        |
| 2.2.1    | Rotation Matrices . . . . .                              | 10        |
| 2.2.2    | Homogeneous Transformations . . . . .                    | 11        |
| 2.2.3    | End-Effector Pose . . . . .                              | 11        |
| 2.2.4    | Cartesian Pose Error . . . . .                           | 11        |
| 2.3      | Kinematics of a 7-DOF Manipulator . . . . .              | 14        |
| 2.3.1    | Forward Kinematics . . . . .                             | 14        |
| 2.3.2    | Differential Kinematics . . . . .                        | 15        |
| 2.3.3    | Geometric Jacobian . . . . .                             | 15        |
| 2.4      | Cartesian Impedance Control . . . . .                    | 16        |
| 2.4.1    | Impedance Wrench . . . . .                               | 16        |
| 2.4.2    | Joint-Torque Control Law . . . . .                       | 17        |
| 2.4.3    | Coriolis and Gravity Compensation in libfranka . . . . . | 18        |
| 2.4.4    | Commanded and Estimated Wrench . . . . .                 | 19        |
| 2.5      | Surface Task Frame . . . . .                             | 19        |
| 2.6      | Stiffness and Damping Representation . . . . .           | 20        |
| 2.7      | Centre of Compliance . . . . .                           | 22        |
| 2.8      | Null-Space Torque . . . . .                              | 27        |
| 2.8.1    | SVD-Based Null-Space Characterisation . . . . .          | 27        |
| 2.8.2    | SVD-Based Pseudoinverse . . . . .                        | 30        |
| 2.8.3    | Null-Space Projectors . . . . .                          | 31        |
| 2.8.4    | Null-Space Damping Torque . . . . .                      | 33        |
| 2.8.5    | Singular-Value Conditioning Torque . . . . .             | 33        |
| 2.8.6    | Complete Null-Space Torque . . . . .                     | 35        |
| 2.9      | Complete Joint-Torque Command . . . . .                  | 35        |
| <b>3</b> | <b>Controller Design and Real-Time Implementation</b>    | <b>37</b> |
| 3.1      | Controller Architecture . . . . .                        | 38        |

|          |                                                              |           |
|----------|--------------------------------------------------------------|-----------|
| 3.2      | Surface-Relative Task Representation . . . . .               | 39        |
| 3.2.1    | Surface Task Frame . . . . .                                 | 40        |
| 3.2.2    | Surface-Relative Tool Orientation . . . . .                  | 40        |
| 3.2.3    | Grinding-Face Geometry and Geometric Clearance . . . . .     | 41        |
| 3.3      | Real-Time Cartesian Impedance Controller . . . . .           | 42        |
| 3.3.1    | State and Reference Update . . . . .                         | 43        |
| 3.3.2    | Cartesian Error and Impedance Wrench . . . . .               | 43        |
| 3.3.3    | Joint-Torque Command . . . . .                               | 44        |
| 3.4      | Phase-Dependent Impedance and Centre of Compliance . . . . . | 45        |
| 3.4.1    | Directional Cartesian Gains . . . . .                        | 45        |
| 3.4.2    | Inertia-Scaled Damping . . . . .                             | 46        |
| 3.4.3    | Virtual Centre of Compliance . . . . .                       | 47        |
| 3.5      | Contact Sequence and Reference Generation . . . . .          | 49        |
| 3.5.1    | Tool Orientation . . . . .                                   | 50        |
| 3.5.2    | Surface Approach . . . . .                                   | 50        |
| 3.5.3    | Set-Up . . . . .                                             | 51        |
| 3.5.4    | Grinding . . . . .                                           | 52        |
| 3.5.5    | Pose Hold, Manual Guidance, and Run Termination . . . . .    | 52        |
| 3.6      | SVD-Based Null-Space Control . . . . .                       | 53        |
| 3.7      | Real-Time Operation, Safety, and Data Recording . . . . .    | 54        |
| 3.7.1    | Robot Preparation and Safety . . . . .                       | 54        |
| 3.7.2    | Real-Time-Safe Data Recording . . . . .                      | 56        |
| 3.7.3    | Post-Run Output and Evaluation Support . . . . .             | 57        |
| <b>4</b> | <b>Experimental Methodology</b>                              | <b>59</b> |
| 4.1      | Experimental System . . . . .                                | 59        |
| 4.1.1    | Robot, Tool, and Surface . . . . .                           | 59        |
| 4.1.2    | Real-Time Computer and Software . . . . .                    | 60        |

|          |                                                           |           |
|----------|-----------------------------------------------------------|-----------|
| 4.1.3    | Operating and Safety Configuration . . . . .              | 61        |
| 4.2      | Surface and Tool Calibration . . . . .                    | 62        |
| 4.2.1    | Surface-Plane Calibration . . . . .                       | 62        |
| 4.2.2    | Grinding-Face Direction Calibration . . . . .             | 64        |
| 4.2.3    | Calibrated Experimental Geometry . . . . .                | 66        |
| 4.3      | Common Contact-Test Configuration and Procedure . . . . . | 67        |
| 4.3.1    | Common Cartesian Gains and Damping . . . . .              | 67        |
| 4.3.2    | Contact Sequence and Set-Up Motion . . . . .              | 69        |
| 4.3.3    | Common Null-Space Configuration . . . . .                 | 71        |
| 4.3.4    | Repetitions and Data Recording . . . . .                  | 72        |
| 4.4      | Surface-Contact Experimental Matrix . . . . .             | 72        |
| 4.4.1    | Parameter Groups and Reference Conditions . . . . .       | 73        |
| 4.4.2    | Cases A to H . . . . .                                    | 74        |
| 4.4.3    | Case-C Direction and Lever Definition . . . . .           | 76        |
| 4.5      | Evaluation Quantities . . . . .                           | 77        |
| 4.5.1    | Signed Set-Up Rotation . . . . .                          | 77        |
| 4.5.2    | Alignment Angle and Flatness Classification . . . . .     | 78        |
| 4.5.3    | Displacement and Wrench Quantities . . . . .              | 79        |
| 4.5.4    | Treatment of Repeated Runs . . . . .                      | 80        |
| 4.6      | Secondary Null-Space Pose-Hold Experiment . . . . .       | 80        |
| 4.6.1    | Experimental Configuration . . . . .                      | 80        |
| 4.6.2    | Commanded Disturbance . . . . .                           | 81        |
| 4.6.3    | Evaluation Quantities . . . . .                           | 82        |
| <b>5</b> | <b>Results and Discussion</b>                             | <b>83</b> |
| 5.1      | Data Quality and Comparison Basis . . . . .               | 83        |
| 5.2      | Surface-Contact Results . . . . .                         | 84        |
| 5.2.1    | Zero-Lever Reference Response: Case D . . . . .           | 85        |

|          |                                                                  |            |
|----------|------------------------------------------------------------------|------------|
| 5.2.2    | Influence of Cartesian Stiffness . . . . .                       | 86         |
| 5.2.3    | Tangential Compliance-Centre Lever: Case E . . . . .             | 89         |
| 5.2.4    | Further Compliance-Centre Dependencies . . . . .                 | 93         |
| 5.2.5    | Generalisation of the Lever-Direction Rule: Case C . . . . .     | 96         |
| 5.3      | Null-Space Pose-Hold Results . . . . .                           | 98         |
| 5.4      | Cross-Case Discussion . . . . .                                  | 99         |
| 5.4.1    | Relative Influence of the Tested Parameters . . . . .            | 99         |
| 5.4.2    | Physical Role of the Compliance-Centre Lever . . . . .           | 100        |
| 5.4.3    | Axis-Dependent Response and Measurement Interpretation . . . . . | 101        |
| 5.4.4    | Implications for Controller Parameter Selection . . . . .        | 102        |
| 5.4.5    | Scope of Interpretation . . . . .                                | 103        |
| <b>6</b> | <b>Conclusion and Future Work</b>                                | <b>105</b> |
| 6.1      | Conclusion . . . . .                                             | 105        |
| 6.2      | Limitations . . . . .                                            | 107        |
| 6.2.1    | Experimental Range . . . . .                                     | 107        |
| 6.2.2    | Measurement and Tool-Mount Uncertainty . . . . .                 | 107        |
| 6.2.3    | Null-Space Configuration and Real-Time Operation . . . . .       | 107        |
| 6.3      | Future Work . . . . .                                            | 108        |
|          | <b>Bibliography</b>                                              | <b>112</b> |
| <b>A</b> | <b>Controller Source Listings</b>                                | <b>113</b> |
| A.1      | Surface Task Frame and Spatial Gains . . . . .                   | 113        |
| A.2      | Tool Orientation and Rotation Error . . . . .                    | 114        |
| A.3      | Geometric Clearance and Phase Targets . . . . .                  | 115        |
| A.4      | Centre of Compliance and the Offset Adjoint . . . . .            | 117        |
| A.5      | Task-Inertia Damping . . . . .                                   | 118        |
| A.6      | Null-Space Torque . . . . .                                      | 119        |

|          |                                                           |            |
|----------|-----------------------------------------------------------|------------|
| A.7      | Core Control Callback . . . . .                           | 120        |
| <b>B</b> | <b>Recorded Experimental Data</b>                         | <b>122</b> |
| B.1      | Control Phases . . . . .                                  | 122        |
| B.2      | Signals Used in the Evaluation . . . . .                  | 122        |
| B.3      | Evaluation Quantities . . . . .                           | 125        |
| <b>C</b> | <b>Controller Parameters</b>                              | <b>127</b> |
| C.1      | Surface and Tool Geometry . . . . .                       | 127        |
| C.2      | Phase Sequence and Impedance . . . . .                    | 128        |
| C.3      | Inertia-Scaled Damping and Centre of Compliance . . . . . | 130        |
| C.4      | Null-Space and Operating Parameters . . . . .             | 131        |



# List of Figures

|      |                                                                               |    |
|------|-------------------------------------------------------------------------------|----|
| 2.1  | Frames used in the controller and the end-effector pose error. . . . .        | 10 |
| 2.2  | Moment produced by the compliance-centre lever at both lever signs. . . .     | 23 |
| 3.1  | Torque contributions combined in one control cycle. . . . .                   | 39 |
| 3.2  | Run phase sequence and Cartesian pose hold. . . . .                           | 50 |
| 3.3  | Tool collection and return sequence. . . . .                                  | 56 |
| 4.1  | Experimental system and surface-frame contact geometry. . . . .               | 60 |
| 4.2  | Surface and tool calibration flow. . . . .                                    | 62 |
| 4.3  | Calibrated grinding face and mounting axes in the surface plane. . . . .      | 66 |
| 4.4  | Selected tangential lever for each commanded rotation direction. . . . .      | 77 |
| 5.1  | Angular deviation during set-up for two compliance-centre positions. . . . .  | 84 |
| 5.2  | Set-up rotation with the centre of compliance at the TCP. . . . .             | 85 |
| 5.3  | Set-up rotation about the commanded tangent by rotational stiffness. . . .    | 87 |
| 5.4  | Set-up rotation by cross-axis translational stiffness. . . . .                | 89 |
| 5.5  | Set-up rotation by tangential centre position, both tangents and signs. . . . | 90 |
| 5.6  | Set-up rotation, commanded force and moment at three centre positions. . .    | 92 |
| 5.7  | Surface-frame rotation, force and moment at the outer Case-E positions. . .   | 93 |
| 5.8  | Case-F set-up rotation for tool- and surface-frame lever definitions. . . . . | 94 |
| 5.9  | Set-up rotation by centre position along the tool axis. . . . .               | 95 |
| 5.10 | Set-up rotation by centre position at both commanded magnitudes. . . . .      | 96 |

|                                                                                   |     |
|-----------------------------------------------------------------------------------|-----|
| 5.11 Case-C set-up rotation with the direction-selected and fixed levers. . . . . | 97  |
| 5.12 Null-space response during the Cartesian pose-hold disturbance test. . . . . | 99  |
| 5.13 Alignment-angle change against end-effector rotation. . . . .                | 102 |

# List of Tables

|     |                                                                         |     |
|-----|-------------------------------------------------------------------------|-----|
| 3.1 | Functional subsystems of the surface-grinding controller. . . . .       | 38  |
| 3.2 | Coordinate frames used for the phase-dependent Cartesian gains. . . . . | 46  |
| 3.3 | Selectable null-space torque contributions. . . . .                     | 53  |
| 3.4 | Signal groups stored during the real-time control loop. . . . .         | 57  |
| 4.1 | Documented configuration of the experimental system. . . . .            | 61  |
| 4.2 | Common phase-transition and trajectory parameters for Cases A to H. . . | 69  |
| 4.3 | Structure of the surface-contact investigation. . . . .                 | 73  |
| 4.4 | Experimental cases and parameter variations. . . . .                    | 74  |
| 4.5 | Case-C orientation commands and lever vectors. . . . .                  | 77  |
| 5.1 | Case-D zero-lever response. . . . .                                     | 85  |
| 5.2 | Case-A response by rotational stiffness. . . . .                        | 87  |
| 5.3 | Case-B response by cross-axis translational stiffness. . . . .          | 88  |
| 5.4 | Case-E response by tangential centre position. . . . .                  | 90  |
| 5.5 | Case-F response by lever-definition frame. . . . .                      | 93  |
| 5.6 | Case-G response by tool-axis centre position. . . . .                   | 94  |
| 5.7 | Case-H response by commanded orientation-offset magnitude. . . . .      | 95  |
| 5.8 | Case-C direction-rule comparison at the common 40 mm lever magnitude. . | 97  |
| 5.9 | Conditions classified as tilted by TCP height. . . . .                  | 101 |
| B.1 | Recorded signal groups used in the evaluation. . . . .                  | 123 |

|     |                                                     |     |
|-----|-----------------------------------------------------|-----|
| C.1 | Surface and tool parameters. . . . .                | 128 |
| C.2 | Phase and mode gains. . . . .                       | 129 |
| C.3 | Phase-transition and trajectory parameters. . . . . | 130 |
| C.4 | Null-space and operating parameters. . . . .        | 131 |

# List of Abbreviations

**ORANGE** — **sufficient.** The abbreviations are separated from the symbol list and their printed forms are controlled centrally.

|            |                                              |
|------------|----------------------------------------------|
| CSV        | Comma-Separated Values                       |
| DH         | Denavit–Hartenberg                           |
| DOF        | Degree of Freedom                            |
| EE         | End-Effector                                 |
| E-stop     | Emergency Stop                               |
| FCI        | Franka Control Interface                     |
| FCU        | Franka Control Unit                          |
| F/T        | Force/Torque                                 |
| IP         | Internet Protocol                            |
| LDLT       | Lower–Diagonal–Lower-Transpose Factorisation |
| OS         | Operating System                             |
| PREEMPT_RT | Real-Time Preemption Patch                   |
| ROS        | Robot Operating System                       |
| SE(3)      | Special Euclidean Group in three dimensions  |
| SO(3)      | Special Orthogonal Group in three dimensions |
| SVD        | Singular Value Decomposition                 |
| TCP        | Tool Centre Point                            |

# List of Symbols

**ORANGE — sufficient.** The notation is extensive but well organised, and the unit column makes the mixed translational and rotational quantities traceable.

## Frames and Kinematics

|                         |                                                                        |                |
|-------------------------|------------------------------------------------------------------------|----------------|
| $\{0\}$                 | Robot base frame                                                       | [-]            |
| $\{i\}$                 | Joint frame $i$                                                        | [-]            |
| $\{EE\}$                | End-effector frame used by the robot model                             | [-]            |
| $n$                     | Number of joints ( $n = 7$ )                                           | [-]            |
| $q, \dot{q}$            | Joint position / velocity vector                                       | [rad], [rad/s] |
| $q_{\text{init}}$       | Initial joint configuration used by the controller and pose-hold study | [rad]          |
| $p$                     | Position / translation vector                                          | [m]            |
| $R$                     | Rotation matrix                                                        | [-]            |
| $R_x, R_y, R_z$         | Elementary rotations about $x, y, z$                                   | [-]            |
| $\alpha, \beta, \gamma$ | Generic rotations about the $x, y, z$ axes                             | [rad]          |
| $\alpha_s, \beta_s$     | Configured surface rotations about the base-frame $x$ - and $y$ -axes  | [rad]          |
| $e_z$                   | Base-frame unit vector along the $z$ -axis                             | [-]            |
| $T$                     | Homogeneous transformation matrix                                      | [-]            |

|                          |                                                              |              |
|--------------------------|--------------------------------------------------------------|--------------|
| $J(q)$                   | Geometric Jacobian; linear rows above angular rows           | [m/rad], [-] |
| $z_{i-1}$                | Rotation axis of joint $i$ , expressed in the base frame     | [-]          |
| $p_{i-1}$                | Point on the axis of joint $i$ , expressed in the base frame | [m]          |
| $x_{EE}, y_{EE}, z_{EE}$ | End-effector frame axes (base frame)                         | [-]          |

### Pose and Error

|                   |                                                                                        |            |
|-------------------|----------------------------------------------------------------------------------------|------------|
| $p_{EE}, p_{TCP}$ | End-effector / tool-centre-point position; $p_{TCP} = p_{EE}$ in the implemented model | [m]        |
| $R_{EE}, T_{EE}$  | End-effector orientation / transformation                                              | [-]        |
| $p_d, R_d, T_d$   | Desired position / orientation / transformation                                        | [m], [-]   |
| $T_{err}$         | Relative (error) transformation                                                        | [-]        |
| $\Delta R$        | Current-to-desired relative rotation,                                                  | [-]        |
|                   | $R_{EE}^T R_d$                                                                         |            |
| $\phi$            | Orientation-error angle                                                                | [rad]      |
| $u, [u]_{\times}$ | Current-EE-frame orientation-error axis / its skew matrix                              | [-]        |
| $e_p$             | Translational (position) error                                                         | [m]        |
| $e_R$             | Base-frame rotational error used by the command                                        | [rad]      |
| $e_{R,EE}$        | Rotational error expressed in the current EE frame                                     | [rad]      |
| $e_{p,c}, e_c$    | Compliance-centre position error / stacked error                                       | [m], [rad] |

|                                        |                                                                                                   |                       |
|----------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------|
| $e$                                    | Stacked Cartesian error                                                                           | [m], [rad]            |
| $\dot{x}$                              | Cartesian velocity (twist)                                                                        | [m/s], [rad/s]        |
| $\dot{p}_{EE}, \dot{p}_d, \omega_{EE}$ | Measured linear end-effector velocity, desired linear velocity, and angular end-effector velocity | [m/s], [m/s], [rad/s] |

### Cartesian Impedance Gains

|                                        |                                                                                                                                  |                        |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|------------------------|
| $K_p, D_p$                             | Generic translational stiffness / damping block; a frame or phase subscript is added when needed                                 | [N/m], [N s/m]         |
| $K_R, D_R$                             | Generic rotational stiffness / damping block; a frame or phase subscript is added when needed                                    | [N m/rad], [N m s/rad] |
| $K_{p,t_1}, K_{p,t_2}, K_{p,n}$        | Translational stiffness entries along $t_1, t_2$ , and $n_s$                                                                     | [N/m]                  |
| $K_{R,t_1}, K_{R,t_2}, K_{R,n}$        | Rotational stiffness entries about $t_1, t_2$ , and $n_s$                                                                        | [N m/rad]              |
| $R_{\text{task}}, T_R$                 | Generic task-frame orientation and corresponding block rotation; $R_{\text{task}} = R_{\text{surface}}$ for the implemented task | [-]                    |
| $K_{p,\text{task}}, D_{p,\text{task}}$ | Local translational stiffness / damping in the chosen task frame                                                                 | [N/m], [N s/m]         |
| $K_{R,\text{task}}, D_{R,\text{task}}$ | Local rotational stiffness / damping in the chosen task frame                                                                    | [N m/rad], [N m s/rad] |
| $K_{p,0}, D_{p,0}$                     | Translational stiffness / damping used in the base-frame command                                                                 | [N/m], [N s/m]         |
| $K_{R,0}, D_{R,0}$                     | Rotational stiffness / damping used in the base-frame command                                                                    | [N m/rad], [N m s/rad] |



|            |                                                                      |                                                       |
|------------|----------------------------------------------------------------------|-------------------------------------------------------|
| $K_0, D_0$ | Full $6 \times 6$ stiffness / damping used in the base-frame command | $K$ : [N/m], [N m/rad];<br>$D$ : [N s/m], [N m s/rad] |
|------------|----------------------------------------------------------------------|-------------------------------------------------------|

**Dynamics and Torques**

|                         |                                                                                                                   |                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| $F$                     | Cartesian wrench                                                                                                  | [N], [N m]                                            |
| $f, m$                  | Commanded Cartesian force / moment                                                                                | [N], [N m]                                            |
| $f_{\text{press}}, m_c$ | Elastic press against the surface, $f_{\text{press}} = K_p e_p$ / corresponding compliance-centre coupling moment | [N], [N m]                                            |
| $K, D$                  | Full Cartesian stiffness / damping matrices                                                                       | $K$ : [N/m], [N m/rad];<br>$D$ : [N s/m], [N m s/rad] |
| $\Lambda$               | Operational-space (Cartesian) inertia matrix                                                                      | [kg], [kg m], [kg m <sup>2</sup> ]                    |
| $M(q)$                  | Joint-space mass matrix                                                                                           | [kg m <sup>2</sup> ]                                  |
| $\zeta$                 | Directional coefficient in the inertia-scaled damping calculation                                                 | [-]                                                   |
| $\tau$                  | Joint torque vector                                                                                               | [N m]                                                 |
| $\tau_c, \tau_g$        | Coriolis / gravity compensation torque                                                                            | [N m]                                                 |
| $\tau_{\text{cart}}$    | Cartesian impedance torque, $J^\top(q)F$                                                                          | [N m]                                                 |
| $\tau_{\text{cmd}}$     | Complete commanded joint torque                                                                                   | [N m]                                                 |

**Surface and Contact Geometry**

|                                               |                                                                                                                                                                   |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $n_s$                                         | Calibrated surface-plane normal [-]<br>copied into the controller and used<br>in the evaluation                                                                   |
| $t_1, t_2$                                    | Surface tangent directions (unit) [-]                                                                                                                             |
| $a_s, \tilde{t}_1$                            | Surface-frame reference direction / [-]<br>projected tangent before normalisa-<br>tion                                                                            |
| $R_{\text{surface}}$                          | Surface task frame $[t_1 \ t_2 \ n_s]$ in the [-]<br>base frame                                                                                                   |
| $p_{\text{cal},i}, r_{\text{probe,EE}}$       | Captured marked-corner point in [m], [m]<br>the base frame / fixed corner offset<br>in the EE frame                                                               |
| $T_{\text{cal},i}, R_{\text{cal},i}, \bar{R}$ | Captured tool-calibration pose / its [-]<br>rotation / mean of the three estima-<br>tion rotations                                                                |
| $\bar{n}_B$                                   | Invariant base-frame direction in the [-]<br>tool-normal calibration                                                                                              |
| $\varepsilon_{\text{plane}}, \varepsilon_g$   | Surface-plane validation residual / [m]<br>grinding-face feature-selection toler-<br>ance                                                                         |
| $U, \Sigma, V$                                | Singular-value decomposition fac- [-]<br>tors of $\bar{R}$                                                                                                        |
| $n_{\text{EE}}, n_T, n_d$                     | Calibrated grinding-face direction [-]<br>in the EE frame / EE-inferred<br>grinding-face direction in the base<br>frame / signed controller target di-<br>rection |
| $s_a$                                         | Tool-axis target sign, with $n_d = s_a n_s$ [-]                                                                                                                   |
| $p_s$                                         | Point on the configured surface [m]                                                                                                                               |

|                                             |                                                                                        |     |
|---------------------------------------------|----------------------------------------------------------------------------------------|-----|
| $p_c$                                       | Centre of compliance                                                                   | [m] |
| $r_c$                                       | Compliance-centre-to-TCP lever,<br>$p_{\text{TCP}} - p_c$                              | [m] |
| $r_{\text{face,EE}}$                        | Grinding-face centre offset in the EE<br>frame                                         | [m] |
| $r_{\text{width,EE}}, r_{\text{length,EE}}$ | Grinding-face half-width / half-<br>length vector in the EE frame                      | [m] |
| $r_{g,\text{EE}}, p_g$                      | Selected grinding-face point or edge<br>in the EE frame / its base-frame po-<br>sition | [m] |
| $f_C$                                       | Environment-on-tool contact force<br>used in the geometric sketch                      | [N] |

**Compliance and Alignment**

|                                                          |                                                                                                                                         |                                                       |
|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| $K_{\text{task}}, D_{\text{task}}$                       | Full local Cartesian stiffness / damping in the chosen task frame                                                                       | $K$ : [N/m], [N m/rad];<br>$D$ : [N s/m], [N m s/rad] |
| $\text{Ad}(r_c)$                                         | Compliance-centre-to-TCP point-shift adjoint                                                                                            | [-]                                                   |
| $K_c, D_c$                                               | Block-diagonal stiffness / damping at the centre of compliance                                                                          | $K$ : [N/m], [N m/rad];<br>$D$ : [N s/m], [N m s/rad] |
| $F_c, F_{\text{TCP}}$                                    | Cartesian wrench at the centre of compliance / corresponding wrench at the TCP                                                          | [N], [N m]                                            |
| $K_{\text{TCP}}, D_{\text{TCP}}$                         | Centre-of-compliance gains mapped by congruence to the TCP                                                                              | $K$ : [N/m], [N m/rad];<br>$D$ : [N s/m], [N m s/rad] |
| $\theta_{\text{align}}, \Delta\theta_{\text{align}}$     | EE-inferred tool-axis alignment angle / before–after improvement; the indices before and after denote the start and end of set-up       | [rad]                                                 |
| $\theta_{t_1}, \theta_{t_2}$                             | Surface-frame components of the commanded tool orientation offset                                                                       | [rad]                                                 |
| $\Delta\theta_{\text{set}}, \Delta\theta_{\text{set}}^S$ | Finite set-up rotation in the base frame / resolved in the surface frame; $\Delta\theta_{\text{set}, t_i}$ is its component about $t_i$ | [rad]                                                 |
| $\phi_{\text{set}}, u_{\text{set}}$                      | Set-up rotation angle / unit rotation axis                                                                                              | [rad], [-]                                            |
| $r_{c,t}, \rho_c$                                        | Selected tangential compliance-centre lever / its magnitude                                                                             | [m]                                                   |
| $\Delta p_g, s_g$                                        | Grinding contact-point displacement / its magnitude                                                                                     | [m]                                                   |
| $\Delta p_{\text{TCP}}, s_{\text{TCP}}$                  | TCP displacement / its magnitude                                                                                                        | [m]                                                   |

|                                              |                                                                                                                                                |            |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| $F_n$                                        | Positive normal magnitude of the model-estimated external-force change from the clearance transition, $ n_s^\top \Delta \hat{f}_{\text{ext}} $ | [N]        |
| $F_{n,\text{cmd}}, M_{t_i,\text{cmd}}$       | Signed commanded normal force / commanded TCP moment about surface tangent $t_i$                                                               | [N], [N m] |
| $F_{n,\text{block}}$                         | Fully blocked normal virtual-spring command scale                                                                                              | [N]        |
| $\hat{f}_{\text{ext}}, \hat{f}_{\text{ref}}$ | Model-estimated external force / clearance-transition reference                                                                                | [N]        |

**Quasi-Static Stiffness and Damping Design**

|                    |                                                          |                              |
|--------------------|----------------------------------------------------------|------------------------------|
| $k_i$              | Directional translational or rotational stiffness        | [N/m] or [N m/rad]           |
| $\lambda_i$        | Directional Cartesian inertia used for damping selection | [kg] or [kg m <sup>2</sup> ] |
| $d_{\text{dir},i}$ | Directional damping coefficient                          | [N s/m] or [N m s/rad]       |

**Null-Space and Singular Value Decomposition**

|                             |                                                                                                                   |                   |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------|
| $J^+$                       | Thresholded-SVD Moore–Penrose pseudoinverse                                                                       | [rad/m], [-]      |
| $N_q, N_\tau$               | Joint-velocity / torque null-space projector                                                                      | [-]               |
| $\rho, \sigma_{\text{thr}}$ | Relative SVD tolerance / resulting singular-value threshold                                                       | [-], [m/rad]      |
| $\sigma_i, \sigma_{\min}$   | Jacobian singular value / $\sigma_6$ conditioning indicator; its value follows the length unit of the linear rows | [m/rad]           |
| $U_J, \Sigma_J, V_J$        | Singular value decomposition factors of $J$                                                                       | [-], [m/rad], [-] |
| $c, c_i$                    | Joint-velocity coefficients in the right-singular-vector basis / coefficient for direction $i$                    | [rad/s]           |
| $u_i, v_i$                  | Left / right singular vectors                                                                                     | [-]               |
| $v_6, v_7$                  | $\sigma_6$ -associated direction / structural null direction                                                      | [-]               |
| $\dot{q}_{\text{null}}$     | Projected joint velocity in the numerical null space                                                              | [rad/s]           |
| $F_d$                       | Commanded point-force-equivalent disturbance magnitude                                                            | [N]               |
| $r_p, J_p(q)$               | Point on the robot link used for the commanded disturbance / its translational Jacobian                           | [m], [m/rad]      |
| $u_f, f_d(t), s_d(t)$       | Fixed disturbance-force direction / commanded disturbance-force vector / dimensionless time profile               | [-], [N], [-]     |
| $\tau_{\text{dist}}$        | Joint-torque-equivalent commanded disturbance                                                                     | [N m]             |

|                                             |                                                                               |             |
|---------------------------------------------|-------------------------------------------------------------------------------|-------------|
| $d_{\text{null}}$                           | Null-space damping                                                            | [N m s/rad] |
| $k_{\sigma}$                                | Sigma-conditioning torque magnitude                                           | [N m]       |
| $\alpha_{\text{probe}}$                     | Null-direction sampling angle                                                 | [rad]       |
| $\delta_{\sigma}, \Delta_{\sigma}$          | Sigma-comparison deadband / sampled difference                                | [m/rad]     |
| $s_{\sigma}$                                | Deadbanded singular-value-conditioning direction selector                     | [-]         |
| $\tau_d, \tau_{\sigma}, \tau_{\text{null}}$ | Projected damping / sigma / total null-space torque                           | [N m]       |
| $E_N$                                       | Integrated projected joint-velocity magnitude during the disturbance interval | [rad]       |
| <b>Miscellaneous</b>                        |                                                                               |             |
| $T_s$                                       | Control sampling time (1 ms)                                                  | [s]         |
| $I, I_3, I_4, I_6, I_7$                     | Identity matrices                                                             | [-]         |

# Chapter 1

## Introduction

### 1.1 Motivation

Industrial manipulators commonly use position control to track commanded trajectories. In surface-finishing applications, placement tolerances can cause the physical surface pose to differ from its programmed pose. The surface is positioned manually, and the tool is held in a gripper. Their residual angular misalignment is therefore unknown before contact. Rigid position control resists the corresponding corrective motion and can generate high contact loads.

Torque-controlled collaborative robots allow contact compliance to be specified directly and account for a growing share of industrial deployments [14, 26]. Joint torque sensing and a torque-level command interface determine how the robot yields under contact as well as where it moves. In surface finishing, this capability can reduce the loads caused by angular tool–surface misalignment. It can also permit the grinding face to rotate towards the surface while maintaining the commanded normal press. The resulting alignment is evaluated relative to the physical surface.

Impedance control specifies this yielding behaviour as a dynamic relation between motion and interaction force [13]. Cartesian impedance control defines the relation for the end-effector pose. Its translational and rotational compliance can therefore be assigned independently along selected task directions. During edge-first contact, the wrench contains both force and moment components. Gains defined from the contact geometry allow part of this moment to rotate the tool towards the surface. The stiffness and damping



matrices consequently determine both the contact response and the free-space tracking behaviour.

## 1.2 Related Work

The relevant literature comprises three areas: Cartesian impedance control, real-time implementation on torque-controlled robots, and the placement of the centre of compliance  $p_c$ . The first area is Cartesian impedance control itself. The controller uses standard serial-manipulator kinematics [23, 4, 19]: homogeneous transformations for representing the end-effector pose and the Jacobian for relating joint motion to Cartesian motion. Khatib established the operational-space formulation, in which a Cartesian wrench  $F$  is mapped to joint torques  $\tau$  through  $J^\top$  [15]; this mapping is adopted in the controller. Hogan defined the impedance relation between end-effector motion and interaction force [13]. Albu-Schäffer et al. implemented Cartesian impedance control using joint-torque sensing [1], which corresponds to the torque-controlled interface used in this thesis.

The second area concerns the real-time implementation of Cartesian impedance control on torque-controlled robots. Mayr et al. implemented a modular Cartesian impedance controller for the Franka Emika Panda that combines real-time model access, null-space control, signal treatment, and command limiting [17]. The controller developed in this thesis uses the libfranka model interface to obtain the required robot state and model quantities during the real-time control loop. It also includes a selectable null-space torque  $\tau_{\text{null}}$  for influencing the redundant joint motion without changing the commanded Cartesian task.

Recent work has applied compliant and force-controlled strategies directly to robotic surface finishing. Alt et al. combined perception, planning, and force-controlled execution for robotic surface treatment [2]. Min et al. integrated demonstrated motion and force skills with impedance control on a 7-DOF collaborative robot [18]. Wu et al. used adaptive variable impedance control to regulate the contact force during robotic grinding [29]. These studies address force-controlled surface treatment. The present work instead examines contact-induced angular alignment through directional Cartesian stiffness and a virtual centre of compliance  $p_c$ .

The third area concerns the location of the centre of compliance  $p_c$ . Fasse and Broenink

formulated spatial impedance about a selected point, so that translation and rotation become coupled through the position of this point [7]. This formulation provides the theoretical basis for the compliance-centre shift used in this thesis. The same principle appears mechanically in remote-centre-compliance devices, in which elastic elements are arranged so that the tool behaves as if it rotates about a virtual point located away from the mechanism itself [20, 28]. More recent mechanically compliant and variable-compliance-centre strategies apply this principle to peg-in-hole insertion [27, 12]. In the mechanically compliant mechanisms, elastic bending produces the alignment motion rather than software control alone. In these approaches, the compliance is arranged so that contact forces reduce misalignment instead of increasing it. Most of these studies focus on insertion tasks and define the compliance centre  $p_c$  through either the mechanical design or a strategy adapted to the hole geometry. In this thesis, an equivalent effect is created in software by shifting the virtual centre of compliance  $p_c$  away from the TCP. The independent effects of this position and the axis-specific stiffness during planar tool alignment are then investigated on a torque-controlled robot.

Suomalainen et al. experimentally investigated how compliance-centre placement and compliant-axis selection influence alignment in an assembly task [25]. Friedrich et al. subsequently proposed an active remote centre of compliance  $p_c$  that combines passive compliance with active force control [11]. These approaches further illustrate the role of compliance location in contact alignment. The present work examines a software-defined virtual compliance centre  $p_c$  for planar tool-surface alignment.

### 1.3 Problem Statement

The angular relation between the tool and the surface plane is uncertain before contact because both the surface placement and the tool mounting carry tolerances. Under rigid position control, this residual angle produces an undesired contact moment rather than a corrective motion. A tool tilted with respect to the surface cannot be brought flat by translational compliance alone, because the wrench that closes the gap must also contain a moment. Translational compliance therefore does not by itself produce the required corrective rotation. Placing the centre of compliance  $p_c$  away from the tool centre point (TCP) couples translation and rotation, so that pressing the tool into the plane also causes

it to rotate towards the plane. This placement defines a task-to-impedance mapping rather than a physical pivot. The resulting response was evaluated from the motion measured during contact.

The alignment response cannot be predicted from the gain values alone because it also depends on the contact geometry, lever direction, robot configuration, and compliance of the tool mount. The experiments therefore compare directional stiffness and compliance-centre placement under otherwise matched conditions. A commanded tool orientation offset represents the initial angular misalignment between the tool and the surface. Chapters 2 and 3 introduce the frame conventions and controller formulation required for these comparisons.

The investigation addresses three dependencies in sequence. Each one concerns contact-induced alignment under a commanded tool orientation offset:

1. The effects of rotational stiffness about the commanded rotation axis and translational stiffness perpendicular to it are evaluated first.
2. The direction, sign, and magnitude of the tangential compliance-centre lever  $r_c$  are then varied across commanded rotation axes, directions, and offset angles.
3. Finally, these results are used to evaluate a geometric lever-selection rule beyond the two principal surface tangents.

## 1.4 Scope and Contributions

Within this scope, the experiments evaluate how the commanded tool orientation offset, surface-frame stiffness, and virtual centre of compliance  $p_c$  influence contact-induced alignment. The sequence begins with an alignment baseline. Stiffness and compliance-centre effects are then isolated before the geometric lever-selection rule is evaluated.

The controller is a phase-scheduled Cartesian impedance controller written in C++ using `libfranka` and `Eigen`. It runs in the 1 kHz torque-control loop of the Franka Emika Panda. The commanded Cartesian wrench  $F$  is mapped to the Cartesian impedance torque  $\tau_{\text{cart}}$  through  $J^\top$ , and the Coriolis torque  $\tau_c$  is obtained from the robot model and added to the command. Each control phase uses its own Cartesian stiffness values, while the damping is calculated from an estimate of the Cartesian inertia  $\Lambda$ .

A surface-fixed coordinate frame is constructed from the surface geometry. Its axes consist of the unit surface normal  $n_s$  and two mutually orthogonal unit vectors  $t_1$  and  $t_2$  lying in the surface plane. The directions  $t_1$  and  $t_2$  therefore represent the two independent tangential directions along the surface. This frame is used to define the translational and rotational stiffness values according to the contact geometry.

Each run follows a fixed sequence of control phases. First, the tool is brought to the commanded orientation and approaches the surface up to a specified geometric clearance. Based on the rectangular grinding-face geometry and the current tool orientation, the controller predicts the point on the tool expected to reach the surface first. For this purpose, the four tool corners are compared along the approach direction. A single leading corner is selected for a general orientation offset. If two neighbouring corners are equally close to the surface, their midpoint is used as the predicted contact point at the centre of the leading edge. If all four corners are equally close to the surface, the centre of the grinding face is used. This predicted contact point is fixed when the clearance is reached and remains unchanged during set-up and grinding.

During contact set-up, the desired position of the predicted contact point is moved gradually from the clearance position towards the surface and slightly beyond the surface plane. The physical surface prevents the tool from reaching this virtual target, so the resulting position error  $e_p$  generates the normal pressing force. Because the robot command is defined at the TCP, the controller calculates the corresponding TCP target using the fixed geometric offset between the TCP and the predicted contact point.

The desired tool orientation remains equal to the orientation reached at the clearance point, but it is not enforced rigidly. The finite rotational stiffness allows the actual tool orientation to change when the contact forces produce a moment, so the tool can rotate towards the surface during set-up.

During this phase, the  $6 \times 6$  stiffness and damping matrices defined at the virtual centre of compliance  $p_c$  are transformed to the TCP through an adjoint congruence transformation. The resulting off-diagonal blocks couple translation and rotation, allowing the commanded pressing motion to generate a corrective moment that helps the tool align with the plane surface during set-up. The effects of this translation–rotation coupling are investigated in this thesis. After contact set-up, the controller proceeds to the tangential grinding motion.

The software implements a subsequent grinding phase, including an optional tangential sweep. The reported runs ended at the enabled pre-grinding gate and therefore contain no grinding motion. The quantitative evaluation is restricted to the contact-induced alignment established during set-up.

The point-shift adjoint and congruence transformation are established theory. The implementation contribution lies in their phase-dependent, real-time integration with the contact sequence and controller described in Chapter 3.

Accordingly, the contributions of this thesis are divided into implemented controller components and experimentally established findings. The implemented work includes a frame-consistent real-time Cartesian impedance controller for the 7-DOF Franka Emika Panda. It also includes a spatial compliance-centre formulation in which the  $6 \times 6$  stiffness and damping matrices are defined at a selected virtual centre of compliance  $p_c$  and transformed to the TCP. In addition, a contact and evaluation methodology was developed in which the physical surface orientation and the grinding-face axis are defined independently, allowing the alignment of the tool to be evaluated relative to the surface.

The experimental findings follow the same progression. First, the measurements quantify how rotational stiffness about the commanded rotation axis and translational stiffness perpendicular to it affect contact-induced alignment. The response was axis-dependent, and the tested combination of low translational and high rotational stiffness produced a non-additive response. Within the investigated range, however, these stiffness changes were smaller than the effect of moving the virtual centre of compliance  $p_c$ .

Second, the compliance-centre study establishes distinct effects of lever direction, sign, definition frame, and tested position. The assisting tangential lever was perpendicular to the commanded rotation axis. Reversing the commanded rotation direction reversed the assisting lever sign on both principal surface tangents. About  $t_1$ , the zero-lever baseline already produced almost the full helpful robot rotation, whereas about  $t_2$  a tangential lever was necessary to produce rotation in the helpful direction. The tested 40 mm lever was not sufficient to remove the full initial  $t_2$  deviation.

Third, these observations lead to an offset-dependent geometric selection rule. The tangential lever is chosen perpendicular to the commanded rotation axis, and its sign is selected so that the press-induced moment opposes the angular error. Case C tested this

rule at four tangent-plane directions using one common 40 mm magnitude. At the two diagonal directions, the selected and fixed levers differed by only  $0.07^\circ$  and  $0.05^\circ$ , within the descriptive experimental scatter, because the fixed lever retained a component along the selected direction. About  $t_2$ , the selected lever changed the response from  $-1.61^\circ$  to  $+4.43^\circ$ . This extends the contribution beyond separate  $t_1$  and  $t_2$  comparisons.

Projected joint damping and two-point minimum-singular-value  $\sigma_{\min}$  conditioning were also implemented for the redundant seventh joint. Complementary Cartesian pose-hold trials evaluated both terms using an internally generated joint-torque disturbance equivalent to a point force at an offset point on link 3. The point was located 0.200 m along the link-frame  $z$ -axis. The results describe the null-space response to this commanded disturbance.

## 1.5 Thesis Structure

Chapter 2 establishes the impedance law, frame conventions, and compliance-centre shift. Their real-time implementation on the Franka Emika Panda is described in Chapter 3. The experimental method and results follow in Chapters 4 and 5. Chapter 6 states the resulting conclusions and future work.

# Chapter 2

## Theoretical Background

This chapter presents the mathematical basis of the Cartesian impedance controller. The required frame conventions and pose errors are introduced first. The subsequent sections derive the kinematic mappings, the impedance wrench  $F$ , the compliance-centre transformation, and the null-space torque  $\tau_{\text{null}}$ .

### 2.1 Reference Frames

The following right-handed coordinate frames are used in the theoretical formulation and the controller [23, 4].

- **Base frame  $\{0\}$ :** The base frame is fixed to the robot mounting surface. Its origin is the robot base reference point used by the kinematic model. For the upright Panda configuration used in this thesis, the  $z_0$ -axis is normal to the mounting surface, while the  $x_0$ - and  $y_0$ -axes lie in the mounting plane. Unless stated otherwise, Cartesian positions, directions, velocities, forces, and moments are expressed in this frame.
- **Joint frames  $\{1\}, \{2\}, \dots, \{n\}$ :** These frames are attached to the successive links of the kinematic chain according to the Denavit–Hartenberg convention [5, 4]. Joint  $i$  rotates about  $z_{i-1}$ , and  $p_{i-1}$  denotes a point on this axis. The joint frames define the transformations between consecutive links and the indexing used in the forward kinematics and geometric Jacobian  $J(q)$ .
- **End-effector frame  $\{\text{EE}\}$ :** The end-effector frame is attached to the controlled TCP and moves with the tool. In the implemented robot model, the end-effector

origin and TCP are identified, so  $p_{\text{TCP}} = p_{\text{EE}}$ . The physical grinding face is represented separately by its calibrated geometric offset from this frame. The position  $p_{\text{EE}}$  and orientation  $R_{\text{EE}}$ , both expressed relative to the base frame, define the current Cartesian pose of the robot. The axes  $x_{\text{EE}}$ ,  $y_{\text{EE}}$ , and  $z_{\text{EE}}$  describe the current end-effector orientation. The configured tool approach axis is defined in this frame and is transformed to the base frame using  $R_{\text{EE}}$ .

- **Desired end-effector frame  $\{d\}$ :** The desired frame represents the commanded TCP pose. Its origin is  $p_d$ , and its orientation is  $R_d$ , both expressed relative to the base frame. The difference between the desired and current end-effector frames provides the translational and rotational errors used by the impedance controller.
- **Surface task frame  $\{S\}$ :** The surface task frame is tied to the configured surface rather than to the moving tool. Its origin is placed at the configured surface point  $p_s$ . Its orientation  $R_{\text{surface}}$  is defined by the two surface tangents  $t_1$  and  $t_2$  and the surface normal  $n_s$ :


$$R_{\text{surface}} = \begin{bmatrix} t_1 & t_2 & n_s \end{bmatrix}. \quad (2.1)$$

The directions  $t_1$  and  $t_2$  lie in the surface plane and are mutually orthogonal, while  $n_s$  is normal to the surface. This frame is used to describe the commanded tool orientation offset and to assign stiffness and damping values according to the two tangential directions and the normal direction. For the contact task, the task-frame orientation  $R_{\text{task}}$  equals the surface-frame orientation:

$$R_{\text{task}} = R_{\text{surface}}. \quad (2.2)$$

Figure 2.1 shows these frames together with the pose error between the current and the desired end-effector frame.



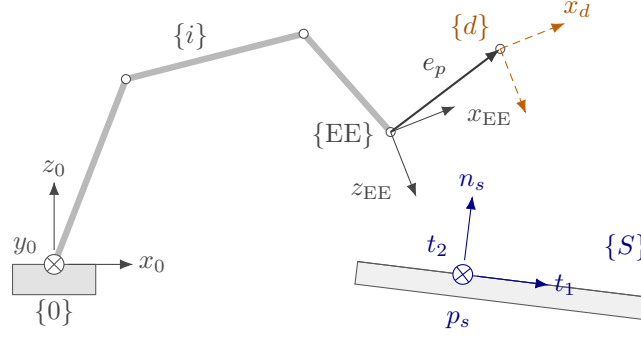

**Figure 2.1:** Frames used in the controller and the end-effector pose error.

## 2.2 Rigid-Body Transformations

The positions and orientations of the frames introduced in Section 2.1 are related through rotation matrices and homogeneous transformations.

### 2.2.1 Rotation Matrices

An orientation is represented by a rotation matrix  $R \in SO(3)$ , satisfying

$$R^\top R = I, \quad \det R = 1, \quad R^{-1} = R^\top. \quad (2.3)$$

Here,  $I$  is the  $3 \times 3$  identity matrix and  $\det(\cdot)$  denotes the determinant.

The notation  ${}^b R_a$  denotes the orientation of frame  $\{a\}$  expressed in frame  $\{b\}$ . Its columns contain the axes of frame  $\{a\}$  expressed in frame  $\{b\}$ . A vector  $v$  is transformed from frame  $\{a\}$  to frame  $\{b\}$  according to

$${}^b v = {}^b R_a {}^a v. \quad (2.4)$$

The elementary right-handed rotations use the rotation angles  $\alpha$ ,  $\beta$ , and  $\gamma$  about the  $x$ -,  $y$ -, and  $z$ -axes, respectively:

$$R_x(\alpha) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \alpha & -\sin \alpha \\ 0 & \sin \alpha & \cos \alpha \end{bmatrix}, \quad R_y(\beta) = \begin{bmatrix} \cos \beta & 0 & \sin \beta \\ 0 & 1 & 0 \\ -\sin \beta & 0 & \cos \beta \end{bmatrix}, \quad R_z(\gamma) = \begin{bmatrix} \cos \gamma & -\sin \gamma & 0 \\ \sin \gamma & \cos \gamma & 0 \\ 0 & 0 & 1 \end{bmatrix}. \quad (2.5)$$

### 2.2.2 Homogeneous Transformations

A position is represented by a vector  $p \in \mathbb{R}^3$ . The homogeneous transformation  ${}^bT_a$  combines the rotation and translation from frame  $\{a\}$  to frame  $\{b\}$  [4, 23]:

$${}^bT_a = \begin{bmatrix} {}^bR_a & {}^b p_a \\ 0^\top & 1 \end{bmatrix}, \quad (2.6)$$

where  ${}^b p_a$  is the position of the origin of frame  $\{a\}$  expressed in frame  $\{b\}$ . A point expressed in frame  $\{a\}$  is transformed to frame  $\{b\}$  according to

$${}^b p = {}^bR_a {}^a p + {}^b p_a. \quad (2.7)$$

Successive transformations are composed by matrix multiplication:

$${}^cT_a = {}^cT_b {}^bT_a. \quad (2.8)$$

### 2.2.3 End-Effector Pose

The controlled pose consists of the end-effector position

$$p_{EE} = \begin{bmatrix} p_{x,EE} & p_{y,EE} & p_{z,EE} \end{bmatrix}^\top \in \mathbb{R}^3 \quad (2.9)$$

and the orientation  $R_{EE} \in SO(3)$ . Both are expressed in the base frame and combined in the end-effector transformation  $T_{EE}$ :

$$T_{EE} = \begin{bmatrix} R_{EE} & p_{EE} \\ 0^\top & 1 \end{bmatrix}. \quad (2.10)$$

In the implementation,  $T_{EE}$  is obtained directly from the reported robot state, and the orientation is not converted to an Euler-angle representation.

### 2.2.4 Cartesian Pose Error

The desired end-effector transformation  $T_d$  is

$$T_d = \begin{bmatrix} R_d & p_d \\ 0^\top & 1 \end{bmatrix}, \quad (2.11)$$

where  $p_d$  and  $R_d$  are the desired TCP position and orientation, respectively. The current end-effector pose is denoted by  $T_{EE}$ .

The relative pose-error transformation  $T_{err}$  maps the current end-effector frame to the desired frame:

$$T_{err} = T_{EE}^{-1} T_d = \begin{bmatrix} R_{EE}^\top R_d & R_{EE}^\top (p_d - p_{EE}) \\ 0^\top & 1 \end{bmatrix}. \quad (2.12)$$

When the current and desired poses coincide,  $T_{err} = I_4$ . The rotational and translational blocks of eq. (2.12) therefore both represent zero error in this case.

**Position error.** The translational block of eq. (2.12) expresses the position error  $e_p$  in the current end-effector frame. The position error  $e_p$  used by the Cartesian impedance law is expressed in the base frame:

$$e_p = p_d - p_{EE} \in \mathbb{R}^3. \quad (2.13)$$

A positive position error  $e_p$  therefore points from the current TCP position towards the desired TCP position.

**Orientation error.** The relative rotation  $\Delta R$  is the rotational block of eq. (2.12):

$$\Delta R = R_{EE}^\top R_d. \quad (2.14)$$

It represents the rotation required to carry the current end-effector orientation to the desired orientation. If both orientations coincide, then  $\Delta R = I$ .

For use in the impedance controller,  $\Delta R$  is represented by a rotation angle  $\phi$  and a unit rotation axis  $u \in \mathbb{R}^3$  [23, 19]. The angle follows from

$$\text{tr}(\Delta R) = 1 + 2 \cos \phi, \quad (2.15)$$

and is therefore

$$\phi = \arccos\left(\frac{\text{tr}(\Delta R) - 1}{2}\right), \quad \phi \in [0, \pi]. \quad (2.16)$$

Rodrigues' formula expresses the relative rotation as

$$\Delta R = I + \sin \phi [u]_{\times} + (1 - \cos \phi)[u]_{\times}^2, \quad (2.17)$$

where

$$[u]_{\times} = \begin{bmatrix} 0 & -u_z & u_y \\ u_z & 0 & -u_x \\ -u_y & u_x & 0 \end{bmatrix}, \quad [u]_{\times}^{\top} = -[u]_{\times}. \quad (2.18)$$

Subtracting the transpose of  $\Delta R$  isolates its skew-symmetric part:

$$\frac{1}{2}(\Delta R - \Delta R^{\top}) = \sin \phi [u]_{\times}. \quad (2.19)$$

For  $\sin \phi \neq 0$ , the rotation axis is obtained from

$$u = \frac{1}{2 \sin \phi} \begin{bmatrix} \Delta R_{32} - \Delta R_{23} \\ \Delta R_{13} - \Delta R_{31} \\ \Delta R_{21} - \Delta R_{12} \end{bmatrix}. \quad (2.20)$$

Multiplying the unit axis by the angle gives the current-frame orientation error  $e_{R,EE}$ .

Rotating it into the base frame gives the controller orientation error  $e_R$ :

$$e_{R,EE} = \phi u, \quad e_R = R_{EE} e_{R,EE} \in \mathbb{R}^3. \quad (2.21)$$

The direction of  $e_R$  defines the axis of the required correction, while its magnitude is the angular error in radians. When the current and desired orientations coincide,  $\phi = 0$  and  $e_R = 0$ . Together,  $e_p = p_d - p_{EE}$  and  $e_R$  are expressed in the base frame and point in the translational and rotational directions required to reduce the pose error.

The complete Cartesian error  $e$  stacks the position error  $e_p$  and orientation error  $e_R$  used

by the impedance controller:

$$e = \begin{bmatrix} e_p \\ e_R \end{bmatrix} \in \mathbb{R}^6. \quad (2.22)$$

## 2.3 Kinematics of a 7-DOF Manipulator

Having defined the end-effector pose as the controlled variable, its relation to the joint configuration is introduced next.

### 2.3.1 Forward Kinematics

Forward kinematics maps the joint-configuration vector  $q$

$$q = \begin{bmatrix} q_1 & q_2 & \cdots & q_n \end{bmatrix}^\top \in \mathbb{R}^n \quad (2.23)$$

to the end-effector pose. Using the joint frames introduced in Section 2.1, the transformation from the base frame  $\{0\}$  to the final link frame  $\{n\}$  is

$${}^0T_n(q) = {}^0T_1(q_1) {}^1T_2(q_2) \cdots {}^{n-1}T_n(q_n). \quad (2.24)$$

In the standard Denavit–Hartenberg convention [5, 4, 23], joint  $i$  rotates by  $q_i$  about the axis  $z_{i-1}$ . The transformation between two consecutive joint frames is

$${}^{i-1}T_i(q_i) = R_z(q_i) T_z(d_i) T_x(a_i) R_x(\alpha_i), \quad (2.25)$$

where  $a_i$ ,  $d_i$ , and  $\alpha_i$  describe the fixed geometry between the consecutive joint frames, while  $q_i$  is the revolute-joint coordinate.

The complete transformation gives the end-effector pose in the base frame:

$${}^0T_n(q) = T_{EE}(q) = \begin{bmatrix} R_{EE}(q) & p_{EE}(q) \\ 0^\top & 1 \end{bmatrix}. \quad (2.26)$$

This convention establishes the standard kinematic relation and the joint and frame in-

dexing used in the subsequent Jacobian  $J(q)$  formulation. The real-time controller does not reconstruct the Panda pose from these Denavit–Hartenberg transformations. Instead, the current end-effector pose is read from the libfranka robot state, while the Jacobian is obtained from the libfranka model interface. The Denavit–Hartenberg formulation is therefore used here as the theoretical kinematic basis rather than as a second real-time kinematic implementation.

### 2.3.2 Differential Kinematics

Differential kinematics maps the joint-velocity vector  $\dot{q}$  to the end-effector twist  $\dot{x}$ :

$$\dot{x} = \begin{bmatrix} \dot{p}_{\text{EE}} \\ \omega_{\text{EE}} \end{bmatrix} = J(q)\dot{q}, \quad (2.27)$$

where  $\dot{p}_{\text{EE}} \in \mathbb{R}^3$  and  $\omega_{\text{EE}} \in \mathbb{R}^3$  are the linear and angular velocities of the end-effector, respectively. The joint-velocity vector is

$$\dot{q} = \begin{bmatrix} \dot{q}_1 & \dot{q}_2 & \cdots & \dot{q}_n \end{bmatrix}^\top \in \mathbb{R}^n, \quad (2.28)$$

and  $J(q) \in \mathbb{R}^{6 \times n}$  is the geometric Jacobian. For the 7-DOF Panda,  $n = 7$ . The end-effector twist and the Jacobian used in the controller are expressed in the base frame. This relation provides the Cartesian velocity  $\dot{x}$  required by the damping term of the impedance controller.

### 2.3.3 Geometric Jacobian

The geometric Jacobian  $J(q)$  is written column-wise as

$$J(q) = \begin{bmatrix} J_1 & J_2 & \cdots & J_n \end{bmatrix} \in \mathbb{R}^{6 \times n}, \quad (2.29)$$

where  $J_i$  describes the contribution of joint  $i$  to the end-effector twist. Since all joints of the Panda are revolute, each column is given by

$$J_i = \begin{bmatrix} z_{i-1} \times (p_{\text{EE}} - p_{i-1}) \\ z_{i-1} \end{bmatrix} \in \mathbb{R}^6, \quad (2.30)$$

where  $z_{i-1}$  is the axis of joint  $i$ , and  $p_{i-1}$  is a point on that axis. Both are expressed in the base frame. The upper block describes the linear velocity generated at the end-effector, while the lower block describes the corresponding angular velocity [23, 4].

Because the joint axes and their positions depend on the current configuration, the Jacobian also depends on  $q$ . In the implemented controller,  $J(q)$  is obtained directly from the libfranka model interface.

## 2.4 Cartesian Impedance Control

The geometric Jacobian  $J(q)$  is also used through its transpose to map a Cartesian wrench  $F$  to joint torques  $\tau$  [15]. Before introducing this mapping, the desired Cartesian interaction behaviour is defined.

In this thesis, Cartesian impedance control is formulated as a spring–damper relation between the end-effector motion and the commanded wrench [13, 21, 17]. The Cartesian pose error  $e$ , defined in Section 2.2.4, produces a restoring wrench through the stiffness matrix  $K$ , while the Cartesian velocity  $\dot{x}$  produces an opposing wrench through the damping matrix  $D$ . Their entries determine the translational and rotational compliance in the selected task directions [22]. Physically, the stiffness terms determine how strongly a pose error generates a restoring force or moment, while the damping terms oppose the corresponding Cartesian motion.

### 2.4.1 Impedance Wrench

The impedance wrench is evaluated in the robot base frame. The corresponding translational stiffness and damping matrices are  $K_{p,0}, D_{p,0} \in \mathbb{R}^{3 \times 3}$ , while the rotational matrices are  $K_{R,0}, D_{R,0} \in \mathbb{R}^{3 \times 3}$ . These matrices are not generally diagonal in the base frame because the direction-dependent gains are defined relative to the task frame. Their base-frame representation therefore changes with the task-frame orientation, even when the local gain values remain unchanged.

The commanded Cartesian force  $f$  is given by the translational spring–damper law [13, 17]

$$f = K_{p,0}e_p + D_{p,0}(\dot{p}_d - \dot{p}_{EE}) \in \mathbb{R}^3, \quad (2.31)$$

where  $\dot{p}_d$  and  $\dot{p}_{EE}$  are the desired and measured linear velocities expressed in the base frame. For a fixed position setpoint,  $\dot{p}_d = \mathbf{0}$ , and the damping term becomes  $-D_{p,0}\dot{p}_{EE}$ .

The commanded Cartesian moment  $m$  is

$$m = K_{R,0}e_R - D_{R,0}\omega_{EE} \in \mathbb{R}^3, \quad (2.32)$$

where  $\omega_{EE}$  is the measured end-effector angular velocity expressed in the base frame. Since no angular reference velocity is commanded, the rotational damping acts directly against  $\omega_{EE}$ .

The Cartesian wrench  $F$  stacks the force and moment:

$$F = \begin{bmatrix} f \\ m \end{bmatrix} = \begin{bmatrix} K_{p,0}e_p + D_{p,0}(\dot{p}_d - \dot{p}_{EE}) \\ K_{R,0}e_R - D_{R,0}\omega_{EE} \end{bmatrix} \in \mathbb{R}^6. \quad (2.33)$$

The wrench is ordered as force followed by moment, and all its components are expressed in the base frame. It is mapped to joint torques  $\tau_{\text{cart}}$  through the Jacobian transpose in the following subsection.

### 2.4.2 Joint-Torque Control Law

By the principle of virtual work, the commanded Cartesian wrench  $F$  is mapped to joint torques  $\tau_{\text{cart}}$  through the transpose of the geometric Jacobian  $J(q)$  [15]:

$$\tau_{\text{cart}} = J^\top(q)F, \quad (2.34)$$

where  $\tau_{\text{cart}} \in \mathbb{R}^n$  is the Cartesian impedance torque contribution and  $J^\top(q) \in \mathbb{R}^{n \times 6}$ . Substituting eq. (2.33) gives



$$\tau_{\text{cart}} = J^\top(q) \begin{bmatrix} K_{p,0}e_p + D_{p,0}(\dot{p}_d - \dot{p}_{\text{EE}}) \\ K_{R,0}e_R - D_{R,0}\omega_{\text{EE}} \end{bmatrix}. \quad (2.35)$$

The gain matrices in this expression are the base-frame matrices obtained from the selected task-frame gains. A change in the surface-frame orientation therefore changes the Cartesian wrench  $F$  and the resulting joint-torque contribution  $\tau_{\text{cart}}$ , even when the local gain values remain unchanged.

### 2.4.3 Coriolis and Gravity Compensation in libfranka

In a general model-compensated torque controller, the commanded joint torque  $\tau_{\text{cmd}}$  combines Cartesian impedance, gravity, and Coriolis/centrifugal compensation:

$$\tau_{\text{cmd}} = \tau_{\text{cart}} + \tau_g(q) + \tau_c(q, \dot{q}), \quad (2.36)$$

where  $\tau_g(q)$  is the gravity torque and  $\tau_c(q, \dot{q})$  is the Coriolis and centrifugal torque.

These terms are handled differently by the Franka Control Interface. The Coriolis vector provided by the libfranka model is added explicitly to the command because it is not compensated internally. A separate gravity term is not added. In external joint-torque mode, the robot compensates gravity and motor friction internally, and the commanded torque is interpreted as excluding gravity [9]. Adding  $\tau_g(q)$  would therefore compensate gravity twice.

The implemented commanded torque  $\tau_{\text{cmd,impl}}$  is consequently

$$\tau_{\text{cmd,impl}} = \tau_{\text{cart}} + \tau_c(q, \dot{q}) = J^\top(q)F + \tau_c(q, \dot{q}), \quad (2.37)$$

which follows the official libfranka Cartesian impedance example [10]. The null-space torque  $\tau_{\text{null}}$  introduced later is added to this expression to obtain the complete commanded torque in eq. (2.95).

### 2.4.4 Commanded and Estimated Wrench

The commanded wrench  $F$  and the model-estimated external wrench are distinct controller signals. The commanded wrench follows from eq. (2.33) and is mapped to the joints by  $J^\top$ . By contrast, the robot estimates the external wrench from the measured joint torques and its dynamic model. Its translational part is denoted by  $\hat{f}_{\text{ext}}$ .

Contact evaluation uses the force change from the value stored at the clearance transition,

$$\Delta \hat{f}_{\text{ext}} = \hat{f}_{\text{ext}} - \hat{f}_{\text{ref}}. \quad (2.38)$$

Both  $f$  and  $\Delta \hat{f}_{\text{ext}}$  are expressed in the base frame. Their signed components along the surface normal  $n_s$  are therefore obtained by projection. The commanded normal force is  $F_{n,\text{cmd}} = n_s^\top f$ , whereas the estimated normal-load magnitude is  $F_n = |n_s^\top \Delta \hat{f}_{\text{ext}}|$ .

During a quasi-static press, the selected sign convention gives  $n_s^\top \Delta \hat{f}_{\text{ext}} \approx F_{n,\text{cmd}} < 0$  and hence  $F_n \approx -F_{n,\text{cmd}}$ . This relation expresses approximate force balance; it does not identify the two signals. Model error, friction, transient motion, and motion within the tool mount can produce differences.

## 2.5 Surface Task Frame

The contact experiment uses a task frame tied to the surface geometry. This frame is defined before the stiffness and damping matrices are introduced, so that the local gain entries can later be interpreted as normal and tangential values instead of as abstract base-frame directions.

Let the unit surface normal  $n_s \in \mathbb{R}^3$ , with  $\|n_s\| = 1$ , be expressed in the robot base frame. To complete the frame, choose a surface-frame reference direction  $a_s \in \mathbb{R}^3$  that is not parallel to  $n_s$ . This direction fixes the orientation of  $t_1$  within the surface plane. The first tangent vector is obtained by projecting  $a_s$  onto the plane orthogonal to  $n_s$ , and the second tangent vector is then obtained by a cross product. With  $\tilde{t}_1$  denoting the unnormalised projected tangent, the construction is a Gram–Schmidt orthonormalisation step applied to the surface normal  $n_s$  and the surface-frame reference direction [23, 4]:

$$\begin{aligned}
\tilde{t}_1 &= a_s - n_s (n_s^\top a_s), \\
t_1 &= \frac{\tilde{t}_1}{\|\tilde{t}_1\|}, \\
t_2 &= n_s \times t_1.
\end{aligned} \tag{2.39}$$

Here,  $t_1$  and  $t_2$  are unit tangent vectors lying in the surface plane. This frame makes the gain directions physically meaningful: separate translational and rotational compliance can be assigned along the two surface tangents and along or about the surface normal instead of along arbitrary base-frame axes. The construction is valid as long as  $\|\tilde{t}_1\| \neq 0$ , which means that the surface-frame reference direction  $a_s$  must not be parallel to the normal  $n_s$ . To match the implemented controller and its parameter order, the surface task frame collects the two tangents first and the normal last,

$$R_{\text{surface}} = \begin{bmatrix} t_1 & t_2 & n_s \end{bmatrix}. \tag{2.40}$$

The column order is fixed: every surface-frame three-vector in the implementation uses  $[\text{tangent 1}, \text{tangent 2}, \text{normal}]^\top$ . In the gain representation below, the contact task uses this frame by setting  $R_{\text{task}} = R_{\text{surface}}$ . This makes stiffness values such as  $K_{p,t_1}$ ,  $K_{p,t_2}$ , and  $K_{p,n}$  local surface-frame quantities in that same order.

## 2.6 Stiffness and Damping Representation

Direction-dependent stiffness and damping gains are most conveniently defined in a task frame whose axes coincide with the desired principal compliance directions. The corresponding matrices are diagonal in that frame but are not generally diagonal when expressed in the robot base frame.

Let  $R_{\text{task}} \in SO(3)$  denote the orientation of the task frame relative to the base frame. Its columns contain the task-frame axes expressed in the base frame. The local gains  $K_{p,\text{task}}$ ,  $D_{p,\text{task}}$ ,  $K_{R,\text{task}}$ , and  $D_{R,\text{task}}$  are rotated into the corresponding base-frame gain matrices:

$$\begin{aligned}
K_{p,0} &= R_{\text{task}} K_{p,\text{task}} R_{\text{task}}^\top, & D_{p,0} &= R_{\text{task}} D_{p,\text{task}} R_{\text{task}}^\top, \\
K_{R,0} &= R_{\text{task}} K_{R,\text{task}} R_{\text{task}}^\top, & D_{R,0} &= R_{\text{task}} D_{R,\text{task}} R_{\text{task}}^\top.
\end{aligned} \tag{2.41}$$

For an impedance without translation–rotation coupling in the task frame, the full task-frame stiffness  $K_{\text{task}}$  and damping  $D_{\text{task}}$  are

$$K_{\text{task}} = \begin{bmatrix} K_{p,\text{task}} & 0 \\ 0 & K_{R,\text{task}} \end{bmatrix}, \quad D_{\text{task}} = \begin{bmatrix} D_{p,\text{task}} & 0 \\ 0 & D_{R,\text{task}} \end{bmatrix}. \quad (2.42)$$

The block rotation matrix  $T_R$  applies the task-frame rotation to the translational and rotational blocks:

$$T_R = \text{diag}(R_{\text{task}}, R_{\text{task}}), \quad (2.43)$$

The corresponding full base-frame stiffness  $K_0$  and damping  $D_0$  are

$$K_0 = T_R K_{\text{task}} T_R^\top, \quad D_0 = T_R D_{\text{task}} T_R^\top. \quad (2.44)$$

The task-frame rotation changes the matrix representation without changing the physical directions assigned to the gains. For example,  $K_{p,n}$  acts along the calibrated surface normal even when that normal is not aligned with a base-frame axis.

For the contact task, the task frame is the surface frame, whose orientation is

$$R_{\text{task}} = R_{\text{surface}} = \begin{bmatrix} t_1 & t_2 & n_s \end{bmatrix}. \quad (2.45)$$

For example, the local translational stiffness is defined as

$$K_{p,\text{task}} = \text{diag}(K_{p,t_1}, K_{p,t_2}, K_{p,n}), \quad (2.46)$$

and its base-frame representation is

$$K_{p,0} = R_{\text{surface}} \text{diag}(K_{p,t_1}, K_{p,t_2}, K_{p,n}) R_{\text{surface}}^\top. \quad (2.47)$$

The local rotational-stiffness entries  $K_{R,t_1}$ ,  $K_{R,t_2}$ , and  $K_{R,n}$  follow the same axis order:

$$K_{R,\text{task}} = \text{diag}(K_{R,t_1}, K_{R,t_2}, K_{R,n}), \quad (2.48)$$

and the damping matrices are constructed analogously. A change in the configured surface orientation therefore changes the corresponding base-frame gain matrices even when the local gain values remain unchanged. During approach, contact set-up, and grinding, the reported contact runs used this surface-frame construction for both translational and rotational gain blocks. In the reported experiments, the phase-indexed numerical matrices in eqs. (4.25) and (4.26) were assigned to  $[t_1, t_2, n_s]$  before transformation to the base frame. The active gain matrices were based on the calibrated surface frame and were not rotated with the current end-effector orientation  $R_{EE}$ .

## 2.7 Centre of Compliance

The task-frame transformation of eq. (2.44) rotates the principal stiffness directions while leaving the impedance reference point at the end-effector origin, identified here with the tool centre point (TCP). Independently of this orientation choice, the virtual spring can be centred at a different point. Shifting the impedance reference from the TCP to a centre of compliance  $p_c$  transforms a block-diagonal impedance at  $p_c$  into a coupled impedance at the TCP [19, 7, 24, 16]. This construction is applied during contact set-up to generate translation–rotation coupling that supports tool alignment. Its physical purpose is to use the normal pressing action not only to produce a translational contact load, but also to generate a rotational moment. The selected offset between  $p_c$  and the TCP defines the lever through which this moment is produced.

Two transformations used by the controller must therefore be distinguished. A task-frame rotation changes the directions along which the impedance acts, whereas the point shift changes the point about which the impedance is defined.

Figure 2.2 shows this geometry for the two signs of the tangential lever.

The lever  $r_c$  is a controller parameter. It places the virtual spring relative to the TCP and is selected before a run. It is distinct from the geometric point or edge of the grinding face used to generate the set-up trajectory.


Three forces occur in this thesis and they carry separate symbols, so that the one entering a cross product is never in doubt:

- $f$  is the commanded Cartesian force of the control law, the translational half of the

wrench  $F$  that eq. (2.34) maps to joint torques;

- $f_{\text{press}}$  is the elastic press this section works with,  $f_{\text{press}} = K_p e_p$ , the part of the commanded force that the compression against the surface produces;
- $\Delta \hat{f}_{\text{ext}}$  is the model-estimated external force change from the clearance-transition reference. It is distinct from the command, and its normal magnitude is  $F_n$ .

The moment  $m_c$  of this section is elastic and follows from  $f_{\text{press}}$  alone. It is the moment that press exerts at the TCP through the lever, namely the cross product of the vector running from the TCP to the centre of compliance with the press, in that order. The vector in this direction is  $-r_c$ , which is the reversal that produces the sign in eq. (2.55): written with  $r_c$  itself the cross product points the other way. The measured contact wrench, and the form it takes during the experiment, is treated in section 5.4.2.

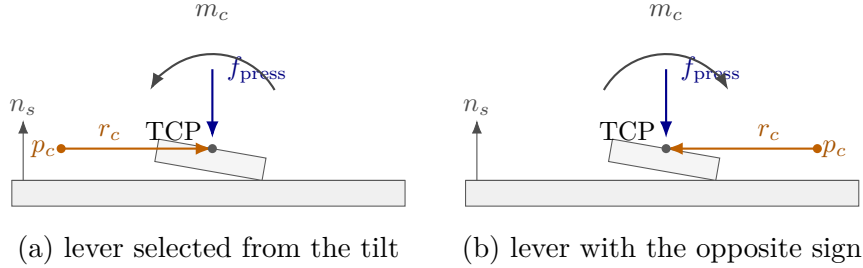

**Figure 2.2:** Moment produced by the compliance-centre lever at both lever signs.

For a dual-arm assembly task, Suomalainen et al. experimentally showed that compliance-centre placement and compliant-axis selection affect the alignment response [25]. This task-level result motivates the placement study in this thesis. The point-shift adjoint below remains derived from the spatial-transformation formulation.

The lever  $r_c$  from the centre of compliance  $p_c$  to the TCP, expressed in the base frame, is

$$r_c = p_{\text{TCP}} - p_c \in \mathbb{R}^3, \quad p_{\text{TCP}} = p_{\text{EE}}. \quad (2.49)$$

Let  $[r_c]_{\times}$  denote the skew-symmetric matrix satisfying  $[r_c]_{\times} a = r_c \times a$ . Under the small-angle approximation, the compliance-centre position error  $e_{p,c}$  is

$$e_{p,c} = e_p + [r_c]_{\times} e_R. \quad (2.50)$$

The positive sign follows from the selected lever convention. The vector from the TCP to

the centre of compliance  $p_c$  is  $-r_c$ , and therefore

$$e_R \times (-r_c) = [r_c]_{\times} e_R.$$

The compliance-centre error  $e_c$  stacks the translational error  $e_{p,c}$  and the rotational error  $e_R$ . The point-shift adjoint  $\text{Ad}(r_c)$  maps the corresponding TCP error to this stacked error:

$$e_c = \begin{bmatrix} e_{p,c} \\ e_R \end{bmatrix} = \text{Ad}(r_c) \begin{bmatrix} e_p \\ e_R \end{bmatrix}, \quad \text{Ad}(r_c) = \begin{bmatrix} I_3 & [r_c]_{\times} \\ 0 & I_3 \end{bmatrix}. \quad (2.51)$$

The point-shift adjoint  $\text{Ad}(r_c)$  changes the reference point of the impedance. By contrast,  $T_R = \text{diag}(R_{\text{task}}, R_{\text{task}})$  in eq. (2.44) changes its principal directions.

After any required task-frame rotation, the decoupled centre-of-compliance stiffness  $K_c$  and damping  $D_c$  are

$$K_c = \begin{bmatrix} K_p & 0 \\ 0 & K_R \end{bmatrix}, \quad D_c = \begin{bmatrix} D_p & 0 \\ 0 & D_R \end{bmatrix}. \quad (2.52)$$

All blocks in eq. (2.52) are expressed in the base-frame orientation. The compliance-centre wrench  $F_c$  is

$$F_c = K_c e_c.$$

Transforming this power-conjugate wrench gives the corresponding TCP wrench  $F_{\text{TCP}}$ :

$$F_{\text{TCP}} = \text{Ad}(r_c)^{\top} F_c.$$

The resulting TCP stiffness  $K_{\text{TCP}}$  is therefore

$$K_{\text{TCP}} = \text{Ad}(r_c)^{\top} K_c \text{Ad}(r_c) = \begin{bmatrix} K_p & K_p [r_c]_{\times} \\ [r_c]_{\times}^{\top} K_p & K_R + [r_c]_{\times}^{\top} K_p [r_c]_{\times} \end{bmatrix}. \quad (2.53)$$

The TCP damping  $D_{\text{TCP}}$  uses the same point shift:

$$D_{\text{TCP}} = \text{Ad}(r_c)^\top D_c \text{Ad}(r_c) = \begin{bmatrix} D_p & D_p[r_c]_\times \\ [r_c]_\times^\top D_p & D_R + [r_c]_\times^\top D_p[r_c]_\times \end{bmatrix}. \quad (2.54)$$

The off-diagonal blocks introduce translation–rotation coupling. A translational error can therefore generate a restoring moment, while a rotational error can generate a restoring force. This coupling is absent from the block-diagonal impedance defined directly at the TCP.

For a purely translational error,  $e_R = 0$ , the coupling reduces to a single term. With

$$f_{\text{press}} = K_p e_p,$$

the elastic moment at the TCP is

$$m_c = [r_c]_\times^\top f_{\text{press}} = -r_c \times f_{\text{press}}. \quad (2.55)$$

A commanded tool orientation offset turns the tool about one of the surface tangents. The lever is chosen perpendicular to that tangent within the tangent plane, so that the moment the press generates opposes the commanded rotation. Reversing the commanded orientation offset reverses the lever with it.

The right-handed surface frame satisfies

$$t_1 \times t_2 = n_s, \quad n_s \times t_1 = t_2, \quad n_s \times t_2 = -t_1. \quad (2.56)$$

Let the commanded orientation offset in the surface plane have components  $\theta_{t_1}$  and  $\theta_{t_2}$ . For a non-zero offset and a selected tangential lever magnitude  $\rho_c > 0$ , the lever direction can be written directly from these two components as

$$r_{c,t} = \rho_c \frac{\theta_{t_2} t_1 - \theta_{t_1} t_2}{\sqrt{\theta_{t_1}^2 + \theta_{t_2}^2}}. \quad (2.57)$$

The selected lever is therefore perpendicular to the commanded orientation-offset direction in the surface plane. Its sign changes when the commanded offset is reversed. For the two principal surface tangents, eq. (2.57) reduces to



$$r_{c,t} = -\rho_c t_2 \quad \text{for a positive } t_1 \text{ offset,} \quad r_{c,t} = +\rho_c t_1 \quad \text{for a positive } t_2 \text{ offset.}$$

Because the set-up motion is commanded primarily along the surface normal, the elastic press is approximated for this sign analysis as

$$f_{\text{press}} \approx -F_n n_s, \quad (2.58)$$

where  $F_n > 0$  denotes the corresponding quasi-static normal-force magnitude. Tangential force components caused by pose error, friction, or the evolving contact geometry are not represented in this first-order argument. Substitution into eq. (2.55) gives

$$m_c \approx -F_n \rho_c \frac{\theta_{t_1} t_1 + \theta_{t_2} t_2}{\sqrt{\theta_{t_1}^2 + \theta_{t_2}^2}}. \quad (2.59)$$

Thus, the press-induced moment is directed opposite to the commanded orientation offset. For a positive command about  $t_1$  it reduces to  $m_c \approx -F_n \rho_c t_1$ , and for a positive command about  $t_2$  it reduces to  $m_c \approx -F_n \rho_c t_2$ . Reversing the orientation offset reverses both the selected lever and the generated moment.

The coupling vanishes for  $r_c = 0$ . Conversely, if  $K_p$  is nonsingular, zero coupling implies  $r_c = 0$ . Since  $\text{Ad}(r_c)$  is invertible, the congruence transformation also preserves definiteness:

$$K_c \succeq 0 \implies K_{\text{TCP}} \succeq 0, \quad K_c \succ 0 \implies K_{\text{TCP}} \succ 0. \quad (2.60)$$

The same statements apply to  $D_c$  and  $D_{\text{TCP}}$ . Negative off-diagonal entries therefore represent coupling terms rather than negative stiffness directions.

The congruence transformation preserves the symmetry and definiteness of the source gain matrices. Closed-loop robot–controller–contact behaviour with phase switching was assessed experimentally under the operating conditions reported in Chapter 4.

This formulation is a local small-motion model in which  $r_c$  is treated as fixed during one controller evaluation. For a surface-fixed lever, its components remain constant in the surface frame and therefore its base-frame vector remains constant during set-up. For a

tool-fixed lever, its components remain constant in the end-effector frame, but its base-frame vector changes as the end effector rotates. The controller therefore updates the base-frame lever and the corresponding shifted gain matrices during each control cycle for the tool-fixed definition.

The local linearised centre of compliance  $p_c$  is consequently a selected point rather than a measured physical pivot. It need not coincide with the physical contact location. The observed motion also depends on the finite rotational stiffness, the lever direction, the environmental constraint, friction, and the additional active controller terms introduced later.

## 2.8 Null-Space Torque

The Franka Emika Panda has seven joints, while the controlled end-effector task contains six components: three translational and three rotational. The robot is therefore kinematically redundant. The Cartesian impedance behaviour at the end-effector is the primary objective, and the remaining joint-space freedom can be used for a secondary objective.

In this thesis, the secondary joint-space action consists of a null-space damping contribution and an active singular-value conditioning contribution. Both are projected using the joint-torque null-space projector  $N_\tau$ . For the full-row-rank  $6 \times 7$  Panda Jacobian, one joint-space direction remains after the six task-producing directions are accounted for. The singular value decomposition (SVD) is used here for two distinct purposes:  $v_7$  identifies this redundant direction, while  $\sigma_6$  describes the weakest task-producing mapping. The controller damps motion in the projected null space and can additionally bias the robot toward the sampled null-space direction with the larger  $\sigma_6$ . The required null-space direction, pseudoinverse, and projector are introduced before the two torque contributions are defined.

### 2.8.1 SVD-Based Null-Space Characterisation

The geometric Jacobian  $J(q)$  relates the current joint velocity  $\dot{q}$  to the end-effector velocity  $\dot{x}$ :

$$\dot{x} = J(q)\dot{q}, \quad J(q) \in \mathbb{R}^{6 \times 7}, \quad (2.61)$$

where

$$\dot{x} = \begin{bmatrix} \dot{p}_{\text{EE}} \\ \omega_{\text{EE}} \end{bmatrix} \in \mathbb{R}^6 \quad (2.62)$$

contains the three linear and three angular velocity components of the end-effector.

A joint velocity  $\dot{q}$  belongs to the kinematic null space when

$$J(q)\dot{q} = 0. \quad (2.63)$$

Such a joint velocity  $\dot{q}$  changes the robot configuration while preserving the end-effector position and orientation to first order. The Jacobian  $J(q)$  is the first-order term in the expansion of the forward kinematics about the current configuration, so a finite displacement along the null space leaves a pose error of second order in its magnitude. When  $J(q)$  has full row rank, the null space of the  $6 \times 7$  Jacobian  $J(q)$  is one-dimensional.

The SVD is applied to the Jacobian  $J(q)$  at the current joint configuration  $q$  [3, 6]:

$$J(q) = U_J \Sigma_J V_J^\top, \quad U_J \in \mathbb{R}^{6 \times 6}, \quad \Sigma_J \in \mathbb{R}^{6 \times 7}, \quad V_J \in \mathbb{R}^{7 \times 7}. \quad (2.64)$$

The Jacobian  $J(q)$  is the input to the decomposition. The SVD returns the matrices  $U_J$ ,  $\Sigma_J$ , and  $V_J$ , with the singular values contained in  $\Sigma_J$ .

The columns of  $V_J$  form an orthonormal basis of the seven-dimensional joint-velocity space. The joint velocity  $\dot{q}$  can therefore be expressed as

$$\dot{q} = V_J c = \sum_{i=1}^7 c_i v_i, \quad (2.65)$$

where  $v_i$  is the  $i$ -th column of  $V_J$ , and  $c \in \mathbb{R}^7$  contains the components of  $\dot{q}$  along these basis directions.

Similarly, the columns of  $U_J$  form an orthonormal basis of the six-dimensional end-effector-velocity space. Substituting  $\dot{q} = V_J c$  into eq. (2.61) gives

$$\dot{x} = J(q)V_J c = U_J \Sigma_J c. \quad (2.66)$$

Thus,  $V_J$  provides the basis directions in which the joint velocity  $\dot{q}$  is expressed, while  $U_J$  provides the corresponding basis directions in which the end-effector velocity  $\dot{x}$  is expressed. The matrix  $\Sigma_J$  scales the mapping between these directions.

For the  $6 \times 7$  Jacobian  $J(q)$ , the ordered Jacobian singular values  $\sigma_i$  occupy the diagonal of the singular-value matrix:

$$\Sigma_J = \begin{bmatrix} \text{diag}(\sigma_1, \sigma_2, \dots, \sigma_6) & 0_{6 \times 1} \end{bmatrix}, \quad (2.67)$$

where

$$\sigma_1 \geq \sigma_2 \geq \dots \geq \sigma_6 \geq 0. \quad (2.68)$$

For the first six basis directions,

$$Jv_i = \sigma_i u_i, \quad i = 1, \dots, 6, \quad (2.69)$$

where  $u_i$  is the  $i$ -th column of  $U_J$ . A joint velocity  $\dot{q}$  in the direction  $v_i$ ,

$$\dot{q} = c_i v_i, \quad (2.70)$$

therefore produces the end-effector velocity

$$\dot{x} = c_i \sigma_i u_i. \quad (2.71)$$

The singular value  $\sigma_i$  scales the mapping from the joint-velocity basis direction  $v_i$  to the corresponding end-effector-velocity basis direction  $u_i$ .

The seventh column of  $V_J$  corresponds to the zero column of  $\Sigma_J$  and therefore satisfies

$$Jv_7 = 0. \quad (2.72)$$

A null-space joint velocity  $\dot{q}$  may be scaled by the scalar amplitude  $c_7$ :

$$\dot{q} = c_7 v_7 \quad (2.73)$$

therefore changes the joint configuration without producing an end-effector velocity. When the Jacobian  $J(q)$  has full row rank,  $v_7$  spans its one-dimensional kinematic null space.

The minimum task-producing singular value  $\sigma_{\min}$  is

$$\sigma_{\min} = \sigma_6. \quad (2.74)$$

The quantities  $v_7$  and  $\sigma_6$  have different purposes. The vector  $v_7$  represents the redundant joint-motion direction, whereas  $\sigma_6$  describes the weakest of the six mappings from joint velocity  $\dot{q}$  to end-effector velocity. As  $\sigma_6$  approaches zero, one end-effector velocity direction becomes increasingly difficult to produce, indicating an approach to a loss of Jacobian  $J(q)$  row rank. Because the geometric Jacobian combines translational and rotational rows with different physical units, the numerical value of  $\sigma_{\min}$  depends on the chosen Jacobian representation and length unit. It is therefore used in this thesis as a relative conditioning indicator for comparisons made with the same Jacobian convention, rather than as a unit-invariant manipulability measure. Within that fixed convention,  $\sigma_{\min}$  is used to compare the conditioning of nearby joint configurations and to select the direction of the conditioning torque.

### 2.8.2 SVD-Based Pseudoinverse

The Jacobian pseudoinverse  $J^+$  maps end-effector-velocity components back to the corresponding joint-velocity directions. Its calculation uses the singular directions obtained from the SVD.

Small singular values lead to large reciprocal values and can amplify numerical errors. A relative singular-value threshold is therefore applied. Let  $\rho \geq 0$  denote the configured relative SVD tolerance. The corresponding absolute singular-value threshold  $\sigma_{\text{thr}}$  is calculated from the largest singular value  $\sigma_1$ :

$$\sigma_{\text{thr}} = \rho\sigma_1. \quad (2.75)$$

A singular direction is retained when

$$\sigma_i > \sigma_{\text{thr}}. \quad (2.76)$$

The Jacobian pseudoinverse  $J^+$  is defined as

$$J^+ = \sum_{\substack{i=1 \\ \sigma_i > \sigma_{\text{thr}}}}^6 \frac{1}{\sigma_i} v_i u_i^\top \in \mathbb{R}^{7 \times 6}. \quad (2.77)$$

For each retained singular direction,  $J^+$  maps an end-effector-velocity component along  $u_i$  to the corresponding joint-velocity direction  $v_i$  and scales it by  $1/\sigma_i$ . Directions at or below  $\sigma_{\text{thr}}$  receive a reciprocal value of zero.

### 2.8.3 Null-Space Projectors

The pseudoinverse is used to separate a joint-space vector into a task-related component and a null-space component. For an arbitrary joint velocity  $\dot{q}$ , this decomposition is

$$\dot{q} = \underbrace{J^+ J \dot{q}}_{\text{task-related component}} + \underbrace{(I_7 - J^+ J) \dot{q}}_{\text{null-space component}}. \quad (2.78)$$

The product  $J^+ J$  projects  $\dot{q}$  onto the joint-space directions that contribute to the end-effector velocity. Since  $J$  includes all three linear and all three angular velocity components, this task-related component accounts for the complete controlled end-effector pose at the velocity level.

The complementary joint-velocity projector  $N_q$  is

$$N_q = I_7 - J^+ J \in \mathbb{R}^{7 \times 7}. \quad (2.79)$$

Applying  $N_q$  to an arbitrary joint velocity  $\dot{q}$  gives the projected null-space velocity  $\dot{q}_{\text{null}}$ :

$$\dot{q}_{\text{null}} = N_q \dot{q}. \quad (2.80)$$

When  $J$  has full row rank and all six task-producing singular directions are retained,

$$J \dot{q}_{\text{null}} = J N_q \dot{q} = 0. \quad (2.81)$$

The projected joint velocity  $\dot{q}_{\text{null}}$  can therefore change the robot configuration while preserving the end-effector position and orientation to first order.

A corresponding decomposition is used for a secondary joint torque  $\tau_0$ . The joint-torque projector  $N_\tau$  is the transpose of the velocity projector:

$$N_\tau = N_q^\top = I_7 - J^\top J^{+\top} \in \mathbb{R}^{7 \times 7}. \quad (2.82)$$

The secondary torque can then be written as

$$\tau_0 = \underbrace{J^\top J^{+\top} \tau_0}_{\text{task-related component}} + \underbrace{N_\tau \tau_0}_{\text{null-space component}}. \quad (2.83)$$

The first component lies in the joint-torque subspace associated with Cartesian wrenches  $F$  through  $J^\top$ . The second component is retained as the secondary null-space torque  $\tau_{\text{null}}$ :

$$\tau_{\text{null}} = N_\tau \tau_0. \quad (2.84)$$

The transpose relation follows from the mechanical power  $\tau^\top \dot{q}$  between joint torques  $\tau$  and joint velocities  $\dot{q}$ . Thus,  $N_q$  is applied to joint velocities  $\dot{q}$ , while  $N_\tau$  is applied to secondary joint torques  $\tau_0$ .

The projector provides an orthogonal kinematic separation with respect to the Jacobian and the Moore–Penrose pseudoinverse. It is not the inertia-weighted dynamically consistent null-space projector used in some operational-space formulations. Cartesian task retention under the implemented secondary torques is therefore also evaluated experimentally.

For the SVD-based pseudoinverse,  $J^+ J$  is an orthogonal and symmetric projector. Hence,

$$N_q = N_\tau \quad (2.85)$$

holds analytically. The separate symbols distinguish the quantity on which the projector acts. In the implementation,  $N_\tau$  is additionally symmetrised to reduce floating-point asymmetry.

When  $J$  has full row rank and all six task-producing singular directions are retained,

$$N_q = N_\tau = v_7 v_7^\top. \quad (2.86)$$

In this case, projection retains only the component along the redundant direction  $v_7$ . When a singular value lies at or below the selected threshold, its associated right-singular direction is also assigned to the numerical null space.

#### 2.8.4 Null-Space Damping Torque

The current joint velocity  $\dot{q}$  is separated into task-related and null-space components according to eq. (2.78). The null-space damping torque  $\tau_d$  acts on the component  $N_q \dot{q}$ :

$$\tau_d = -d_{\text{null}} N_\tau \dot{q} = -d_{\text{null}} N_q \dot{q}, \quad (2.87)$$

where  $d_{\text{null}} \geq 0$  is the null-space damping coefficient. The negative sign makes the torque oppose motion along the redundant joint-space direction and dissipate the associated motion.

#### 2.8.5 Singular-Value Conditioning Torque

The second contribution applies an active torque along the redundant direction  $v_7$ . Its sign is selected by comparing  $\sigma_{\min}$  at two nearby joint configurations.

The probe angle  $\alpha_{\text{probe}}$  specifies the joint-space step from the current configuration  $q$ . The sampled configurations in the positive and negative null directions are  $q_+$  and  $q_-$ :

$$q_+ = q + \alpha_{\text{probe}} v_7, \quad q_- = q - \alpha_{\text{probe}} v_7. \quad (2.88)$$



The Jacobian  $J(q)$  is recalculated at both configurations. The minimum singular values  $\sigma_+$  and  $\sigma_-$  correspond to  $q_+$  and  $q_-$ , respectively:

$$\sigma_+ = \sigma_{\min}(J(q_+)), \quad \sigma_- = \sigma_{\min}(J(q_-)). \quad (2.89)$$

The sampled singular-value difference  $\Delta_\sigma$  is

$$\Delta_\sigma = \sigma_+ - \sigma_-. \quad (2.90)$$

The singular-value-conditioning direction selector  $s_\sigma$  is defined as

$$s_\sigma = \begin{cases} +1, & \Delta_\sigma > \delta_\sigma, \\ -1, & \Delta_\sigma < -\delta_\sigma, \\ 0, & |\Delta_\sigma| \leq \delta_\sigma, \end{cases} \quad (2.91)$$

where  $\delta_\sigma \geq 0$  is the comparison deadband. Within this deadband, the selector  $s_\sigma$  is set to zero and the conditioning contribution is suppressed.

The selected direction is invariant to the sign convention of  $v_7$  returned by the SVD. Reversing  $v_7$  exchanges  $q_+$  and  $q_-$  and reverses  $s_\sigma$ , so the product  $s_\sigma v_7$  remains unchanged.

The conditioning-torque magnitude  $k_\sigma$  is specified independently of the probe angle.

The vector  $v_7$  represents the instantaneous null-space direction at the current configuration. For a finite probe angle,  $q_+$  and  $q_-$  provide local approximations of the nonlinear constant-pose self-motion. The corresponding preservation of the end-effector pose is therefore a first-order property of the sampled direction.

The selector  $s_\sigma$  uses the sign of  $\Delta_\sigma$  to choose the sampled direction with the larger value of  $\sigma_{\min}$ . This produces a two-point directional conditioning strategy based on local comparison rather than on the magnitude of the sampled variation.

The vector  $s_\sigma v_7$  defines the selected secondary joint-space direction. Projecting it with  $N_\tau$  gives the singular-value conditioning torque  $\tau_\sigma$ :

$$\tau_\sigma = k_\sigma N_\tau (s_\sigma v_7), \quad (2.92)$$

where  $k_\sigma \geq 0$  specifies the commanded torque magnitude.

When the Jacobian has full row rank and all six task-producing singular directions are retained,  $v_7$  lies in the one-dimensional null space and

$$N_\tau v_7 = v_7. \quad (2.93)$$

The conditioning contribution therefore acts along the selected redundant joint direction, while the damping contribution opposes motion within the projected subspace.

### 2.8.6 Complete Null-Space Torque

Combining the damping and conditioning contributions gives

$$\tau_{\text{null}} = \tau_d + \tau_\sigma = -d_{\text{null}} N_\tau \dot{q} + k_\sigma N_\tau (s_\sigma v_7) \in \mathbb{R}^7. \quad (2.94)$$

When the Jacobian  $J(q)$  has full row rank, its null space is one-dimensional and is spanned by  $v_7$ . If the Jacobian loses row rank, the null space becomes multidimensional and the projector includes the additional numerical-null-space directions. The damping contribution acts on motion in all these directions through  $N_\tau \dot{q}$ . The implemented conditioning term retains its two probes along  $+v_7$  and  $-v_7$ .

The two contributions therefore have different roles:  $\tau_d$  opposes redundant joint motion that is already present, whereas  $\tau_\sigma$  actively biases the robot along the selected redundant direction toward the nearby sampled configuration with the larger  $\sigma_{\text{min}}$ .

The activation of the damping and conditioning contributions is a controller configuration choice. The available combinations and the configuration used in the reported experiments are described in section 3.6.

## 2.9 Complete Joint-Torque Command

The complete joint-torque command  $\tau_{\text{cmd}}$  combines the Cartesian impedance torque  $\tau_{\text{cart}}$ , the null-space torque  $\tau_{\text{null}}$ , and the Coriolis compensation  $\tau_c$ :

$$\tau_{\text{cmd}} = \tau_{\text{cart}} + \tau_{\text{null}} + \tau_c(q, \dot{q}) = J^\top(q)F + \tau_{\text{null}} + \tau_c(q, \dot{q}). \quad (2.95)$$

Here,  $\tau_{\text{cart}} = J^\top(q)F$  is the Cartesian impedance torque,  $\tau_{\text{null}}$  is the secondary null-space torque, and  $\tau_c(q, \dot{q})$  is the Coriolis and centrifugal compensation obtained from the robot model and added in the control callback. A separate gravity term is not added because gravity compensation is handled internally by the Franka Control Interface, as described in Section 2.4.3. The next chapter implements these torque contributions in the real-time control loop and combines them with the surface-relative geometry, phase-dependent references, and contact sequence.

# Chapter 3

## Controller Design and Real-Time Implementation

This chapter describes how the Cartesian impedance formulation of Chapter 2 is implemented as a real-time controller for the Franka Emika Panda. The controller is written in C++ using libfranka and Eigen and is executed through the Franka Control Interface (FCI) with a nominal control period of 1 ms.

The implementation is organised around the control flow required for the surface-alignment task. A surface-relative task representation first defines the surface frame, the grinding-face orientation, and the point or edge of the rectangular face used by the contact sequence. The real-time callback then updates the Cartesian reference, evaluates the impedance wrench, and maps it to joint torque. During set-up, the directional impedance can be shifted to a virtual centre of compliance  $p_c$ , so that the commanded normal press also produces a moment. A secondary SVD-based null-space controller acts on the redundant joint motion without changing the Cartesian task to first order.

The chapter therefore follows the controller logic rather than the source-code file structure. The architecture is introduced first, followed by the task geometry, real-time impedance calculation, phase-dependent gains and virtual centre of compliance, contact sequence, null-space controller, and supporting real-time, safety, and recording functions. Numerical values used in the reported experiments are documented in Chapter 4 and Appendix C rather than repeated throughout this chapter.

### 3.1 Controller Architecture

The software separates configuration and operator interaction from the real-time control calculation and from post-run data processing. The complete parameter set is read and validated before a controller session starts. The real-time callback then receives only the prepared configuration, preallocated state, robot-model interface, and non-blocking operator requests. File output and run evaluation are performed after torque control has stopped.

Table 3.1 summarises the main functional subsystems.

**Table 3.1:** Functional subsystems of the surface-grinding controller.

| Subsystem                        | Responsibility                                                                                                              |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Configuration                    | Validates the parameter set and constructs the typed controller configuration.                                              |
| Task geometry                    | Constructs the surface frame, tool orientation target, grinding-face geometry, and geometric clearance quantities.          |
| Real-time controller             | Updates the active phase and Cartesian reference and evaluates the 1 kHz joint-torque callback.                             |
| Impedance and null-space control | Constructs the active Cartesian gains, optional compliance-centre shift, Cartesian wrench, and secondary null-space torque. |
| Operator and robot interface     | Manages mode selection, manual guidance, robot preparation, gripper actions, and tool handling.                             |
| Recording and evaluation         | Buffers controller signals during torque control and performs file output and run-summary calculations afterwards.          |

The main operating path is a phase sequence for tool orientation, surface approach, contact set-up, and grinding. Additional modes provide standard Cartesian pose hold, pose hold with the set-up impedance, and manual guidance. The same configuration system supplies the surface and tool geometry, phase-dependent Cartesian gains, damping settings, virtual centre of compliance, null-space parameters, safety thresholds, and data-



### 3.2.1 Surface Task Frame

The mathematical surface-frame construction is introduced in Section 2.5. In the implementation, the parameter set contains a point  $p_s$  on the surface, the surface orientation, and a surface-frame reference direction  $a_s$  used to define the first tangent. The resulting rotation has the fixed column order

$$R_{\text{surface}} = \begin{bmatrix} t_1 & t_2 & n_s \end{bmatrix}.$$

The reference direction  $a_s$  is projected onto the plane orthogonal to  $n_s$  and normalised to obtain  $t_1$ . The second tangent is constructed as

$$t_2 = n_s \times t_1,$$

which completes the right-handed frame in robot-base coordinates. A fallback reference direction is used when the configured direction is approximately parallel to  $n_s$ .

This surface frame is used consistently for the approach direction, the surface-relative orientation command, directional Cartesian gains, the compliance-centre definition when a surface-fixed lever is selected, and the surface-resolved quantities used in the experimental evaluation. The descent direction is

$$-n_s,$$

from the free-space starting region towards the configured plane. The calibrated surface values used for the reported experiments are given in Chapter 4 and Appendix C.

### 3.2.2 Surface-Relative Tool Orientation

The grinding-face direction is calibrated once in the end-effector frame. Its current direction in the robot base frame is calculated from the measured end-effector orientation:

$$n_T = R_{\text{EE}} n_{\text{EE}}. \tag{3.1}$$

The flat target direction is chosen as the configured sign of the surface normal. Com-

manded orientation offsets about  $t_1$  and  $t_2$  are combined into a surface-frame rotation vector and applied to this flat target:

$$n_d = \exp([\theta_{t_1} t_1 + \theta_{t_2} t_2]_{\times}) (\pm n_s). \quad (3.2)$$

The shortest rotation that aligns the captured tool direction with  $n_d$  is applied to the complete start orientation. The implementation can additionally prescribe a twist about the desired grinding-face axis. The long axis of the rectangular face and the selected surface tangent are projected onto the plane normal to  $n_d$ , and the requested in-plane rotation is then applied about that axis. Because a centred rectangle is unchanged by a half-turn, the implementation selects the equivalent orientation closest to the captured start pose.

The construction separates the two orientation roles used later in the contact sequence:  $\theta_{t_1}$  and  $\theta_{t_2}$  define the commanded inclination relative to the surface, whereas the normal-axis twist defines the in-plane orientation of the rectangular face. The exact settings used for the measurements are stated in Chapter 4.

### 3.2.3 Grinding-Face Geometry and Geometric Clearance

The grinding face is represented as a rectangle fixed in the end-effector frame. Its centre offset, half-width vector, and half-length vector define the four vertices

$$\{r_{\text{face,EE}} \pm r_{\text{width,EE}} \pm r_{\text{length,EE}}\}. \quad (3.3)$$

For a selected point on the face with end-effector-frame offset  $r_{g,\text{EE}}$ , its current base-frame position is

$$p_g = p_{\text{EE}} + R_{\text{EE}} r_{g,\text{EE}}. \quad (3.4)$$

During tool orientation and surface approach, all four vertices are transformed to the base frame and compared along the descent direction. The vertex with the largest projection is geometrically closest to the surface in that direction. Vertices whose projected positions agree within the configured tie tolerance are grouped and averaged. A general orientation



therefore selects a leading corner, two nearly equal neighbouring corners define a leading edge, and four nearly equal corners define the face centre.

The controller distinguishes the clearance of the foremost face point from the height of the averaged controlled point. The foremost-face clearance is used only to determine the transition from approach to set-up. The averaged point is the reference point used for the subsequent set-up motion.

At the geometric clearance transition, the implementation stores

- the selected end-effector-frame point or edge reference;
- its projection onto the calibrated surface;
- the measured TCP pose and the orientation that will be held during set-up; and
- the current model-estimated external wrench as a reference for later changes.

The selected face offset is then kept fixed during set-up. The desired contact-point position is generated relative to its projected surface point and converted back to the corresponding TCP reference. This allows the phase logic to command the geometrically relevant point on the grinding face while the Cartesian impedance law remains formulated at the TCP.

### 3.3 Real-Time Cartesian Impedance Controller

One controller session prepares the task geometry and phase-dependent gains and then registers a joint-torque callback with libfranka. Before torque control begins, the current robot state is read once to initialise the desired pose, phase state, external-wrench reference, and preallocated recording buffer.

The callback receives the current `RobotState` and the elapsed cycle duration and returns the seven commanded joint torques  $\tau_{\text{cmd}}$ :

**Listing 3.1:** Registration of the joint-torque callback through libfranka.

```
1 | robot.control(  
2 |     [&](const franka::RobotState& state,  
3 |         franka::Duration period) -> franka::Torques {  
4 |  
5 |         // Real-time state and torque calculations  
6 |  
7 |         return franka::Torques(tau_array);  
8 |     });
```

Within each callback, the measured joint state, end-effector pose, end-effector Jacobian,

robot-model quantities, and model-estimated external wrench are read first. The phase logic then updates the desired Cartesian reference. The controller evaluates the Cartesian error, selects the active impedance branch, maps the resulting wrench through  $J^\top$ , adds the secondary torque terms, records the required signals, and returns the final joint-torque vector.

### 3.3.1 State and Reference Update

The robot state provides the measured joint configuration  $q$ , joint velocity  $\dot{q}$ , and end-effector transformation. The libfranka model returns the  $6 \times 7$  geometric Jacobian  $J(q)$  of the configured end-effector frame together with the joint-space mass matrix and Coriolis terms. Multiplication of the Jacobian by  $\dot{q}$  gives the measured Cartesian linear and angular velocities in the base frame.

The end-effector transformation supplied by the robot state is used directly for  $p_{EE}$  and  $R_{EE}$ ; the real-time controller does not reconstruct this pose from a separate Denavit–Hartenberg chain.

The phase state machine supplies the desired TCP position  $p_d$ , desired linear velocity  $\dot{p}_d$ , and desired orientation  $R_d$ . Their meaning depends on the active phase: tool orientation changes the orientation reference while holding position, approach advances the position reference along  $-n_s$ , set-up advances the selected grinding-face point into the surface, grinding maintains the normal press and can add a tangential sweep, and pose hold regulates a captured Cartesian pose. The detailed phase logic is described in Section 3.5.

### 3.3.2 Cartesian Error and Impedance Wrench

The translational error is the desired-minus-measured position error. The orientation error follows the convention introduced in Section 2.2.4. The current-to-desired relative rotation is converted to an axis–angle vector and expressed in the robot base frame:

$$\Delta R = R_{EE}^\top R_d, \quad e_R = R_{EE} u \phi. \quad (3.5)$$

A rotational mask can be applied after this transformation by resolving  $e_R$  in the surface frame, selecting the enabled components, and transforming the result back to the base

frame. The mask acts on the rotational spring error; the damping term continues to use the measured angular velocity.

The six-dimensional displacement and velocity errors are

$$\Delta x = \begin{bmatrix} e_p \\ e_R \end{bmatrix}, \quad \Delta v = \begin{bmatrix} \dot{p}_d - \dot{p}_{EE} \\ -\omega_{EE} \end{bmatrix}. \quad (3.6)$$

For the decoupled impedance branch, the Cartesian wrench is evaluated from the translational and rotational blocks separately:

$$F = \begin{bmatrix} K_p e_p + D_p (\dot{p}_d - \dot{p}_{EE}) \\ K_R e_R - D_R \omega_{EE} \end{bmatrix}. \quad (3.7)$$

The same force–moment ordering is used for the coupled branch, but the  $6 \times 6$  stiffness and damping matrices are first shifted from the selected centre of compliance to the TCP as described in Section 3.4.3. The returned wrench is denoted

$$F = \begin{bmatrix} f \\ m \end{bmatrix} \in \mathbb{R}^6. \quad (3.8)$$

### 3.3.3 Joint-Torque Command

The Cartesian wrench is mapped to joint torque through

$$\tau_{\text{cart}} = J^\top(q)F. \quad (3.9)$$

The SVD-based secondary controller supplies  $\tau_{\text{null}}$ . During the dedicated Cartesian pose-hold disturbance study of Section 4.6, the callback also adds the internally commanded joint-torque-equivalent disturbance  $\tau_{\text{dist}}$ . Outside this experiment,  $\tau_{\text{dist}} = 0$ .

The Coriolis and centrifugal contribution  $\tau_c(q, \dot{q})$  is obtained from the libfranka model. The complete impedance-controlled command is therefore

$$\tau_{\text{cmd}} = \tau_{\text{cart}} + \tau_{\text{null}} + \tau_{\text{dist}} + \tau_c(q, \dot{q}). \quad (3.10)$$

No separate gravity term is added because the Franka Control Interface handles gravity compensation for the external joint-torque command, as described in Chapter 2. The final torque vector is returned directly to libfranka; robot-side monitoring and the configured collision behaviour remain active.

## 3.4 Phase-Dependent Impedance and Centre of Compliance

The active Cartesian impedance is determined by three choices: the directional stiffness, the damping associated with those directions, and whether the impedance reference point is the TCP or a shifted virtual centre of compliance. The controller constructs the directional gains first and applies the compliance-centre transformation afterwards.

### 3.4.1 Directional Cartesian Gains

Directional gains are defined in the frame that gives them a physical meaning for the active task. A diagonal gain  $G_{\text{surface}}$  expressed along  $[t_1, t_2, n_s]$  is transformed to the base frame by

$$G_0 = R_{\text{surface}} G_{\text{surface}} R_{\text{surface}}^\top. \quad (3.11)$$

The base-frame matrix can then be applied directly to the base-frame Cartesian errors used by the control law. The implemented frame policy is summarised in Table 3.2.

**Table 3.2:** Coordinate frames used for the phase-dependent Cartesian gains.

| Controller mode                       | Translational gains                             | Rotational gains                |
|---------------------------------------|-------------------------------------------------|---------------------------------|
| Tool orientation and surface approach | Surface frame $[t_1, t_2, n_s]$                 | Surface frame $[t_1, t_2, n_s]$ |
| Set-up and grinding                   | Selectable between base frame and surface frame | Surface frame $[t_1, t_2, n_s]$ |
| Cartesian pose hold                   | Base frame $[x, y, z]$                          | Base frame $[x, y, z]$          |
| Set-up-impedance hold                 | Same construction as set-up                     | Same construction as set-up     |
| Phase-gate hold                       | Configurable hold frame                         | Configurable hold frame         |

The set-up phase is the central case for the contact experiments. Its translational and rotational gains can be aligned with the surface frame so that normal and tangential stiffnesses can be selected independently. The specific matrices used in each experimental case are intentionally left to Chapter 4, where the varied and fixed entries are defined.

Set-up and grinding use the same source stiffness and damping blocks. What changes at the phase transition is the generated Cartesian reference and the choice between the coupled and decoupled impedance branch. A phase gate can temporarily replace the active matrices with dedicated hold gains while the current reference is maintained.

### 3.4.2 Inertia-Scaled Damping

For phase groups configured to use inertia-scaled damping, the damping coefficients are calculated from the current Cartesian inertia and the active directional stiffness. The joint-space inertia matrix  $M(q)$  is obtained from the libfranka model and factorised using a lower–diagonal–lower-transpose (LDLT) decomposition,

$$M = LDL^\top.$$

Rather than explicitly forming  $M^{-1}$ , Eigen’s LDLT factorisation is used to solve

$$MX = J^\top,$$

which gives  $X = M^{-1}J^\top$ . The regularised base-frame operational-space inertia estimate is then

$$\Lambda_0 = \left(JM^{-1}J^\top + 10^{-9}I_6\right)^{-1}. \quad (3.12)$$

The matrix is transformed into the coordinate frame of the active gain block,

$$\Lambda = T_R^\top \Lambda_0 T_R, \quad \lambda_i = \Lambda_{ii}, \quad (3.13)$$

so that each stiffness entry  $k_i$  is paired with the corresponding directional Cartesian inertia  $\lambda_i$ . The calculated damping coefficient is

$$d_{\text{dir},i} = 2\zeta\sqrt{\lambda_i k_i}, \quad (3.14)$$

where  $\zeta$  is the configured directional damping factor. For a single decoupled direction with  $\zeta = 1$ , this expression corresponds to the critical-damping coefficient of that local second-order model.

The calculation is performed independently for the three translational and three rotational directions and is subject to the configured coefficient bounds and numerical validity checks. The resulting damping is cached by phase group and recalculated when that group is entered again, so the current robot configuration is used for the new Cartesian-inertia estimate. If the calculation cannot be used, the configured damping matrix remains available as a fallback.

The reported surface-contact sequence used inertia-scaled damping in the phase groups stated in Chapter 4. Standard Cartesian pose hold is a separate case: its reported null-space trials used fixed hold damping rather than this inertia-scaled calculation.

### 3.4.3 Virtual Centre of Compliance

The theoretical point-shift formulation is derived in Section 2.7. In the implementation, the source translational and rotational gains are first expressed in the required task frame and assembled at a selected virtual centre of compliance  $p_c$ . They are then shifted to the TCP.

The implemented lever convention is

$$r_c = p_{\text{TCP}} - p_c.$$

Two definitions are supported because the meaning of a fixed lever depends on the frame in which it is specified.

For a tool-fixed definition, the configured centre displacement is constant in end-effector coordinates. The corresponding base-frame lever is therefore updated from the measured end-effector orientation during every callback. It rotates in the base frame as the end effector rotates.

For a surface-fixed definition, the lever components are constant in  $[t_1, t_2, n_s]$ . Because the surface frame is fixed for one controller session, the resulting base-frame lever is constant during set-up. The configuration loader requires exactly one definition when the virtual centre is enabled:

$$\text{tool-frame definition} \oplus \text{surface-frame definition} = \text{true}. \quad (3.15)$$

The active base-frame lever is used to construct the point-shift adjoint. The source translational and rotational matrices are assembled into block-diagonal spatial gains at  $p_c$ , and the same congruence is applied independently to stiffness and damping:

$$K_{\text{TCP}} = \text{Ad}^\top(r_c) K_c \text{Ad}(r_c), \quad D_{\text{TCP}} = \text{Ad}^\top(r_c) D_c \text{Ad}(r_c). \quad (3.16)$$

For a tool-fixed lever,  $r_c$  and therefore the shifted base-frame matrices are updated as the measured end-effector orientation changes. For a surface-fixed lever, the base-frame lever remains constant and the shifted matrices remain fixed as long as the source gains do not change.

The off-diagonal blocks generated by the point shift introduce translation–rotation coupling. A translational position or velocity error can therefore contribute to the commanded TCP moment, and a rotational error can contribute to the commanded TCP force. When  $r_c = 0$ , the point shift disappears and the spatial matrices reduce to the decoupled block-diagonal form.

This coupling is the mechanism used for contact-induced alignment during set-up. The desired orientation is held at the value captured at the geometric clearance transition, so no time-varying tipping trajectory is commanded. Instead, the selected grinding-face point is advanced towards the surface. The resulting normal press acts through the finite Cartesian impedance; when a non-zero compliance-centre lever is enabled, the shifted impedance introduces a corresponding moment that can assist or oppose the contact-induced rotation. The measured response also depends on the directional stiffness, contact geometry, robot configuration, and physical tool–surface interaction.

The coupled branch is used only in the controller modes configured for a virtual centre of compliance. Other phases use the decoupled Cartesian impedance. The exact cases that used the point-shifted branch in the reported experiments are specified in Chapter 4 and Appendix C.


## 3.5 Contact Sequence and Reference Generation

The main run sequence is

tool orientation  $\longrightarrow$  surface approach  $\longrightarrow$  set-up  $\longrightarrow$  grinding.

The orientation phase can be omitted by configuration, and optional operator gates can hold the current reference between phases. Standard Cartesian pose hold, set-up-impedance hold, and manual guidance are separate operator modes. Figure 3.2 summarises the implemented phase flow.



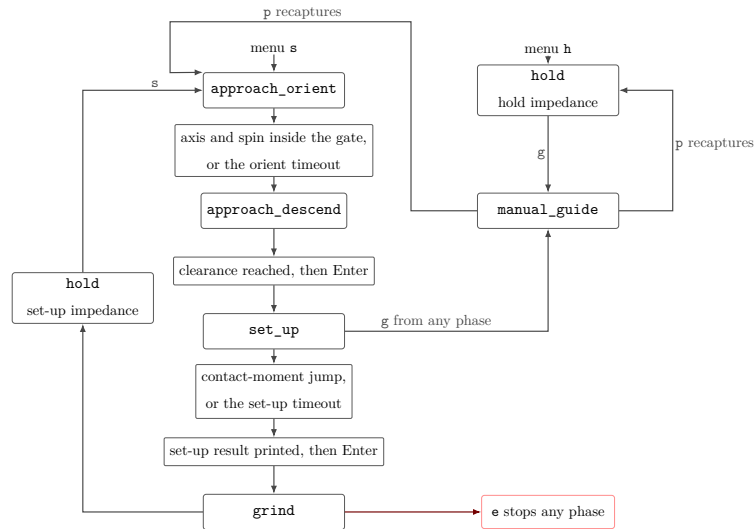

**Figure 3.2:** Run phase sequence and Cartesian pose hold.

### 3.5.1 Tool Orientation

The tool-orientation phase keeps the captured start position fixed while the desired orientation is advanced towards the surface-relative target of Section 3.2.2. The reference follows a rate-limited interpolation from the captured start orientation.

The transition is evaluated from the tool-axis error and, when the in-plane twist is enabled, the remaining spin error about the target tool axis. A configured minimum duration prevents immediate acceptance of a transient orientation, while a timeout provides an alternative transition path. The orientation reached at the end of this phase becomes the reference used during surface approach.

### 3.5.2 Surface Approach

During surface approach, the desired position advances from the captured start position along  $-n_s$  with a rate limit and maximum travel. The rectangular grinding-face geometry is evaluated continuously during this motion, so the controller always knows which corner or edge currently has the smallest geometric clearance to the surface.

The transition to set-up occurs when the foremost-face clearance reaches the configured geometric threshold. This is not a force-detected contact event. The model-estimated external wrench is recorded during approach, but it does not determine the phase transition.

At the clearance transition, the selected grinding-face point or edge is selected and held constant, and the controller stores its projected surface point, the current TCP pose, the orientation reference, and the external-wrench reference. If the optional pre-set-up gate is enabled, the controller first holds the captured pose until operator confirmation and then captures the set-up references from the current measured state. Reaching the maximum permitted approach distance before the geometric clearance is satisfied terminates the approach.

### 3.5.3 Set-Up

Set-up generates the contact press that is evaluated in the experiments. The selected grinding-face point is advanced from its projected surface location along the descent direction. A scalar set-up coordinate is integrated at the configured speed and clamped at its configured endpoint. From this contact-point target and the stored end-effector-frame offset, the controller calculates the corresponding TCP reference.

The desired orientation remains equal to the orientation captured at the clearance transition. It therefore acts as a finite-stiffness rotational reference rather than as a rigid pose constraint. Contact-induced rotation can occur when the Cartesian wrench overcomes the corresponding rotational spring. When the virtual centre of compliance is enabled, the point-shifted matrices of Section 3.4.3 additionally couple the translational press to the commanded moment.

The model-estimated external wrench is referenced to the value captured at the clearance transition. For the force component,  $\Delta \hat{f}_{\text{ext}}$  is resolved in the surface frame as

$$R_{\text{surface}}^{\top} \Delta \hat{f}_{\text{ext}} = \begin{bmatrix} t_1^{\top} \Delta \hat{f}_{\text{ext}} & t_2^{\top} \Delta \hat{f}_{\text{ext}} & n_s^{\top} \Delta \hat{f}_{\text{ext}} \end{bmatrix}^{\top}. \quad (3.17)$$

The last component is the signed model-estimated normal-force change. The commanded wrench  $F = [f^{\top}, m^{\top}]^{\top}$  and the model-estimated external wrench remain separate signals. The former is generated by the impedance controller; the latter is supplied by the robot state and is used as a supporting contact quantity.

After the configured minimum duration, set-up can terminate through its moment-change condition or through the independent timeout. If the pre-grinding gate is active, the

controller remains in the set-up branch while waiting for operator confirmation. The coupled impedance therefore remains active when it was selected for that run. The exact transition settings and the termination behaviour observed in the reported experiments are documented in Chapter 4.

### 3.5.4 Grinding

The grinding phase maintains the normal set-up reference and can superimpose a tangential sweep along a selected surface tangent. The sweep uses a smooth fifth-order trajectory with zero velocity at its reversal points. When the sweep is disabled, only the normal contact reference is maintained.

Grinding uses the same source stiffness and damping blocks as set-up, but the implemented wrench calculation returns to the decoupled impedance branch after the phase change. The reported contact measurements in this thesis ended at the pre-grinding gate; no reported run entered the grinding sweep. The grinding phase is therefore included here as implemented controller functionality rather than as part of the evaluated contact data.

### 3.5.5 Pose Hold, Manual Guidance, and Run Termination

Standard Cartesian pose hold regulates a captured pose with the dedicated hold impedance. Set-up-impedance hold uses the set-up gain construction and can retain the virtual centre of compliance. These hold modes are also used for dedicated controller checks outside the main contact sequence.

Manual guidance can be entered from an impedance-controlled state. The controller then returns the Coriolis contribution together with joint-space damping,

$$\tau_{\text{guide}} = \tau_c(q, \dot{q}) - d_{\text{guide}}\dot{q}, \quad (3.18)$$

where  $d_{\text{guide}}$  is the configured guidance damping. After operator confirmation, the measured pose, joint configuration, and required references are recaptured before the selected sequence or hold mode resumes.

A controller session ends when the configured duration expires, an operator stop is re-

quested, the maximum approach distance is exceeded, or libfranka terminates the motion because of a robot-side event. File writing and post-run evaluation occur only after the real-time callback has finished.

## 3.6 SVD-Based Null-Space Control

The Cartesian impedance defines the primary task. The Panda has one additional joint-space degree of freedom when the  $6 \times 7$  task Jacobian has full row rank, so the implementation includes a secondary null-space controller for redundant motion. The theoretical projector, damping term, and two-point singular-value-conditioning strategy are derived in Section 2.8; this section describes their execution in the real-time callback.

For each impedance-controlled cycle, the full singular value decomposition of  $J(q)$  is evaluated. The relative SVD tolerance is multiplied by the largest current singular value to obtain the threshold used in the Moore–Penrose pseudoinverse. Singular directions above the threshold are inverted; the remaining reciprocal entries are set to zero. The resulting joint-torque null-space projector  $N_\tau$  is symmetrised numerically.

The projected joint velocity and damping torque are

$$\dot{q}_{\text{null}} = N_\tau \dot{q}, \quad \tau_d = -d_{\text{null}} \dot{q}_{\text{null}}. \quad (3.19)$$

The controller provides the four secondary-torque modes listed in Table 3.3.

**Table 3.3:** Selectable null-space torque contributions.

| Mode         | Returned secondary torque |
|--------------|---------------------------|
| Disabled     | 0                         |
| Damping only | $\tau_d$                  |
| Sigma only   | $\tau_\sigma$             |
| Combined     | $\tau_d + \tau_\sigma$    |

For singular-value conditioning, the current redundant right-singular direction  $v_7$  is sampled in both signs. Two nearby joint configurations are formed at  $q \pm \alpha_{\text{probe}} v_7$  and their Jacobians are evaluated using the current robot transformations. The smallest singular values at the two sampled configurations are compared. If their difference exceeds

the configured deadband, the sign associated with the larger  $\sigma_{\min}$  is selected; within the deadband, no conditioning torque is requested.

The selected direction is projected again through  $N_\tau$  before the conditioning torque is returned. This keeps the commanded contribution in the numerical null space defined by the current pseudoinverse. The combined mode adds this contribution to the projected joint-velocity damping.

The surface-contact experiments used one fixed null-space configuration, while the dedicated pose-hold study varied the secondary terms to examine them separately. The corresponding numerical settings belong to the experimental method and are given in Chapter 4, Section 4.6, and Appendix C.

## 3.7 Real-Time Operation, Safety, and Data Recording

The functions around the control law are designed so that robot preparation, operator interaction, and file handling do not add blocking operations to the joint-torque callback. Safety monitoring remains active on the robot side, and the signals required for the experimental evaluation are written to preallocated memory during control.

### 3.7.1 Robot Preparation and Safety

Before a torque-controlled session begins, the software establishes the FCI connection, requests error recovery, applies the selected collision behaviour, and loads the robot model:

$$\text{FCI connection} \longrightarrow \text{error recovery} \longrightarrow \text{collision configuration} \longrightarrow \text{robot model.} \quad (3.20)$$


The robot can then be moved to a configured initial joint posture using a libfranka joint-motion generator, or the operator can start from a pose captured after manual guidance. The initial posture used in the reported experiments is documented in Appendix C rather than embedded in the controller description.

The complete joint-torque command of Equation (3.10) is returned directly to libfranka:

$$\text{Torques}(\tau_{\text{cmd}}) \longrightarrow \text{libfranka}. \quad (3.21)$$

No additional application-side saturation or torque-rate limiter is applied after the Cartesian, null-space, disturbance, and Coriolis terms have been assembled. The configured robot-side collision/reflex monitoring therefore remains an important independent safety layer. A robot communication, motion-generation, or torque-control error exits the callback through `franka::Exception`. Configuration, file, and numerical errors are handled separately through standard exceptions.

**Gripper verification and tool handling.** The start-up interface also supports opening, grasping, and recalibrating the Franka Hand. Gripper state is checked before and after an action so that an incorrectly calibrated finger stroke or an unsuccessful grasp can be detected before torque control begins. An optional tool-transfer routine moves between the configured initial posture, a calculated stand-off posture, and the stored holder posture. The stand-off pose is obtained from damped least-squares inverse kinematics and is accepted only when the resulting joint configuration satisfies the configured joint-limit margins. The tool-transfer sequence is shown in Figure 3.3.

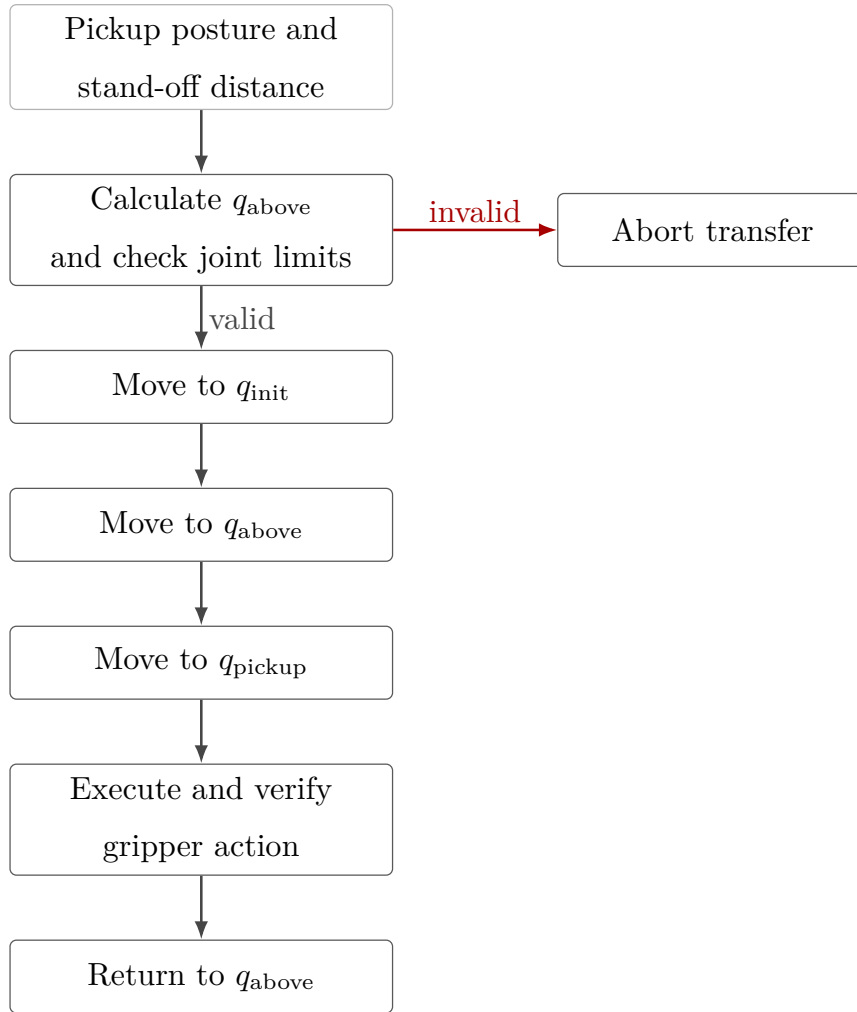

**Figure 3.3:** Tool collection and return sequence.

These preparation functions are supporting implementation features; they do not change the Cartesian control law or the experimental parameter definitions.

### 3.7.2 Real-Time-Safe Data Recording

The controller stores the signals required for post-run analysis in a bounded in-memory ring buffer. The buffer memory is allocated before `robot.control` starts, so the callback does not grow the log dynamically. Each sampled row contains the measured state, active reference, calculated error and wrench, controller phase, secondary-controller state, and returned joint torque.

Table 3.4 groups the principal recorded signals. The complete column-level description used for the experimental evaluation is given in Appendix B.

**Table 3.4:** Signal groups stored during the real-time control loop.

| Signal group              | Recorded quantities                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------|
| Time and controller state | Run time, active control phase, and null-space mode.                                                      |
| TCP state and reference   | Measured and desired TCP pose quantities, Cartesian errors, and linear and angular velocities.            |
| Tool and surface geometry | Controlled grinding-face point, stored clearance geometry, desired contact target, and set-up coordinate. |
| Cartesian wrench          | Commanded wrench and model-estimated external wrench, including the clearance-transition reference.       |
| Null-space controller     | Active null-space parameters, projected motion quantities, singular-value data, and secondary torque.     |
| Disturbance study         | Disturbance waveform, application point, equivalent force, and joint-torque contribution.                 |
| Joint-torque command      | The seven final commanded joint torques returned to libfranka.                                            |

The values captured at the clearance transition refer to the geometric event described in Section 3.5.2; they do not denote a force-detected first-contact event. A sampled row can be represented schematically as

$$\text{ring-buffer row} \leftarrow \{\text{state, reference, error, wrench, phase, torque}\}. \quad (3.22)$$

When the allocated capacity is reached, the write index wraps and new samples replace the oldest rows. This keeps the memory use bounded during real-time control.

### 3.7.3 Post-Run Output and Evaluation Support

After the torque callback ends, the ring-buffer contents are reconstructed in chronological order. File output and summary calculations are then performed outside the real-time control path:



$$\text{ordered samples} \longrightarrow \text{CSV output} \longrightarrow \text{run summary}. \quad (3.23)$$

The output preserves the commanded Cartesian wrench and the model-estimated external wrench as separate quantities. It also stores the geometric clearance-transition references needed to calculate subsequent force and moment changes. The implementation produces a set-up summary containing the final pose, grinding-face point, external-wrench change, phase termination condition, and active controller settings. Detailed experimental metrics are intentionally defined in Chapter 4 and Appendix B so that the implementation chapter remains focused on how the signals are generated and recorded rather than on how the reported comparisons are evaluated.

The controller structure described in this chapter is used throughout the reported experiments. Chapter 4 next specifies the physical system, calibration procedure, experimental parameter matrix, contact procedure, and evaluation quantities used to assess the implemented controller.

# Chapter 4

## Experimental Methodology

This chapter describes how the controller developed in Chapter 3 was evaluated experimentally. The methodology is organised in the order in which the experiments can be reproduced: the physical system is introduced first, followed by the surface and tool calibration, the common contact-test configuration and procedure, the parameter matrix for Cases A to H, the quantities used for evaluation, and the separate Cartesian pose-hold study for the null-space controller.

The main data set consists of surface-contact measurements in which the commanded tool orientation offset, directional Cartesian stiffness, and virtual centre of compliance  $p_c$  were varied under otherwise matched conditions. The primary controller-response quantity is the signed end-effector rotation during set-up. The alignment angle calculated from the end-effector pose, TCP-height flatness classification, displacement, commanded wrench, and model-estimated external load are retained as supporting quantities. A second, independent experiment evaluates the null-space terms under a repeatable internally commanded disturbance.

### 4.1 Experimental System

#### 4.1.1 Robot, Tool, and Surface

The experiments were performed with a seven-degree-of-freedom Franka Emika Panda operated through the Franka Control Interface. Joint-torque commands were transmitted


through libfranka at the nominal sampling period

$$T_s = 1 \text{ ms}, \quad (4.1)$$

corresponding to a nominal control rate of 1 kHz. The real-time controller, Cartesian impedance law, contact geometry, and phase sequence are described in Chapter 3.

The rectangular grinding tool was held by the Franka Hand using custom gripper fingers. The grinding face measured  $40 \times 120$  mm, with the width along  $X_{EE}$  and the length along  $Y_{EE}$ . Its centre was located 20 mm along  $+Z_{EE}$  from the reported end-effector origin. The pads holding the tool were screwed to the gripper fingers. The mounting allowed approximately  $\pm 2^\circ$  of unloaded relative rotation about  $y_{EE}$ . This observation is treated as a mounting characteristic, not as a calibrated uncertainty bound under contact load.

The surface was a plane plate mounted on a raised base board. All reported measurements used dry contact. The physical surface orientation and the grinding-face direction were calibrated separately before the measurements, as described in Section 4.2.

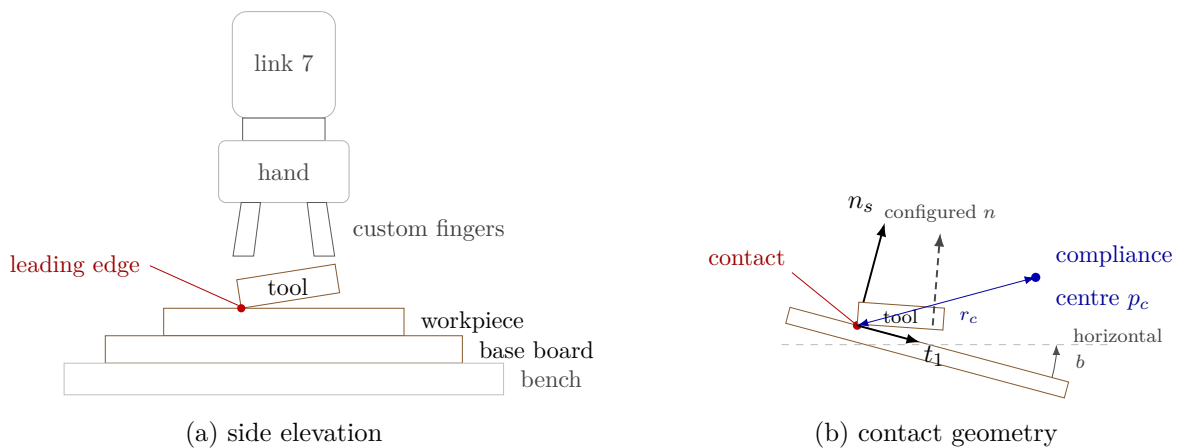

**Figure 4.1:** Experimental system and surface-frame contact geometry.

### 4.1.2 Real-Time Computer and Software

The controller computer ran Ubuntu 20.04.3 with the 5.9.1-rt20 Linux kernel and the PREEMPT\_RT patch. The controller was compiled using g++ 9.3, C++14, and optimisation level -O2. Eigen 3.3.7 was used for matrix calculations and libfranka 0.7.1 for communication with the robot.

Before the measurements, the computer-robot connection was checked with the

`communication_test` program supplied with libfranka 0.7.1 [8]. The program reports the fraction of control commands received by the robot and issues its lower communication-quality warning below an average command-success rate of 0.90. The experimental system passed this criterion. This check verifies communication quality for operation through the nominal 1 kHz interface; it is not a worst-case execution-time or scheduling-jitter measurement.

### 4.1.3 Operating and Safety Configuration

Before torque control started, the robot-side collision behaviour was configured with equal acceleration and nominal joint-torque thresholds of 140 N m. The six Cartesian force and moment channels used thresholds of 240 N or 240 N m, according to the component type. These thresholds supplied the Franka reflex mechanism and were kept unchanged throughout the reported measurements.


The main hardware and software configuration is summarised in Section 4.1.3. The complete run-specific controller configuration is given in Appendix C.

**Table 4.1:** Documented configuration of the experimental system.

| Item                 | Configuration used in the reported experiments                                                                    |
|----------------------|-------------------------------------------------------------------------------------------------------------------|
| Robot                | Franka Emika Panda with seven actuated joints.                                                                    |
| Robot interface      | libfranka joint-torque interface at a nominal control period of 1 ms.                                             |
| Gripper and mounting | Franka Hand with custom fingers; approximately $\pm 2^\circ$ unloaded relative rotation about $y_{EE}$ .          |
| Grinding tool        | Rectangular $40 \times 120$ mm grinding face; centre 20 mm along $+Z_{EE}$ from the reported end-effector origin. |
| Surface              | Plane plate on a raised base board; dry contact.                                                                  |
| Operating system     | Ubuntu 20.04.3.                                                                                                   |
| Real-time kernel     | Linux 5.9.1-rt20 with PREEMPT_RT.                                                                                 |
| Compiler             | <code>g++ 9.3</code> , C++14, optimisation level <code>-O2</code> .                                               |
| Libraries            | Eigen 3.3.7 and libfranka 0.7.1.                                                                                  |
| Collision thresholds | 140 N m joint-side and 240 N or 240 N m Cartesian, according to the channel type.                                 |

## 4.2 Surface and Tool Calibration

The controller requires the physical plane and the grinding-face direction in consistent coordinate frames. These quantities were estimated independently. The surface calibration determined a point on the plane, its normal, and the two surface tangents. The tool calibration determined the grinding-face normal in end-effector coordinates. The calibrated values were then used by both the controller and the evaluation.

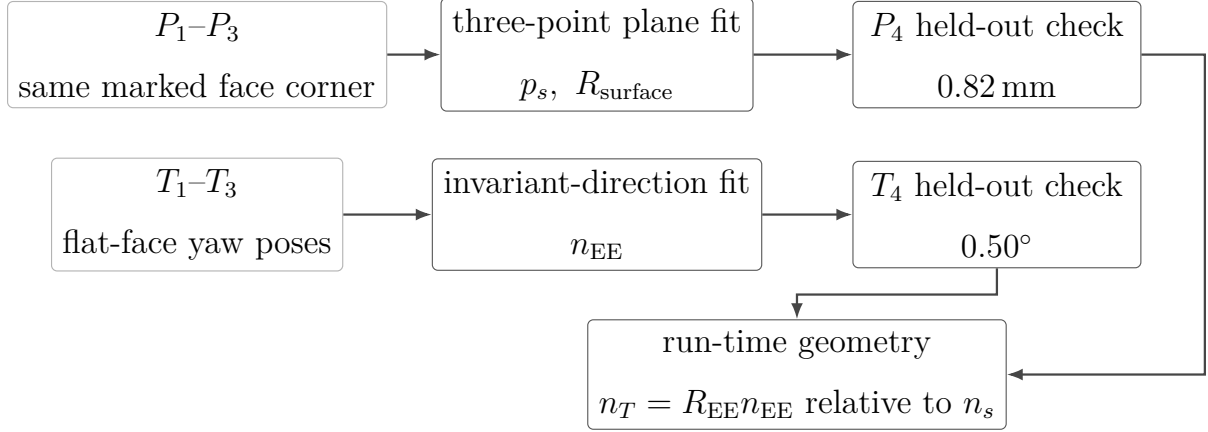

**Figure 4.2:** Surface and tool calibration flow.

### 4.2.1 Surface-Plane Calibration

Four positions distributed over the plate were probed with the same marked  $+X_{\text{EE}}, +Y_{\text{EE}}$  corner of the grinding face. The first three points,  $P_1-P_3$ , defined the plane; the fourth point  $P_4$  was excluded from the fit and used for validation.

For each capture  $i$ , the measured end-effector position  $p_{\text{EE},i}$  and orientation  $R_{\text{EE},i}$  were combined with the fixed end-effector-frame corner offset

$$r_{\text{probe,EE}} = \begin{bmatrix} 0.020 \\ 0.060 \\ 0.020 \end{bmatrix} \text{ m.} \quad (4.2)$$

The corresponding base-frame corner position was

$$p_{\text{cal},i} = p_{\text{EE},i} + R_{\text{EE},i}r_{\text{probe,EE}}. \quad (4.3)$$

The calibrated plane is represented by

$$n_s^\top(p - p_s) = 0, \quad (4.4)$$

where  $p_s$  is a point on the plane and  $n_s$  is the unit outward surface normal. The fitted plane point stored in the controller was

$$p_s = \begin{bmatrix} 0.5153 \\ -0.1072 \\ 0.0031 \end{bmatrix} \text{ m}. \quad (4.5)$$

This point is the centroid of the three fitted corner coordinates. The controller stores the plane orientation through rotations  $\alpha_s$  about the base  $x$ -axis and  $\beta_s$  about the base  $y$ -axis. With  $e_z$  the base-frame  $z$ -axis,

$$n_s = R_y(\beta_s)R_x(\alpha_s)e_z = \begin{bmatrix} \sin(\beta_s) \cos(\alpha_s) \\ -\sin(\alpha_s) \\ \cos(\beta_s) \cos(\alpha_s) \end{bmatrix}. \quad (4.6)$$

The calibrated angles were

$$\alpha_s = -1.585^\circ, \quad \beta_s = +0.988^\circ, \quad (4.7)$$

which give

$$n_s \approx \begin{bmatrix} 0.017245 \\ 0.027663 \\ 0.999469 \end{bmatrix}, \quad \|n_s\| = 1. \quad (4.8)$$

The held-out point provided an independent geometric check. Its perpendicular residual from the calibrated plane was

$$\varepsilon_{\text{plane}} = \left| n_s^\top(p_{\text{cal},4} - p_s) \right|, \quad (4.9)$$

with

$$\varepsilon_{\text{plane}} = 0.82 \text{ mm.} \quad (4.10)$$

The in-plane orientation was fixed by projecting the base-frame reference direction  $a_s = e_x$  onto the calibrated plane:

$$t_1 = \frac{(I - n_s n_s^\top) a_s}{\|(I - n_s n_s^\top) a_s\|}. \quad (4.11)$$

The second tangent completes the right-handed frame,

$$t_2 = n_s \times t_1. \quad (4.12)$$

For the calibrated plane,

$$t_1 \approx \begin{bmatrix} 0.999851 \\ -0.000477 \\ -0.017238 \end{bmatrix}, \quad t_2 \approx \begin{bmatrix} 0.000000 \\ 0.999618 \\ -0.027667 \end{bmatrix}. \quad (4.13)$$

The surface frame used throughout the contact measurements is therefore

$$R_{\text{surface}} = \begin{bmatrix} t_1 & t_2 & n_s \end{bmatrix} \approx \begin{bmatrix} 0.999851 & 0.000000 & 0.017245 \\ -0.000477 & 0.999618 & 0.027663 \\ -0.017238 & -0.027667 & 0.999469 \end{bmatrix}. \quad (4.14)$$

All surface-resolved quantities use the coordinate order  $[t_1, t_2, n_s]$ .

### 4.2.2 Grinding-Face Direction Calibration

The grinding-face direction in the end-effector frame cannot be taken from the nominal  $+Z_{\text{EE}}$  axis alone because the physical tool and its mount introduce geometric offsets. To identify this direction, the complete grinding face was seated flat on the calibrated plane at four different yaw angles. The face normal in the base frame remains unchanged when only the yaw is varied; therefore the end-effector-frame direction that maps to the same base-frame direction across the captures identifies the grinding-face normal.

The first three captured rotations were used for estimation and the fourth was retained for validation. With  $R_{\text{cal},i}$  the rotational part of the captured pose,

$$R_{\text{cal},1}n_{\text{EE}} \approx R_{\text{cal},2}n_{\text{EE}} \approx R_{\text{cal},3}n_{\text{EE}} = \bar{n}_B. \quad (4.15)$$

The estimator formed  $\bar{R} = (R_{\text{cal},1} + R_{\text{cal},2} + R_{\text{cal},3})/3$  and applied the singular-value decomposition  $\bar{R} = U\Sigma V^\top$ . The corresponding dominant singular-vector pair provided the invariant base-frame direction and the grinding-face direction in the end-effector frame. The sign was chosen toward nominal  $+Z_{\text{EE}}$ . The final value used in every reported run was

$$n_{\text{EE}} = \begin{bmatrix} 0.026387057 \\ -0.006678514 \\ 0.999629492 \end{bmatrix}, \quad \|n_{\text{EE}}\| = 1. \quad (4.16)$$

It differs from nominal  $+Z_{\text{EE}}$  by approximately  $1.56^\circ$ . The calibration identifies the effective geometric direction used by the controller and evaluation; it does not determine the physical source of this offset.

During each controller cycle, the corresponding direction in the base frame is calculated from


$$n_T = R_{\text{EE}}n_{\text{EE}}. \quad (4.17)$$

The flat orientation target satisfies

$$R_d n_{\text{EE}} = -n_s. \quad (4.18)$$

The target sign is therefore  $s_a = -1$ . The commanded spin about the desired grinding-face axis, measured from  $t_1$ , was  $90^\circ$  for all reported runs. In the flat target orientation the projected long face axis is aligned with the  $t_2$  line.



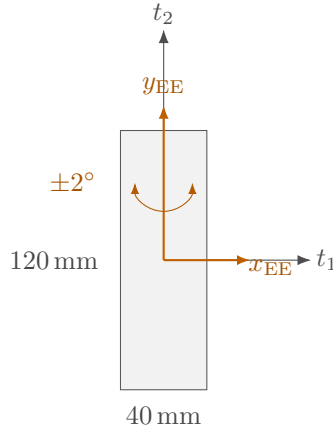

**Figure 4.3:** Calibrated grinding face and mounting axes in the surface plane.

### 4.2.3 Calibrated Experimental Geometry

The calibrated grinding face is represented in end-effector coordinates by its centre offset

$$r_{\text{face,EE}} = \begin{bmatrix} 0 \\ 0 \\ 0.020 \end{bmatrix} \text{ m}, \quad (4.19)$$

and the half-width and half-length vectors

$$r_{\text{width,EE}} = \begin{bmatrix} 0.020 \\ 0 \\ 0 \end{bmatrix} \text{ m}, \quad r_{\text{length,EE}} = \begin{bmatrix} 0 \\ 0.060 \\ 0 \end{bmatrix} \text{ m}. \quad (4.20)$$

For any point on the face with end-effector-frame offset  $r_{g,\text{EE}}$ , the corresponding base-frame position is

$$p_g = p_{\text{EE}} + R_{\text{EE}} r_{g,\text{EE}}. \quad (4.21)$$

The controller uses the rectangular-face model described in Chapter 3 to determine the point or edge with the smallest geometric clearance to the plane. The feature-selection tolerance was

$$\varepsilon_g = 0.1 \text{ mm}. \quad (4.22)$$

Corners whose heights differ by no more than this tolerance are treated as one edge or face and averaged to obtain the geometric reference used at the clearance transition. Chapter 3 describes the corresponding run-time selection algorithm; the present chapter only records the calibrated geometry used by that algorithm.

## 4.3 Common Contact-Test Configuration and Procedure

All surface-contact cases used the same calibrated geometry, phase sequence, normal press trajectory, fixed gain entries, and null-space configuration except where a parameter was explicitly varied. This section defines that common experimental basis before the individual cases are introduced in Section 4.4.

### 4.3.1 Common Cartesian Gains and Damping

The phase-dependent gains are diagonal in the calibrated surface frame  $[t_1, t_2, n_s]$  before any compliance-centre shift. During orientation and approach, the translational stiffness was isotropic and the rotational stiffness was higher about the surface tangents:

$$K_{p,\text{app}} = \begin{bmatrix} 150 & 0 & 0 \\ 0 & 150 & 0 \\ 0 & 0 & 150 \end{bmatrix} \text{ N/m}, \quad K_{R,\text{app}} = \begin{bmatrix} 180 & 0 & 0 \\ 0 & 180 & 0 \\ 0 & 0 & 90 \end{bmatrix} \text{ N m/rad.} \quad (4.23)$$

The pre-set-up gate was configured with the same stiffness as the nominal set-up state,

$$K_{p,\text{gate}} = \begin{bmatrix} 2000 & 0 & 0 \\ 0 & 2000 & 0 \\ 0 & 0 & 350 \end{bmatrix} \text{ N/m}, \quad K_{R,\text{gate}} = \begin{bmatrix} 5 & 0 & 0 \\ 0 & 5 & 0 \\ 0 & 0 & 50 \end{bmatrix} \text{ N m/rad.} \quad (4.24)$$

The gate was disabled in the reported contact runs and these gains therefore did not act as a separate phase. The nominal set-up and configured grinding stiffnesses were

$$K_{p,\text{set}} = K_{p,\text{grind}} = \begin{bmatrix} 2000 & 0 & 0 \\ 0 & 2000 & 0 \\ 0 & 0 & 350 \end{bmatrix} \text{ N/m}, \quad (4.25)$$

and

$$K_{R,\text{set}} = K_{R,\text{grind}} = \begin{bmatrix} 5 & 0 & 0 \\ 0 & 5 & 0 \\ 0 & 0 & 50 \end{bmatrix} \text{ N m/rad}. \quad (4.26)$$

The lower normal translational stiffness limits the elastic normal-force increase for a given normal position error, while the higher tangential entries restrict motion in the surface plane. The low rotational stiffnesses about  $t_1$  and  $t_2$  permit contact-induced alignment rotation. The higher entry about  $n_s$  mainly resists in-plane spin of the grinding face. Because the translational matrix is diagonal in the surface frame,

$$K_{p,n} = n_s^\top K_{p,\text{set}} n_s = 350 \text{ N/m}. \quad (4.27)$$

The directional damping coefficients for approach, set-up, and the configured grinding phase were calculated from the Cartesian inertia and the active stiffness as described in Section 3.4.2. Approach used  $\zeta = 1.9$ ; set-up and grinding used  $\zeta = 1.0$ . The configured fallback matrices, used only if the inertia-based calculation could not be applied, were

$$D_{p,\text{app}} = \begin{bmatrix} 20 & 0 & 0 \\ 0 & 20 & 0 \\ 0 & 0 & 20 \end{bmatrix} \text{ N s/m}, \quad D_{R,\text{app}} = \begin{bmatrix} 15 & 0 & 0 \\ 0 & 15 & 0 \\ 0 & 0 & 12 \end{bmatrix} \text{ N m s/rad}, \quad (4.28)$$

and

$$D_{p,\text{set}} = \begin{bmatrix} 10 & 0 & 0 \\ 0 & 10 & 0 \\ 0 & 0 & 175 \end{bmatrix} \text{ N s/m}, \quad D_{R,\text{set}} = \begin{bmatrix} 10.01 & 0 & 0 \\ 0 & 10.01 & 0 \\ 0 & 0 & 10 \end{bmatrix} \text{ N m s/rad}. \quad (4.29)$$

The detailed archived damping configuration is reproduced in Appendix C.

### 4.3.2 Contact Sequence and Set-Up Motion

The common trajectory and transition parameters are collected in Section 4.3.2. The table is the single reference for the fixed contact-test sequence used by Cases A to H.

**Table 4.2:** Common phase-transition and trajectory parameters for Cases A to H.

| Quantity                           | Value         | Role                                                                         |
|------------------------------------|---------------|------------------------------------------------------------------------------|
| Minimum orientation time           | 1.0 s         | Prevents an immediate phase transition.                                      |
| Tool-axis transition tolerance     | 0.016 rad     | Maximum remaining tool-axis error before descent.                            |
| Spin transition tolerance          | 0.009 rad     | Maximum remaining normal-axis spin error.                                    |
| Orientation timeout / maximum rate | 8.0 s / 20°/s | Bounds the orientation phase.                                                |
| Descent speed                      | 0.1 m/s       | Reference speed along the descent direction.                                 |
| Maximum descent distance           | 0.640 m       | Terminates an unsuccessful approach.                                         |
| Surface clearance                  | 0.020 m       | Geometric transition from approach to set-up.                                |
| Minimum set-up time                | 2.0 s         | Earliest activation of the moment-based exit condition.                      |
| Set-up timeout                     | 5.0 s         | Time-based set-up termination.                                               |
| Moment-change threshold            | 150 N m       | Alternative set-up termination based on the model-estimated external moment. |
| Set-up push speed                  | 0.080 m/s     | Rate of the signed press coordinate.                                         |

**Table 4.2:** Common phase-transition and trajectory parameters for Cases A to H (continued).

| Quantity                  | Value                   | Role                                                            |
|---------------------------|-------------------------|-----------------------------------------------------------------|
| Set-up push endpoint      | +0.240 m                | Final signed Cartesian spring reference.                        |
| Pre-set-up gate           | disabled                | Approach transfers directly to set-up.                          |
| Pre-grind gate            | enabled                 | Holds the reached pose before the optional grinding transition. |
| Configured grinding sweep | $t_2$ , 0.030 m, 0.2 Hz | Implemented but not entered in the reported runs.               |

Before each run, the active parameter set was loaded and the robot was moved to the configured initial joint posture. The calibrated surface frame, grinding-face geometry, phase gains, damping settings, null-space parameters, and compliance-centre definition were prepared before the torque callback started.

During the orientation phase, the TCP position was held while the calibrated grinding-face direction was brought to the required surface-relative orientation, including the commanded angular offset of the active case. Surface approach then moved the Cartesian reference along the descent direction at 0.1 m/s. During approach, the controller continuously evaluated the point or edge of the rectangular face with the smallest geometric clearance.

The clearance transition occurred when this selected grinding-face point or edge was 20 mm above the calibrated plane. The transition was therefore defined by geometry and not by a force threshold. At that instant, the controller stored the TCP pose, the orientation reference, the selected grinding-face point or edge, its projection onto the plane, and the model-estimated external wrench as a reference for later evaluation. Because the pre-set-up gate was disabled, the controller entered set-up directly.

During set-up, the signed press coordinate advanced from the captured clearance value, approximately  $-0.020$  m, toward  $+0.240$  m at 0.080 m/s. The endpoint is a Cartesian spring reference beyond the calibrated plane; it is not interpreted as a physical penetration of the same magnitude. The reference reaches the endpoint after approximately 3.25 s and

is then held until the phase ends.

Cases A, B, and D used the decoupled Cartesian impedance during set-up. Cases C and E to H used the point-shifted  $6 \times 6$  impedance associated with the selected centre of compliance. In every case, the orientation captured at the clearance transition remained the rotational reference during set-up. The measured alignment rotation therefore results from the contact response rather than from a time-varying orientation command.

After the minimum set-up duration of 2 s, the phase could end if the norm of the model-estimated external-moment change reached 150 N m. A separate 5 s timeout provided the second termination condition. Every reported contact run ended at the timeout; the moment-change threshold was not reached. The enabled pre-grind gate then held the reached pose. The reported measurements were terminated at this gate, so the archived data contain orientation, approach, and set-up, but no grinding sweep.

The set-up stiffness and commanded press range also define a virtual elastic command scale. For a completely blocked 0.260 m reference change along the calibrated normal,

$$F_{n,\text{block}} = 0.260 \, n_s^\top K_{p,\text{set}} n_s = 91.0 \, \text{N}. \quad (4.30)$$

This value is a command-scale bound for a fully blocked virtual spring and not a measured contact load.

### 4.3.3 Common Null-Space Configuration

Projected null-space damping and singular-value conditioning were active together throughout the surface-contact measurements. Keeping this secondary controller fixed prevents changes in the null-space policy from becoming an additional variable across Cases A to H. The gains were

$$d_{\text{null}} = 2 \, \text{N m s/rad}, \quad k_\sigma = 1 \, \text{N m}. \quad (4.31)$$

This is the combined secondary-torque mode of the implementation described in Section 3.6. The contact measurements therefore evaluate the surface-alignment controller with both null-space terms active. Their individual effects are examined separately in the

pose-hold experiment of Section 4.6.

### 4.3.4 Repetitions and Data Recording

The real-time logging buffer recorded the measured robot state, Cartesian reference and error, selected grinding-face point or edge, active control phase, commanded Cartesian wrench, final commanded joint torque, null-space mode, and libfranka model-estimated external wrench. The complete signal list and CSV structure are given in Section 3.7.2 and Appendix B.

Three repetitions were scheduled for each parameter setting, giving 171 surface-contact runs across 57 settings. One run of one Case-E setting was not recorded completely and was therefore excluded. The quantitative evaluation uses the remaining 170 contact runs. That setting has two usable repetitions; every other setting has three. Within each controlled comparison, the calibrated geometry, common phase parameters, fixed gains, and null-space settings remained unchanged. Only the parameter assigned to the corresponding case was varied.

## 4.4 Surface-Contact Experimental Matrix

The surface-contact measurements were organised into three related groups. The first group evaluates stiffness sensitivity, the second evaluates the behaviour of the virtual centre of compliance, and the third tests whether the geometric lever-direction rule extends beyond the two principal surface tangents. The case letters are retained throughout Chapter 5 so that each experimental setting maps directly to its reported result.

**Table 4.3:** Structure of the surface-contact investigation.

| Group                       | Cases | Purpose                                                                                                                                                                    |
|-----------------------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Stiffness sensitivity       | A–B   | Vary rotational stiffness about the commanded rotation direction and translational stiffness along the perpendicular tangent.                                              |
| Compliance-centre behaviour | D–H   | Establish the zero-lever reference, then vary tangential lever direction and sign, lever-definition frame, tool-axis position, and commanded orientation-offset magnitude. |
| Direction generalisation    | C     | Compare a direction-selected tangential lever with one fixed lever at four commanded directions in the surface tangent plane.                                              |

#### 4.4.1 Parameter Groups and Reference Conditions

Case D is the zero-lever reference: the centre of compliance is placed at the TCP, so the commanded press produces no moment through a compliance-centre lever. Cases A and B retain this zero-lever condition while varying one stiffness entry. Case A changes the rotational stiffness about the commanded rotation direction. Case B changes the translational stiffness along the surface tangent perpendicular to that direction.

Cases E to H examine the compliance-centre configuration. Case E varies the tangential lever position and its sign on both surface tangents. Case F compares one nominal 40 mm lever when its coordinates are fixed in the end-effector frame and when they are fixed in the surface frame. Case G moves the centre along the tool axis. An axial displacement would produce no tangential lever component if the tool axis were exactly parallel to the normal press direction; at finite inclination a small tangential component remains, so Case G tests the sensitivity to this nominally weak direction. Case H compares  $+5^\circ$  and  $+10^\circ$  commanded orientation offsets at two matched lever positions.

Case C tests the geometric lever-selection rule at four commanded directions in the tangent plane. The selected lever is perpendicular to the commanded rotation direction and its sign is chosen so that the press-induced coupling moment acts in the required alignment direction. The exact vectors are given in Table 4.5.



## 4.4.2 Cases A to H

**Table 4.4:** Experimental cases and parameter variations.

| Case | Varied quantity                                  | Commanded tool orientation offset     | Tested values                                                                                                                                                                                                                                                            | Runs | Comparison                                                                                                |
|------|--------------------------------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------------------------------|
| A    | Rotational stiffness                             | +10° about $t_1$ or $t_2$             | $K_{R,t_1}$ or $K_{R,t_2} = 15$ and 50 N m/rad, according to the commanded rotation direction. The orthogonal tangent remained at 5 N m/rad. The matched 5 N m/rad reference is shared with Case D and is not counted again here.                                        | 12   | Influence of command-direction rotational stiffness on set-up rotation.                                   |
| B    | Translational stiffness                          | +10° about $t_1$ or $t_2$             | For a command about $t_1$ , $K_{p,t_2} = 300$ and 800 N/m; for a command about $t_2$ , $K_{p,t_1}$ carried those values. The shared 2000 N/m reference is in Case D. One additional condition per axis paired 300 N/m with 50 N m/rad command-axis rotational stiffness. | 18   | Influence of cross-axis translational stiffness and the combined low-translation/high-rotation condition. |
| C    | Commanded rotation direction and lever selection | +10° in four tangent-plane directions | At $\pm 45^\circ$ , a 40 mm lever selected for the commanded rotation direction was compared with the lever selected for the $t_1$ command and then held fixed. At $+90^\circ$ , the fixed lever was compared with the selected Case-E reference.                        | 15   | Whether one fixed lever represents the direction-selected rule across the tested rotation directions.     |

**Table 4.4:** Experimental cases and parameter variations (continued).

| Case | Varied quantity                                                      | Commanded tool orientation offset             | Tested values                                                                                                                                                                                          | Runs | Comparison                                                                                                           |
|------|----------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------------------------------------------------------------------------------------------------------------------|
| D    | Zero-lever reference; the centre of compliance was placed at the TCP | None, and $\pm 10^\circ$ about $t_1$ or $t_2$ | No lever at each of the five commanded-orientation conditions.                                                                                                                                         | 15   | Reference response without lever-induced coupling.                                                                   |
| E    | Direction and sign of the tangential compliance-centre lever         | $\pm 10^\circ$ about $t_1$ or $t_2$           | $-40, -20, -10, 0, +10, +20$ , and $+40$ mm along the tangent perpendicular to the commanded rotation direction. Positive is the direction selected to assist a positive commanded orientation offset. | 72   | Dependence on tangential lever position, direction, and command sign.                                                |
| F    | Compliance-centre lever-definition frame                             | None and $+10^\circ$ about $t_1$              | The same nominal 40 mm lever coordinates were defined once in the end-effector frame and once in the surface frame. The $+10^\circ$ tool-frame reference is shared with Case E.                        | 9    | Effect of the frame in which the lever is fixed as the end effector rotates.                                         |
| G    | Compliance-centre position along the tool axis                       | $+10^\circ$ about $t_1$                       | $-40, -20, -10, +10, +20$ , and $+40$ mm along the tool axis. The 0 mm entry is the corresponding Case-E trial.                                                                                        | 18   | Sensitivity to an axial centre displacement whose tangential moment contribution is small at the tested inclination. |

**Table 4.4:** Experimental cases and parameter variations (continued).

| Case | Varied<br>quantity                               | Commanded<br>tool<br>orientation<br>offset | Tested values                                                                                          | Runs | Comparison                                                     |
|------|--------------------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------|------|----------------------------------------------------------------|
| H    | Commanded<br>orientation-<br>offset<br>magnitude | +5° about<br>$t_1$ or $t_2$                | 0 and +40 mm along the<br>assisting tangent, compared<br>with the same positions at<br>+10° in Case E. | 12   | Dependence on<br>commanded<br>orientation-offset<br>magnitude. |

The run counts in Section 4.4.2 include the three scheduled repetitions for each newly recorded setting. Shared reference conditions are identified in the table and were not recorded or counted twice.

### 4.4.3 Case-C Direction and Lever Definition

The compliance-centre lever follows the convention

$$r_c = p_{\text{TCP}} - p_c. \quad (4.32)$$

A tool-fixed lever is constant in end-effector coordinates and therefore rotates in the base frame with the end effector. A surface-fixed lever is constant in the surface frame  $[t_1, t_2, n_s]$ . In both cases, the active lever is transformed to base coordinates during each control cycle before the stiffness and damping matrices are shifted to the TCP.


For a commanded rotation represented by surface components  $(\theta_{t_1}, \theta_{t_2})$ , the direction-selected tangential lever is

$$r_{c,t} = \frac{\rho_c}{\sqrt{\theta_{t_1}^2 + \theta_{t_2}^2}} (\theta_{t_2} t_1 - \theta_{t_1} t_2), \quad (4.33)$$

where  $\rho_c > 0$  is the selected lever magnitude. Case C used  $\rho_c = 40$  mm. The selected lever changes with the commanded rotation direction, whereas the fixed comparison retains the lever selected for the  $t_1$  command.

**Table 4.5:** Case-C orientation commands and lever vectors.

| Commanded direction    | Lever setting                | $[\theta_{t_1}, \theta_{t_2}]$ (deg) | $[r_{c,t_1}, r_{c,t_2}, r_{c,n}]$ (mm) |
|------------------------|------------------------------|--------------------------------------|----------------------------------------|
| About $t_1$            | selected                     | $[+10.0, 0.0]$                       | $[0, -40.0, 0]$                        |
| $-45^\circ$ from $t_1$ | selected                     | $[+7.1, -7.1]$                       | $[-28.3, -28.3, 0]$                    |
| $+45^\circ$ from $t_1$ | selected                     | $[+7.1, +7.1]$                       | $[+28.3, -28.3, 0]$                    |
| About $t_2$            | selected                     | $[0.0, +10.0]$                       | $[+40.0, 0, 0]$                        |
| $-45^\circ$ from $t_1$ | fixed at the $t_1$ selection | $[+7.1, -7.1]$                       | $[0, -40.0, 0]$                        |
| $+45^\circ$ from $t_1$ | fixed at the $t_1$ selection | $[+7.1, +7.1]$                       | $[0, -40.0, 0]$                        |
| About $t_2$            | fixed at the $t_1$ selection | $[0.0, +10.0]$                       | $[0, -40.0, 0]$                        |

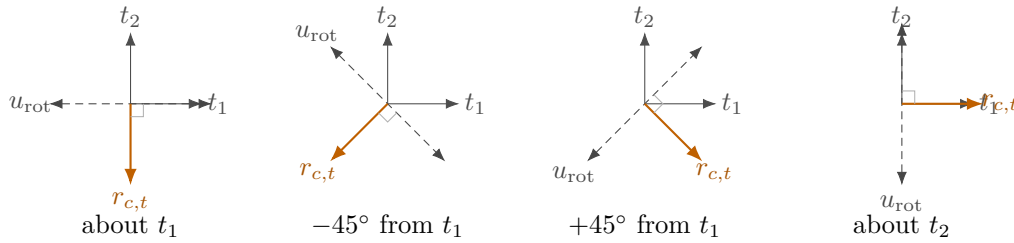**Figure 4.4:** Selected tangential lever for each commanded rotation direction.

The principal-axis selected conditions are shared with Case E. The five newly recorded Case-C settings are the two diagonal directions with both lever definitions and the  $t_2$  direction with the fixed lever; each was repeated three times.

## 4.5 Evaluation Quantities

The evaluation separates the controller response from geometric quantities that depend on the calibrated tool model. The signed set-up rotation is the primary comparison quantity for Cases A to H. The alignment angle, TCP-height classification, displacements, commanded wrench, and model-estimated normal load provide complementary information and are not treated as interchangeable measurements of the same physical quantity.

### 4.5.1 Signed Set-Up Rotation

The finite end-effector rotation between the clearance transition and the end of set-up is written as

$$\Delta\theta_{\text{set}} = \phi_{\text{set}} u_{\text{set}}. \quad (4.34)$$

Here  $\phi_{\text{set}}$  and  $u_{\text{set}}$  are the angle and unit axis of the relative rotation  $R_{\text{after}} R_{\text{before}}^\top$ , evaluated using the same finite-rotation relations as in Equations (2.16) and (2.20). The vector is expressed in the robot base frame.

For comparison with the commanded surface directions, it is resolved in the surface frame:

$$\Delta\theta_{\text{set}}^S = R_{\text{surface}}^\top \Delta\theta_{\text{set}}. \quad (4.35)$$

The signed component along the commanded rotation direction is the primary controller-response metric. A positive value denotes rotation in the intended alignment direction. This quantity is calculated from end-effector motion and does not require the calibrated grinding-face direction  $n_{\text{EE}}$ .

### 4.5.2 Alignment Angle and Flatness Classification

The grinding-face direction used for the alignment calculation is obtained from the measured end-effector orientation and the calibrated direction in the end-effector frame:

$$n_T = R_{\text{EE}} n_{\text{EE}}. \quad (4.36)$$

The alignment angle is

$$\theta_{\text{align}} = \cos^{-1}(-n_T^\top n_s). \quad (4.37)$$

The negative sign follows the flat target  $R_d n_{\text{EE}} = -n_s$ . The angle describes the grinding-face alignment calculated from the end-effector pose under the assumption that the calibrated relation between the tool and end effector remains fixed. Relative motion in the tool mounting is not captured by this calculation.

The change over set-up is reported as

$$\Delta\theta_{\text{align}} = \theta_{\text{align,before}} - \theta_{\text{align,after}}, \quad (4.38)$$

so a positive value means that the calculated angular difference decreased. The before value is taken at the clearance transition and the after value at the end of set-up.

A separate geometry-based flatness classification is obtained from the final TCP height relative to the calibrated plane and the height expected from the calibrated rectangular tool geometry when the grinding face is flat. This classification uses the end-effector position and calibrated geometry; it is not a direct angular measurement of the physical grinding face. The alignment angle and the TCP-height classification are therefore reported separately from the primary set-up rotation.

### 4.5.3 Displacement and Wrench Quantities

Let  $p_g$  denote the point or edge of the grinding face selected at the clearance transition. Its displacement and magnitude are

$$\Delta p_g = p_{g,\text{after}} - p_{g,\text{before}}, \quad s_g = \|\Delta p_g\|. \quad (4.39)$$

The TCP displacement is evaluated in the same form:

$$\Delta p_{\text{TCP}} = p_{\text{TCP},\text{after}} - p_{\text{TCP},\text{before}}, \quad s_{\text{TCP}} = \|\Delta p_{\text{TCP}}\|. \quad (4.40)$$

Both displacement vectors were additionally resolved in the surface frame to separate tangential and normal motion.

The supporting normal-load quantity is derived from the change in the libfranka model-estimated external force relative to the value stored at the clearance transition:

$$F_n = \left| n_s^\top (\hat{f}_{\text{ext}} - \hat{f}_{\text{ref}}) \right|. \quad (4.41)$$

This is a model-estimated force change, not an independently measured contact force. The commanded normal force and commanded TCP moment used in the controller-response plots are instead obtained from  $F = [f^\top, m^\top]^\top$ :

$$F_{n,\text{cmd}} = n_s^\top f, \quad M_{t_i,\text{cmd}} = t_i^\top m. \quad (4.42)$$

Thus  $F_{n,\text{cmd}}$  is a signed command, while  $F_n$  is the positive magnitude of a model-estimated change. During a quasi-static press the two are expected to have approximately opposite magnitude under the chosen sign convention, but they remain distinct controller signals.

#### 4.5.4 Treatment of Repeated Runs

For a measured quantity  $y$ , let  $N_y$  be the number of usable repetitions and  $y_j$  the value from repetition  $j$ . The arithmetic mean is

$$\bar{y} = \frac{1}{N_y} \sum_{j=1}^{N_y} y_j, \quad (4.43)$$

and the sample standard deviation is

$$s_y = \sqrt{\frac{1}{N_y - 1} \sum_{j=1}^{N_y} (y_j - \bar{y})^2}. \quad (4.44)$$

Three repetitions were scheduled for every parameter setting. As noted in Section 4.3.4, one Case-E setting contains two usable repetitions because one archived run is incomplete; all other settings contain three. Comparisons are restricted to settings with the same calibrated geometry, common phase timing, fixed gain entries, and null-space configuration. The within-setting standard deviations are reported with the corresponding results in Chapter 5.

### 4.6 Secondary Null-Space Pose-Hold Experiment

The surface-contact measurements keep projected damping and singular-value conditioning active together. A separate Cartesian pose-hold experiment was therefore used to compare their individual effects under a repeatable internally commanded disturbance.

#### 4.6.1 Experimental Configuration

The pose-hold controller maintained the initial TCP pose with isotropic stiffness

$$K_{p,\text{hold}} = \begin{bmatrix} 2000 & 0 & 0 \\ 0 & 2000 & 0 \\ 0 & 0 & 2000 \end{bmatrix} \text{ N/m}, \quad K_{R,\text{hold}} = \begin{bmatrix} 50 & 0 & 0 \\ 0 & 50 & 0 \\ 0 & 0 & 50 \end{bmatrix} \text{ N m/rad}. \quad (4.45)$$

Unlike the contact-sequence phases, the twelve pose-hold trials used fixed Cartesian damping matrices rather than inertia-scaled damping:

$$D_{p,\text{hold}} = \begin{bmatrix} 50 & 0 & 0 \\ 0 & 50 & 0 \\ 0 & 0 & 50 \end{bmatrix} \text{ N s/m}, \quad D_{R,\text{hold}} = \begin{bmatrix} 8 & 0 & 0 \\ 0 & 8 & 0 \\ 0 & 0 & 8 \end{bmatrix} \text{ N m s/rad}. \quad (4.46)$$

Four null-space settings were tested with three repetitions each: no null-space torque, projected damping with  $d_{\text{null}} = 2 \text{ N m s/rad}$ , sigma conditioning with  $k_{\sigma} = 1.5 \text{ N m}$ , and sigma conditioning with  $k_{\sigma} = 2.0 \text{ N m}$ . The probe step, sigma deadband, and relative SVD threshold remained at  $0.08 \text{ rad}$ ,  $10^{-6}$ , and  $10^{-4}$ , respectively.

### 4.6.2 Commanded Disturbance

The disturbance represents the joint-torque equivalent of a commanded point force acting at a specified location on link 3. The point was defined by the link-frame offset

$$r_p = \begin{bmatrix} 0 \\ 0 \\ 0.200 \end{bmatrix} \text{ m}. \quad (4.47)$$

At the initial posture  $q_{\text{init}}$ , the structural null direction  $v_7(q_{\text{init}})$  and the translational point Jacobian  $J_p(q_{\text{init}})$  define the fixed base-frame force direction

$$u_f = \frac{J_p(q_{\text{init}})v_7(q_{\text{init}})}{\|J_p(q_{\text{init}})v_7(q_{\text{init}})\|_2}. \quad (4.48)$$

The commanded force magnitude was  $F_d = 20 \text{ N}$ . The force waveform and corresponding equivalent joint torque were



$$\tau_{\text{dist}}(t) = J_p(q(t))^\top f_d(t), \quad f_d(t) = F_d s_d(t) u_f. \quad (4.49)$$

The scale  $s_d(t)$  increased from zero to one through a half-cosine from 5 to 7 s, remained at one until 8 s, and returned to zero during the following second. The equivalent disturbance was limited to

$$\|\tau_{\text{dist}}\|_2 \leq 3 \text{ N m}.$$

The disturbance is internal to the controller and therefore provides a repeatable comparison input; it is not a separately applied physical force.

### 4.6.3 Evaluation Quantities

The predefined Cartesian task-retention criterion was a peak position-error norm below 2 mm. Redundant motion was quantified by integrating the norm of the projected joint velocity over the disturbance interval,

$$E_N = \int_{5\text{ s}}^{9\text{ s}} \|N_q(q)\dot{q}\|_2 dt, \quad (4.50)$$

and the result was converted to degrees for reporting. Singular-value conditioning was evaluated from the final change in  $\sigma_{\min}$ , while Cartesian task retention was evaluated from the peak position-error norm. The corresponding results are presented in Chapter 5.

# Chapter 5

## Results and Discussion

This chapter presents the measured response of the surface-contact experiments and the complementary Cartesian pose-hold study. The contact experiments are not discussed in alphabetical Case A–H order. Instead, the results are organised according to the experimental questions. The zero-lever response is established first, followed by the stiffness variations, the tangential compliance-centre study, the remaining compliance-centre dependencies, and the generalisation of the lever-direction rule. The final sections combine these results into a cross-case interpretation.

The principal controller-response quantity is the signed set-up rotation  $\Delta\theta_{\text{set}}$  about the commanded rotation direction, as defined in section 4.5. The alignment angle  $\theta_{\text{align}}$ , the TCP-height flatness classification, displacements, commanded wrench, and model-estimated normal load are used as supporting quantities.

### 5.1 Data Quality and Comparison Basis


Of the 171 recorded contact runs, 170 provide analysable measurements. One run of a Case-E setting was not recorded completely, so that setting is evaluated from two repetitions; all other settings use three. No completed run was excluded.

Repeatability was assessed from the usable repetitions of each setting. The median within-setting standard deviation of the signed set-up rotation was approximately  $0.04^\circ$  about  $t_1$  and  $0.14^\circ$  about  $t_2$ . Differences below approximately  $0.1^\circ$  are therefore treated as being of the same order as the observed experimental scatter. This value is a descriptive

comparison scale rather than a statistical significance limit. The scatter is not uniform: individual Case-E settings reached  $0.42^\circ$  about  $t_1$  and  $2.35^\circ$  about  $t_2$  near transitions between response regimes.

The final evaluation interval was close to steady state for most conditions. During the final second of set-up, the median changes in the model-estimated normal load and the alignment angle were 0.10 N and  $0.00^\circ$ , respectively. The largest corresponding changes were 1.10 N and  $0.60^\circ$ . These values support a quasi-static comparison of the final responses, while the complete transient behaviour remains visible in the recorded time histories.

The alignment angle at the beginning of set-up was not identical to the commanded orientation offset because the preceding orientation phase ended with finite tracking error. Matched conditions nevertheless started reproducibly. A commanded  $+10^\circ$  offset reached  $9.34 \pm 0.02^\circ$  about  $t_1$  and  $10.04 \pm 0.03^\circ$  about  $t_2$ . At the smaller command, the corresponding initial values were  $4.29^\circ$  and  $5.19^\circ$ . The commanded offset therefore identifies the experimental condition, while the measured initial value is retained in the figures and tables where it is required.

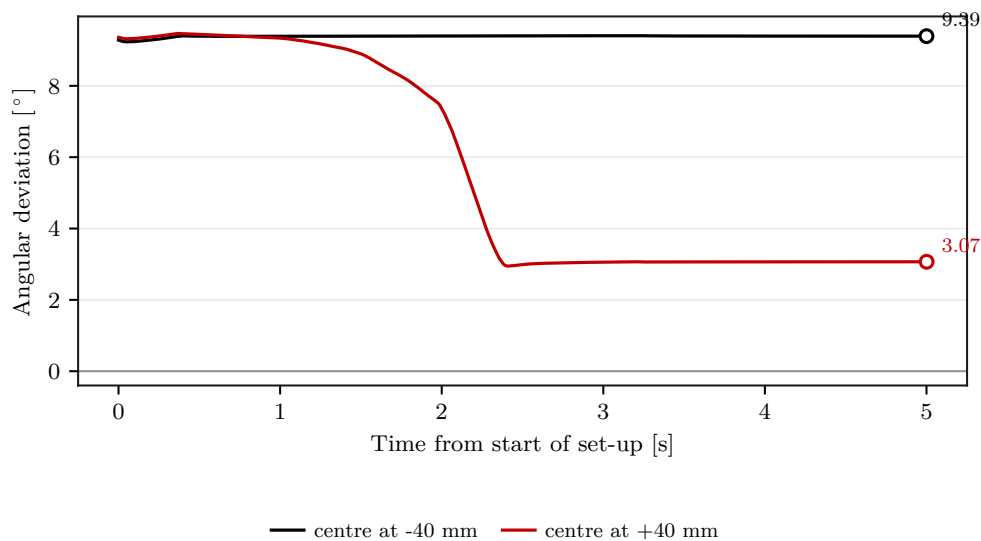

**Figure 5.1:** Angular deviation during set-up for two compliance-centre positions.

## 5.2 Surface-Contact Results

The contact results are organised by their role in the comparison. Case D provides the zero-lever reference. Cases A and B quantify stiffness sensitivity. Case E then tests


the tangential compliance-centre lever over both surface tangents and both signs of the commanded orientation offset. Cases F, G, and H examine the lever-definition frame, the tool-axis centre position, and the commanded orientation-offset magnitude. Case C is presented last because it tests whether the direction rule obtained from the principal surface tangents extends to intermediate tangent-plane directions.

### 5.2.1 Zero-Lever Reference Response: Case D

Case D places the centre of compliance on the TCP. The commanded press therefore produces no moment through a compliance-centre lever, and the measured response provides the reference for the remaining contact cases under the common Cartesian impedance and null-space settings.

**Table 5.1:** Case-D zero-lever response.

| Commanded orientation offset | $\theta_{\text{align, before}}$ | $\Delta\theta_{\text{set}}$ | $\Delta\theta_{\text{align}}$ | Flat by TCP height |
|------------------------------|---------------------------------|-----------------------------|-------------------------------|--------------------|
| None                         | 0.74                            | -0.97                       | $-1.56 \pm 0.01$              | yes                |
| +10° about $t_1$             | 9.32                            | +7.57                       | $+5.94 \pm 0.03$              | yes                |
| -10° about $t_1$             | 9.43                            | -10.83                      | $+7.19 \pm 0.24$              | yes                |
| +10° about $t_2$             | 10.07                           | -1.63                       | $-1.74 \pm 0.17$              | yes                |
| -10° about $t_2$             | 9.59                            | -1.25                       | $+1.20 \pm 0.19$              | yes                |

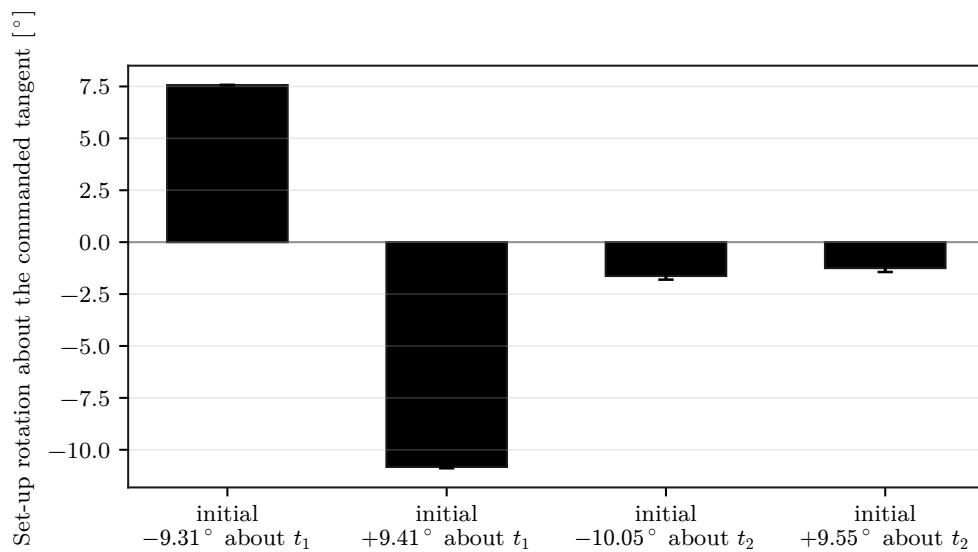

**Figure 5.2:** Set-up rotation with the centre of compliance at the TCP.

The zero-lever response is strongly axis-dependent. For the positive  $10^\circ$  command, the end effector rotates  $+7.57^\circ$  about  $t_1$  but  $-1.63^\circ$  about  $t_2$ . Reversing the commanded orientation gives  $-10.83^\circ$  about  $t_1$  and  $-1.25^\circ$  about  $t_2$ . Substantial alignment-directed end-effector rotation is therefore already present about  $t_1$ , whereas the zero-lever response about  $t_2$  remains small and does not follow the desired sign for the positive command.

The TCP-height criterion classifies all five Case-D settings as flat. This is a geometry-based classification and does not independently measure the physical grinding-face orientation. The difference between the TCP-height result and the alignment angle calculated from the end-effector pose is consistent with relative tool-gripper motion and with the calibration assumptions used by the alignment metric. The experiment does not independently determine the magnitude or physical cause of that relative motion.

The zero-orientation-offset condition further shows why the alignment angle is kept separate from the controller-response metric. The alignment angle changes from  $0.74^\circ$  at set-up entry to approximately  $2.30^\circ$  after set-up although no initial orientation offset is commanded, while the TCP-height criterion still classifies the tool as flat. The signed set-up rotation is therefore used for the controller comparisons that follow.


## 5.2.2 Influence of Cartesian Stiffness

### Case A: Rotational Stiffness

Case A varies the rotational stiffness about the commanded surface tangent. The  $5\text{ N m/rad}$  condition is the corresponding zero-lever reference from Case D and is not a separate measurement.

**Table 5.2:** Case-A response by rotational stiffness.

| Commanded orientation offset | Varied entry | Value<br>[N m/rad] | $\Delta\theta_{\text{set}}$<br>[°] | Flat by<br>TCP height |
|------------------------------|--------------|--------------------|------------------------------------|-----------------------|
| +10° about $t_1$             | $K_{R,t_1}$  | 5                  | +7.57                              | yes                   |
|                              |              | 15                 | +7.29                              | yes                   |
|                              |              | 50                 | +2.73                              | <b>no</b>             |
| +10° about $t_2$             | $K_{R,t_2}$  | 5                  | -1.63                              | yes                   |
|                              |              | 15                 | -1.52                              | yes                   |
|                              |              | 50                 | -0.48                              | yes                   |

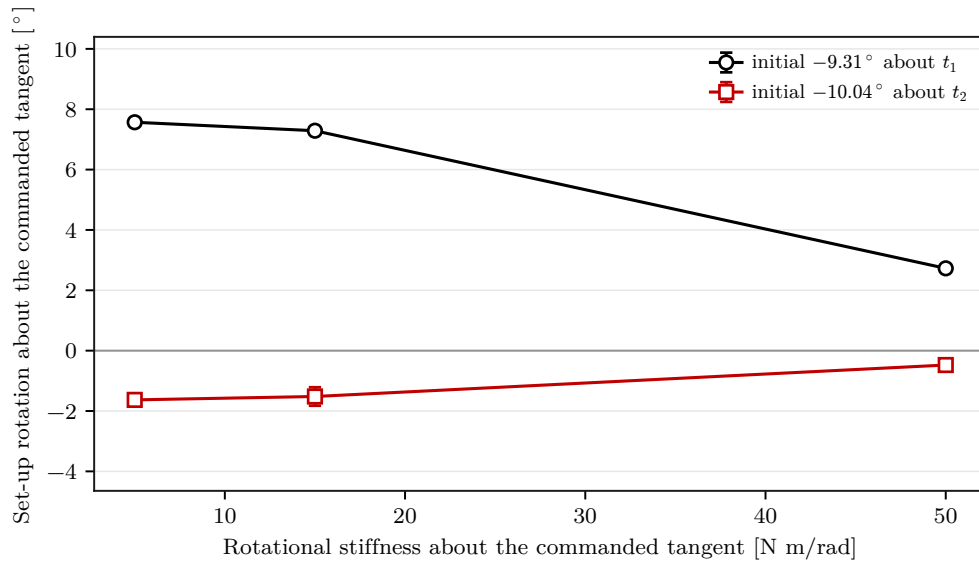**Figure 5.3:** Set-up rotation about the commanded tangent by rotational stiffness.


About  $t_1$ , increasing the command-axis rotational stiffness from 5 to 50 N m/rad reduces the signed set-up rotation from +7.57 to +2.73°. The final TCP-height classification changes from flat at the two lower stiffnesses to tilted at the highest value, where the TCP remains 3.6 mm above the flat-tool height. About  $t_2$ , the set-up rotation remains small across all three tested stiffness values, changing from -1.63 to -0.48°. All three  $t_2$  settings are classified as flat.

### Case B: Cross-Axis Translational Stiffness

Case B varies the translational stiffness along the surface tangent perpendicular to the commanded rotation direction. A further condition combines the lowest tested cross-axis translational stiffness, 300 N/m, with the highest tested command-axis rotational stiffness, 50 N m/rad.

**Table 5.3:** Case-B response by cross-axis translational stiffness.

| Commanded<br>orientation<br>offset | Varied<br>entries      | Setting             | Cross-axis<br>translation<br>[N/m] | Command-axis<br>rotation<br>[N m/rad] | $\Delta\theta_{\text{set}}$<br>[°] | Flat by<br>TCP height |
|------------------------------------|------------------------|---------------------|------------------------------------|---------------------------------------|------------------------------------|-----------------------|
| +10° about $t_1$                   | $K_{p,t_2}, K_{R,t_1}$ | translation<br>only | 300                                | 5                                     | +7.59                              | yes                   |
|                                    |                        | translation<br>only | 800                                | 5                                     | +7.56                              | yes                   |
|                                    |                        | reference           | 2000                               | 5                                     | +7.57                              | yes                   |
|                                    |                        | both varied         | 300                                | 50                                    | +2.80                              | <b>no</b>             |
|                                    |                        |                     |                                    |                                       |                                    |                       |
| +10° about $t_2$                   | $K_{p,t_1}, K_{R,t_2}$ | translation<br>only | 300                                | 5                                     | -2.24                              | yes                   |
|                                    |                        | translation<br>only | 800                                | 5                                     | -1.78                              | yes                   |
|                                    |                        | reference           | 2000                               | 5                                     | -1.63                              | yes                   |
|                                    |                        | both varied         | 300                                | 50                                    | -1.03                              | yes                   |
|                                    |                        |                     |                                    |                                       |                                    |                       |

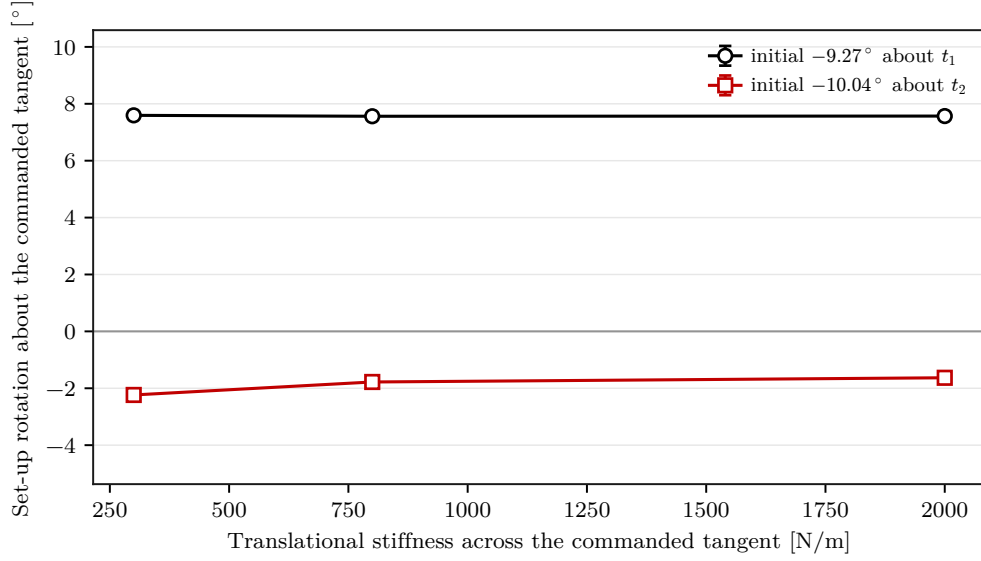

**Figure 5.4:** Set-up rotation by cross-axis translational stiffness.

The translation-only variation has little effect about  $t_1$ : changing the cross-axis stiffness from 300 to 2000 N/m changes the signed set-up rotation by only  $0.02^\circ$ . About  $t_2$ , the same variation changes the signed response by  $0.61^\circ$ , from  $-2.24$  to  $-1.63^\circ$ . All translation-only settings are classified as flat.

The combined stiffness condition is consistent with the individual stiffness effects acting approximately additively at the resolution of these measurements. About  $t_1$ , the additive estimate from the individual changes is approximately  $+2.75^\circ$ , compared with the measured  $+2.80^\circ$ . About  $t_2$ , the corresponding values are approximately  $-1.09^\circ$  and  $-1.03^\circ$ . The differences of  $0.05^\circ$  and  $0.06^\circ$  are within the descriptive comparison scale, so no additional interaction is resolved beyond the approximately additive individual effects.


### 5.2.3 Tangential Compliance-Centre Lever: Case E

Case E is the main compliance-centre sweep. The centre of compliance is moved along the surface tangent perpendicular to the commanded rotation direction. Seven positions from  $-40$  to  $+40$  mm are tested for both surface tangents and for both signs of the commanded orientation offset.



**Table 5.4:** Case-E response by tangential centre position.

| Commanded orientation<br>offset | Initial | -40    | -20    | -10    | 0      | +10    | +20   | +40 mm |
|---------------------------------|---------|--------|--------|--------|--------|--------|-------|--------|
| +10° about $t_1$                | -9.32   | +0.14  | +0.99  | +7.45  | +7.57  | +7.67  | +7.73 | +7.87  |
| -10° about $t_1$                | +9.36   | -11.30 | -11.18 | -11.14 | -10.83 | -10.36 | -5.01 | -0.09  |
| +10° about $t_2$                | -10.03  | -4.51  | -1.95  | -1.85  | -1.63  | -1.31  | -1.12 | +4.43  |
| -10° about $t_2$                | +9.55   | -10.51 | -1.51  | -1.29  | -1.25  | -1.29  | -1.28 | +4.68  |

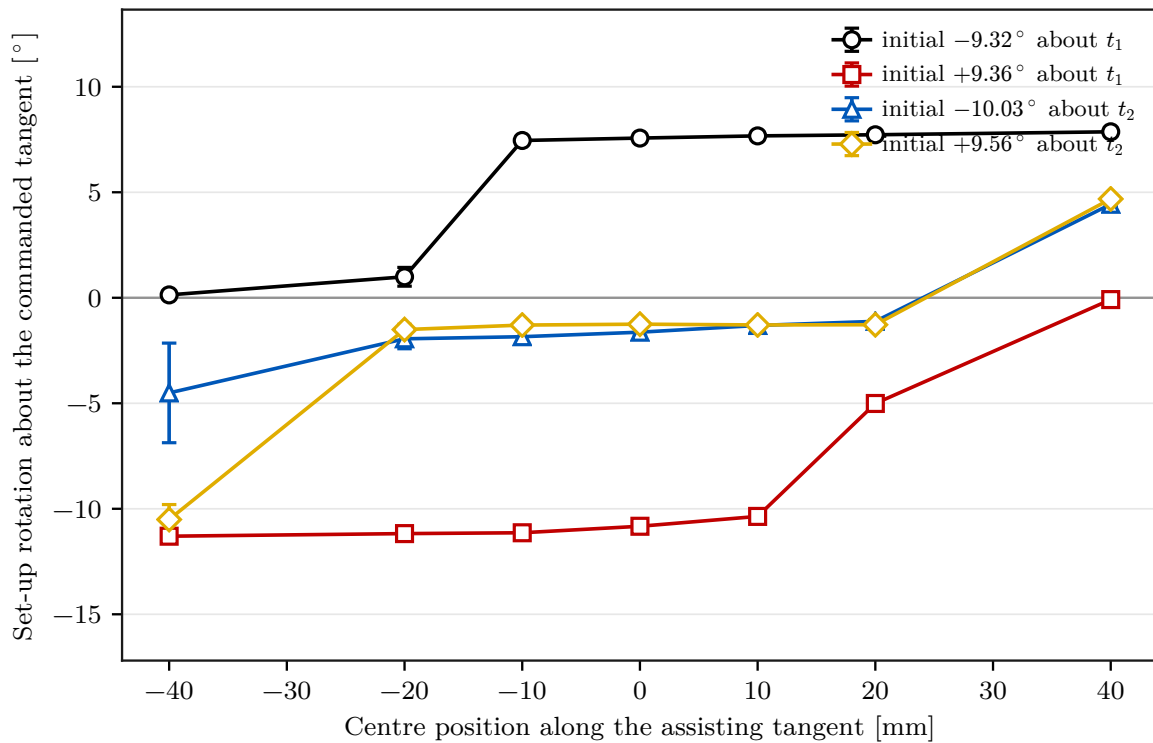**Figure 5.5:** Set-up rotation by tangential centre position, both tangents and signs.

The sign of the commanded orientation determines which side of the TCP assists the required rotation. About  $t_1$ , the positive command produces +7.87° at +40 mm but only +0.14° at -40 mm. Reversing the command exchanges the assisting and opposing sides, with -11.30° at -40 mm and -0.09° at +40 mm.


About  $t_2$ , the effect of the lever is even clearer relative to the zero-lever reference. For the positive command, the signed response changes from -1.63° at the TCP to +4.43° at the assisting +40 mm position. For the reversed command, the assisting end is exchanged and gives -10.51° at -40 mm. The tested 40 mm lever therefore changes the sign of the robot rotation about  $t_2$ , although it does not remove the complete initial alignment angle

for the positive  $10^\circ$  command.

The two tangents also differ in their sensitivity on the assisting side. About  $t_1$ , positions from  $-10$  to  $+40$  mm all give set-up rotations between  $+7.45$  and  $+7.87^\circ$ , close to the  $+7.57^\circ$  zero-lever value. About  $t_2$ , the lever is required to obtain a positive alignment-directed end-effector rotation from the positive-command zero-lever response.


The transition between assisting and opposing behaviour is not equally smooth at all positions. The positive  $t_1$  condition changes sharply between  $-10$  and  $-20$  mm, and the  $-20$  mm setting has a standard deviation of  $0.42^\circ$ . The positive  $t_2$  condition at  $-40$  mm has a standard deviation of  $2.35^\circ$ . These points are treated separately from the approximately  $0.1^\circ$  descriptive comparison scale.

The controller-response time histories support the interpretation that the lever direction changes the commanded moment rather than merely the normal press magnitude.

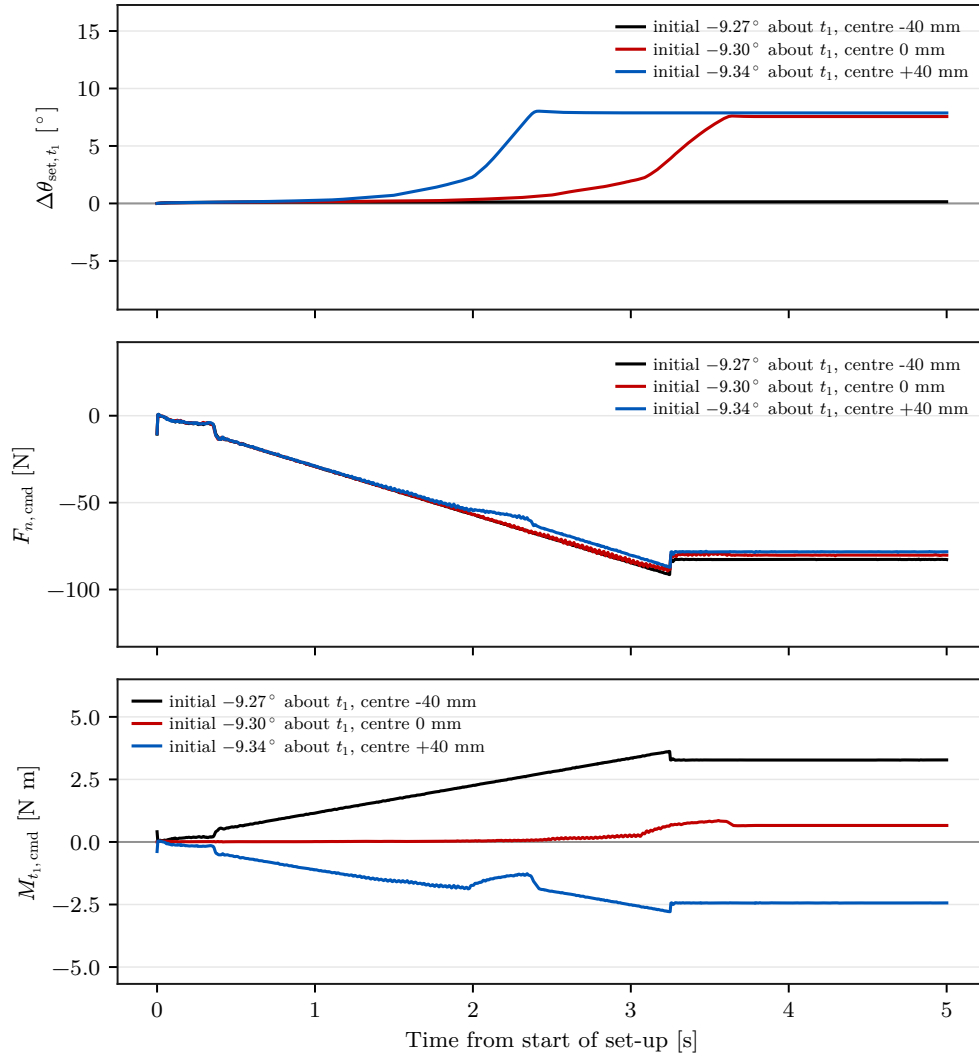

**Figure 5.6:** Set-up rotation  $\Delta\theta_{\text{set},t_1}$ , commanded normal force  $F_{n,\text{cmd}}$ , and commanded TCP moment  $M_{t_1,\text{cmd}}$  for three centre positions. All conditions carry a commanded orientation offset of  $+10^\circ$  about  $t_1$ . The legends state the measured orientation at the beginning of set-up.

At  $-40$ ,  $0$ , and  $+40$  mm, the commanded normal force settles in a similar range of approximately  $-77$  to  $-82$  N, while the commanded TCP moment about  $t_1$  settles at approximately  $+3.28$ ,  $+0.66$ , and  $-2.44$  N m, respectively. The outer lever positions therefore produce moments of similar order and opposite sign while their set-up rotations differ by  $7.73^\circ$ .

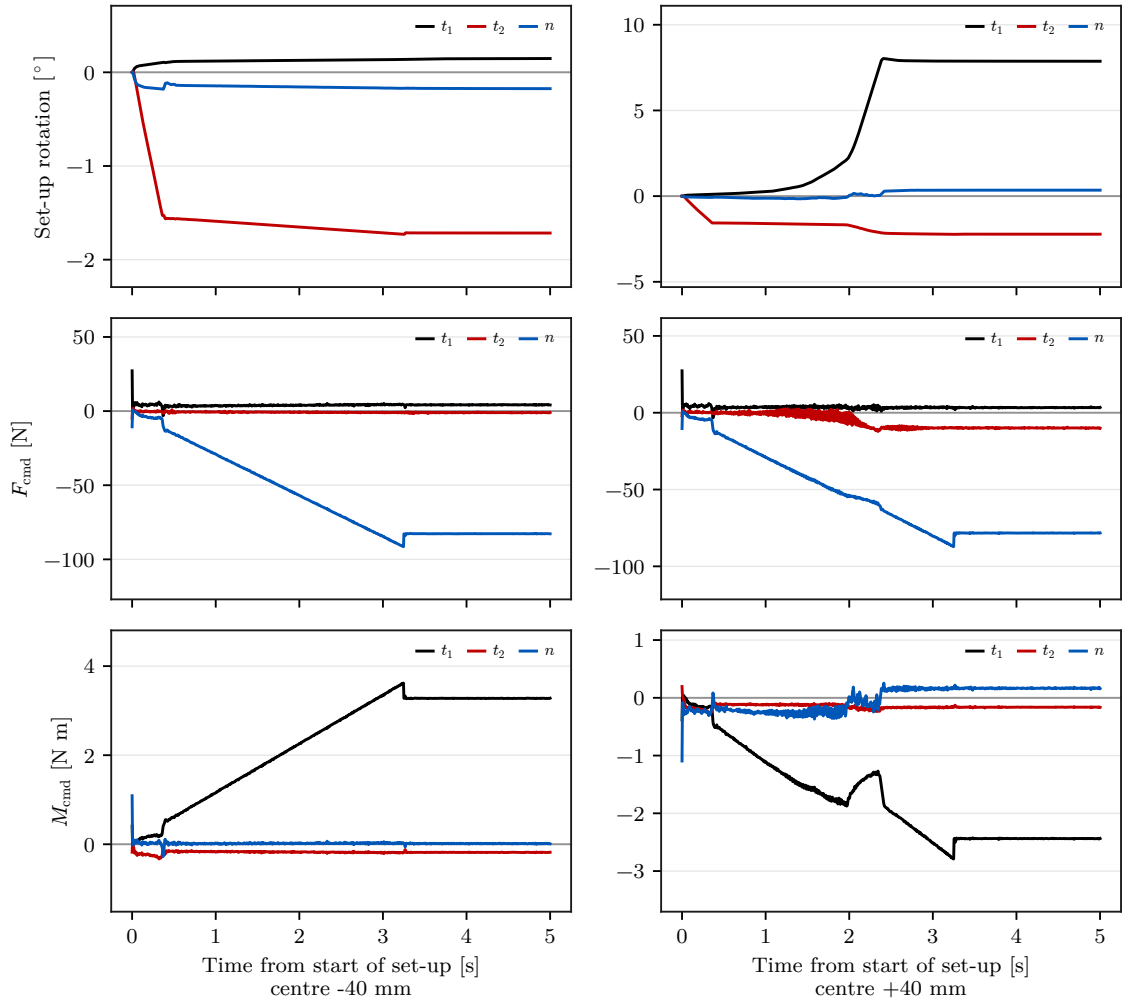

**Figure 5.7:** Surface-frame rotation, force and moment at the outer Case-E positions.


## 5.2.4 Further Compliance-Centre Dependencies

### Case F: Lever-Definition Frame

Case F compares the same nominal 40 mm lever specification when it is defined once in end-effector coordinates and once in surface coordinates. The tool-fixed lever follows the end-effector rotation, whereas the surface-fixed lever remains fixed relative to the calibrated surface.

**Table 5.5:** Case-F response by lever-definition frame.

| Commanded orientation offset | Initial | Tool frame (Case E) | Surface frame    |
|------------------------------|---------|---------------------|------------------|
| None                         | 0.76    | $-0.06 \pm 0.01$    | $-1.05 \pm 0.02$ |
| $+10^\circ$ about $t_1$      | 9.33    | $+7.87 \pm 0.01$    | $+0.13 \pm 0.01$ |

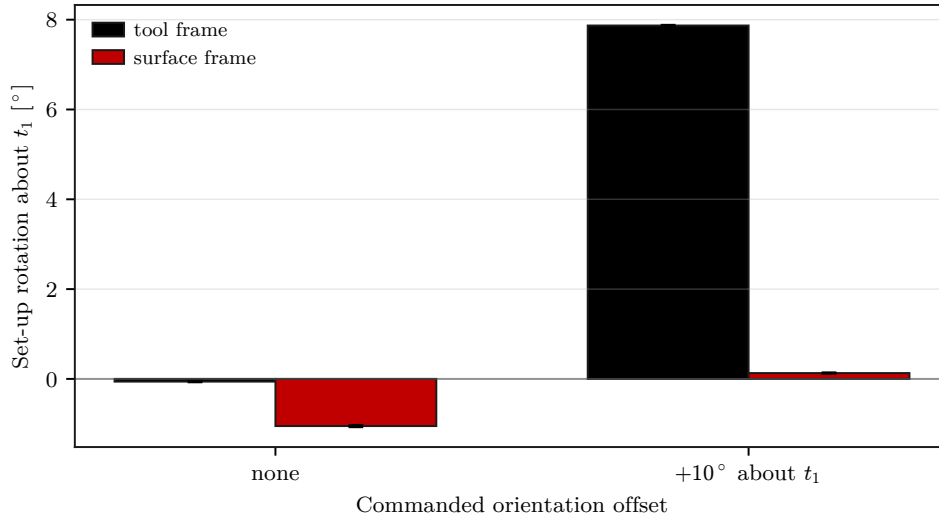

**Figure 5.8:** Case-F set-up rotation for tool- and surface-frame lever definitions.


For the  $+10^\circ$  command about  $t_1$ , the tool-fixed definition gives  $+7.87 \pm 0.01^\circ$  of set-up rotation, whereas the surface-fixed definition gives only  $+0.13 \pm 0.01^\circ$ . The surface-fixed condition is also classified as tilted by TCP height. At zero commanded orientation offset, the two definitions produce  $-0.06 \pm 0.01^\circ$  and  $-1.05 \pm 0.02^\circ$ , respectively. The frame in which the lever is defined is therefore part of the controller setting and cannot be omitted from the compliance-centre specification.

### Case G: Tool-Axis Centre Position

Case G moves the centre of compliance along the tool axis at a fixed  $+10^\circ$  command about  $t_1$ . An axial displacement would produce no tangential coupling moment if the tool axis were exactly parallel to the normal press direction. At finite tool inclination, however, the axial displacement contains a small tangential component, so a weak dependence is possible.

**Table 5.6:** Case-G response by tool-axis centre position.

| Position                        | -40   | -20   | -10   | 0     | +10   | +20   | +40 mm |
|---------------------------------|-------|-------|-------|-------|-------|-------|--------|
| $\Delta\theta_{\text{set},t_1}$ | +7.26 | +7.49 | +7.58 | +7.57 | +7.58 | +7.55 | +7.60  |
| Standard deviation              | 0.13  | 0.01  | 0.01  | 0.01  | 0.01  | 0.03  | 0.04   |

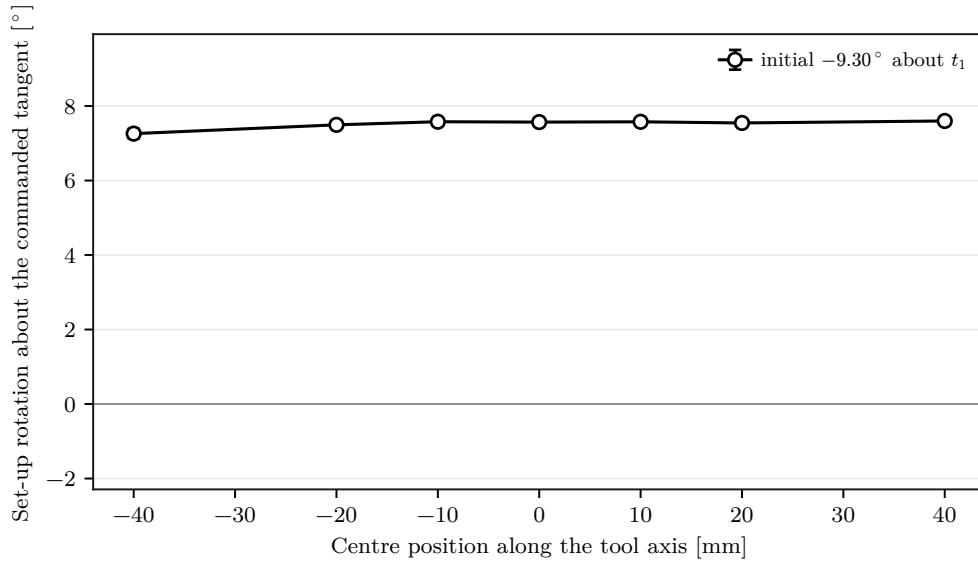

**Figure 5.9:** Set-up rotation by centre position along the tool axis.


The signed set-up rotation changes from  $+7.26$  to  $+7.60^\circ$  over the full  $-40$  to  $+40$  mm sweep. The total span is  $0.34^\circ$ , far smaller than the  $7.73^\circ$  span between the outer tangential positions of Case E for the positive  $t_1$  command. The response is not strictly monotonic, and every Case-G position is classified as flat. The measured variation can arise from the small tangential projection of the axial lever, tangential force components, finite rotation, evolving contact geometry, or tool-mount compliance; these contributions are not isolated by the experiment.

### Case H: Commanded Orientation-Offset Magnitude

Case H repeats the zero-lever and assisting-lever conditions at  $+5^\circ$  and  $+10^\circ$  about both surface tangents.

**Table 5.7:** Case-H response by commanded orientation-offset magnitude.

| Centre position                | About $t_1$ |             | About $t_2$ |             |
|--------------------------------|-------------|-------------|-------------|-------------|
|                                | $+5^\circ$  | $+10^\circ$ | $+5^\circ$  | $+10^\circ$ |
| $\theta_{\text{align,before}}$ | 4.29        | 9.34        | 5.19        | 10.04       |
| 0 mm                           | +2.55       | +7.57       | -1.40       | -1.63       |
| +40 mm                         | +2.70       | +7.87       | +5.91       | +4.43       |

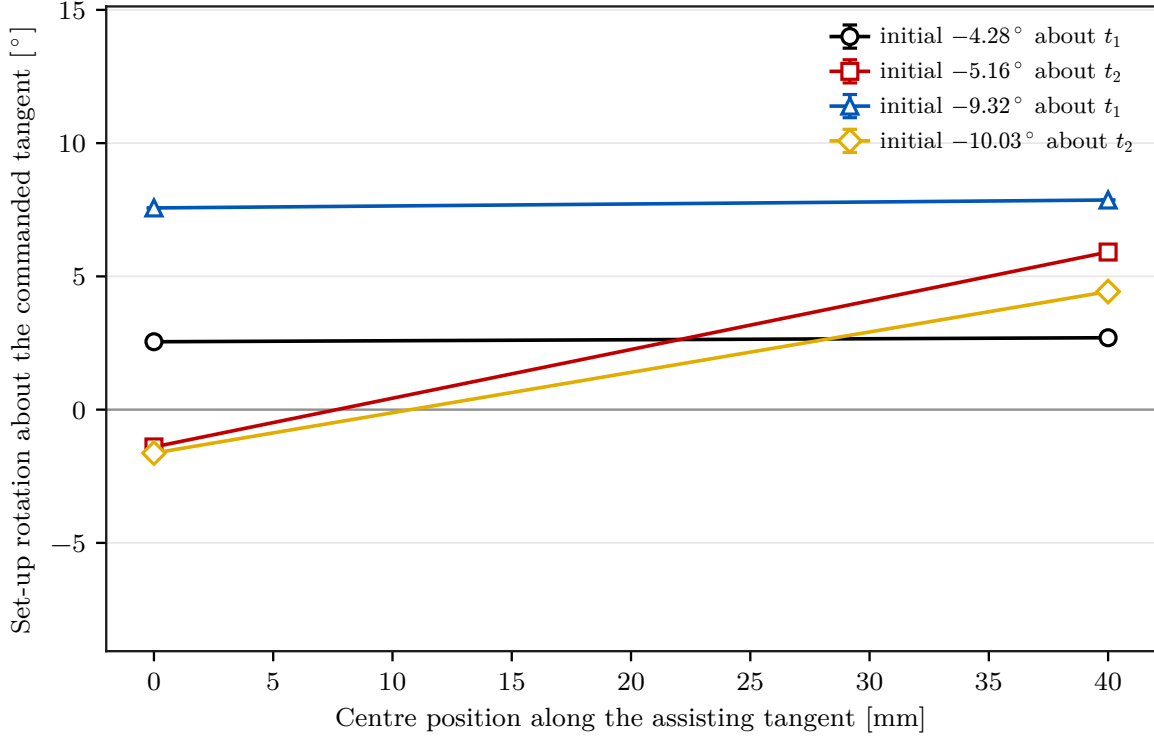

**Figure 5.10:** Set-up rotation by centre position at both commanded magnitudes.

About  $t_1$ , moving the centre from the TCP to the assisting +40 mm position changes the set-up rotation by only  $0.15^\circ$  at the  $5^\circ$  command and  $0.30^\circ$  at the  $10^\circ$  command. About  $t_2$ , the same lever change reverses the response at both commanded magnitudes: from  $-1.40$  to  $+5.91^\circ$  at  $5^\circ$  and from  $-1.63$  to  $+4.43^\circ$  at  $10^\circ$ . The lever-direction effect is therefore present at both tested command magnitudes.


The set-up rotation is not proportional to the commanded orientation offset. For example, the zero-lever  $t_1$  response changes from  $+2.55^\circ$  at the  $5^\circ$  command to  $+7.57^\circ$  at the  $10^\circ$  command. The experiment therefore supports using the commanded orientation magnitude as an independent operating parameter rather than scaling the measured rotation linearly from one command to another.

### 5.2.5 Generalisation of the Lever-Direction Rule: Case C

Cases D and E establish the principal-axis reference and the sign dependence of the tangential lever. Case C tests whether the same geometric direction rule extends to intermediate directions in the surface tangent plane. Each direction is compared with a direction-selected 40 mm lever and with the fixed lever that assists the  $t_1$  command.

**Table 5.8:** Case-C direction-rule comparison at the common 40 mm lever magnitude.

| Commanded rotation direction | Selected $[r_{c,t_1}, r_{c,t_2}]$<br>[mm] | $\Delta\theta_{\text{set}} [^\circ]$ |                |
|------------------------------|-------------------------------------------|--------------------------------------|----------------|
|                              |                                           | selected                             | fixed at $t_1$ |
| About $t_1$                  | $[0, -40.0]$                              | +7.87                                | +7.87          |
| $-45^\circ$ from $t_1$       | $[-28.3, -28.3]$                          | +4.46                                | +4.39          |
| $+45^\circ$ from $t_1$       | $[+28.3, -28.3]$                          | +4.85                                | +4.80          |
| About $t_2$                  | $[+40.0, 0]$                              | +4.43                                | -1.61          |

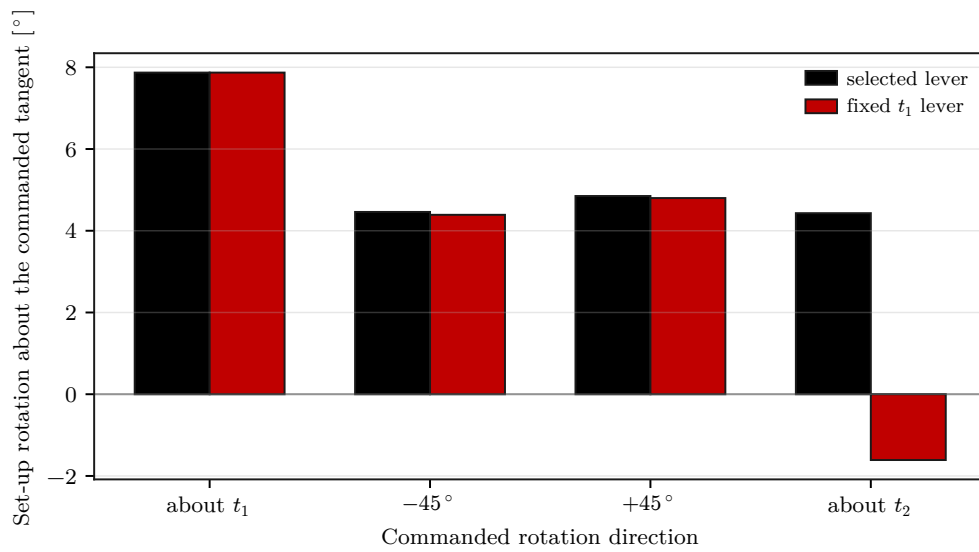**Figure 5.11:** Case-C set-up rotation with the direction-selected and fixed levers.

The selected and fixed levers produce nearly identical responses at the two diagonal directions. The differences are  $0.07^\circ$  at  $-45^\circ$  and  $0.05^\circ$  at  $+45^\circ$ , both within the descriptive experimental scatter. The fixed lever still has a substantial projection along the selected direction at these diagonals, so the experiment does not show a meaningful performance separation there.

The  $t_2$  comparison is different. The selected lever gives  $+4.43^\circ$ , whereas the fixed  $t_1$  lever gives  $-1.61^\circ$ . The direction rule is therefore supported over the four tested directions, with the clearest experimental separation occurring when the selected and fixed lever directions are orthogonal.




### 5.3 Null-Space Pose-Hold Results

The null-space pose-hold study is separate from the contact cases. Matched trials compare the selectable null-space terms under the same internally commanded point-force-equivalent disturbance. The commanded disturbance reached 20.00 N in all twelve trials, with peak equivalent joint-torque norms between 2.17 and 2.45 N m. The torque-limit scale remained equal to one, so the waveform was applied without clipping.

Projected null-space damping reduced the cumulative redundant joint excursion from  $(7.596 \pm 0.916)^\circ$  without null-space torque to  $(5.687 \pm 0.228)^\circ$  at  $d_{\text{null}} = 2 \text{ N m s/rad}$ , a reduction of approximately 25 %. The final change in  $\sigma_{\text{min}}$  became less negative, from  $(-2.13 \pm 0.47) \times 10^{-3}$  to  $(-1.26 \pm 0.10) \times 10^{-3}$ .

Both sigma-only settings returned  $\sigma_{\text{min}}$  approximately to its initial value by the end of the trial. The final changes were  $(1.95 \pm 0.07) \times 10^{-5}$  at  $k_\sigma = 1.5 \text{ N m}$  and  $(1.93 \pm 0.03) \times 10^{-5}$  at  $2 \text{ N m}$ . The lower torque magnitude achieved the same final recovery with lower cumulative excursion,  $(0.283 \pm 0.007)^\circ$  instead of  $(1.619 \pm 0.130)^\circ$ , and a lower mean peak Cartesian position error,  $0.889 \pm 0.024 \text{ mm}$  instead of  $0.983 \pm 0.053 \text{ mm}$ . The largest position error measured in the complete pose-hold study was 1.304 mm, below the predefined 2 mm acceptance limit.

The geometric Jacobian combines translational and rotational rows without a common length scale. The reported  $\sigma_{\text{min}}$  is therefore used only as a relative indicator under the fixed Jacobian convention.

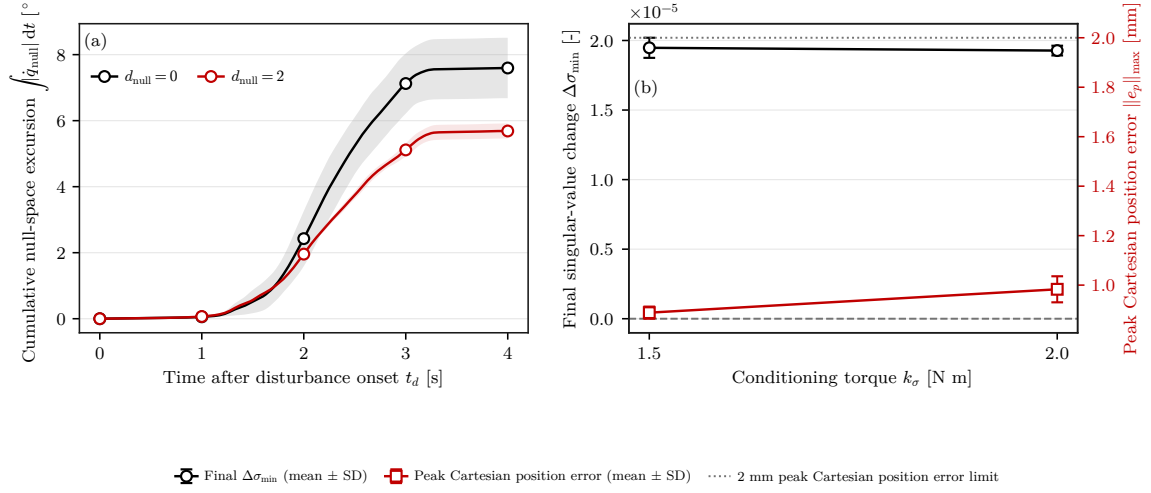

**Figure 5.12:** Null-space response during the Cartesian pose-hold disturbance test. In (a), the solid curves show the mean cumulative null-space excursion and the shaded bands indicate  $\pm$  one standard deviation across the three repetitions.

The pose-hold trials isolate the projected damping and sigma-conditioning terms under the repeatable commanded disturbance. By contrast, the surface-contact experiments use both contributions together in the combined secondary-torque mode and therefore do not separate their individual effects during contact.

## 5.4 Cross-Case Discussion

### 5.4.1 Relative Influence of the Tested Parameters

The tested parameters do not influence the contact response equally. Increasing command-axis rotational stiffness from 5 to 50 N m/rad changes the signed set-up rotation by  $-4.84^\circ$  about  $t_1$  and  $+1.15^\circ$  about  $t_2$ . Changing the perpendicular translational stiffness from 2000 to 300 N/m changes the response by only  $+0.02^\circ$  about  $t_1$  and  $-0.61^\circ$  about  $t_2$ .

The tangential compliance-centre sweep produces the largest within-series changes:  $7.73^\circ$  between the outer positions for the positive  $t_1$  command and  $8.94^\circ$  for the positive  $t_2$  command. Within the tested configuration and ranges, the tangential lever therefore has a stronger influence on the set-up rotation than the tested translational-stiffness variation and a comparable or larger influence than the rotational-stiffness variation.

This comparison does not imply that gain selection is unimportant. Rotational stiffness directly determines the resistance to angular motion, and the cross-axis translational

stiffness can modify the response in some directions. The measurements nevertheless indicate that selecting the compliance-centre lever is the first geometric decision because it determines whether the normal press creates a moment that assists or opposes the required rotation.

### 5.4.2 Physical Role of the Compliance-Centre Lever

The sign dependence observed in Case E follows directly from the point-shifted impedance. With the press directed approximately along the negative surface normal,  $f_{\text{press}} \approx -F_n n_s$ , the coupling moment is

$$m_c = -r_c \times f_{\text{press}}. \quad (5.1)$$

For the two principal surface tangents, the selected tangential lever is

$$r_{c,t} = -\rho_c t_2 \quad \text{about } t_1, \quad r_{c,t} = +\rho_c t_1 \quad \text{about } t_2, \quad \rho_c > 0, \quad (5.2)$$

which gives, under the same normal-force approximation,

$$m_c \approx -F_n \rho_c t_1 \quad \text{about } t_1, \quad m_c \approx -F_n \rho_c t_2 \quad \text{about } t_2. \quad (5.3)$$

The lever must therefore lie along the tangent perpendicular to the commanded rotation direction, with a sign chosen so that the induced moment acts in the alignment direction. Reversing the commanded orientation offset reverses the required lever sign. Case E supports this rule on both principal tangents and at both signs of the commanded offset. Case C supports the extension to the four tested tangent-plane directions, while the diagonal comparisons remain within the experimental scatter because the fixed lever retains a substantial component in the selected direction.

The weak Case-G sensitivity is also consistent with the cross-product mechanism. A lever component parallel to the normal press produces no moment. For a tool inclined by approximately  $10^\circ$ , an axial 40 mm displacement has only  $40 \sin 10^\circ \approx 6.9$  mm of tangential projection. The direct tangential Case-E lever is therefore much more effective over the tested range.

### 5.4.3 Axis-Dependent Response and Measurement Interpretation

The zero-lever Case-D response shows that the two principal surface tangents cannot be treated as dynamically equivalent. The end effector already rotates substantially about  $t_1$  without a compliance-centre lever, whereas the corresponding  $t_2$  response is small. This difference explains why the assisting 40 mm lever adds only  $0.30^\circ$  to the positive  $t_1$  response but changes the positive  $t_2$  response from  $-1.63$  to  $+4.43^\circ$ .

The asymmetry is consistent with the rectangular contact geometry and the direction-dependent compliance of the tool mounting. The grinding face has different half-dimensions across the two surface tangents, and unloaded clearance was observed near the mounting direction associated with  $t_2$ . The experiments do not isolate the individual contributions of contact geometry and tool-mount motion.

Across all contact conditions, the TCP-height criterion classified 50 of the 57 parameter settings as flat. The seven settings classified as tilted are listed in table 5.9.


**Table 5.9:** Conditions classified as tilted by TCP height.

| Condition                                         | Excess height | $\Delta\theta_{\text{align}}$ | $\Delta\theta_{\text{set}}$ |
|---------------------------------------------------|---------------|-------------------------------|-----------------------------|
| Case A, 50 N m/rad about $t_1$                    | 3.6 mm        | +2.38                         | +2.73                       |
| Case B, both stiffness entries varied about $t_1$ | 3.5 mm        | +2.46                         | +2.80                       |
| Case E, $-20$ mm at $+10^\circ$ about $t_1$       | 5.3 mm        | +0.70                         | +0.99                       |
| Case E, $-40$ mm at $+10^\circ$ about $t_1$       | 6.0 mm        | $-0.12$                       | +0.14                       |
| Case E, $+20$ mm at $-10^\circ$ about $t_1$       | 5.2 mm        | +4.43                         | $-5.01$                     |
| Case E, $+40$ mm at $-10^\circ$ about $t_1$       | 9.3 mm        | $-0.13$                       | $-0.09$                     |
| Case F, surface frame at $+10^\circ$ about $t_1$  | 5.9 mm        | $-0.13$                       | +0.13                       |

The flatness classification and the alignment angle answer different questions. TCP height is based on the calibrated plane and grinding-face geometry, whereas the alignment angle is calculated from the measured end-effector orientation and the calibrated grinding-face direction. A difference between them is therefore consistent with relative tool–gripper motion or with the assumptions of the geometric reconstruction, but it is not an independent measurement of physical grinding-face rotation.

The alignment angle can also carry a bias from the calibrated grinding-face direction.

Because the same calibration is used for all runs, this bias is common to the evaluation chain, but it does not necessarily appear as an identical additive angular offset in every orientation. The primary signed set-up rotation does not use the calibrated grinding-face direction; it is obtained from the measured end-effector motion and then resolved in the surface frame. This makes it the more direct quantity for comparing the controller-induced rotation between settings.

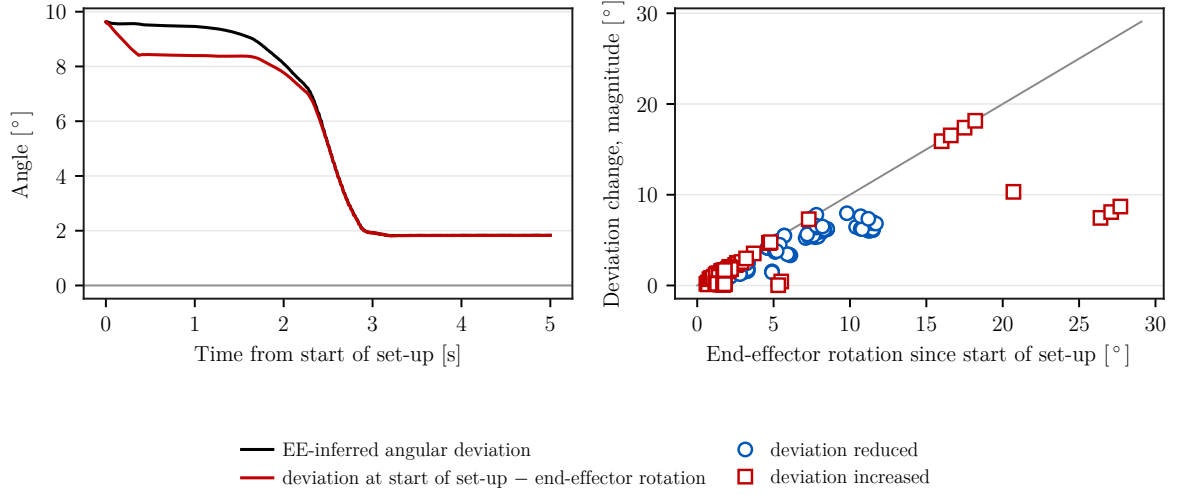

**Figure 5.13:** Comparison between the change in the alignment angle calculated from the end-effector pose and the end-effector rotation since the start of set-up. The left panel shows both quantities for one representative trial. The right panel compares their magnitudes over all archived trials and distinguishes whether the calculated alignment angle decreased or increased during set-up.

The close agreement between the change in the end-effector-based alignment angle and the end-effector rotation provides an internal consistency check of the evaluation. It does not remove the uncertainty in the physical tool-to-gripper relation. In particular, the approximately  $\pm 2^\circ$  unloaded mounting clearance was not characterised as an uncertainty bound under contact load.

#### 5.4.4 Implications for Controller Parameter Selection

Within a similar contact geometry, the measurements suggest selecting the compliance-centre lever before refining the stiffness values. The tangential lever direction is chosen perpendicular to the commanded rotation direction, and its sign is selected so that the press-induced moment assists alignment. The lever-definition frame must also be specified: Case F shows that a tool-fixed and a surface-fixed lever with the same nominal coordinates

can produce very different responses once the end effector rotates.

The lever magnitude is then bounded by both the desired coupling and the robot torque limits. The reported tangential sweep ends at 40 mm. This value adds little to the already large positive  $t_1$  zero-lever rotation but is required to obtain a positive alignment-directed  $t_2$  rotation in the tested configuration. It does not establish a best-performing or sufficient  $t_2$  magnitude. A wider, safety-bounded sweep would be required for that conclusion.

An additional exploratory tool-axis test outside the reported Case-G range used a 120 mm displacement. In that test, the commanded sixth-joint torque reached 21.4 N m against its 12 N m limit and the run aborted. Across the reported sweep, the same joint remained near 6 N m and reached 15.1 N m only at the final tested position. The centre position must therefore be selected together with the joint-torque limits.

After the lever has been selected, the rotational stiffness about the commanded axis can be refined. Increasing it reduced the available alignment motion over the tested range. The perpendicular translational stiffness had a smaller effect and can be treated as a secondary tuning variable for this geometry. This ordering is a practical interpretation of the present measurements, not a universal optimisation rule.

### 5.4.5 Scope of Interpretation

The conclusions of this chapter apply to the tested Panda configuration, rectangular grinding tool, plane surface, dry-contact condition, commanded press trajectory, and sampled parameter ranges. The numerical lever distances are therefore geometry-specific. The transferable result is the relationship between the signed commanded rotation direction and the tangential lever direction and sign, supported over the tested directions.

The physical grinding-face orientation was not measured independently under load. The alignment angle relies on the calibrated tool-to-end-effector relation, while the TCP-height classification relies on the calibrated face geometry. These quantities are therefore retained as supporting indicators rather than substituted for the measured end-effector set-up rotation.

The surface-contact experiments used projected null-space damping and singular-value conditioning together in the combined secondary-torque mode. Their individual effects during contact are not isolated. The separate pose-hold study provides that comparison

under the commanded disturbance. Finally, successful operation through the nominal 1 kHz Franka Control Interface demonstrates the implemented operating rate but does not constitute a worst-case execution-time or jitter analysis.

# Chapter 6

## Conclusion and Future Work

### 6.1 Conclusion

This thesis developed and experimentally evaluated a real-time Cartesian impedance controller for contact-induced alignment of a grinding tool with a plane surface. The controller runs in the Franka Control Interface torque loop and combines surface-relative Cartesian impedance control, a virtual centre of compliance, and null-space control. During set-up, the stiffness and damping defined at the selected centre of compliance  $p_c$  are shifted to the TCP. The resulting translation–rotation coupling allows the commanded normal press to generate an alignment moment without prescribing an additional rotational trajectory.

The main experimental finding is that the position and direction of the compliance-centre lever  $r_c$  had a larger influence on the alignment response than the tested stiffness variations. The zero-lever response was strongly axis-dependent. For a commanded  $+10^\circ$  orientation offset, the end effector already rotated by  $+7.57^\circ$  about  $t_1$  with the centre of compliance at the TCP. Adding the assisting 40 mm tangential lever increased this only slightly to  $+7.87^\circ$ . About  $t_2$ , the same lever magnitude, with its tangential direction selected for the  $t_2$  command, changed the signed set-up rotation from  $-1.63^\circ$  to  $+4.43^\circ$ . In this tested condition, the lever was therefore required to produce end-effector rotation in the assisting direction, although the 40 mm magnitude was not sufficient to remove the complete initial deviation.

These measurements support a simple geometric rule for selecting the compliance-centre



lever. With

$$r_c = p_{\text{TCP}} - p_c, \quad m_c = -r_c \times f_{\text{press}},$$

the assisting tangential lever is selected perpendicular to the commanded rotation axis in the surface tangent plane. Its sign is chosen so that the press-induced moment acts in the required alignment direction. Reversing the commanded rotation direction therefore reverses the assisting lever direction. Case C evaluated this rule at four tangent-plane directions. The two diagonal selected-versus-fixed comparisons differed by only  $0.07^\circ$  and  $0.05^\circ$ , which is within the descriptive experimental scatter, while the  $t_2$  comparison showed the clear change from  $-1.61^\circ$  to  $+4.43^\circ$ . The experiments therefore support the direction-and-sign rule over the tested directions, but they do not establish one universal lever magnitude.

The remaining contact experiments clarify which parameters are secondary to this lever-selection effect. Increasing the rotational stiffness about the commanded rotation axis reduced the set-up rotation, especially about  $t_1$ . The tested perpendicular translational-stiffness variation had a smaller effect. When both stiffness entries were varied together, the measured response was consistent with the individual effects acting approximately additively within the descriptive comparison scale. Moving the compliance centre along the tool axis changed the set-up rotation by only  $0.34^\circ$  over the tested  $-40$  to  $+40$  mm range. The frame used to define the lever also mattered: a tool-fixed lever rotates with the end effector, whereas a surface-fixed lever keeps its direction relative to the surface, so the two definitions separate once the end effector rotates.

The secondary null-space study showed that the redundant joint motion can be influenced without changing the main Cartesian task. In matched Cartesian pose-hold trials, projected null-space damping reduced the cumulative redundant joint excursion by approximately 25 %. Both tested singular-value conditioning torques returned the minimum singular value  $\sigma_{\min}$  approximately to its initial level after the commanded disturbance. These results apply to the isolated pose-hold experiment; the individual null-space contributions were not separated during surface contact.

The main contribution of this thesis is therefore the real-time integration and experimental evaluation of a point-shifted Cartesian impedance for tool-surface alignment, together with a geometry-based rule for choosing the tangential direction and sign of the virtual

compliance-centre lever. The results show that the normal press can be used to generate an alignment moment through this lever, while the required lever magnitude remains dependent on the tool geometry, contact conditions, and robot configuration.

## 6.2 Limitations

### 6.2.1 Experimental Range

The contact study used one Franka Panda configuration, one rectangular tool and mount, one plane surface, one press trajectory, and a bounded set of stiffness and compliance-centre values. The direction-and-sign rule was tested on both principal surface tangents and at two diagonal directions, but the measured response magnitudes remain specific to the investigated geometry and parameter range. In particular, the experiments do not determine a universal best lever magnitude.

### 6.2.2 Measurement and Tool-Mount Uncertainty

The primary controller-response quantity, the signed set-up rotation, was obtained from the measured end-effector motion. The supporting alignment angle  $\theta_{\text{align}}$  was calculated from the end-effector pose and the calibrated grinding-face direction, and therefore assumes that the calibrated tool-to-end-effector relation remains fixed. Relative motion between the tool and gripper under load was not measured independently. The TCP-height quantity provides a geometry-based flatness classification rather than a direct measurement of the physical grinding-face orientation.

The supporting external wrench was obtained from the libfranka model estimate relative to the value stored at the clearance transition. No independent force/torque sensor was used. The reported load quantities should therefore be interpreted as model-based measurements on one consistent evaluation basis.

### 6.2.3 Null-Space Configuration and Real-Time Operation

Projected damping and singular-value conditioning were active together during the surface-contact experiments. Their individual effects were isolated only in the separate

Cartesian pose-hold study under an internally commanded disturbance. The experiments demonstrate operation through the nominal 1 kHz Franka control loop, but they do not constitute a worst-case execution-time or jitter analysis.

## 6.3 Future Work

A first extension is a wider and finer study of the compliance-centre lever. The direction rule should be evaluated over a denser set of tangent-plane angles while the lever magnitude is varied independently at each direction. This would determine how the required magnitude changes with the commanded orientation and contact geometry, rather than selecting one common magnitude in advance.

A second extension is independent measurement of the physical tool response. An external orientation measurement of the grinding face would separate end-effector rotation from relative motion within the tool mount. A direct force/torque sensor would likewise allow the model-estimated external wrench to be compared with an independent contact-load measurement.

The controller should also be tested with additional tool geometries, surface orientations, robot configurations, and press trajectories. These experiments would show how far the observed axis asymmetry and the geometry-based lever-selection rule transfer beyond the arrangement used in this thesis. The null-space study could similarly be extended to physical disturbances and to experiments that isolate damping and singular-value conditioning during surface contact.

Finally, the lever-selection rule can be incorporated directly into the controller. After the initial angular deviation is determined at the clearance transition, the controller could select the tangential lever direction and sign so that the resulting press-induced moment acts against that deviation. The lever magnitude could then be scheduled within predefined geometric and joint-torque limits. This would replace a compliance-centre lever chosen before the run with a geometry-based, run-specific selection.

# Bibliography

- [1] Alin Albu-Schäffer, Christian Ott, Udo Frese, and Gerd Hirzinger. Cartesian impedance control of redundant robots: Recent results with the DLR-light-weight-arms. In *Proceedings of the IEEE International Conference on Robotics and Automation (ICRA)*, volume 3, pages 3704–3709, 2003. doi: 10.1109/ROBOT.2003.1242165.
- [2] Benjamin Alt, Florian Stöckl, Silvan Müller, Christopher Braun, Julian Raible, Saad Alhasan, Oliver Rettig, Lukas Ringle, Darko Katic, Rainer Jäkel, Michael Beetz, Marcus Strand, and Marco F. Huber. RoboGrind: Intuitive and interactive surface treatment with industrial robots. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 2140–2146, 2024. doi: 10.1109/ICRA57147.2024.10611143.
- [3] Stefano Chiaverini, Bruno Siciliano, and Olav Egeland. Review of the damped least-squares inverse kinematics with experiments on an industrial robot manipulator. *IEEE Transactions on Control Systems Technology*, 2(2):123–134, 1994. doi: 10.1109/87.294335.
- [4] John J. Craig. *Introduction to Robotics: Mechanics and Control*. Pearson Prentice Hall, Upper Saddle River, NJ, 3 edition, 2005.
- [5] Jacques Denavit and Richard S. Hartenberg. A kinematic notation for lower-pair mechanisms based on matrices. *Journal of Applied Mechanics*, 22(2):215–221, 1955.
- [6] Alexander Dietrich, Christian Ott, and Alin Albu-Schäffer. An overview of null space projections for redundant, torque-controlled robots. *The International Journal of Robotics Research*, 34(11):1385–1400, 2015. doi: 10.1177/0278364914566516.
- [7] Ernest D. Fasse and Jan F. Broenink. A spatial impedance controller for robotic

- manipulation. *IEEE Transactions on Robotics and Automation*, 13(4):546–556, 1997. doi: 10.1109/70.611320.
- [8] Franka Emika GmbH. libfranka: Communication Test Example. [https://github.com/frankaemika/libfranka/blob/0.7.1/examples/communication\\_test.cpp](https://github.com/frankaemika/libfranka/blob/0.7.1/examples/communication_test.cpp), 2019. Official libfranka 0.7.1 example, file `examples/communication_test.cpp`.
- [9] Franka Emika GmbH. Franka control interface documentation. <https://frankaemika.github.io/docs/>, 2023. Accessed for robot interface, libfranka model access, and torque control documentation.
- [10] Franka Emika GmbH. libfranka: Cartesian Impedance Control Example. [https://github.com/frankaemika/libfranka/blob/master/examples/cartesian\\_impedance\\_control.cpp](https://github.com/frankaemika/libfranka/blob/master/examples/cartesian_impedance_control.cpp), 2023. Official libfranka example, file `examples/cartesian_impedance_control.cpp`.
- [11] Christian Friedrich, Patrick Frank, Marco Santin, and Matthias Haag. Highly dynamic physical interaction for robotics: Design and control of an active remote center of compliance. In *2025 IEEE International Conference on Robotics and Automation (ICRA)*, 2025. doi: 10.1109/ICRA55743.2025.11128451.
- [12] Richard Hartisch and Kevin Haninger. Flexure-based environmental compliance for high-speed robotic contact tasks. In *2022 IEEE/ASME International Conference on Advanced Intelligent Mechatronics (AIM)*, pages 1608–1613, 2022. doi: 10.1109/AIM52237.2022.9863334.
- [13] Neville Hogan. Impedance control: An approach to manipulation—parts i–iii. *Journal of Dynamic Systems, Measurement, and Control*, 107(1):1–24, 1985.
- [14] International Federation of Robotics. World robotics 2023 report. Technical report, IFR Statistical Department, Frankfurt am Main, 2023.
- [15] Oussama Khatib. A unified approach for motion and force control of robot manipulators. *IEEE Journal on Robotics and Automation*, 3(1):43–53, 1987.
- [16] Kevin M. Lynch and Frank C. Park. *Modern Robotics: Mechanics, Planning, and Control*. Cambridge University Press, 2017. URL <https://hades.mech.northwestern.edu/images/7/7f/MR.pdf>. Free preprint.

- [17] Matthias Mayr and Julian M. Salt-Ducaju. A C++ implementation of a cartesian impedance controller for robotic manipulators. *Journal of Open Source Software*, 9(93):5194, 2024. doi: 10.21105/joss.05194.
- [18] Kang Min, Fenglei Ni, Zhaoyang Chen, and Hong Liu. A force control method integrating human skills for complex surface finishing. *Machines*, 12(11):756, 2024. doi: 10.3390/machines12110756.
- [19] Richard M. Murray, Zexiang Li, and S. Shankar Sastry. *A Mathematical Introduction to Robotic Manipulation*. CRC Press, 1994.
- [20] James L. Nevins and Daniel E. Whitney. Computer-controlled assembly. *Scientific American*, 1989. Background source on robotic assembly and compliance.
- [21] Christian Ott, Alin Albu-Schäffer, Andreas Kugi, and Gerd Hirzinger. On the passivity-based impedance control of flexible joint robots. *IEEE Transactions on Robotics*, 24(2):416–429, 2008.
- [22] Mathew Jose Pollayil, Franco Angelini, Guiyang Xin, Michael Mistry, Sethu Vijayakumar, Antonio Bicchi, and Manolo Garabini. Choosing stiffness and damping for optimal impedance planning. *IEEE Transactions on Robotics*, 39(2):1281–1300, 2023. doi: 10.1109/TRO.2022.3216078.
- [23] Bruno Siciliano, Lorenzo Sciavicco, Luigi Villani, and Giuseppe Oriolo. *Robotics: Modelling, Planning and Control*. Springer, London, 2009.
- [24] Stefano Stramigioli, Claudio Melchiorri, and Stefano Andreotti. Intrinsically passive grasping and manipulation. *IEEE Transactions on Robotics and Automation*, 2000. URL <http://robby.caltech.edu/~jwb/courses/CDS270/papers/passive.grasp.pdf>. Open-access preprint.
- [25] Markku Suomalainen, Sylvain Calinon, Emmanuel Pignat, and Ville Kyrki. Improving dual-arm assembly by master-slave compliance. In *2019 International Conference on Robotics and Automation (ICRA)*, pages 8676–8682, 2019. doi: 10.1109/ICRA.2019.8793977.
- [26] Valeria Villani, Francesco Pini, Francesco Leali, and Cristian Secchi. Survey on human–robot collaboration in industrial settings: Safety, intuitive interfaces and

- applications. *Mechatronics*, 55:248–266, 2018. doi: 10.1016/j.mechatronics.2018.02.009.
- [27] Sen Wang, Guodong Chen, Hui Xu, and Zheng Wang. A robotic peg-in-hole assembly strategy based on variable compliance center. *IEEE Access*, 2019. doi: 10.1109/ACCESS.2019.2954459.
- [28] Paul C. Watson. Remote center compliance system. U.S. Patent 4,098,001, 1978. Assigned to The Charles Stark Draper Laboratory.
- [29] Chong Wu, Kai Guo, and Jie Sun. Dual PID adaptive variable impedance constant force control for grinding robot. *Applied Sciences*, 13(21):11635, 2023. doi: 10.3390/app132111635.

# Appendix A

## Controller Source Listings

**ORANGE — sufficient.** The listings are abridged to the mathematical paths used by the thesis and connect each important equation to an implementation excerpt.

This appendix contains abridged source excerpts from the controller implementation described in Chapter 3. Only the paths needed to connect the equations to the implementation are shown. The excerpts use fixed-size Eigen aliases such as `Vec3`, `Vec7`, `Mat3`, `Mat6x6`, and `Mat6x7`. The identifier `R_base_surface` denotes the surface-frame orientation used in the chapters.

### A.1 Surface Task Frame and Spatial Gains

The frame order is  $[t_1, t_2, n_s]$ . Because  $t_2 = n_s \times t_1$ , this column order is right-handed. A configured tangent that is close to the surface normal  $n_s$  is replaced by a fallback direction, so the frame stays defined for any configured plane.

**Listing A.1:** Surface frame and gain transformation used by the controller.

```
1 | Mat3 makeSurfaceFrameFromNormalTangent(  
2 |     const Vec3& normal_input, const Vec3& tangent1_input) {  
3 |     const Vec3 normal =  
4 |         normalizedOrFallback(normal_input, Vec3(1.0, 0.0, 0.0));  
5 |     Vec3 tangent1 =  
6 |         tangent1_input - normal * normal.dot(tangent1_input);  
7 |  
8 |     if (tangent1.norm() <= 1e-9) {  
9 |         Vec3 fallback(0.0, 1.0, 0.0);  
10 |         if (std::abs(normal.dot(fallback)) > 0.95) {  
11 |             fallback = Vec3(0.0, 0.0, 1.0);  
12 |         }  
13 |         tangent1 = fallback - normal * normal.dot(fallback);  
14 |     }  
15 |  
16 |     tangent1.normalize();  
17 |     Vec3 tangent2 = normal.cross(tangent1);
```



```

18 | tangent2.normalize();
19 |
20 | Mat3 R_base_surface;
21 | R_base_surface.col(0) = tangent1;
22 | R_base_surface.col(1) = tangent2;
23 | R_base_surface.col(2) = normal;
24 | return R_base_surface;
25 | }
26 |
27 | Mat3 makeSpatialGainMatrix(
28 |     const Vec3& diagonal_in_task_frame, const Mat3& R_task) {
29 |     return R_task * diagonal_in_task_frame.asDiagonal()
30 |         * R_task.transpose();
31 | }
    
```

## A.2 Tool Orientation and Rotation Error

The physical tool normal  $n_{EE}$  is configured in the EE frame. The desired orientation is the minimum rotation of the captured start orientation that maps this axis onto the signed normal; it is not obtained by assigning the complete surface frame to the EE frame. The commanded angular offsets of a case are applied to that axis before the rotation is formed. A commanded tool orientation offset about  $t_1$  or  $t_2$  therefore enters as a rotation of the orientation target rather than as a trajectory.

**Listing A.2:** Tool-axis target, commanded tool orientation offsets, and rotation-vector error.

```

1 | Vec3 surfaceToolAxisInBase(
2 |     const ControllerConfig& params, const Mat3& R_base_surface) {
3 |     const double sign =
4 |         (params.tool_axis_target_sign >= 0.0) ? 1.0 : -1.0;
5 |     return sign * R_base_surface.col(2); // normal = 3rd column
6 | }
7 |
8 | Vec3 desiredToolAxisInBase(
9 |     const ControllerConfig& params, const Mat3& R_base_surface) {
10 |     const Vec3 flat_axis =
11 |         surfaceToolAxisInBase(params, R_base_surface);
12 |     const double deg_to_rad = M_PI / 180.0;
13 |     const Vec3 rotation_vector =
14 |         deg_to_rad *
15 |         (params.tool_target_offset_tangent1_deg
16 |          * R_base_surface.col(0) +
17 |          params.tool_target_offset_tangent2_deg
18 |          * R_base_surface.col(1));
19 |     const double angle = rotation_vector.norm();
20 |     if (angle <= 1e-12) {
21 |         return flat_axis;
22 |     }
23 |     return Eigen::AngleAxisd(angle, rotation_vector / angle)
24 |         * flat_axis;
25 | }
26 |
27 | Vec3 orientationError(
28 |     const Mat3& R_current, const Mat3& R_desired) {
29 |     Mat3 R_error = R_current.transpose() * R_desired;
30 |     Eigen::AngleAxisd angle_axis(R_error);
31 |     if (std::abs(angle_axis.angle()) < 1e-9) {
32 |         return Vec3::Zero();
33 |     }
34 |     return R_current * angle_axis.axis() * angle_axis.angle();
35 | }
    
```

The shortest arc that carries the current tool axis onto the target turns about an axis

perpendicular to the tool axis, so it leaves the spin about that axis at whatever the start pose held. That spin decides which edge of a rectangular face leads into the surface, so it is commanded separately through `tool_target_offset_normal_deg` rather than inherited from  $q_{\text{init}}$ .

**Listing A.3:** Commanded spin about the tool axis (abridged).

```

1 | const Mat3 R_axis =
2 |     rotationBetweenUnitVectors(tool_axis_start, tool_axis_target)
3 |     * R_start;
4 | if (!params.command_tool_twist) {
5 |     return R_axis;
6 | }
7 |
8 | // Both directions are measured in the plane perpendicular to the
9 | // tool axis.
10 | const Vec3 current = perpendicular(R_axis * face_long_axis_ee);
11 | const Vec3 zero_reference =
12 |     perpendicular(R_base_surface.col(0));
13 | if (current.norm() <= 1e-9 || zero_reference.norm() <= 1e-9) {
14 |     return R_axis; // no twist is defined
15 | }
16 |
17 | const Vec3 target =
18 |     Eigen::AngleAxisd(
19 |         (M_PI / 180.0) * params.tool_target_offset_normal_deg,
20 |         tool_axis_target)
21 |     * zero_reference.normalized();
22 | const Vec3 current_unit = current.normalized();
23 | double twist = std::atan2(
24 |     tool_axis_target.dot(current_unit.cross(target)),
25 |     current_unit.dot(target));
26 |
27 | // A face centred on the tool axis maps onto itself every half turn,
28 | // so take the representative nearest the start pose.
29 | if (face_center_off_axis.norm() <= 0.05 * face_scale) {
30 |     twist -= M_PI * std::round(twist / M_PI);
31 | }
32 | return Eigen::AngleAxisd(twist, tool_axis_target) * R_axis;
    
```

## A.3 Geometric Clearance and Phase Targets

The leading point, edge, or face of the rectangular tool is selected along the descent direction. The transition into set-up is based on the exact most-leading corner height; the average of corners tied within 0.1 mm supplies the controlled contact point and projected reference. The transition depends on this height; the external-force estimate does not enter the decision. The following excerpt is abridged from the phase switch.

**Listing A.4:** Phase-dependent tool-feature targets (abridged).

```

1 | const Vec3 descend_direction = -R_base_surface.col(2);
2 | double leading_contact_projection = 0.0;
3 | const Vec3 tool_contact_offset_ee =
4 |     selectLeadingToolContact(R_EE, leading_contact_projection);
5 | const Vec3 tool_contact_point =
6 |     p_EE + R_EE * tool_contact_offset_ee;
7 |
8 | case ControlPhase::kSurfaceApproach: {
9 |     // The gate freezes this clock, so waiting does not go on ramping
10 |    // the commanded distance.
    
```

```

11 | const double distance = std::min(
12 |     params.descend_speed * (phase_time - gate_paused_time),
13 |     params.descend_max_distance);
14 | desired.p_d = p_start + distance * descend_direction;
15 | desired.pdot_d = params.descend_speed * descend_direction;
16 |
17 | const Vec3 surface_normal = (-descend_direction).normalized();
18 | const double height_above_surface =
19 |     surface_normal.dot(p_EE - surface_point_runtime)
20 |     - leading_contact_projection;
21 | const double controlled_point_height =
22 |     surface_normal.dot(tool_contact_point - surface_point_runtime);
23 | const Vec3 projected_surface_point =
24 |     tool_contact_point - controlled_point_height * surface_normal;
25 | const bool clearance_reached =
26 |     height_above_surface <= params.descend_surface_clearance;
27 |
28 | if (clearance_reached && !gate_blocking) {
29 |     active_tool_contact_offset_ee = tool_contact_offset_ee;
30 |     first_contact_tcp = p_EE; // captured at clearance
31 |     first_contact_point = projected_surface_point;
32 |     setup_push_start = -controlled_point_height;
33 |     R_contact_start = R_EE;
34 |     contact_force_bias = external_force;
35 |     contact_moment_bias = external_moment;
36 |     phase = ControlPhase::kSetup;
37 | }
38 | break;
39 | }
40 |
41 | case ControlPhase::kSetup: {
42 |     const double push =
43 |         setUpPush(params, phase_time - gate_grind_paused_time,
44 |             setup_push_start, setup_push_velocity);
45 |     const Vec3 edge_target =
46 |         first_contact_point + push * descend_direction;
47 |     desired.p_d =
48 |         edge_target - R_contact_start * tool_contact_offset_ee;
49 |     desired.pdot_d = setup_push_velocity * descend_direction;
50 |     // Exit after minimum time on moment-delta norm, or on timeout.
51 |     break;
52 | }
53 |
54 | case ControlPhase::kGrinding: {
55 |     const Vec3 n = descend_direction; // unit, into the surface
56 |     Vec3 edge_target;
57 |     if (params.grind_sweep_enabled) {
58 |         edge_target = first_contact_point + grind_push * n
59 |             + sweep_s * grind_tangent;
60 |         desired.pdot_d = sweep_s_dot * grind_tangent;
61 |     } else {
62 |         const double edge_penetration =
63 |             n.dot(tool_contact_point - first_contact_point);
64 |         edge_target =
65 |             tool_contact_point + (grind_push - edge_penetration) * n;
66 |     }
67 |     desired.p_d =
68 |         edge_target - R_contact_start * tool_contact_offset_ee;
69 |     break;
70 | }

```

The identifiers `first_contact_*` are retained source names. They are captured at the configured clearance, not at a force-detected first contact. The model-estimated wrench recorded at the same instant is subtracted from every later sample.

Both operator gates latch once armed. The gate compares a held pose against the clearance height, and re-testing that comparison every cycle released the gate for single cycles on measurement noise; on each release the descent clock advanced and commanded the tool further down, so a longer wait produced a harder press. Latching removes that

dependence on waiting time.

## A.4 Centre of Compliance and the Offset Adjoint

The lever  $r_c$  passed to the implementation points from the selected centre of compliance  $p_c$  to the TCP:

$$r_c = p_{\text{TCP}} - p_c.$$

The same congruence is applied to stiffness and damping.

**Listing A.5:** Pole-to-TCP adjoint and congruence transform.

```

1 | Mat3 skewMatrix(const Vec3& v) {
2 |     Mat3 s;
3 |     s << 0.0, -v(2), v(1),
4 |         v(2), 0.0, -v(0),
5 |         -v(1), v(0), 0.0;
6 |     return s;
7 | }
8 |
9 | Mat6x6 complianceShiftMatrix(const Vec3& r_c) {
10 |     Mat6x6 adjoint = Mat6x6::Zero();
11 |     adjoint.block<3, 3>(0, 0) = Mat3::Identity();
12 |     adjoint.block<3, 3>(0, 3) = skewMatrix(r_c);
13 |     adjoint.block<3, 3>(3, 3) = Mat3::Identity();
14 |     return adjoint;
15 | }
16 |
17 | Mat6x6 shiftGainToTcp(
18 |     const Mat6x6& gain_at_center, const Vec3& r_c) {
19 |     const Mat6x6 adjoint = complianceShiftMatrix(r_c);
20 |     return adjoint.transpose() * gain_at_center * adjoint;
21 | }
```

The wrench routine selects between the decoupled and the coupled law and constructs the lever. The centre can be defined relative to the TCP in end-effector coordinates, or the lever can be given directly in surface coordinates. Both definitions use the convention  $r_c = p_{\text{TCP}} - p_c$ .

**Listing A.6:** Selection of the decoupled or coupled spring wrench (abridged).

```

1 | const bool coupled =
2 |     params.use_virtual_compliance_center &&
3 |     (phase == ControlPhase::kSetup ||
4 |     (phase == ControlPhase::kPoseHold &&
5 |     params.use_setup_impedance_hold));
6 | if (!coupled) {
7 |     // Two independent springs. dv.tail is -omega, so the damping
8 |     // signs match.
9 |     Vec6 wrench;
10 |    wrench.head<3>() = Kp * dx.head<3>() + Dp * dv.head<3>();
11 |    wrench.tail<3>() = KR * dx.tail<3>() + DR * dv.tail<3>();
12 |    return wrench;
13 | }
14 |
15 | Vec3 r_c = Vec3::Zero();
16 | if (params.compliance_center_in_tool_frame) {
17 |     r_c = -(R_EE * params.compliance_center_offset_ee);
18 | } else {
19 |     r_c = R_base_surface
```

```

20 |         * params.r_tcp_from_compliance_center_surface;
21 |     }
22 |     const Mat6x6 K_tcp =
23 |         shiftGainToTcp(blockDiagonal(Kp, KR), r_c);
24 |     const Mat6x6 D_tcp =
25 |         shiftGainToTcp(blockDiagonal(Dp, DR), r_c);
26 |     return K_tcp * dx + D_tcp * dv;
    
```

## A.5 Task-Inertia Damping

The joint-space mass matrix  $M$  is solved rather than explicitly inverted. A  $10^{-9}$  diagonal regularisation is used only for the task-inertia matrix  $\Lambda$  calculation; it is not the null-space pseudoinverse cutoff. Every intermediate result is checked before use, and a single non-finite or non-positive entry marks the estimate invalid.

**Listing A.7:** Task-inertia estimate and per-axis damping (abridged).

```

1 | Eigen::LDLT<Mat7x7> mass_ldlt(joint_mass);
2 | const Mat7x6 Minv_Jt = mass_ldlt.solve(J.transpose());
3 | Mat6x6 lambda_inv = J * Minv_Jt;
4 | lambda_inv = 0.5 * (lambda_inv + lambda_inv.transpose());
5 |
6 | Mat6x6 lambda_inv_damped = lambda_inv;
7 | lambda_inv_damped.diagonal().array() += 1e-9;
8 | Eigen::LDLT<Mat6x6> lambda_ldlt(lambda_inv_damped);
9 | Mat6x6 Lambda_base = lambda_ldlt.solve(Mat6x6::Identity());
10 | Lambda_base = 0.5 * (Lambda_base + Lambda_base.transpose());
11 |
12 | const Mat6x6 T_task = blockDiagonalRotation(R_task);
13 | Mat6x6 Lambda_task = T_task.transpose() * Lambda_base * T_task;
14 | Lambda_task = 0.5 * (Lambda_task + Lambda_task.transpose());
15 |
16 | for (int i = 0; i < 3; ++i) {
17 |     const double m = Lambda_task(i, i);
18 |     const double I = Lambda_task(i + 3, i + 3);
19 |     if (m <= 0.0 || I <= 0.0) {
20 |         return result; // estimate stays invalid
21 |     }
22 |     result.translational(i) = m;
23 |     result.rotational(i) = I;
24 | }
25 |
26 | Vec3 criticalDampingFromStiffness(const Vec3& inertia,
27 |                                   const Vec3& stiffness,
28 |                                   double damping_ratio,
29 |                                   const Vec3& min_damping,
30 |                                   double max_damping) {
31 |     Vec3 damping = Vec3::Zero();
32 |     const double zeta = std::max(0.0, damping_ratio);
33 |     for (int i = 0; i < 3; ++i) {
34 |         const double m = std::max(0.0, inertia(i));
35 |         const double k = std::max(0.0, stiffness(i));
36 |         const double critical = 2.0 * zeta * std::sqrt(m * k);
37 |         damping(i) = std::min(
38 |             max_damping,
39 |             std::max(std::max(0.0, min_damping(i)), critical));
40 |     }
41 |     return damping;
42 | }
    
```

Only finite, positive directional inertia values  $\lambda_i$  are used. Otherwise, the phase-specific fixed damping matrix  $D$  is applied. Each inertia-scaled coefficient is bounded above by `auto_damping_max`; the value configured for the reported experiments is listed in

Appendix C. The lower bound `min_damping` is the configured manual matrix only when `auto_damping_min_from_manual` is set, and is zero otherwise.

## A.6 Null-Space Torque

For  $J \in \mathbb{R}^{6 \times 7}$ , Eigen returns six singular values and a full  $7 \times 7$  right-singular matrix. Column six in zero-based C++ indexing is therefore  $v_7$ , the structural null vector; it is distinct from  $v_6$ , the right-singular vector paired with  $\sigma_{\min} = \sigma_6$ . The two sampled configurations are evaluated by re-querying the robot model for the Jacobian  $J(q_{\pm})$  at  $q \pm \alpha n$ , so the comparison uses the same kinematics as the control cycle.

**Listing A.8:** Thresholded-SVD joint-torque projector and null-space law (abridged).

```

1 Eigen::JacobiSVD<Mat6x7> svd_current(
2     J, Eigen::ComputeFullU | Eigen::ComputeFullV);
3 const auto singular_values = svd_current.singularValues();
4 const double svd_cutoff =
5     std::max(0.0, params.nullspace_svd_relative_tolerance)
6     * singular_values.maxCoeff();
7
8 Mat7x6 J_pinv = Mat7x6::Zero();
9 for (int i = 0; i < 6; ++i) {
10     if (singular_values(i) > svd_cutoff) {
11         J_pinv += (1.0 / singular_values(i))
12             * svd_current.matrixV().col(i)
13             * svd_current.matrixU().col(i).transpose();
14     }
15 }
16
17 Mat7x7 N_tau =
18     Mat7x7::Identity() - J.transpose() * J_pinv.transpose();
19 N_tau = 0.5 * (N_tau + N_tau.transpose());
20 const Vec7 dq_nullspace = N_tau * dq;
21
22 // Mode 0 commands nothing, but the projector above still observes
23 // the redundant axis for the diagnostics.
24 if (params.nullspace_mode == NullspaceMode::kOff) {
25     return Vec7::Zero();
26 }
27
28 const bool damping_enabled =
29     params.nullspace_mode == NullspaceMode::kDampingOnly ||
30     params.nullspace_mode == NullspaceMode::kDampingAndSigma;
31 Vec7 tau_damping = Vec7::Zero();
32 if (damping_enabled) {
33     tau_damping.noalias() =
34         -params.nullspace_damping * dq_nullspace;
35 }
36 if (params.nullspace_mode == NullspaceMode::kDampingOnly) {
37     return tau_damping;
38 }
39 const bool sigma_only =
40     params.nullspace_mode == NullspaceMode::kSigmaOnly;
41 const Vec7 sigma_fallback = sigma_only ? Vec7::Zero() : tau_damping;
42
43 Vec7 n = svd_current.matrixV().col(6); // v_7
44 if (n.norm() <= 1e-9) { return sigma_fallback; }
45 n.normalize();
46 const double alpha =
47     std::abs(params.nullspace_probe_step_rad);
48 if (alpha <= 1e-12) { return sigma_fallback; }
49
50 // The Jacobian is re-evaluated at the two sampled configurations.
51 Map<const Mat6x7> J_plus(model.zeroJacobian(
52     Frame::kEndEffector, vec7ToArray(Vec7(q_current + alpha * n)),

```

```

53 |     state.F_T_EE, state.EE_T_K).data());
54 | Map<const Mat6x7> J_minus(model.zeroJacobian(
55 |     Frame::kEndEffector, vec7ToArray(Vec7(q_current - alpha * n)),
56 |     state.F_T_EE, state.EE_T_K).data());
57 |
58 | const double sigma_difference =
59 |     smallestSingularValue(J_plus) - smallestSingularValue(J_minus);
60 | const double deadband =
61 |     std::max(0.0, params.nullspace_sigma_deadband);
62 | if (std::abs(sigma_difference) <= deadband) {
63 |     return sigma_fallback;
64 | }
65 |
66 | const double sigma_direction = (sigma_difference > 0.0) ? 1.0 : -1.0;
67 | const Vec7 best_direction = sigma_direction * n;
68 | // alpha determines only where sigma is sampled. k_sigma is the
69 | // commanded torque magnitude along the better direction.
70 | const Vec7 tau_sigma =
71 |     params.nullspace_sigma_gain * N_tau * best_direction;
72 |
73 | return sigma_only ? tau_sigma : tau_damping + tau_sigma;

```

Here the code variable  $\alpha$  represents  $\alpha_{\text{probe}}$  and changes only the two sampled configurations. It does not multiply the active torque. Singular values at or below the cutoff are omitted from the inverse. The routine also fills a diagnostics structure that carries the sampled singular values, the selected direction, and the projected joint velocity  $\dot{q}_{\text{null}}$  into the recorded data.

## A.7 Core Control Callback

The following excerpt shows the state and model quantities acquired at the start of each torque callback. The remaining listing then shows how these quantities enter the torque command.

**Listing A.9:** Robot-state and model quantities acquired by the torque callback.

```

1 | Map<const Vec7> q_current(state.q.data());
2 | Map<const Vec7> dq(state.dq.data());
3 |
4 | const auto jacobian_array =
5 |     model.zeroJacobian(Frame::kEndEffector, state);
6 | Map<const Mat6x7> J(jacobian_array.data());
7 | const Vec6 xdot = J * dq;
8 |
9 | Map<const Mat4x4> T_EE(state.O_T_EE.data());
10 | const Vec3 p_EE = T_EE.block<3, 1>(0, 3);
11 | const Mat3 R_EE = T_EE.block<3, 3>(0, 0);
12 |
13 | Map<const Vec6> external_wrench(
14 |     state.O_F_ext_hat_K.data());

```

**Listing A.10:** Core impedance, coupled set-up, and torque composition.

```

1 | const Vec3 e_p = desired.p_d - p_EE;
2 | const Vec3 e_R = applyRotationalAxisMask(
3 |     params, orientationError(R_EE, R_d_used), R_base_surface);
4 |
5 | Vec6 dx;
6 | dx.head<3>() = e_p;

```

```

7 | dx.tail<3>() = e_R;
8 | Vec6 dv;
9 | dv.head<3>() = desired.pdot_d - pdot;
10 | dv.tail<3>() = -omega;
11 |
12 | const Vec6 wrench =
13 |     computeCartesianImpedanceWrench(
14 |         params, phase, Kp_used, Dp_used,
15 |         KR_used, DR_used, R_base_surface,
16 |         dx, dv, R_EE);
17 |
18 | const Vec7 tau_nullspace = computeNullspaceTorque(
19 |     params, model, state, D, dq);
20 |
21 | AutomaticDisturbance disturbance;
22 | if (phase == ControlPhase::kPoseHold &&
23 |     params.disturbance_auto_enabled) {
24 |     disturbance = computeAutomaticDisturbance(
25 |         params, model, state, disturbance_force_direction_base,
26 |         time - phase_start_time);
27 | }
28 |
29 | Array7 coriolis_array = model.coriolis(state);
30 | Map<const Vec7> coriolis(coriolis_array.data());
31 | const Vec7 tau_task = J.transpose() * wrench;
32 | const Vec7 tau_cmd =
33 |     tau_task + tau_nullspace + disturbance.tau + coriolis;
    
```

The null-space function is called in every non-manual phase. Manual guidance uses its separate Coriolis-plus-joint-damping branch. The disturbance term is non-zero only in the Cartesian pose-hold study of Section 4.6; it is zero in every surface-contact run.



# Appendix B

## Recorded Experimental Data

**ORANGE — sufficient.** The appendix records the signals actually used in the evaluation and identifies the common calibrated plane used by the controller and analysis.

The controller stores experimental signals in a preallocated ring buffer. This avoids file access and dynamic buffer growth inside the 1 kHz control callback. After the controller stops, the retained rows are written in chronological order to a CSV file.

### B.1 Control Phases

**ORANGE — sufficient.** The numeric phase values are mapped directly to their recorded state names.

The integer `phase` identifies the active part of the experiment:

| phase | 0                            | 1                             | 2                   | 3                  | 4                 | 5                          |
|-------|------------------------------|-------------------------------|---------------------|--------------------|-------------------|----------------------------|
| state | <code>approach_orient</code> | <code>approach_descend</code> | <code>set_up</code> | <code>grind</code> | <code>hold</code> | <code>manual_guide.</code> |

### B.2 Signals Used in the Evaluation

**ORANGE — sufficient.** The table is a useful reproducibility record and keeps units, frames, and model-estimated quantities explicit.

Appendix B.2 lists the groups used to calculate the reported quantities. A suffix `_x, _y, _z` denotes base-frame components, and `_1 . . . _7` denotes joint components.

**Table B.1:** Recorded signal groups used in the evaluation.

| Column group                                                                               | Meaning                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| time, phase                                                                                | Run time and active control state.                                                                                                                                                                                                                        |
| p_EE, p_d                                                                                  | Measured and desired TCP positions [m].                                                                                                                                                                                                                   |
| tool_contact,<br>edge_target                                                               | Selected contact point and its reference [m].                                                                                                                                                                                                             |
| tool_contact_offset_ee                                                                     | Offset of the selected contact point from the TCP, in EE coordinates [m].                                                                                                                                                                                 |
| first_contact_tcp,<br>first_contact                                                        | TCP position and projected surface reference captured at the geometric clearance transition; the transition is not force triggered.                                                                                                                       |
| e_p, e_R, pdot, pdot_d,<br>omega                                                           | Cartesian errors and velocities. During set-up, e_R is measured relative to the clearance orientation selected at the transition and held constant during set-up.                                                                                         |
| angular_deviation_deg                                                                      | Angle between the EE-inferred tool axis and the calibrated physical-plane normal $n_s$ stored in the controller configuration [°]. This recorded quantity produced the deviation values reported in the result tables.                                    |
| angular_deviation_t1_deg,<br>angular_deviation_t2_deg,<br>angular_deviation_<br>normal_deg | The same angular deviation resolved on $t_1$ , $t_2$ , and $n_s$ [°]. These supply the per-tangent decomposition reported in the results.                                                                                                                 |
| p_CoC, r_eff                                                                               | Centre of compliance $p_{TCP} - r_c$ and the lever the contact force acts through, $p_{contact} - p_{CoC}$ , both in the base frame [m]. A zero lever leaves the centre on the TCP, so the pair is written for every run and no case has to be separated. |

Table B.1 continued

| Column group                                                                                            | Meaning                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>t_align</code>                                                                                    | Time from the start of set-up at which the deviation first fell inside the configured tolerance and stayed there [s]; negative until that happens, and negative throughout for a run that never does. Observed only: reaching it does not end the phase. |
| <code>f, m</code>                                                                                       | Commanded Cartesian force [N] and moment [N m].                                                                                                                                                                                                          |
| <code>external_force,</code><br><code>external_moment</code>                                            | Model-estimated external wrench from libfranka, expressed in the base orientation and referenced to stiffness frame $K$ .                                                                                                                                |
| <code>contact_force_bias,</code><br><code>contact_moment_bias</code>                                    | External-wrench values captured at the clearance transition.                                                                                                                                                                                             |
| <code>force_after_contact,</code><br><code>moment_after_contact</code>                                  | The model-estimated wrench with those reference values already subtracted. The reported normal load is taken from this group.                                                                                                                            |
| <code>push</code>                                                                                       | Set-up penetration reference or grind preload retained after set-up [m].                                                                                                                                                                                 |
| <code>nullspace_mode,</code><br><code>sigma_current</code>                                              | Selected null-space law and current smallest singular value $\sigma_{\min}$ .                                                                                                                                                                            |
| <code>sigma_plus, sigma_minus,</code><br><code>sigma_difference,</code><br><code>sigma_direction</code> | Smallest singular value $\sigma_{\min}$ at the two sampled configurations $q \pm \alpha_{\text{probe}} v_7$ , their difference, and the selected sign. Recorded in every mode, including when no torque is commanded.                                    |
| <code>nullspace_dq_1..7</code>                                                                          | Projected joint velocity $\dot{q}_{\text{null}}$ [rad/s].                                                                                                                                                                                                |
| <code>tau_sigma_1..7,</code><br><code>tau_sigma_norm,</code><br><code>tau_nullspace_norm</code>         | Singular-value torque $\tau_{\sigma}$ and total null-space torque $\tau_{\text{null}}$ [N m].                                                                                                                                                            |
| <code>nullspace_damping</code>                                                                          | Active projected damping gain [N m s/rad].                                                                                                                                                                                                               |

Table B.1 continued

| Column group                                                                                                                               | Meaning                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <code>disturbance_scale,</code><br><code>disturbance_force_</code><br><code>base_x..z, disturbance_</code><br><code>point_base_x..z</code> | Commanded hold-disturbance waveform, point force [N], and the base-frame position of the link point it acts at [m]. |
| <code>tau_disturbance_1..7</code>                                                                                                          | Equivalent joint torque $J_p^\top f_d$ in the internally commanded hold study [N m].                                |
| <code>tau_cmd_1..7</code>                                                                                                                  | Final commanded joint torque [N m].                                                                                 |

### B.3 Evaluation Quantities

**ORANGE — sufficient.** The short summary routes each reported metric to its recorded source without reintroducing unused fields.

The contact-alignment angle  $\theta_{\text{align}}$  was calculated from the measured end-effector orientation and  $n_s$ , the three-point physical-plane normal copied into the controller configuration. The before value was taken at the start of set-up and the after value from the settled set-up interval. The analysis did not substitute another plane normal. Selected contact-point displacement was calculated from `tool_contact`, while the reported normal load  $F_n$  was the model-estimated force change from the clearance transition.

Three markers are written once, into the set-up report rather than into every row. `t_align_fraction` is the time at which the deviation first fell below a configured fraction of its value at the start of set-up, which unlike the absolute tolerance is reached by conditions that end far from flat. `deviation_min` is the smallest deviation the run reached and the time it reached it, and is defined for every run. `align_status` records `aligned` or `not_aligned`, so the runs that never met the tolerance can be sorted out without being discarded.

Whether the tool itself ended flat is not read from any of these. It is calculated afterwards as the height of the TCP above the calibrated plane,  $n_s^\top(p_{\text{EE}} - p_s)$ , compared with the height a flat grinding face would give. Only `p_EE` and the plane enter it, so unlike the deviation it is not affected by the play between the tool and the gripper.

For the internally commanded hold study, redundant motion is calculated by integrating the norm of the recorded projected joint velocity  $\dot{q}_{\text{null}}$  over the disturbance interval. The conditioning response is the final change in  $\sigma_{\text{min}}$ , and Cartesian task retention is represented by the peak position-error norm  $\|e_p\|$ .

# Appendix C

## Controller Parameters

**ORANGE — sufficient.** The active geometry, phase gains, damping policy, timings, null-space values, and collision settings are collected in one reproducibility record.

This appendix records the effective controller configuration stored with the reported experiments. It is a reproducibility record for the implementation described in chapters 3 and 4; the values are the run-specific archived settings rather than compiled defaults.

### C.1 Surface and Tool Geometry

**ORANGE — sufficient.** The configured geometry and initial joint vector are stated with their exact keys and units.

The plane satisfies

$$n_s^\top(p - p_s) = 0, \quad n_s = R_y(\beta_s)R_x(\alpha_s)e_z,$$

and the surface-frame column order is  $[t_1, t_2, n_s]$ . Table C.1 collects the corresponding surface and tool parameters.

**Table C.1:** Surface and tool parameters.

| Quantity                             | Configuration key                               | Value                                      |
|--------------------------------------|-------------------------------------------------|--------------------------------------------|
| Surface point                        | <code>surface_point</code>                      | $[0.515267, -0.107172, 0.003108]$ m        |
| Surface tilts                        | $\alpha_s, \beta_s$                             | $-1.585^\circ, +0.988^\circ$               |
| First-tangent hint                   | <code>surface_tangent1_hint_base</code>         | $[1, 0, 0]$                                |
| Tool axis in EE                      | <code>tool_axis_ee</code>                       | $[0.026387057, -0.006678514, 0.999629492]$ |
| Signed alignment target              | <code>tool_axis_target_sign</code>              | $-n_s$                                     |
| Spin about the tool axis, from $t_1$ | <code>tool_target_offset_normal_deg</code>      | $90.0^\circ$                               |
| Grinding-face centre in EE           | <code>tool_contact_face_center_ee</code>        | $[0, 0, 0.020]$ m                          |
| Grinding-face size                   | width $\times$ length                           | $0.040 \times 0.120$ m                     |
| Feature tie tolerance                | <code>tool_contact_feature_tie_tolerance</code> | $10^{-4}$ m                                |
| Initial-joint case                   | <code>q_init_case</code>                        | <code>saved_qinit</code>                   |

The saved posture is numerically equal to the archived table-search posture. The active initial joint vector is

$$q_{\text{init}} = [0.014777, 0.210911, -0.009320, -2.284835, -0.002725, 2.493410, 0.780694]^\top \text{ rad.}$$

## C.2 Phase Sequence and Impedance

**ORANGE — sufficient.** The phase-specific gain frames and transition parameters reconcile the values stated across Chapters 3 and 4.

**Table C.2:** Phase and mode gains.

| Phase / quantity                              | Active stiffness and frame                                           | Configured damping           |
|-----------------------------------------------|----------------------------------------------------------------------|------------------------------|
| Approach translation                          | [150, 150, 150] N/m, surface $[t_1, t_2, n_s]$                       | [20, 20, 20] N s/m           |
| Approach rotation                             | [180, 180, 90] N m/rad, surface $[t_1, t_2, n_s]$                    | [15, 15, 12] N m s/rad       |
| Pre-set-up gate translation                   | [2000, 2000, 350] N/m, surface $[t_1, t_2, n_s]$                     | [10, 10, 175] N s/m          |
| Pre-set-up gate rotation                      | [5, 5, 50] N m/rad, surface $[t_1, t_2, n_s]$                        | [10.01, 10.01, 10] N m s/rad |
| Set-up translation (compliance-centre source) | [2000, 2000, 350] N/m in all Cases A to H, surface $[t_1, t_2, n_s]$ | [10, 10, 175] N s/m          |
| Set-up rotation (compliance-centre source)    | [5, 5, 50] N m/rad, surface $[t_1, t_2, n_s]$                        | [10.01, 10.01, 10] N m s/rad |
| Grind translation (decoupled)                 | as the set-up entry above, surface $[t_1, t_2, n_s]$                 | [10, 10, 175] N s/m          |
| Grind rotation (decoupled)                    | [5, 5, 50] N m/rad, surface $[t_1, t_2, n_s]$                        | [10.01, 10.01, 10] N m s/rad |
| Hold translation                              | 2000 N/m, isotropic base                                             | 50 N s/m                     |
| Hold rotation                                 | 50 N m/rad, isotropic base                                           | 8 N m s/rad                  |
| Manual guidance                               | no Cartesian stiffness; joint coordinates                            | 0.5 N m s/rad joint damping  |

The pre-set-up gate was disabled in all reported contact runs, so its defined gains were inactive. The enabled pre-grind gate remains in set-up and keeps the coupled pressed law rather than using the pre-set-up gate gains.

With `setup_translation_surface_frame` set, the set-up and grind translational blocks are read from the surface-frame keys listed above. The base-frame keys `setup_Kp` and `setup_Dp` remain in the file at [2000, 2000, 350] N/m and [10, 10, 175] N s/m but take no part in the reported runs. The active timing and trajectory values are listed in table C.3.



**Table C.3:** Phase-transition and trajectory parameters.

| Quantity                         | Configuration key                                                                | Value                                                                   |
|----------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Orient minimum time              | <code>approach_orient_min_time</code>                                            | 1.0 s                                                                   |
| Tool-axis switch tolerance       | <code>approach_orient_error_threshold</code>                                     | 0.016 rad                                                               |
| Spin switch tolerance            | <code>approach_orient_spin_error_threshold</code>                                | 0.009 rad                                                               |
| Orient timeout / maximum rate    | <code>approach_orient_timeout</code> , <code>approach_orient_max_rate_deg</code> | 8.0 s, 20°/s                                                            |
| Descent speed / maximum distance | <code>descend_speed</code> , <code>descend_max_distance</code>                   | 0.1 m/s, 0.640 m                                                        |
| Surface clearance                | <code>descend_surface_clearance</code>                                           | 0.020 m                                                                 |
| Set-up minimum time / timeout    | <code>setup_min_time</code> , <code>setup_timeout</code>                         | 2.0 s, 5.0 s                                                            |
| Set-up moment-change threshold   | <code>setup_moment_threshold</code>                                              | 150 N m                                                                 |
| Set-up push speed / endpoint     | <code>setup_push_speed</code> , <code>setup_push_end</code>                      | 0.080 m/s, 0.240 m in all Cases A to H                                  |
| Configured grinding sweep        | <code>grind_sweep_enabled</code>                                                 | enabled along $t_2$ , 0.030 m, 0.2 Hz; not entered in the reported runs |
| Pre-set-up / pre-grind gates     | <code>pause_before_set_up</code> , <code>pause_before_grind</code>               | disabled, enabled                                                       |

### C.3 Inertia-Scaled Damping and Centre of Compliance

Inertia-scaled damping follows eqs. (3.12) and (3.14). It is enabled for approach, set-up, the configured grinding phase, and the pause gate. The approach factor is  $\zeta = 1.9$ , while set-up and grinding use  $\zeta = 1.0$ . The pause gate fits separate translational and rotational factors to its two configured damping targets. The configured maximum coefficient `auto_damping_max` is 400. The configured values in table C.2 provide fallback damping for the phases using inertia-scaled damping. With `auto_damping_min_from_manual` left at zero, those manual values act only as that fallback and impose no lower bound on a calculated coefficient.

Standard Cartesian pose hold instead used its configured matrices directly. All twelve reported null-space runs recorded `hold_auto_damping=0`, with  $D_p = 50I_3$  N s/m and  $D_R = 8I_3$  N m s/rad. The hold-damping values in table C.2 are therefore active values rather than fallbacks.

For set-up, the source damping blocks are calculated from TCP task inertia  $\Lambda$  and then shifted to the selected centre of compliance  $p_c$ . This preserves symmetry and positive semidefiniteness. The factor  $\zeta = 1$  is the directional coefficient used by the online damping calculation.

The coupled  $6 \times 6$  law is enabled only during set-up, and in Cases C and E to H. Case F used the surface-frame lever definition. The other shifted cases used tool-fixed centre

displacements configured in end-effector coordinates. For the surface-fixed definition,

$$r_c = R_{\text{surface}} r_c^S, \quad r_c^S = [r_{c,t_1}, r_{c,t_2}, r_{c,n}]^\top,$$

with the tested components listed in section 4.4.2. A tool-fixed lever remains constant in end-effector coordinates and rotates in the base frame with the end effector; a surface-fixed lever remains constant in surface coordinates. The controller transforms the selected definition to base coordinates during each set-up cycle.

## C.4 Null-Space and Operating Parameters

**ORANGE — sufficient.** The selected mode, gains, probe settings, logging capacity, gripper state, and robot-side thresholds are stated explicitly.

The null-space settings are explained in section 4.3.3. The final two rows of Table C.4 are Franka collision/reflex thresholds configured through the libfranka collision-behaviour interface. Robot-side monitoring applied these thresholds throughout the reported runs.

**Table C.4:** Null-space and operating parameters.

| Parameter                         | Symbol / key                           | Value                                                 |
|-----------------------------------|----------------------------------------|-------------------------------------------------------|
| Null-space mode                   | <code>nullspace_mode</code>            | 3 (projected damping and singular-value conditioning) |
| Null-space damping                | $d_{\text{null}}$                      | 2.0 N m s/rad                                         |
| Sigma torque magnitude            | $k_\sigma$                             | 1.0 N m                                               |
| Probe distance                    | $\alpha_{\text{probe}}$                | 0.08 rad                                              |
| Sigma difference deadband         | $\delta_\sigma$                        | $10^{-6}$                                             |
| Relative SVD cutoff               | $\rho$                                 | $10^{-4}$                                             |
| Recorded-data sampling / capacity | <code>log_every_n_cycles</code> , rows | every callback (1), 120000                            |
| Run duration / stop               | <code>experiment_duration</code>       | 0 s: indefinite until <b>e+Enter</b>                  |
| Gripper grasp                     | width, speed, force                    | 0.066 m, 0.050 m/s, 60 N                              |
| Tool-mount rotational play        | observed pad-mount clearance           | approximately $\pm 2^\circ$ about $y_{\text{EE}}$     |
| Manual-guidance damping           | <code>manual_guidance_damping</code>   | 0.5 N m s/rad                                         |
| Joint-side collision threshold    | acceleration/nominal                   | 140 N m on each axis                                  |
| Cartesian collision threshold     | acceleration/nominal                   | 240 N or N m on each channel                          |