


Model Description of Amass Products

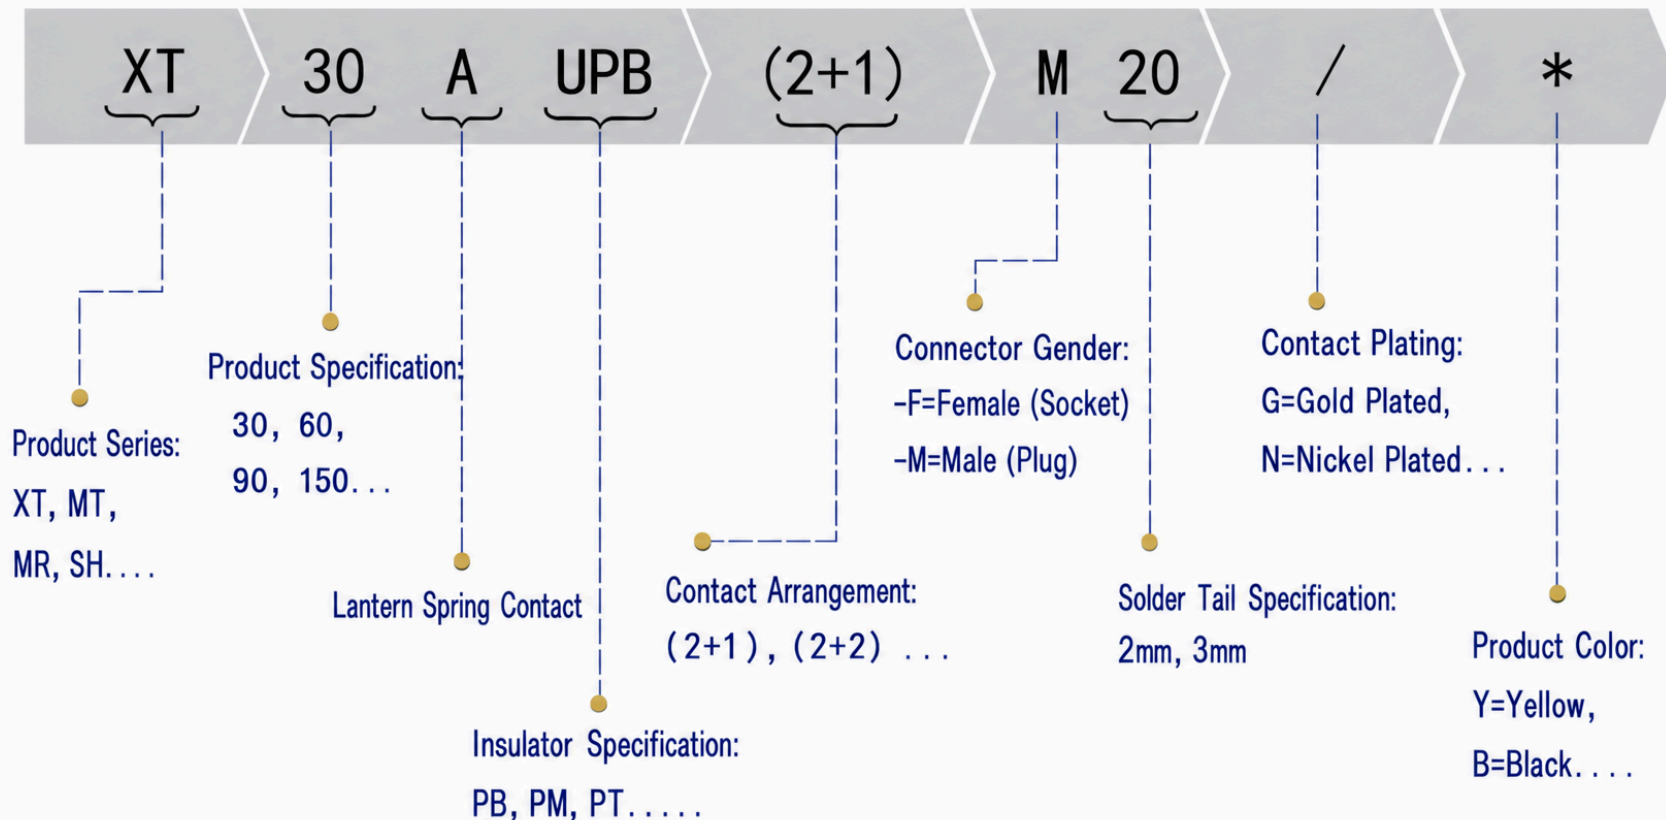

Amass Product Specification


1. Product Overview

This right-angle, through-hole 2PIN connector provides an integrated solution for space-constrained PCB applications. Available with gold-plated or nickel-plated options, with two selections for plating thickness, and features a wire harness design for easy and secure connections.

2. Application

☐ Lithium Battery ☐ Motor ☒ Controller ☐ Charger ☐ Others

3. Product Diagram

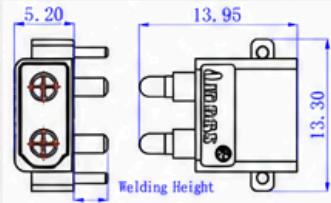Product Image	Outline Drawing
	
Part Number	Welding Height
XT30PW20-M. G. *	2.0mm
XT30PW30-M. G. *	3.0mm

4. Specifications

Material	Specification	Plating	Plating Thickness
Metal Parts	QSn4-4-4	G: Gold Plated (Au)	0.03μm
Material	Specification	Color	Flammability Rating
Housing	PA66	*: Y=Yellow, B=Black	UL94-V0

5. Performance

Electrical Performance	Test Method	Performance
Rated Voltage	UL1977	DC 500V
Rated Current	UL1977	15A
Contact Resistance	GB/T5095.2	1.20mΩ
Insulation Resistance	GB/T5095.2	2000MΩ
Withstanding Voltage	&A 1min <80℃	30A
Temperature Rise	UL1977	15A 4h <60℃
Wire Pull-out Force	GB/T2900.18	2.50mm
Mechanical Performance	Standard	Performance
Insertion Force	GB/T5095.8	1.2 kg-3.5kg
Extraction Force	GB/T5095.8	1.2 kg-3.5kg
Durability	GB/T5095.1	100 times
Protection Rating	GB/T4208	IP40
Environmental Performance	Standard	Performance
Operating Temperature	GB/T 2423.3	-20℃ to 120℃
Salt Spray	GB/T 2423.17	48h

6. Wire Gauge & Current Rating Reference

mm ²	Ambient 60℃	Ambient 85℃
16#	20A	25A
18#	15A	20A
20#	10A	15A


7. Options

☐ With cover ☐ With latch ☐ Waterproof ☐ Fireproof

8. Certifications

☒ UL ☒ CE ☒ RoHS 2.0 ☐ Reach

9. Installation Recommendation

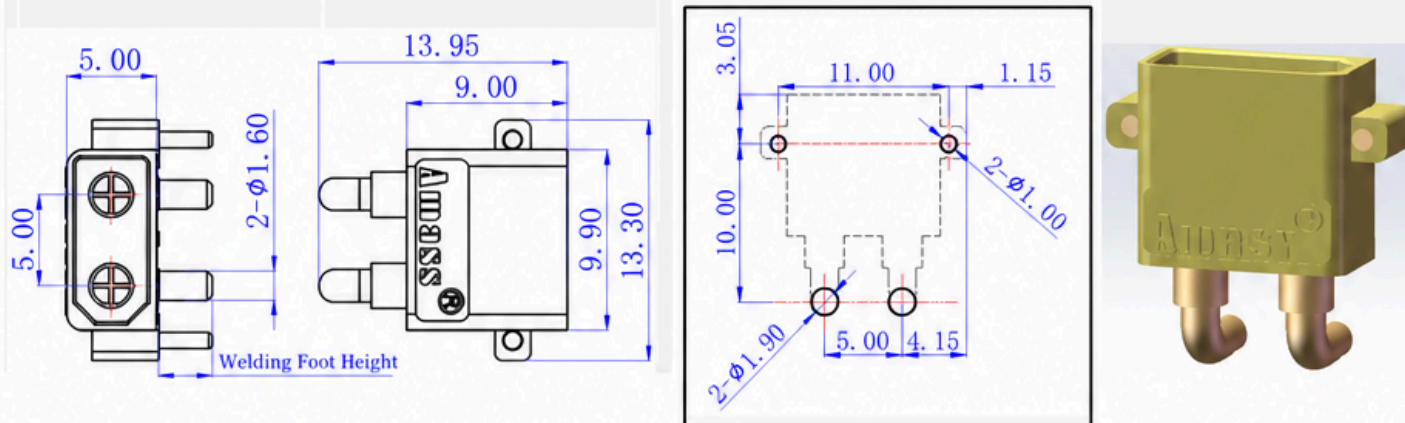

Installation Hole Diagram

Warning:

During use, do not exceed the specified current and voltage.



- Overcurrent and overvoltage can lead to malfunctions and accidents.
- When the connector is in the powered state, plugging or unplugging the connector may cause malfunctions and accidents, so please plug or unplug it only when unpowered.

Do not use the connector under external force.



- Do not use the connector when it is under external force or stress. Excessive external force can cause malfunctions and accidents, so please use it under such conditions.
- The connector is a component designed for electrical connections, so please do not use it as part of the enclosure or as a structural component of equipment.

Use in the specified environment.



- Please use in environments with high temperatures and high humidity.
- Do not use in environments other than those specified in this document, as it may cause malfunctions. Therefore, do not use in such conditions.

Handle with care.



- Please handle the connector carefully and with care.
- Please be careful when opening the package, as this product is precision parts and packaged as such. If dropped or subjected to strong impact, it may cause deformation, bending, or breakage.

Prepared by:

Reviewed by:

Approved by: