

1. Description


1.1. Project

Project Name	nucleo411
Board Name	NUCLEO-F411RE
Generated with:	STM32CubeMX 4.19.0
Date	02/07/2017

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

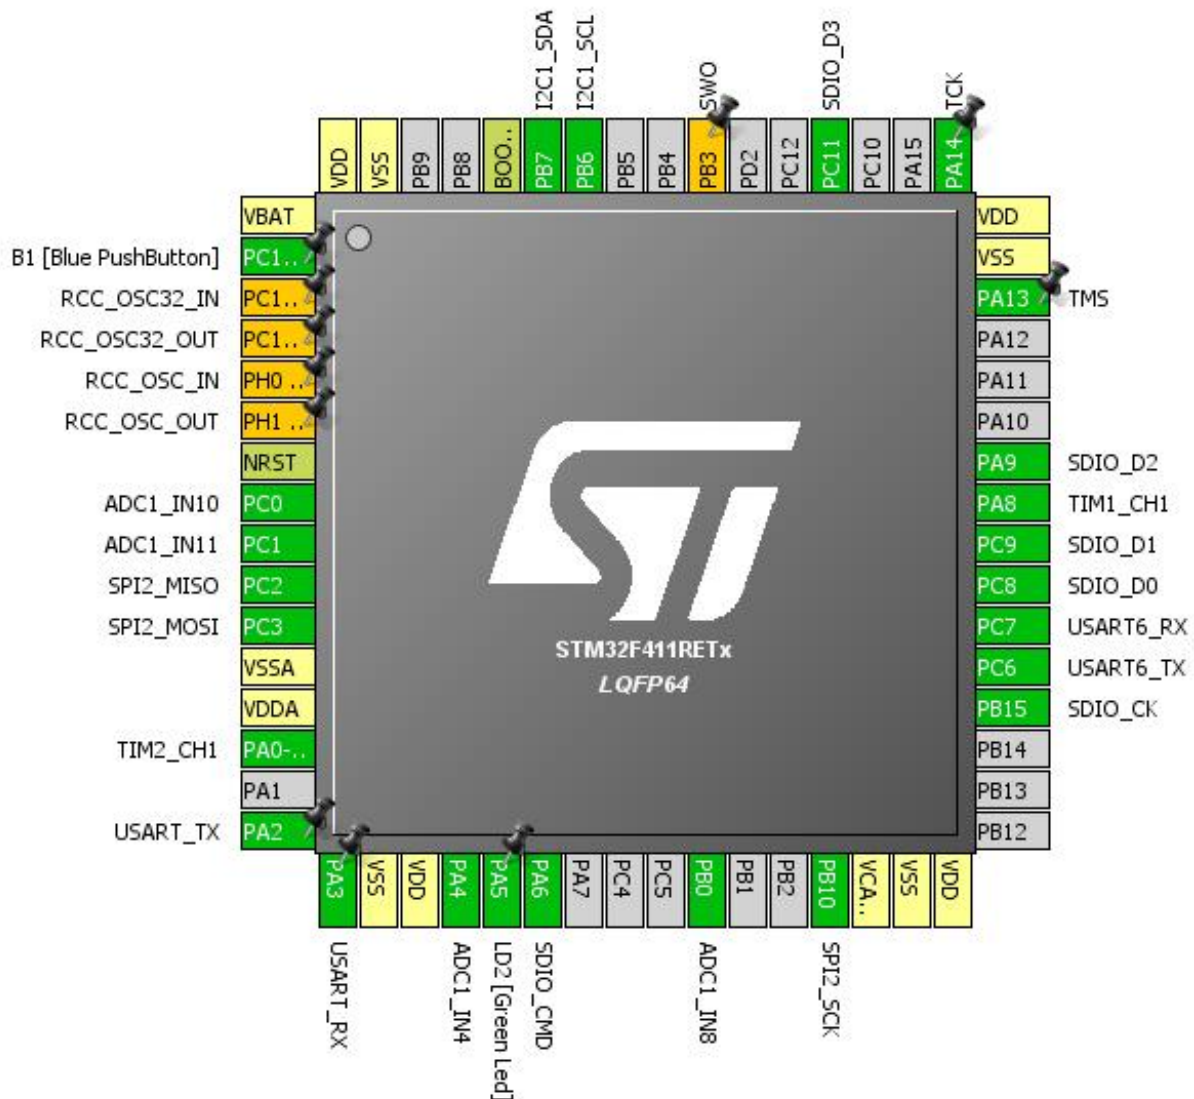

3. Pins Configuration


Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-ANTI_TAMP	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PH0 - OSC_IN *	I/O	RCC_OSC_IN	
6	PH1 - OSC_OUT *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	PC0	I/O	ADC1_IN10	
9	PC1	I/O	ADC1_IN11	
10	PC2	I/O	SPI2_MISO	
11	PC3	I/O	SPI2_MOSI	
12	VSSA	Power		
13	VDDA	Power		
14	PA0-WKUP	I/O	TIM2_CH1	
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
20	PA4	I/O	ADC1_IN4	
21	PA5 **	I/O	GPIO_Output	LD2 [Green Led]
22	PA6	I/O	SDIO_CMD	
26	PB0	I/O	ADC1_IN8	
29	PB10	I/O	SPI2_SCK	
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
36	PB15	I/O	SDIO_CK	
37	PC6	I/O	USART6_TX	
38	PC7	I/O	USART6_RX	
39	PC8	I/O	SDIO_D0	
40	PC9	I/O	SDIO_D1	
41	PA8	I/O	TIM1_CH1	
42	PA9	I/O	SDIO_D2	
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
52	PC11	I/O	SDIO_D3	
55	PB3 *	I/O	SYS_JTDO-SWO	SWO
58	PB6	I/O	I2C1_SCL	
59	PB7	I/O	I2C1_SDA	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

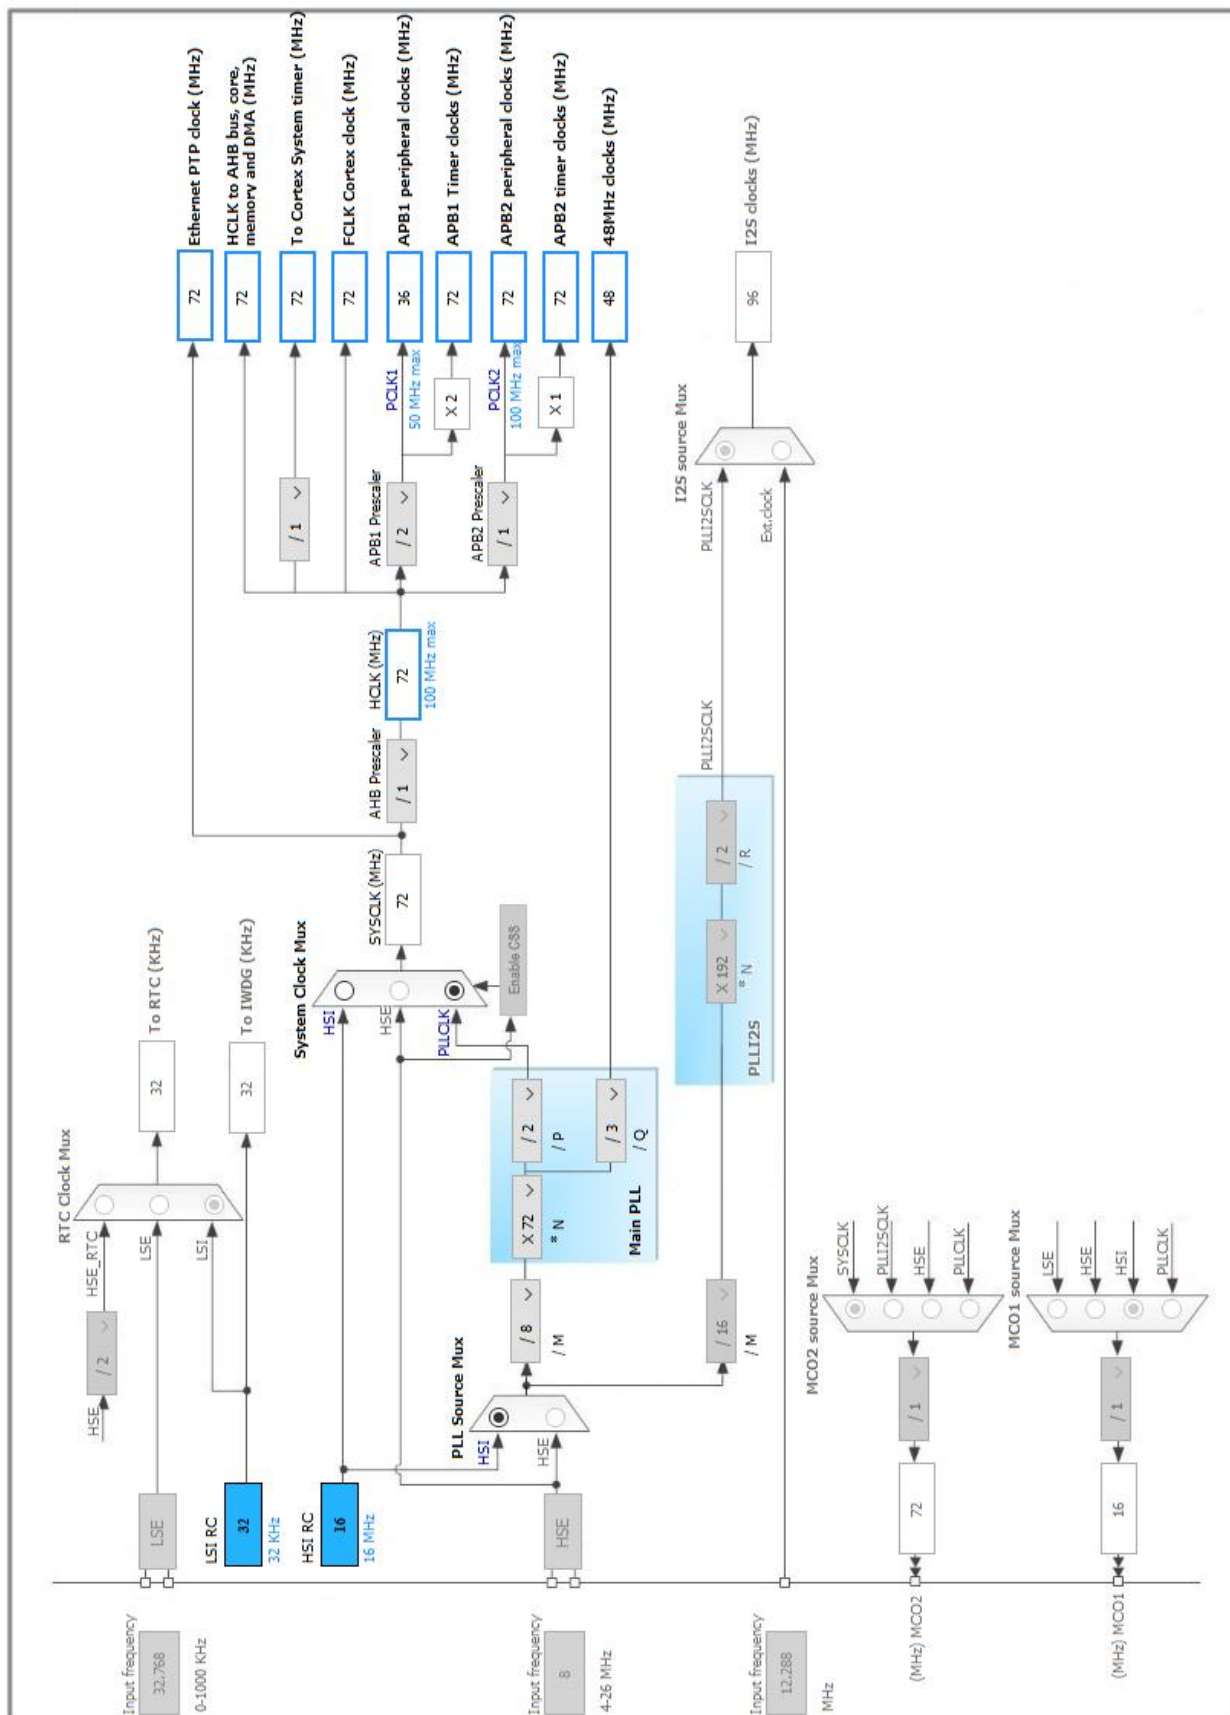

5. IPs and Middleware Configuration

5.1. ADC1

mode: IN4

mode: IN8

mode: IN10

mode: IN11

5.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	PCLK2 divided by 2
Resolution	12 bits (15 ADC Clock cycles)
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
<u>Rank</u>	1
Channel	Channel 4
Sampling Time	3 Cycles

ADC_Injected_ConversionMode:

Number Of Conversions	0
-----------------------	---

WatchDog:

Enable Analog WatchDog Mode	false
-----------------------------	-------

5.2. CRC

mode: Activated

5.3. I2C1

I2C: I2C

5.3.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

5.4. SDIO

Mode: SD 4 bits Wide bus

5.4.1. Parameter Settings:

SDIO parameters:

SDIOCLK clock divide factor	0
-----------------------------	---

5.5. SPI2

Mode: Full-Duplex Master

5.5.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	18.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.6. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.7. TIM1

Channel1: PWM Generation CH1

5.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	0
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

5.8. TIM2

Channel1: PWM Generation CH1

5.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	0
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (32 bits value)	0
Fast Mode	Disable
CH Polarity	High

5.9. USART2

Mode: Asynchronous

5.9.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.10. USART6

Mode: Asynchronous

5.10.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.11. FATFS

mode: SD Card

5.11.1. Set Defines:

Version:

FATFS version	R0.11
---------------	-------

Function Parameters:

FS_TINY (Tiny mode)	Disabled
FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FORWARD (Forward function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FASTSEEK (Fast seek function)	Enabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1 (Windows)
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_NORTC (Timestamp feature)	Dynamic timestamp
NORTC_YEAR (Year for timestamp)	2015
NORTC_MON (Month for timestamp)	6
NORTC_MDAY (Day for timestamp)	4
WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000
SYNC_t (O/S sync object)	osSemaphoreId
FS_LOCK (Number of files opened simultaneously)	2

5.11.2. IPs instances:

SDIO/SDMMC:

SDIO instance	SDIO
---------------	------

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PC0	ADC1_IN10	Analog mode	No pull-up and no pull-down	n/a	
	PC1	ADC1_IN11	Analog mode	No pull-up and no pull-down	n/a	
	PA4	ADC1_IN4	Analog mode	No pull-up and no pull-down	n/a	
	PB0	ADC1_IN8	Analog mode	No pull-up and no pull-down	n/a	
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	Very High *	
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	Very High *	
SDIO	PA6	SDIO_CMD	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB15	SDIO_CK	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC8	SDIO_D0	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC9	SDIO_D1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PA9	SDIO_D2	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC11	SDIO_D3	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
SPI2	PC2	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PC3	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB10	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
TIM1	PA8	TIM1_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM2	PA0-WKUP	TIM2_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	Very High *	USART_RX
USART6	PC6	USART6_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PC7	USART6_RX	Alternate Function Push Pull	Pull-up	Very High	

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
					*	
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13-ANTI_TAMP	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 global interrupt	unused		
TIM1 break interrupt and TIM9 global interrupt	unused		
TIM1 update interrupt and TIM10 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM11 global interrupt	unused		
TIM1 capture compare interrupt	unused		
TIM2 global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI2 global interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
SDIO global interrupt	unused		
USART6 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411RETx
Datasheet	026289_Rev4

7.2. Parameter Selection

Temperature	25
Vdd	null