



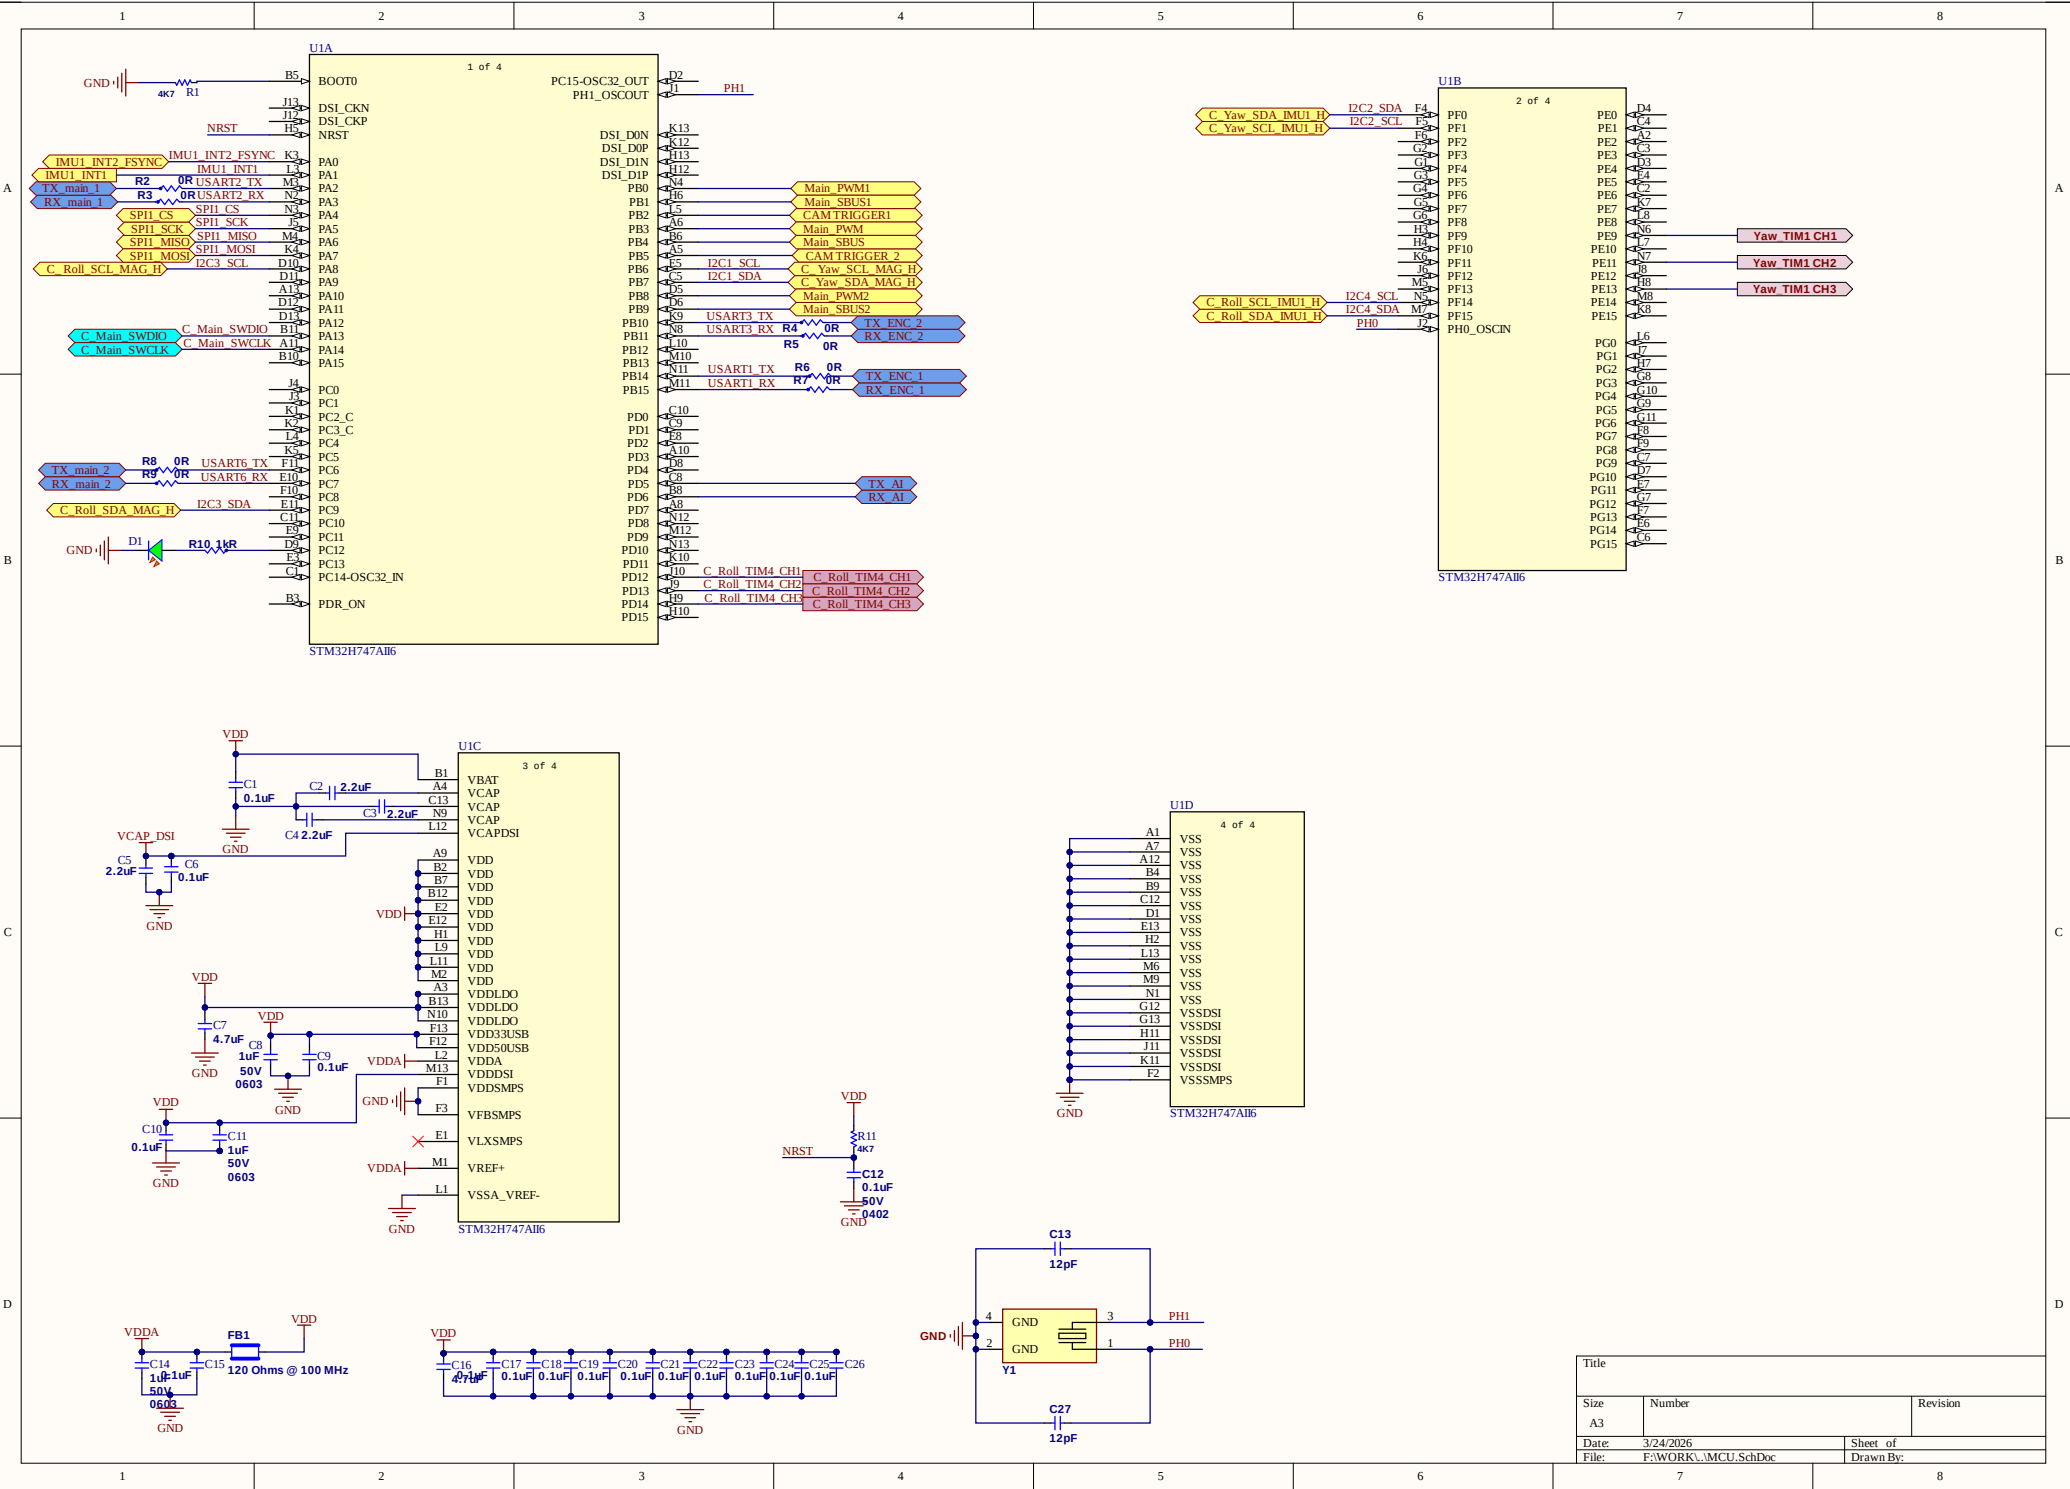


Title		
Size	Number	Revision
A3		
Date	3/24/2026	Sheet of
File	F:\WORK\MCU_SchDoc	Drawn By:


Buck 12V - 5V

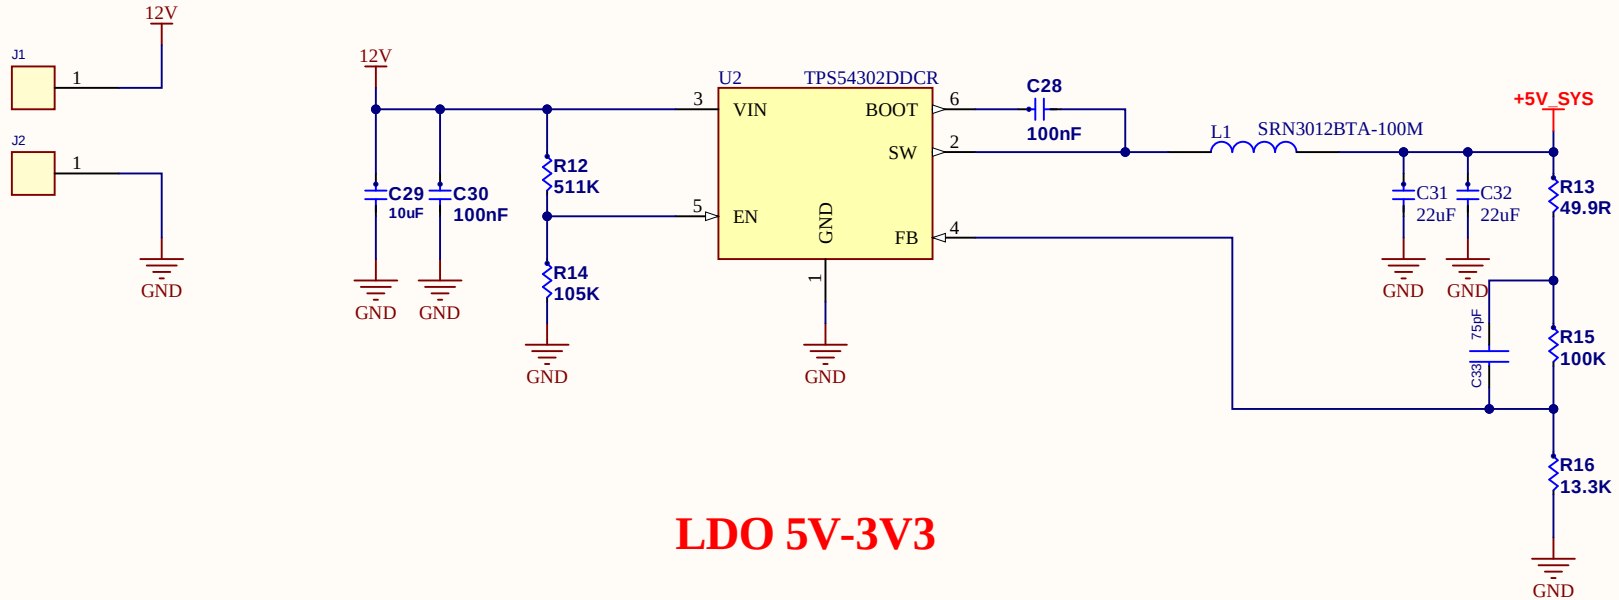


LDO 5V-3V3

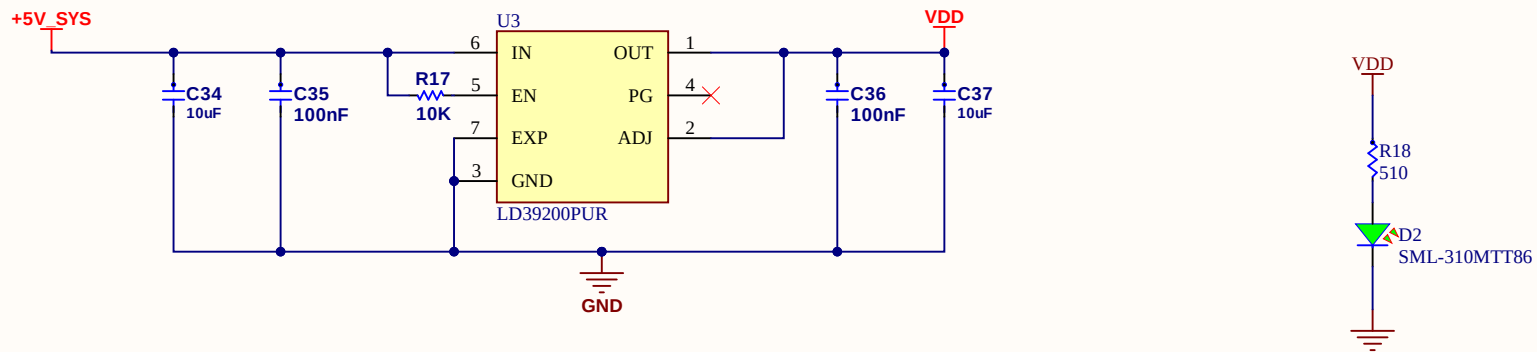


Title		
Size	Number	Revision
A		
Date:	3/24/2026	Sheet of
File:	F:\WORK\..PWR.SchDoc	Drawn By:

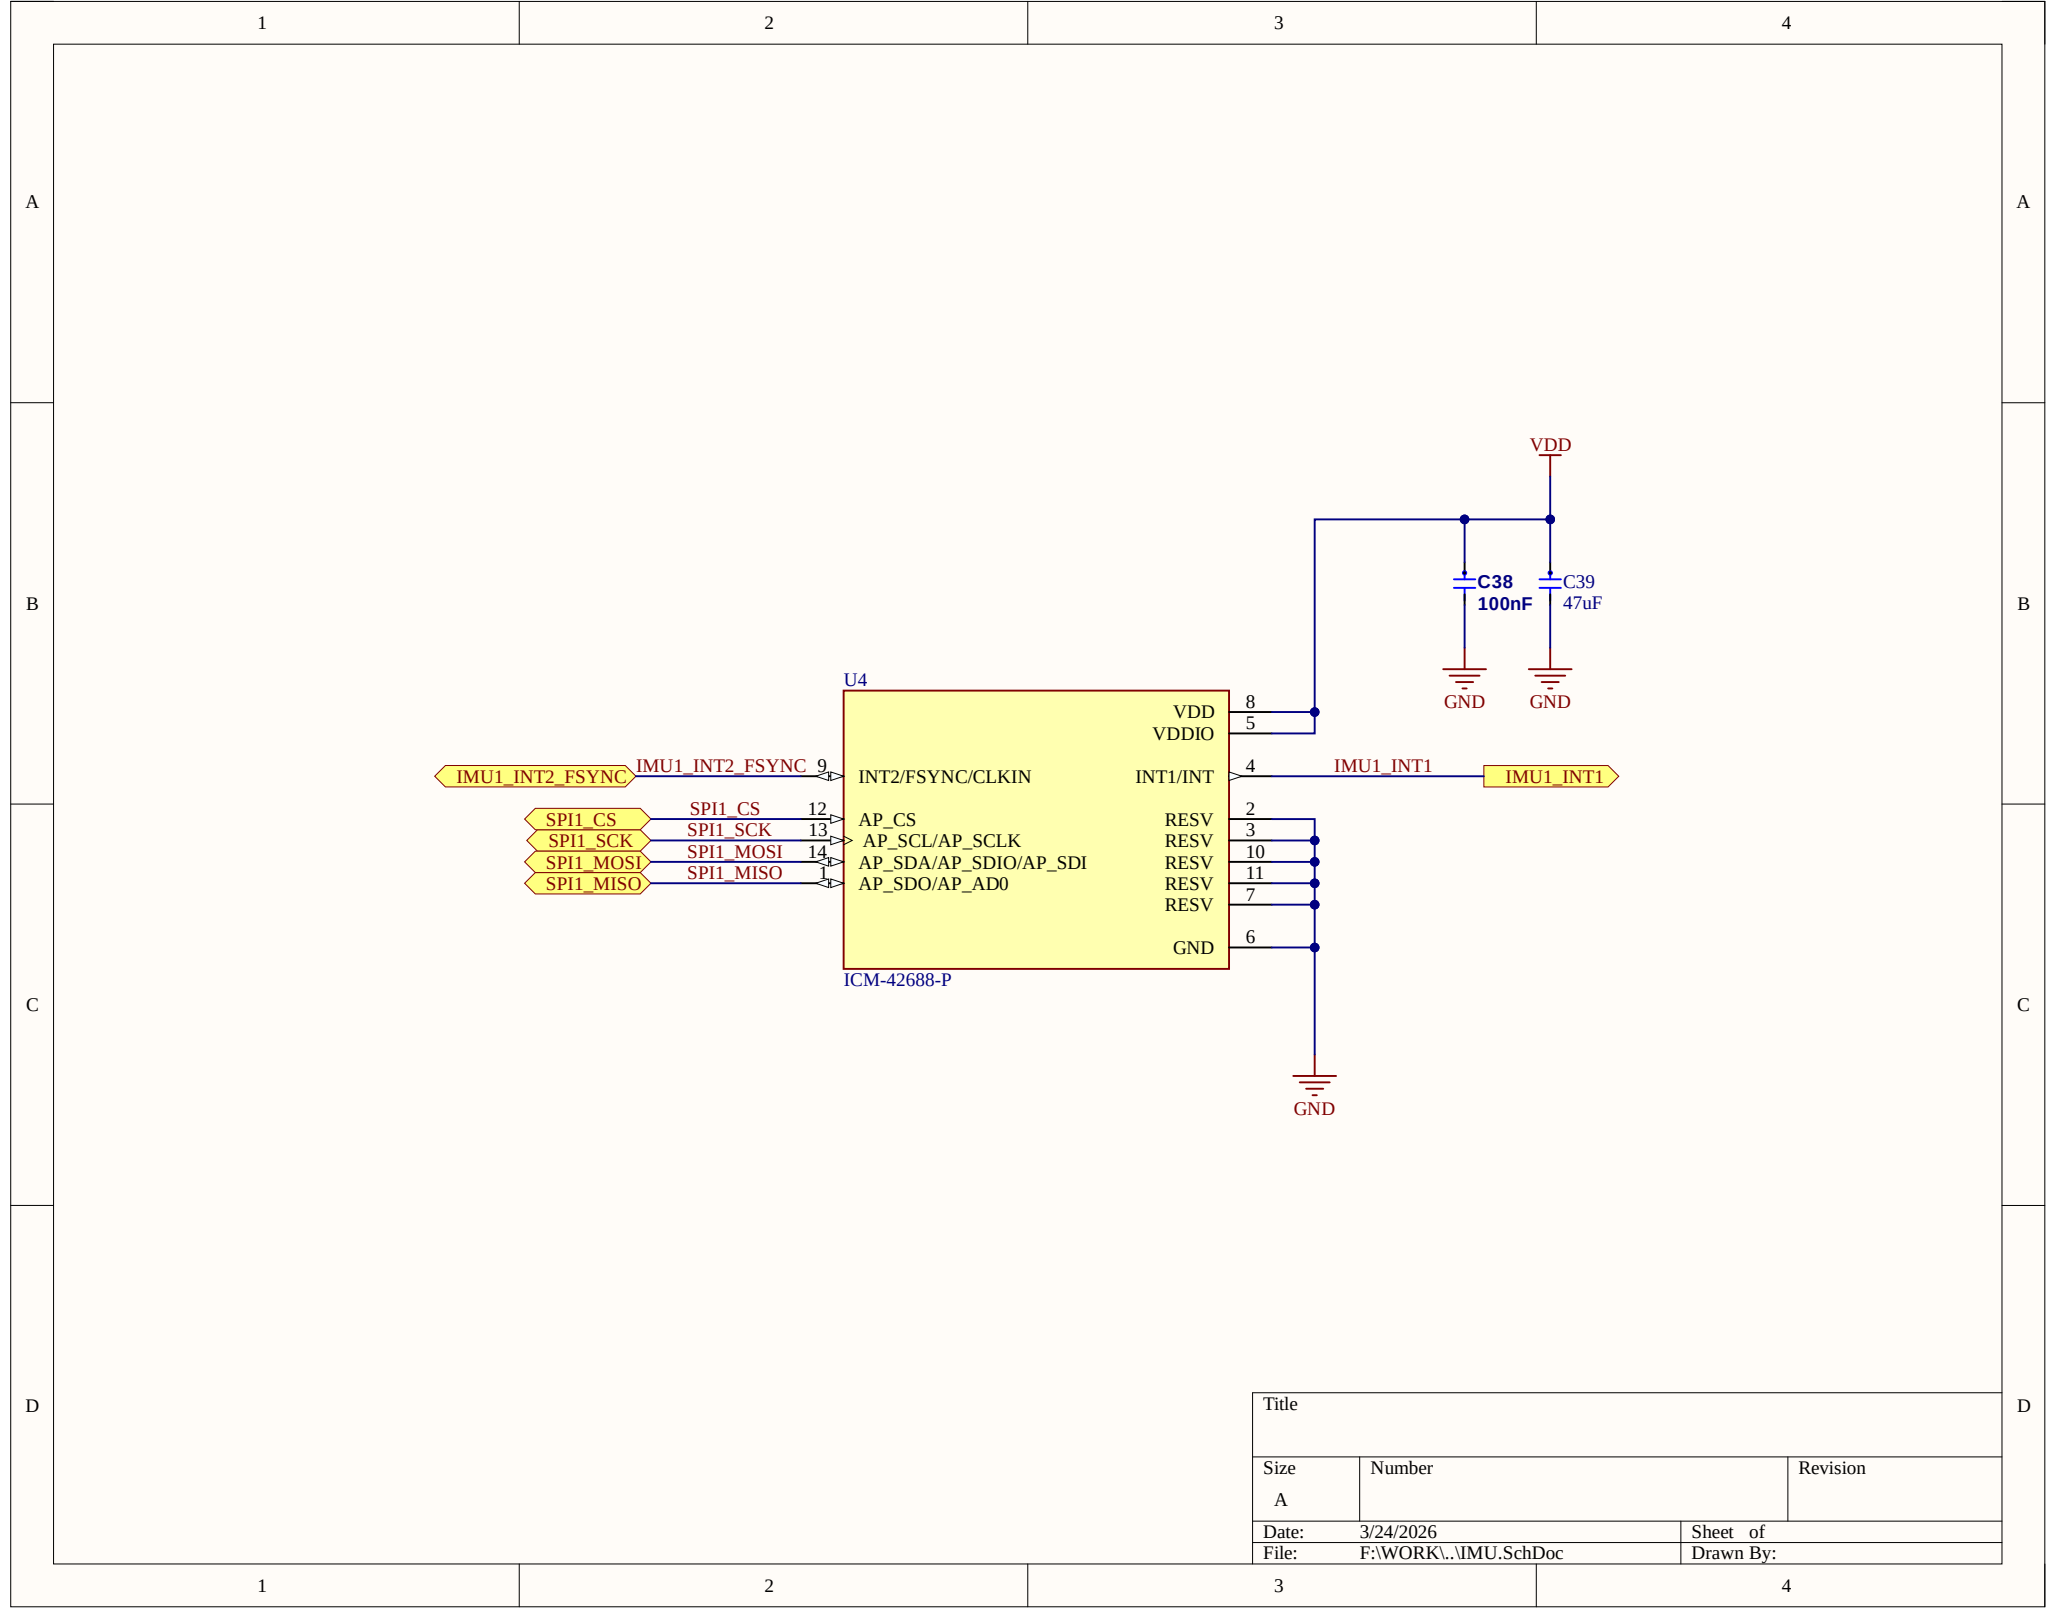



Central Yaw to Main

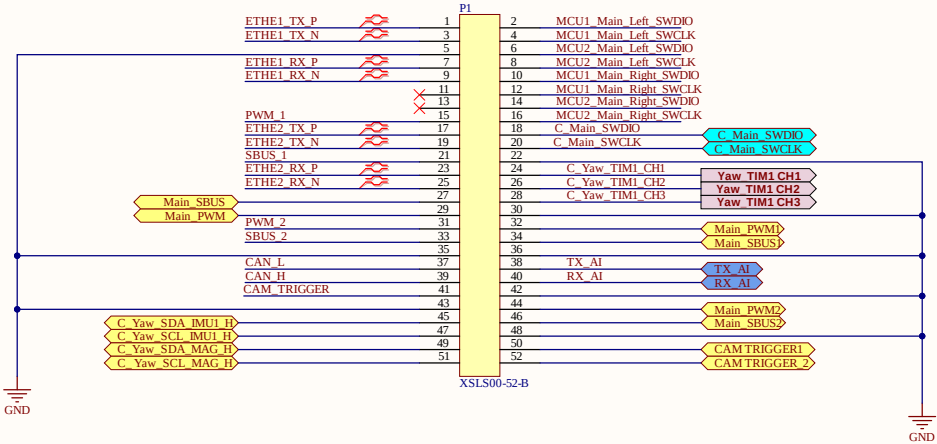

C ROLL TO Main Rotor

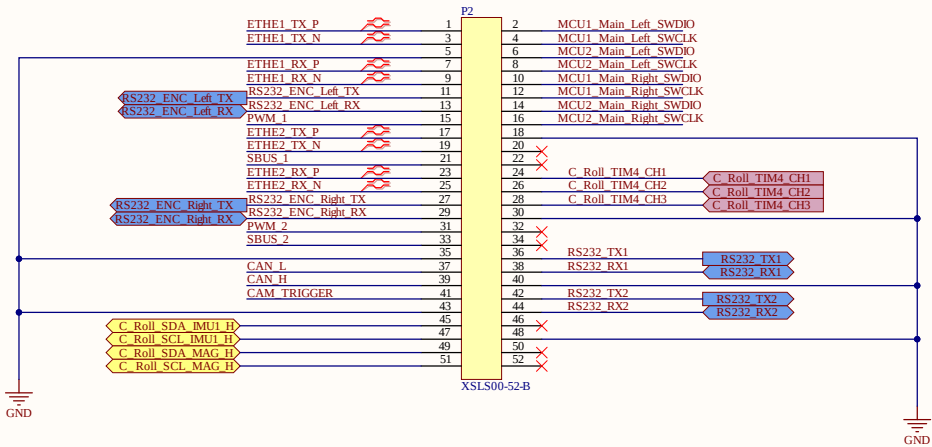

Title		
Size	Number	Revision
A3		
Date	3/24/2026	Sheet of
File:	F:\WORK\...\Connector.SchDoc	Drawn By:

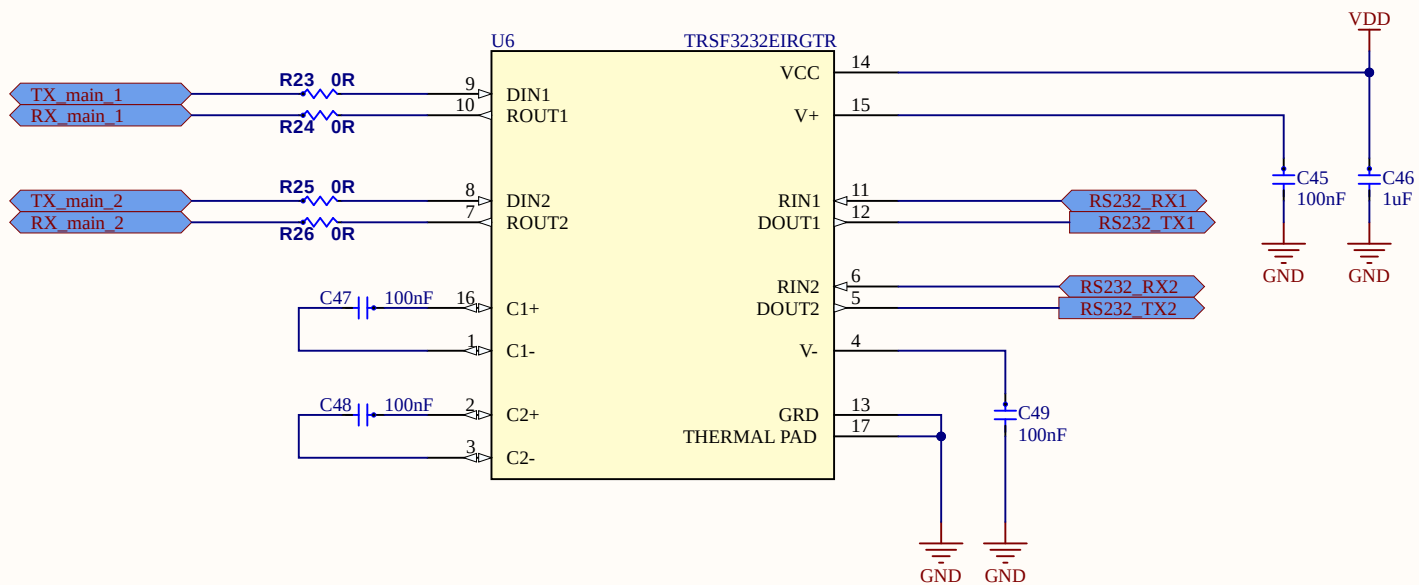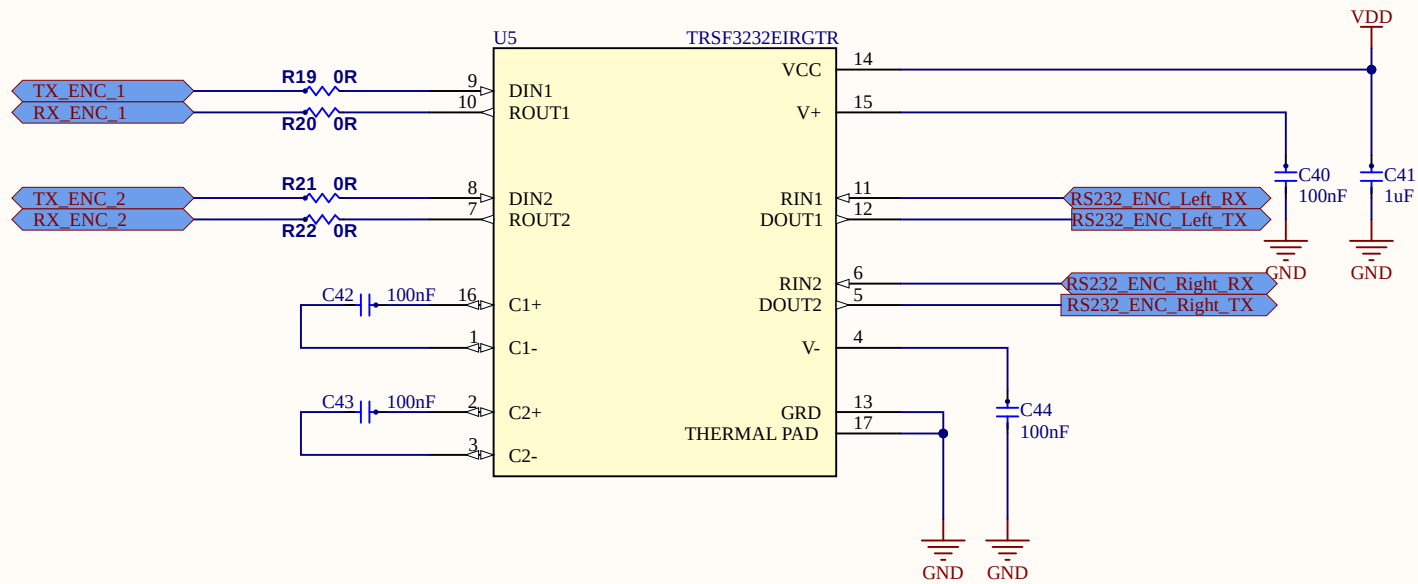

Title		
Size	Number	Revision
A		
Date:	3/24/2026	Sheet of
File:	F:\WORK\..RS232.SchDoc	Drawn By:

Comment	Description	Designator	Footprint	LibRef	Quantity
CAP0603 0.1uF 50V	Cap 0.1uF 50V 0603	C1, C6, C9, C10, C15, C17, C18, C19, C20, C21, C22, C23, C24, C25, C26	CAP0603	CAP0603 0.1uF 50V	15
CAP0603 2.2uF 25V	Cap 2.2uF 25V 0603	C2, C3, C4, C5	CAP0603	CAP0603 2.2uF 25V	4
CAP0603 4.7uF 10V	Cap 4.7uF 10V 0603	C7, C16	CAP0603	CAP0603 4.7uF 10V	2
CAP0603 1uF 50V	Cap 1uF 50V 0603	C8, C11, C14	CAP0603	CAP0603 1uF 50V	3
CAP0402 0.1uF 50V	Cap 0.1uF 50V 0402	C12	CAP0402	CAP0402 0.1uF 50V	1
CAP0402 12pF 50V	Cap 12pF 50V 0402	C13, C27	CAP0402	CAP0402 12pF 50V	2
CC0402KRX5R98B104	CAP CER 0.1UF 50V X5R 0402	C28, C30, C35, C36	CAP0402-M	CMP-00265-1	4
GRM188R6Y1A106MA73D	CAP CER 10UF 35V X5R 0603	C29, C34, C37	CAP0603-M	CMP-01031-1	3
GRM158R61A226ME15D	CAP CER 22UF 10V X5R 0402	C31, C32	CAP0402-M	CMP-00520-1	2
75pF	CAP CER 75PF 25V COG/NP0 0402	C33	C_0402	CAP_Dup1_16	1
C0603C104MSRACTU	CAP CER 0.1UF 50V X7R 0603	C38	CAP0603-M	CMP-00691-1	1
CL21A476MQYNNNE	CAP CER 47UF 6.3V X5R 0805	C39	CAP0805-M	885012107014	1
GRM155R71H104KE14D	CAP CER 0.1UF 50V X7R 0402	C40, C42, C43, C44, C45, C47, C48, C49	CAP0402-M	CMP-01036-1	8
CC0402KRX5R88B105	CAP CER 1UF 25V X5R 0402	C41, C46	CAP0402-M	CMP-00520-1	2
SML-310MTT86	LED GREEN CLEAR 0603 SMD	D1, D2	SML-310MTT86-Footprint-1	CMP-01130-2	2
BLM15PX121S21D	120 Ohms @ 100 MHz 1 Power Line Ferrite Bead 0402 (1005 Metric) 2A 55mOhm	FB1	FERRIT0402	BLM15PX121S21D	1
CON1	SOLDER PADS	J1, J2	wire1_220s	CON1	2
SRN3012BTA-100M	10uH	L1	SRN3012BTA330M	SRN3012BTA-330M	1
XSL500-52-B		P1, P2	XSL500-52-B	XSL500-52-B	2
RES0402 4K7	RES 4K7 0402	R1, R11	RES0402	RES0402 4K7	2
ERJ-2RK4701X	RES SMD 4.7K OHM 1% 1/10W 0402	R2, R3, R4, R5, R6, R7, R8, R9, R19, R20, R21, R22, R23, R24, R25, R26	RES0402	CMP-00607-1	16
RC0603FR-071KL	RES SMD 1K OHM 1% 1/10W 0603	R10	RES0603	CMP-00067-1	1
511K	RES SMD 511K OHM 1% 1/16W 0402	R12	RES0402	CMP-00299-1_1	1
49.9R	RES SMD 49.9R OHM 1% 1/16W 0402	R13	RES0402	CMP-00299-1_1	1
105K	RES SMD 105K OHM 1% 1/16W 0402	R14	RES0402	CMP-00299-1_1	1
100K	RES SMD 100K OHM 1% 1/16W 0402	R15	RES0402	CMP-00299-1_1	1
13.3K	RES SMD 13.3K OHM 1% 1/16W 0402	R16	RES0402	CMP-00299-1_1	1
RES0402 10K	RES 10K 0402	R17	RES0402	RES0402 10K	1
RT0402FRE07510RL	RES SMD 510 OHM 1% 1/16W 0402	R18	RES0402	RC0402FR-0722KL	1
STM32H747AI16	High-performance and DSP with DP-FPU, Arm Cortex-M7 + Cortex-M4 MCU with 2MBytes of Flash memory, 1MB RAM, 480 MHz CPU, Art Accelerator, L1 cache, external memory interface, large set of peripherals, SMPs, MIPI-DSI	U1	UFBGA169	STM32H747AI16	1
TPS54302DDCR	4.5-V to 28-V Input, 3-A Output, EMI Friendly Synchronous Step-Down Converter	U2	SOT95P280X110-6N	TPS54302DDCR	1
LD39200PUR	LDO IC 1 Output 2A 6-DFN_3x3	U3	LD39200PUR	LD39200PUR	1
ICM-42688-P	Accelerometer, Gyroscope, 6 Axis Sensor Output	U4	PQFN50P300X250X97-14N	ICM-42688-P	1
TRSF3232EIRGTR	No Description Available	U5, U6	VQFN_2EIRGTR_TEX	TRSF3232EIRGTR	2
ECS-240-12-37B-CKY-TR	Crystal 24 MHz ±10ppm 12pF 50 Ohms 4-SMD, No Lead	Y1	XTAL_ECS-240-12-37B-CKY-TR	ECS-240-12-37B-CKY-TR	1