


总型号



减速机型号

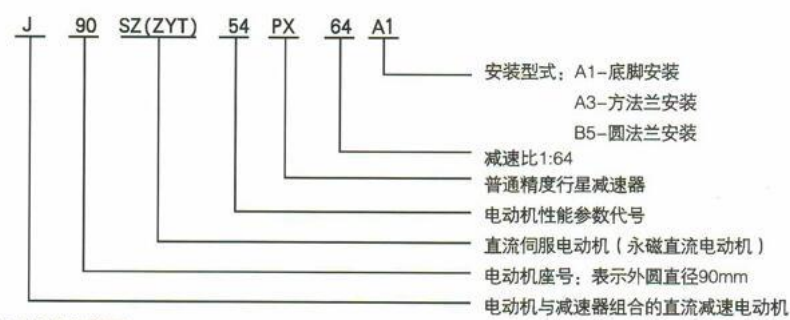

减速比 (i)	输出转速 (r/min)	输出转矩 (N.m)	减速器 安装方式	配用电机 额定功率 (w)	额定电压		配用电机 额定转速 (r/min)	配用电机 型号		
					电枢 (v)	激磁 (v)				
4 (6)	750 (500)	0.180 (0.271)	A3	20	24, 27, 48,		3000	55ZYT		
		0.262 (0.393)		29	110, 220					
		0.361 (0.542)		40	(24)	24		70SZ (ZYT)01		
					(27)	27		70SZ (ZYT)02		
					(48)	48		70SZ (ZYT)03		
					(110)	110		70SZ (ZYT)04		
	1500 (1000)	0.307 (0.461)	68	(24)	24	70SZ (ZYT)05				
				(27)	27	70SZ (ZYT)06				
				(48)	48	70SZ (ZYT)07				
				(110)	110	70SZ (ZYT)08				
	750 (500)	0.497 (0.745)	55	(24)	24	70SZ (ZYT)51				
				(27)	27	70SZ (ZYT)52				
				(48)	48	70SZ (ZYT)53				
				(110)	110	70SZ (ZYT)54				
	1500 (1000)	0.416 (0.623)	92	(24)	24	70SZ (ZYT)55				
				(27)	27	70SZ (ZYT)56				
				(48)	48	70SZ (ZYT)57				
				(110)	110	70SZ (ZYT)58				
375 (250)	0.904 (1.356)	A1 或 A3	50	(110)	110	1500	90SZ (ZYT)01			
	1.446 (2.169)		80	(220)	220		90SZ (ZYT)02			
				(110)	110		90SZ (ZYT)51			
				(220)	220		90SZ (ZYT)52			
				(24)	24		90SZ (ZYT)55			
				(180)	200		90SZ65			
	2.260 (3.390)		125	(110)			90ZYT101			
				(220)			90ZYT102			
				750 (500)	0.831 (1.247)		92	(110)	110	90SZ (ZYT)03
								(220)	220	90SZ (ZYT)04
(24)		24				90SZ05				
(36)	36	90SZ11								
1.366 (2.034)	150	(110)	110			90SZ (ZYT)53				
		(220)	220			90SZ (ZYT)54				
250 (167) 560 (375)	2.079 (3.118)		230	110		90ZYT103				
				220		90ZYT104				
				24		90ZYT105				
				540	180	200	1000	90SZ64		
							113	2250	90SZ66	