

ZombieVerter VCU

Aptiv  
33511394

J1  
ZombieVerter VCU V1 (56 way M SICMA Header)

56 empty pins hidden

56 pins

Aptiv  
13669859

X1  
56 Way F 1.5 SICMA Block

|                        |    |
|------------------------|----|
| RS232 Rx               | 1  |
| RS232 Tx               | 2  |
| GP Out 3               | 3  |
| GP Out 2               | 4  |
| PWM 3                  | 5  |
| PWM 2                  | 6  |
| PWM 1                  | 7  |
| Analog 2 in            | 8  |
| Analog 1 in            | 9  |
| DAC 2                  | 10 |
| DAC 1                  | 11 |
| MG2 Temp -             | 12 |
| MG2 Temp +             | 13 |
| MG1 Temp -             | 14 |
| Ignition T15 In        | 15 |
| REQ-                   | 16 |
| REQ+                   | 17 |
| CLK-                   | 18 |
| CLK+                   | 19 |
| MTH-                   | 20 |
| MTH+                   | 21 |
| HTM-                   | 22 |
| HTM+                   | 23 |
| LIN                    | 24 |
| CAN EXT 3 L            | 25 |
| CAN EXT 3 H            | 26 |
| CAN EXT L              | 27 |
| CAN EXT H              | 28 |
| MG1 Temp +             | 29 |
| Oil Pump PWM           | 30 |
| Neg Contactor LS Sw... | 31 |
| Inverter Power LS S... | 32 |
| Main Contactor LS S... | 33 |
| Precharge LS Switch    | 34 |
| Pot 2                  | 35 |
| Pot 1                  | 36 |
| Trans SP               | 37 |
| Trans SL2-             | 38 |
| Trans SL1-             | 39 |
| Trans PB3              | 40 |
| Trans PB2              | 41 |
| Trans PB1              | 42 |
| CAN EXT 2 L            | 43 |
| CAN EXT 2 H            | 44 |
| Throttle Ground        | 45 |
| Throttle 2             | 46 |
| Throttle 1             | 47 |
| +5v Throttle           | 48 |
| Brake Input            | 49 |
| GP12v Input            | 50 |
| Hvrequest              | 51 |
| Start                  | 52 |
| Reverse Direction      | 53 |
| Forward Direction      | 54 |
| Ground                 | 55 |
| Permanent +12V         | 56 |

F11.OUT (Pg.3)

InDtsch12-M.3 (Pg.4)

InDtsch12-M.2 (Pg.4)

OilPump.6 (Pg.2)

InDtsch12-M.5 (Pg.4)

InDtsch12-M.7 (Pg.4)

InDtsch12-M.6 (Pg.4)

F22.OUT (Pg.3)

Sumitomo  
90980-12326

X3  
L110 Solenoid

|            |    |
|------------|----|
| SL1+       | 1  |
| SL2+       | 2  |
| X1.37 SP   | 3  |
| E          | 4  |
| NC         | 5  |
| SP         | 6  |
| X1.39 SL1- | 7  |
| X1.38 SL2- | 8  |
| X1.42 PB1  | 9  |
| X1.41 PB2  | 10 |
| THO        | 11 |
| X1.40 PB3  | 12 |
| NC         | 13 |

Sumitomo  
HX040-6P

X2  
Honda Foot Pedal

|       |   |
|-------|---|
| GND   | 1 |
| APP2  | 2 |
| Vref1 | 3 |
| GND   | 4 |
| APP1  | 5 |
| Vref2 | 6 |

Lexus  
LS600HL

X4  
LS600H Inverter

|       |    |
|-------|----|
| DRN2  | 1  |
| MTH+  | 2  |
| MTH++ | 3  |
| NC    | 4  |
| DRN5  | 5  |
| GCSG  | 6  |
| GSNG  | 7  |
| DRN6  | 8  |
| GRFG  | 9  |
| BR2+  | 10 |
| BR2   | 11 |
| DRN4  | 12 |
| CLK-  | 13 |
| CLK+  | 14 |
| NC    | 15 |
| GI    | 16 |
| GCS   | 17 |
| GSN   | 18 |
| NC    | 19 |
| GRF   | 20 |
| DRN1  | 21 |
| HTM-  | 22 |
| HTM+  | 23 |
| ILK   | 24 |
| HGDN  | 25 |
| DRN7  | 26 |
| MCSG  | 27 |
| MSNG  | 28 |
| MRFG  | 29 |
| MRFG  | 30 |
| GND1  | 31 |
| GND2  | 32 |
| DRN3  | 33 |
| REQ-  | 34 |
| REQ+  | 35 |
| NC    | 36 |
| NC    | 37 |
| DRN8  | 38 |
| MSN   | 39 |
| MRF   | 40 |

Sumitomo  
90980-12520


X5  
MG1 Resolver


|           |   |
|-----------|---|
| X4.20 MRF | 1 |
| X4.18 MSN | 2 |
| X4.17 MCS | 3 |
| MMTD      | 4 |
| X4.9 MRFG | 5 |
| X4.7 MSNG | 6 |
| X4.6 MCSG | 7 |
| MMT       | 8 |


Sumitomo  
90980-12520


X6  
MG2 Resolver


|            |   |
|------------|---|
| X4.40 MRF  | 1 |
| X4.39 MSN  | 2 |
| X4.38 MCS  | 3 |
| MMTD       | 4 |
| X4.27 MRFG | 5 |
| X4.29 MSNG | 6 |
| X4.28 MCSG | 7 |
| MMT        | 8 |

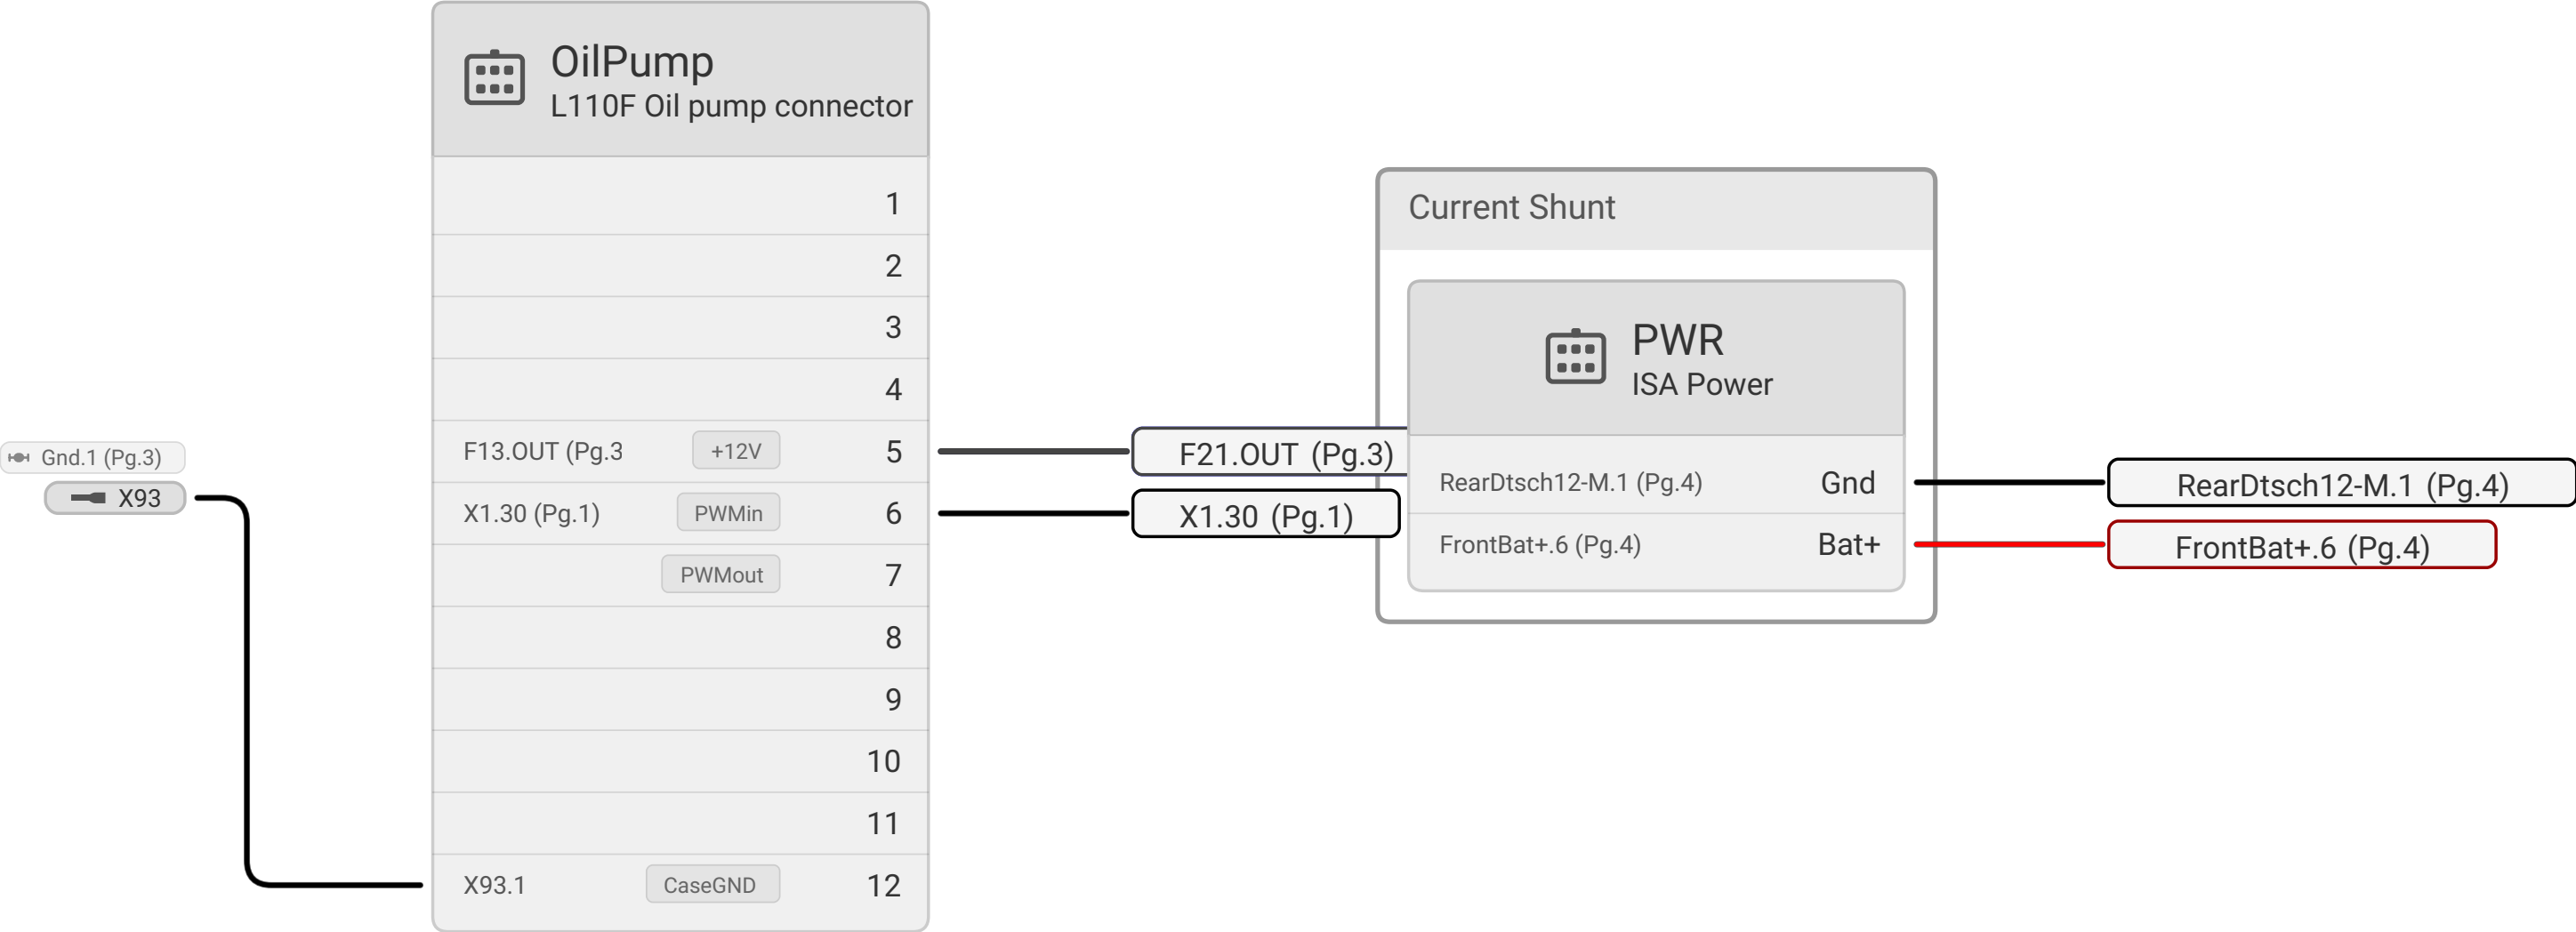

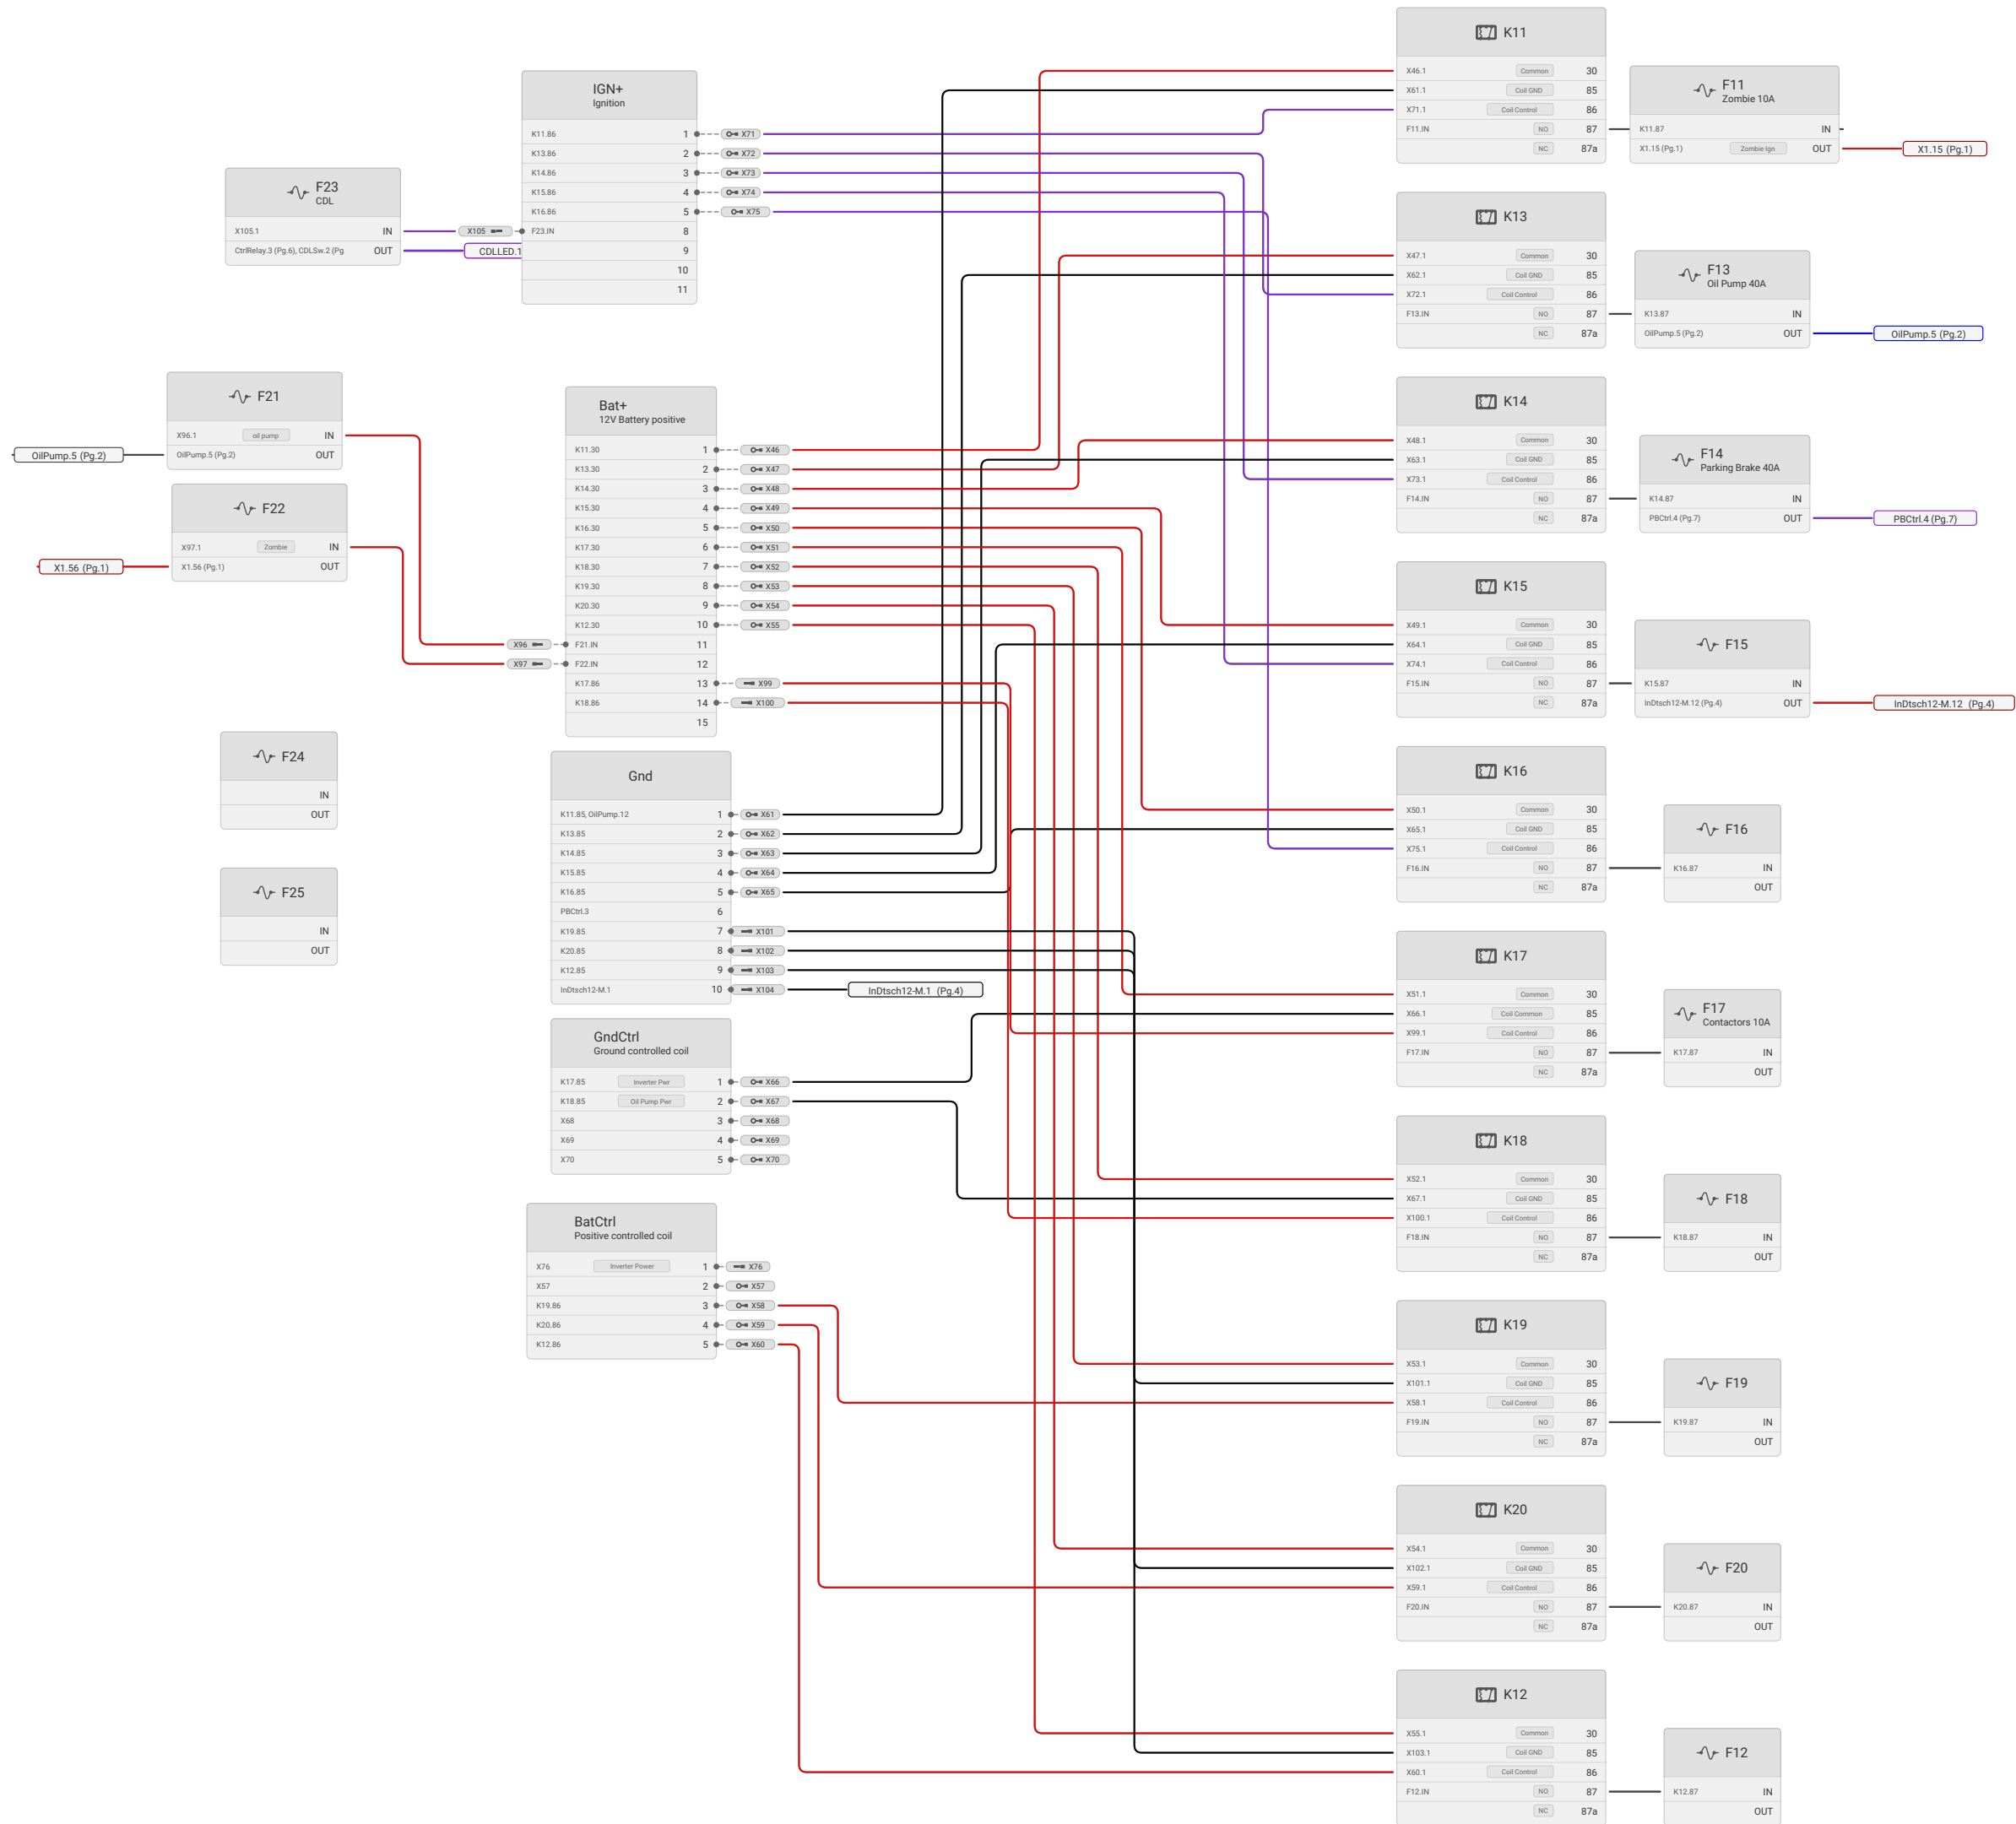


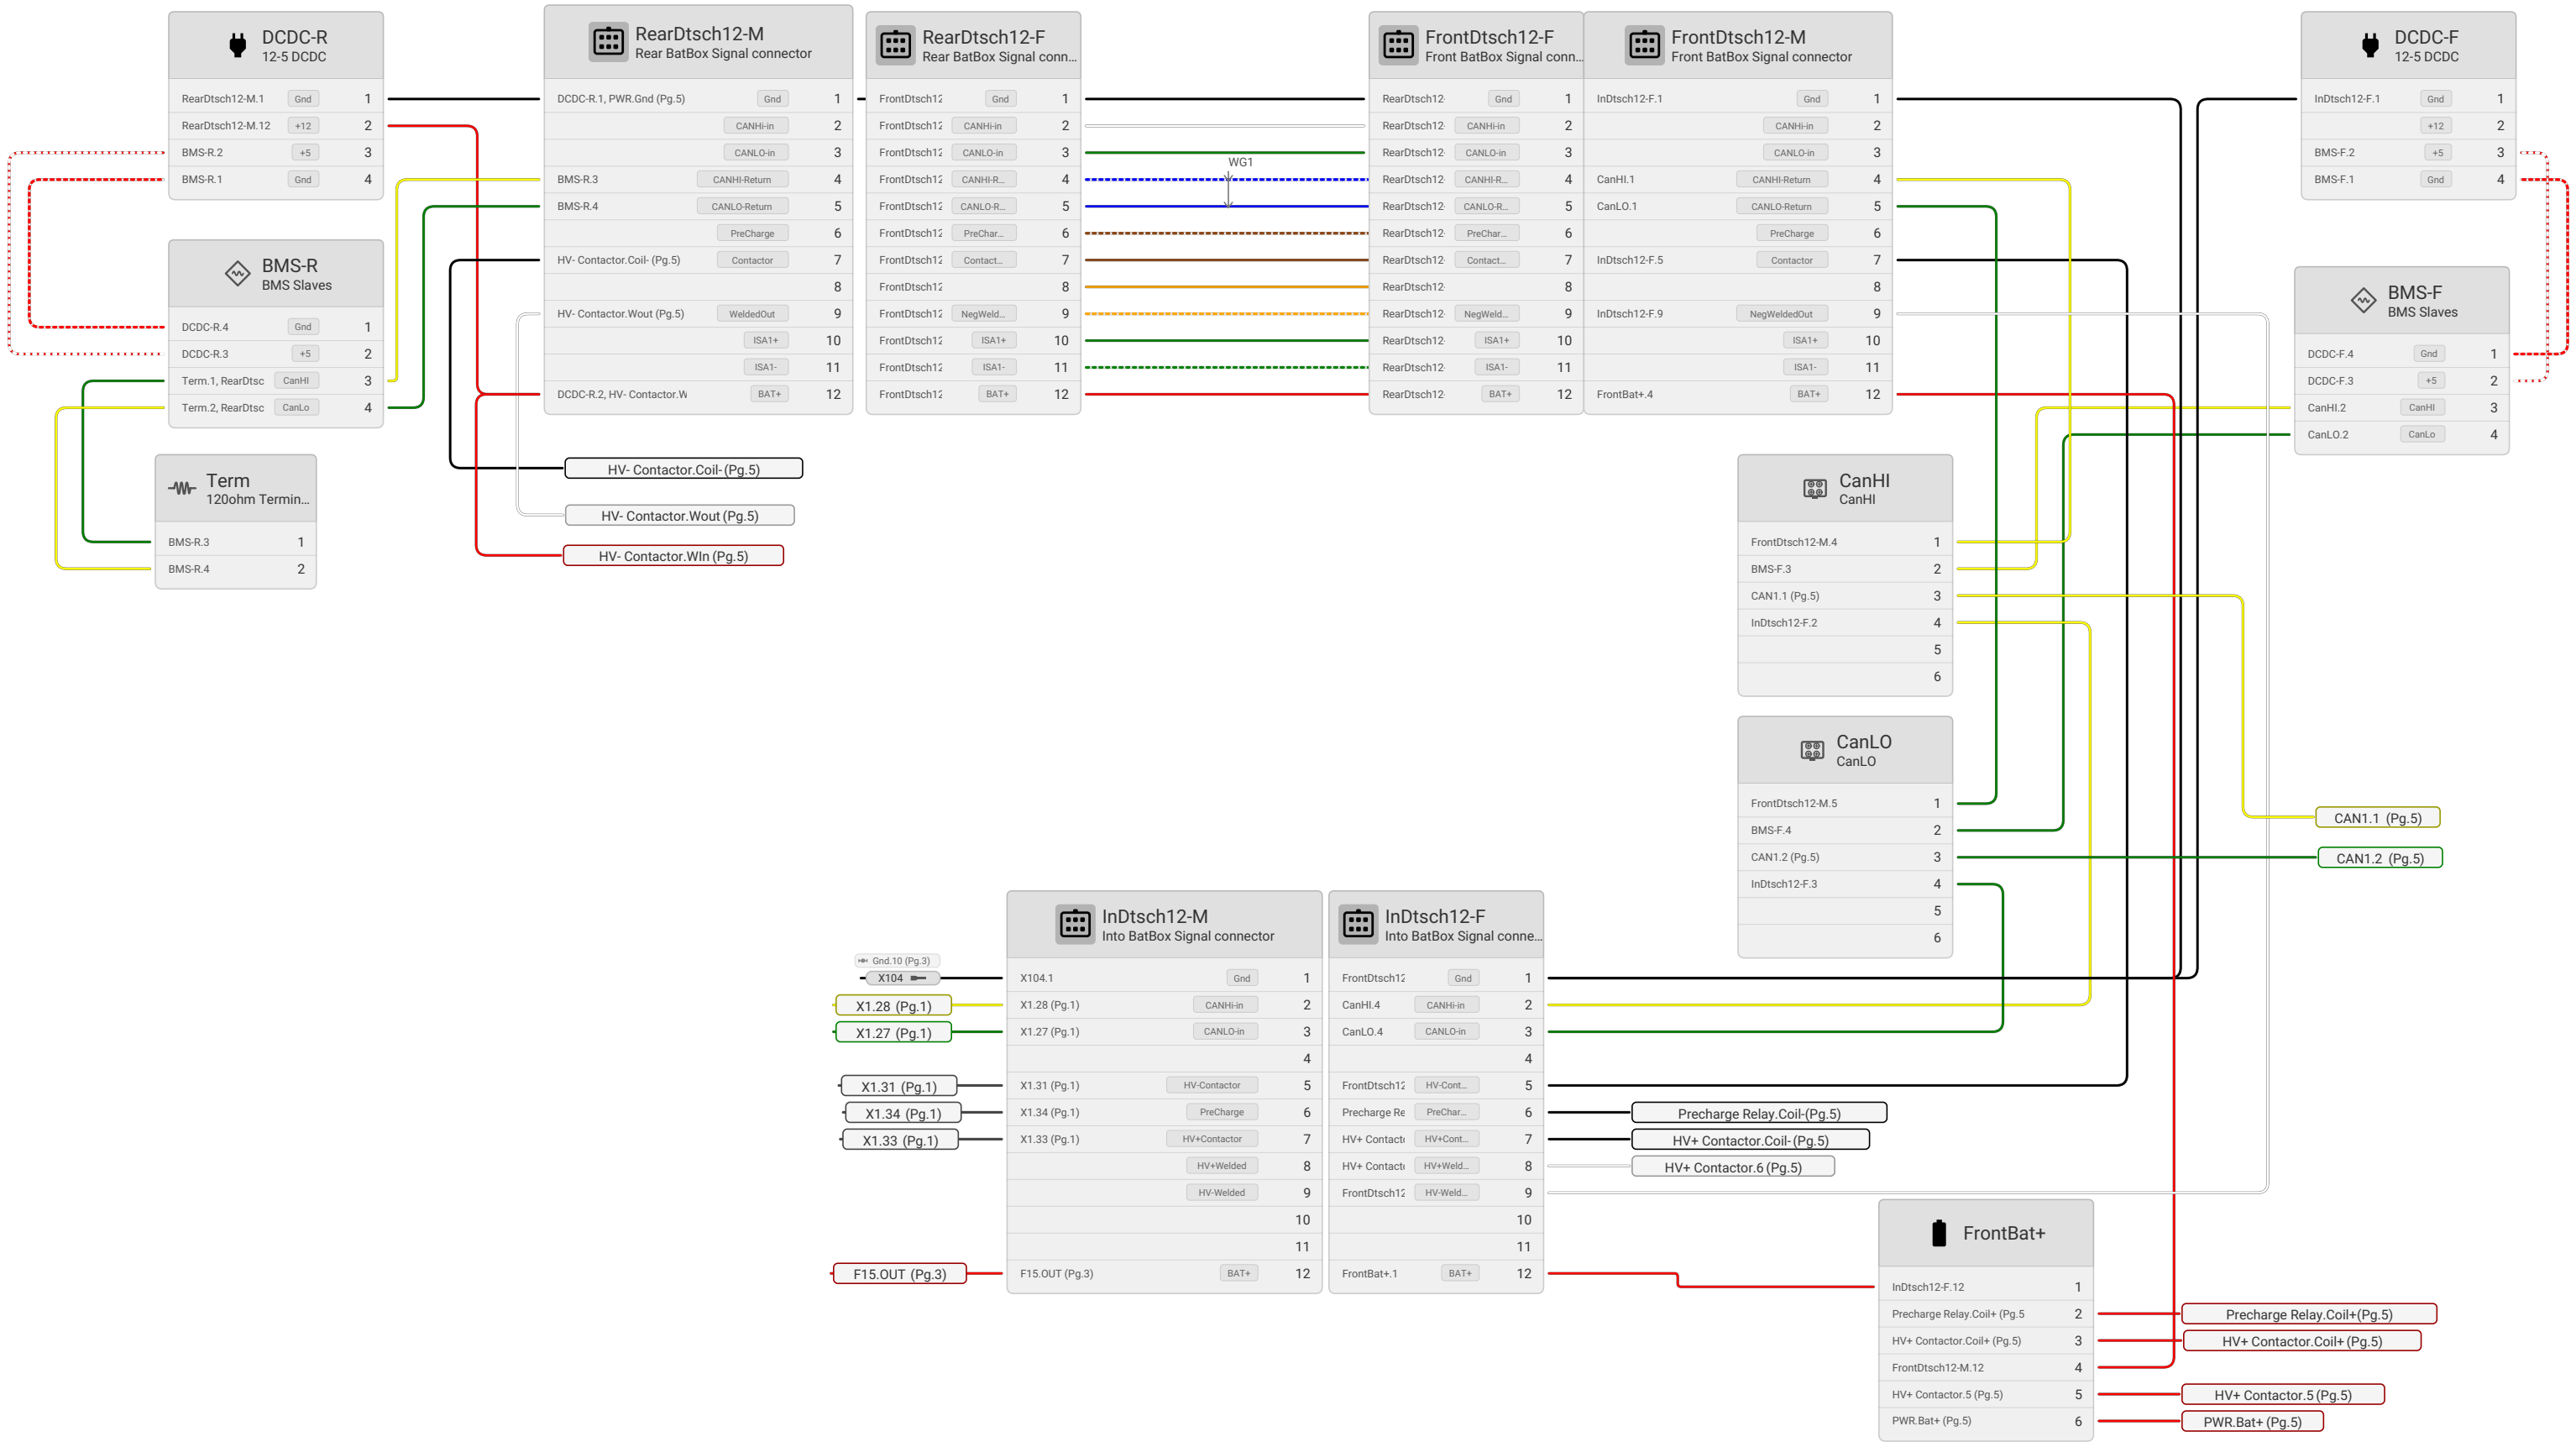

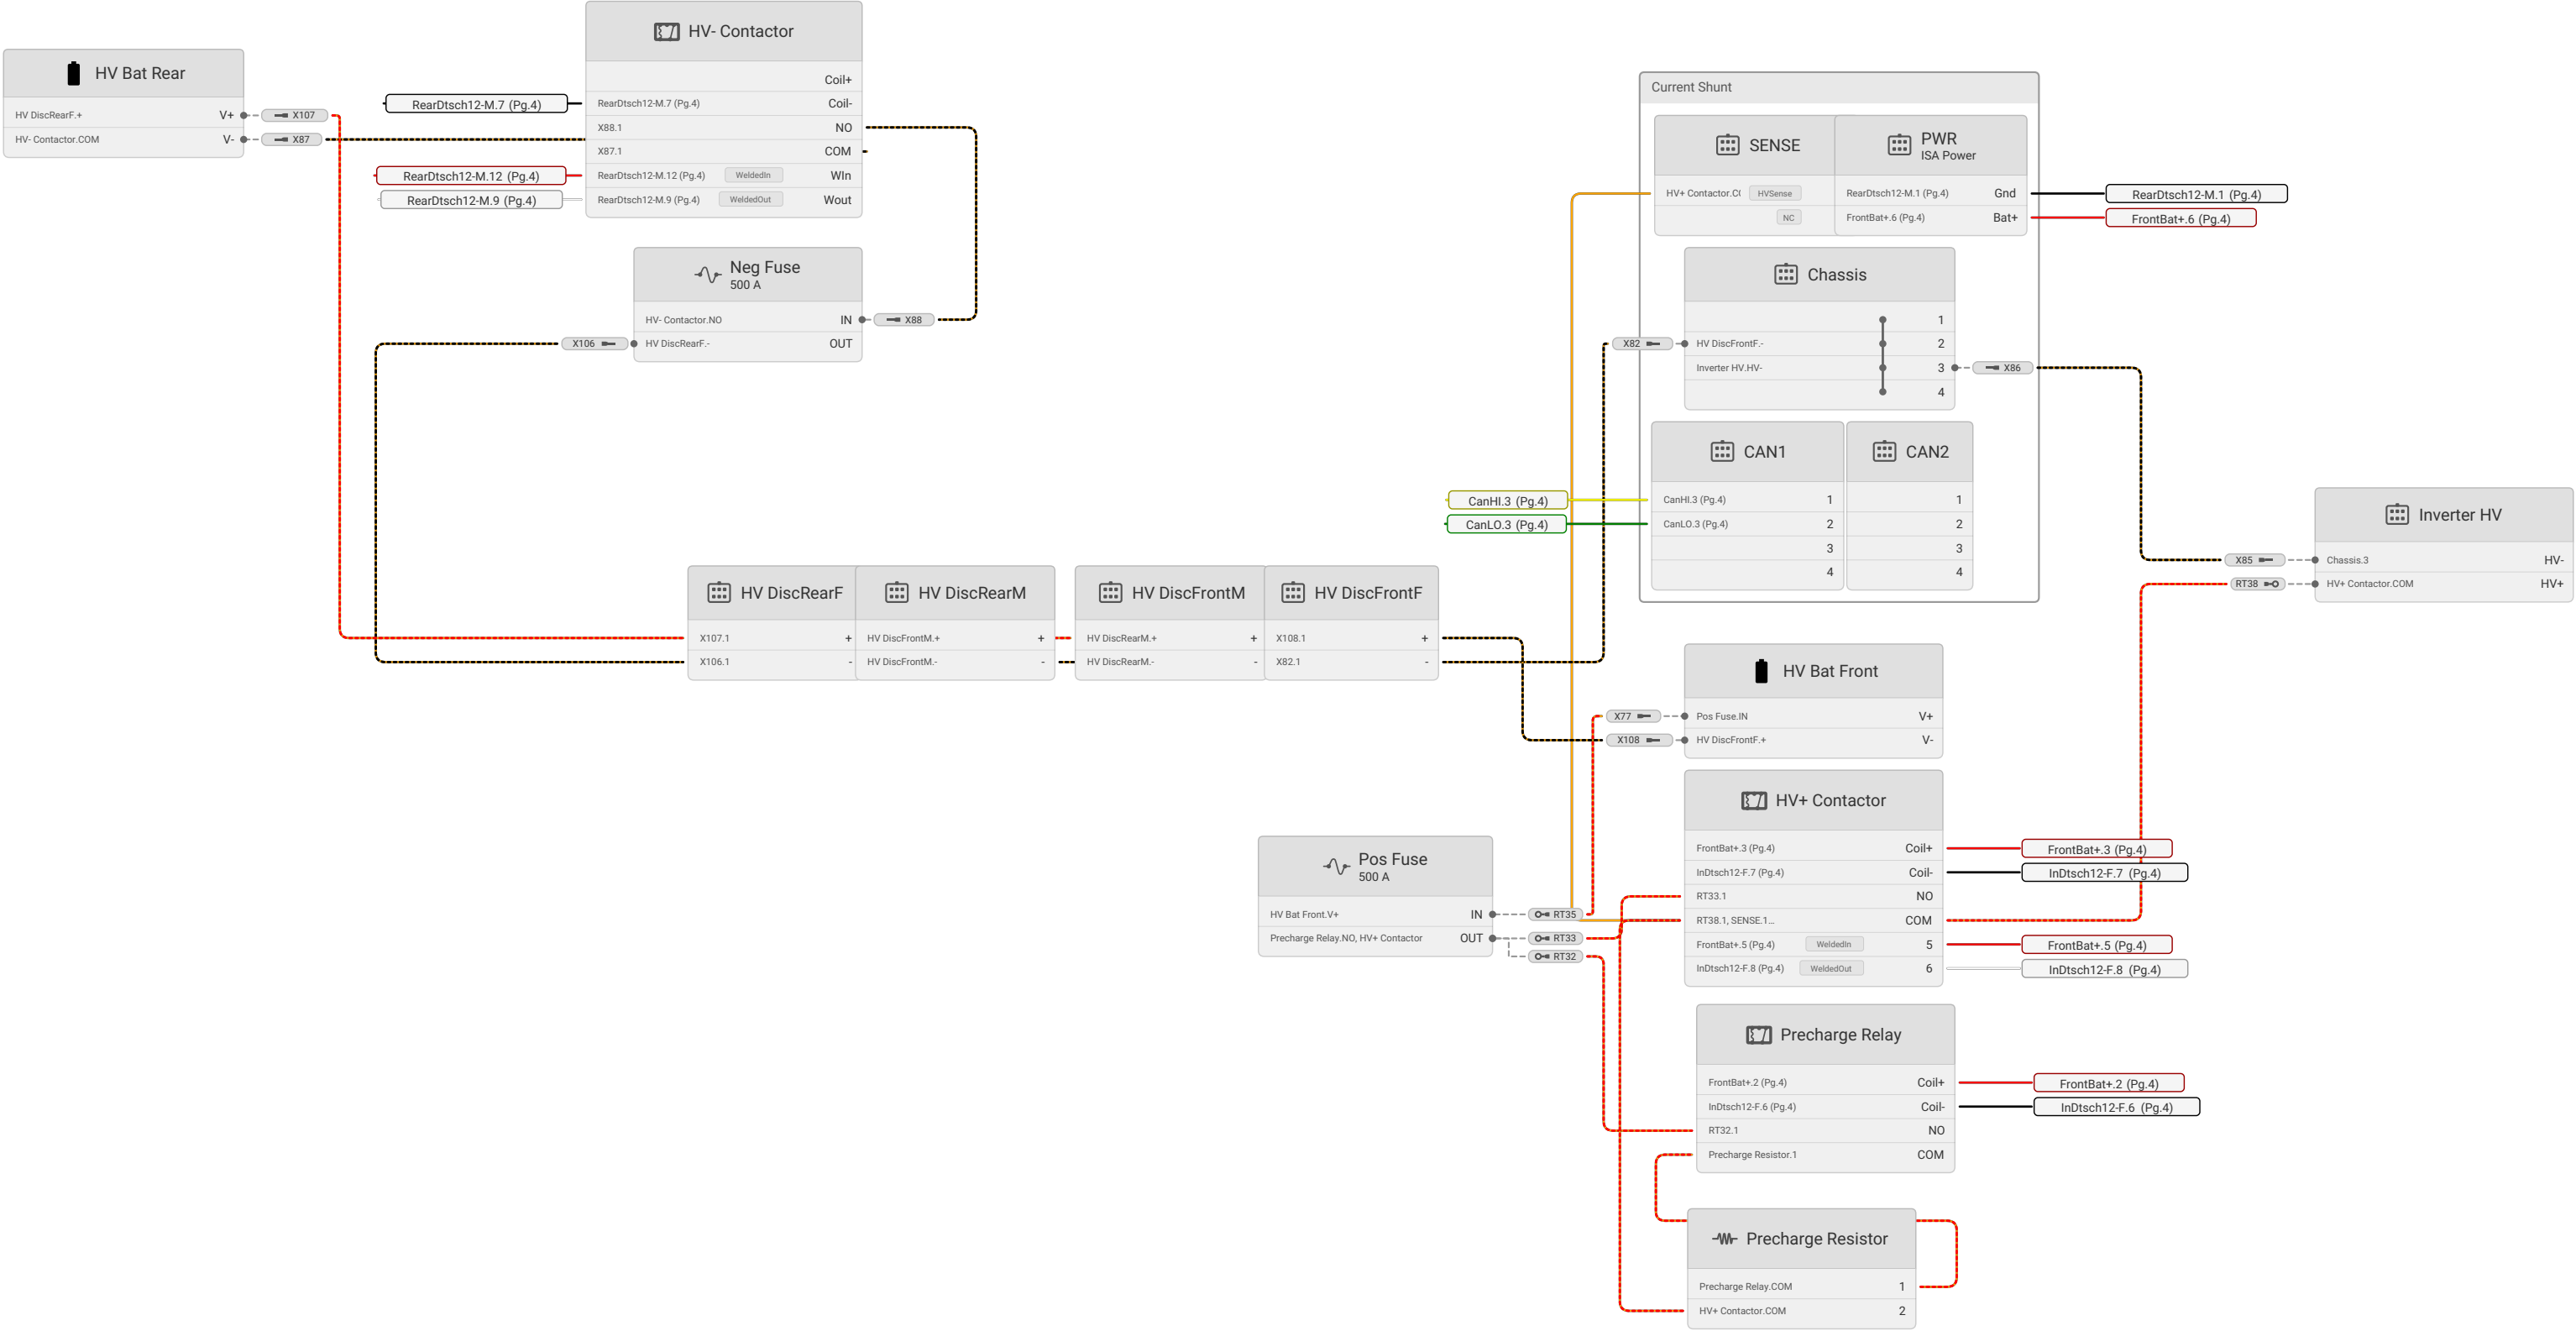

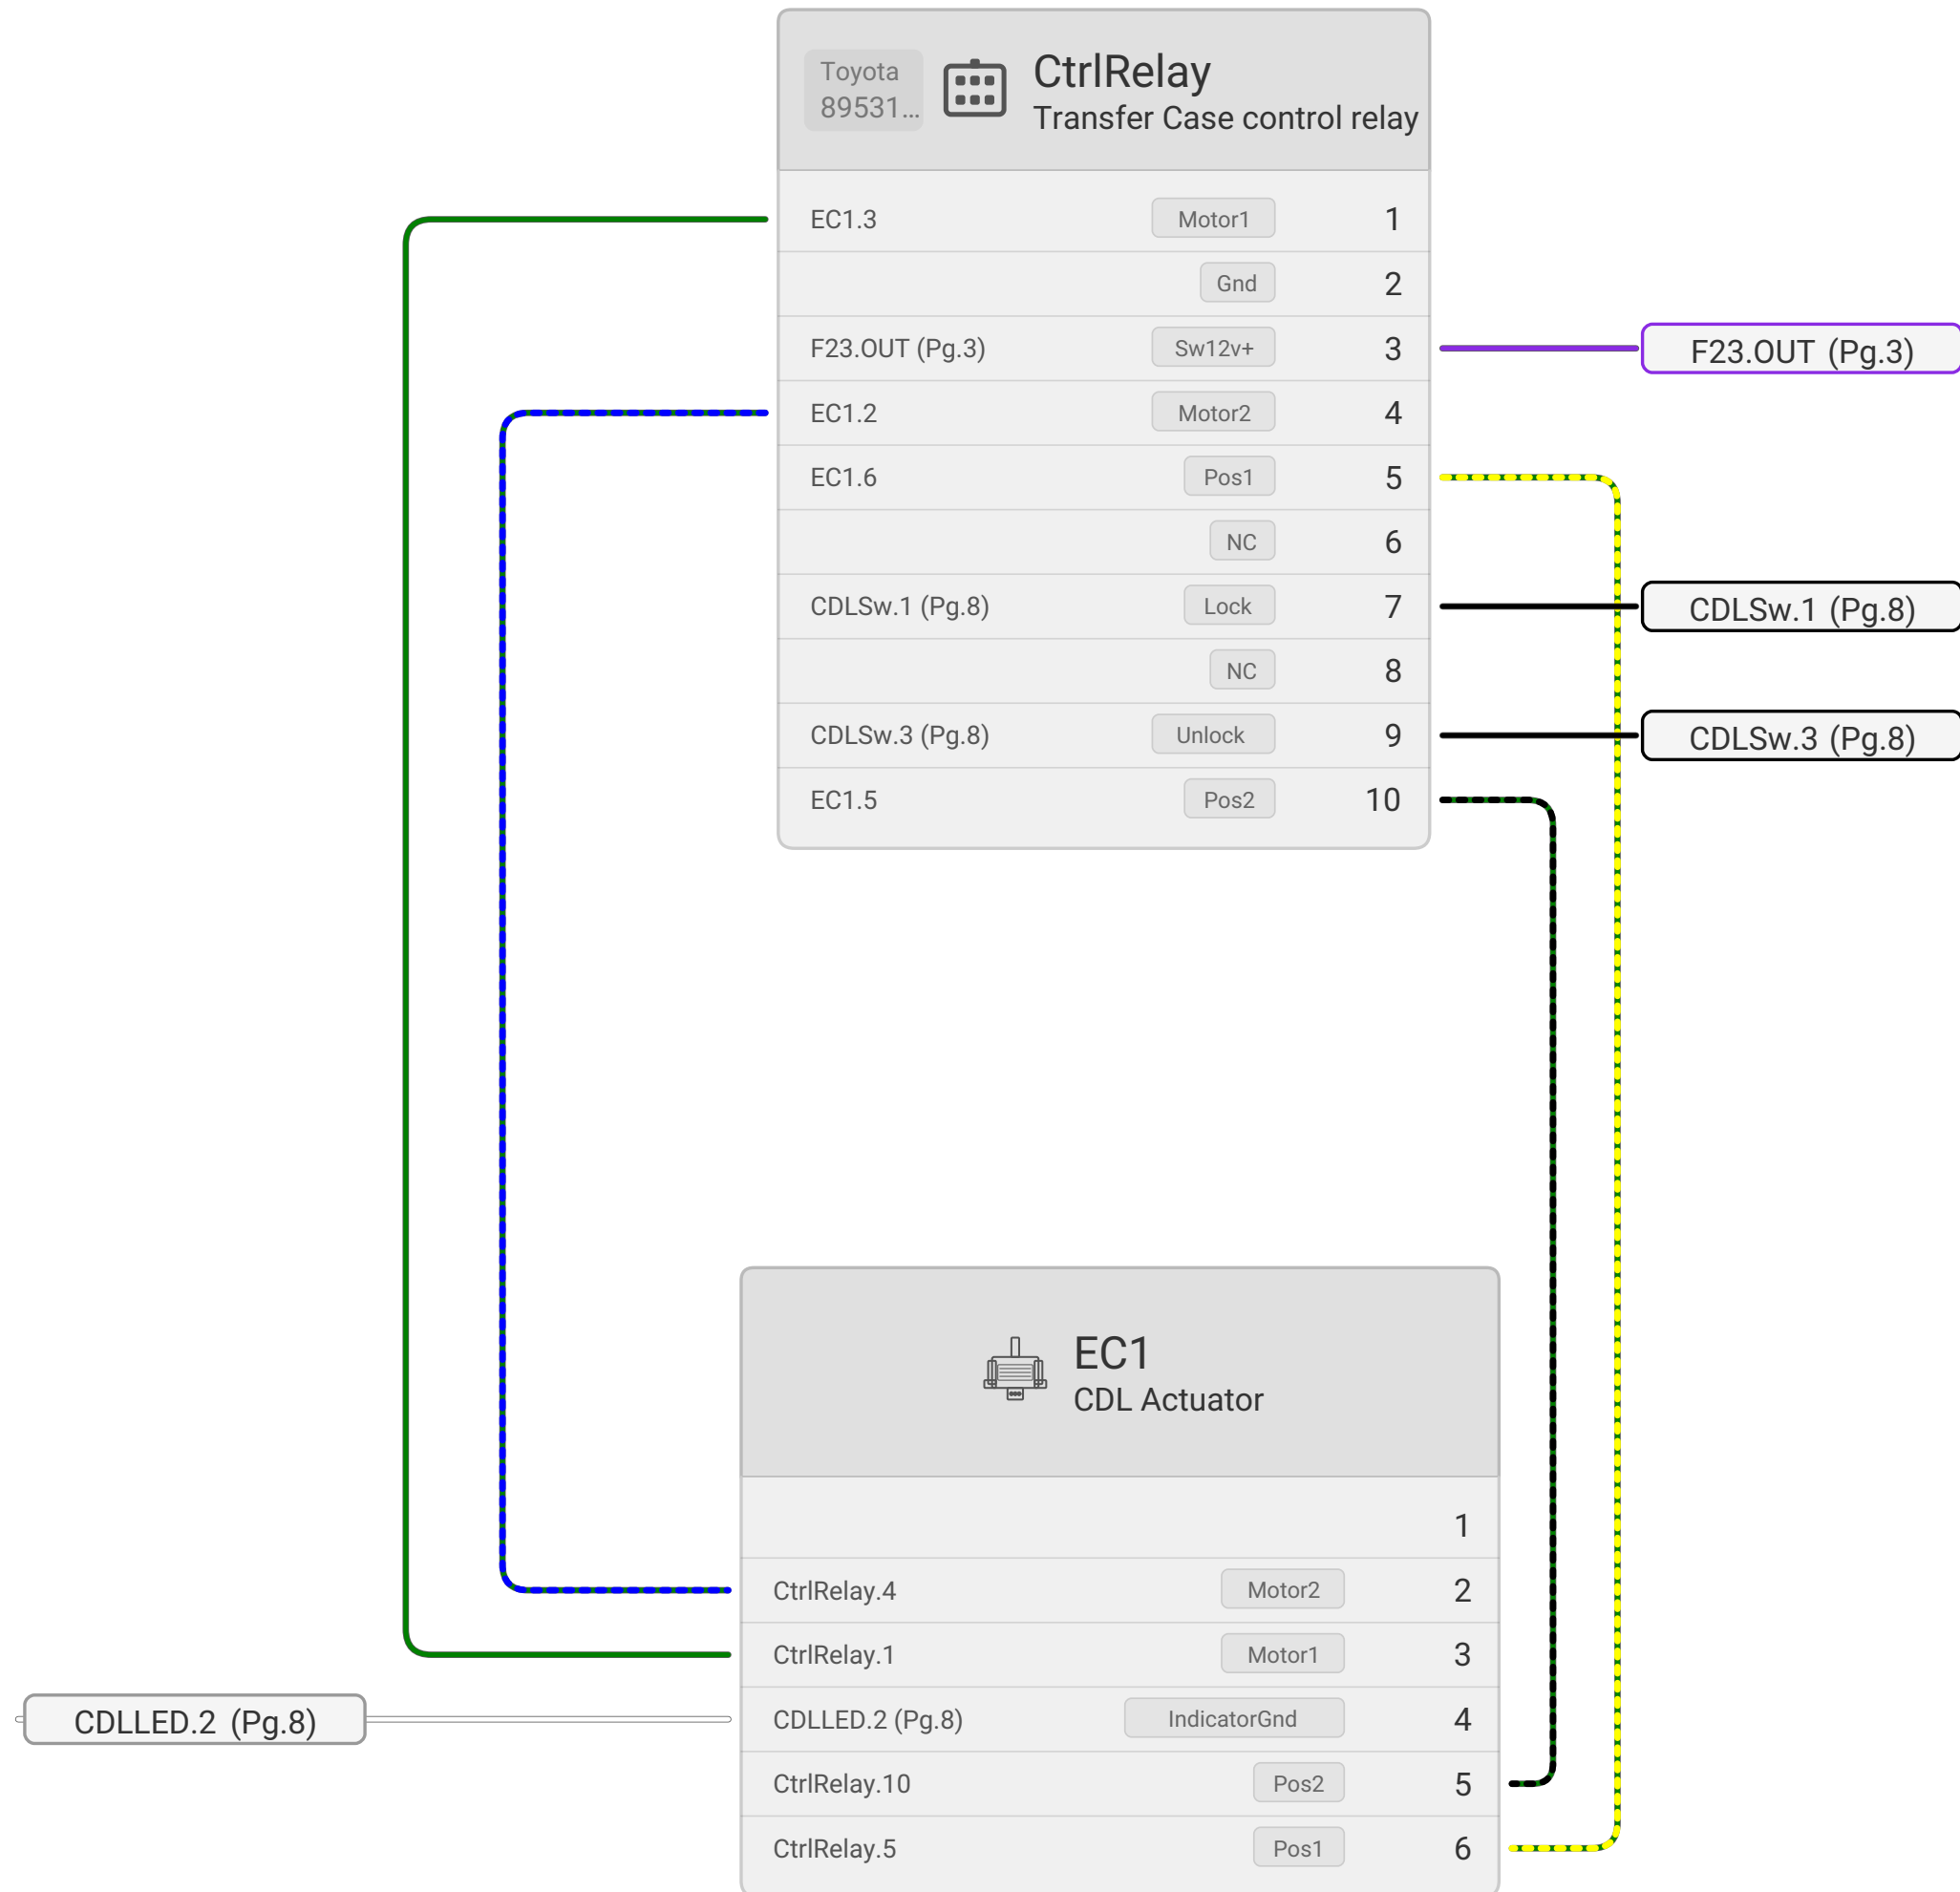



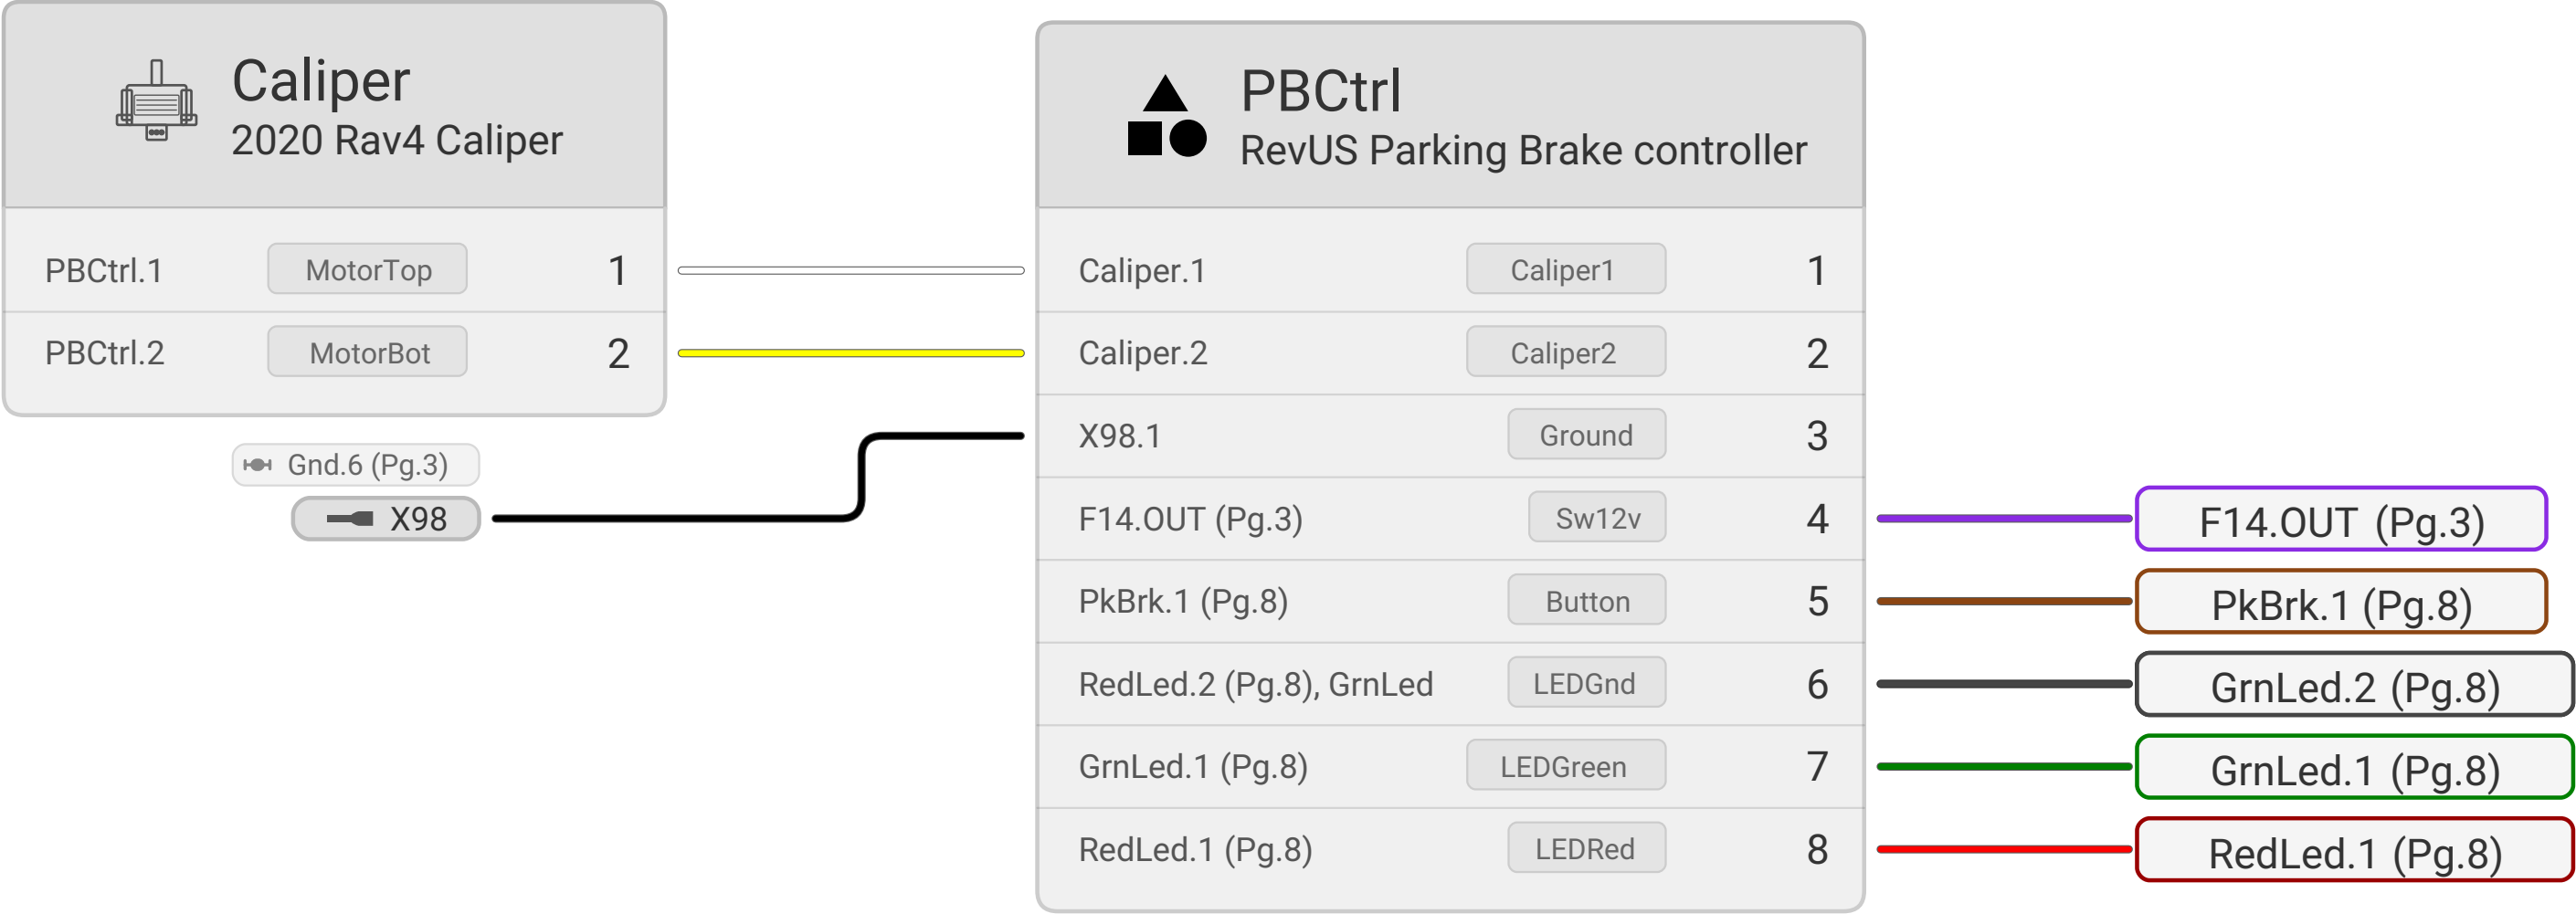



PRNDL  
M5Dial PRNDL

|        |   |
|--------|---|
| Sw12v+ | 1 |
| Gnd    | 2 |
| CANHi  | 3 |
| CANLo  | 4 |



ZombieD...  
M5Dial Zomb...

|        |   |
|--------|---|
| Sw12v+ | 1 |
| Gnd    | 2 |
| CANHi  | 3 |
| CANLo  | 4 |

CDL Switch



CDLSw  
Center Difflock Switch

|                    |        |   |                    |
|--------------------|--------|---|--------------------|
| CtrlRelay.7 (Pg.6) | Lock   | 1 | CtrlRelay.7 (Pg.6) |
| F23.OUT (Pg.3)     | Sw12v+ | 2 | F23.OUT (Pg.3)     |
| CtrlRelay.9 (Pg.6) | Unlock | 3 | CtrlRelay.9 (Pg.6) |



CDLLED  
Amber LED

|                |        |   |                |
|----------------|--------|---|----------------|
| F23.OUT (Pg.3) | Sw12v+ | 1 | F23.OUT (Pg.3) |
| EC1.4 (Pg.6)   | Gnd    | 2 | EC1.4 (Pg.6)   |

Illuminated PushButton



PkBrk  
Momentary switch

|                 |   |                 |
|-----------------|---|-----------------|
| PBCtrl.5 (Pg.7) | 1 | PBCtrl.5 (Pg.7) |
|                 | 2 |                 |



RedLed  
Red LED

|                 |   |                 |
|-----------------|---|-----------------|
| PBCtrl.8 (Pg.7) | 1 | PBCtrl.8 (Pg.7) |
| PBCtrl.6 (Pg.7) | 2 | PBCtrl.6 (Pg.7) |



GrnLed  
Green LED

|                 |   |                 |
|-----------------|---|-----------------|
| PBCtrl.7 (Pg.7) | 1 | PBCtrl.7 (Pg.7) |
| PBCtrl.6 (Pg.7) | 2 | PBCtrl.6 (Pg.7) |