Charts – General Data

1. General

This chapter contains miscellaneous charts associated with the various systems. As an aid to quick reference, the various sections are arranged in chapter order. For example, the second element of the three element number is (in the case of FLIGHT CONTROLS) 27, therefore, pages relating to charts associated with flight controls, will bear the three element number 91–27–00.

A. Cable Charts

The left and right end terminations for all cables listed in the various sections of this chapter, are shown on Figure 1 and Figure 2, in order to show the measuring points, when referring to the cable length column in the particular cable chart. Thus, if the length column states A7 to B1 69.120 inches, the length between the left-hand termination A7 shown on Figure 1, and right-hand termination B1 shown on Figure 2, will be 69.120 inches. Where a third or center terminal is fitted to a cable, a third reference is given. For example $A7_L$ = 15.400 inches shown in length column, indicates that dimension $A7_L$ on Figure 1, is 15.400 inches. Comprehensive data for each cable is given on the cable charts; termination numbers on Figure 1 and Figure 2, are for reference only.


If cables are nylon covered, it is essential that the nylon be trimmed back before installation of the terminal. When the nylon must be trimmed back clear of a terminal shoulder, the appropriate dimension is indicated in the relevant cable chart termination column by an asterisk (*) followed by the dimension in inches. This is also shown on Figure 1 and Figure 2. Where no dimension is given, trim nylon so that after installation, nylon covering butts terminal shoulder.

B. Electrical Load Charts

The electrical load charts provide a description and quantity of each unit of electrical equipment in the aircraft, as well as the normal load drawn by each unit.

*WHEN CABLES ARE NYLON COVERED, TRIM NYLON BACK TO MEASUREMENT GIVEN IN LEFT TERMINATION COLUMN ON APPROPRIATE CABLE CHART WHERE NO MEASUREMENT IS GIVEN, TRIM NYLON TO CONTACT SWAGED END OF TERMINAL WHEN INSTALLED.


CAUTION: WHEN TRIMMING NYLON COVER, EXTREME CARE MUST BE TAKEN TO AVOID CUTTING CABLE STRANDS.

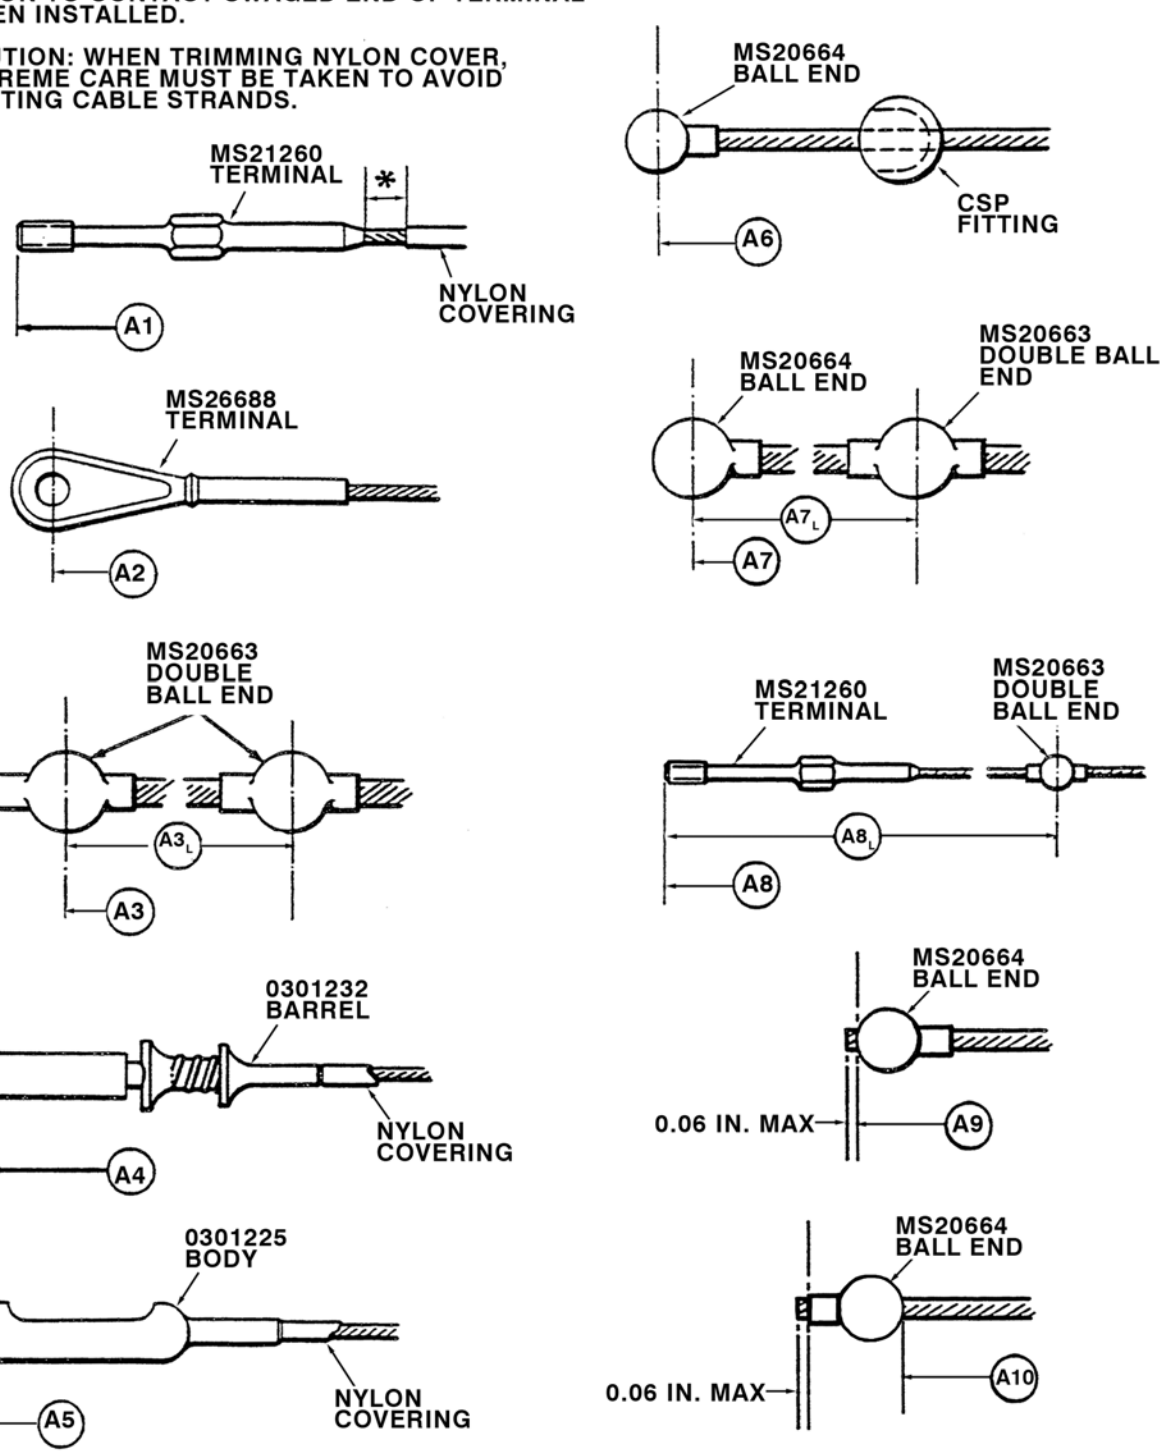

Left-hand Cable Terminations
Figure 1

*WHEN CABLES ARE NYLON COVERED, TRIM NYLON BACK TO MEASUREMENT GIVEN IN RIGHT TERMINATION COLUMN ON APPROPRIATE CABLE CHART. WHERE NO MEASUREMENT IS GIVEN, TRIM NYLON TO CONTACT SWAGED END OF TERMINAL WHEN INSTALLED.

CAUTION: WHEN TRIMMING NYLON COVER; EXTREME CARE MUST BE TAKEN TO AVOID CUTTING CABLE STRANDS.

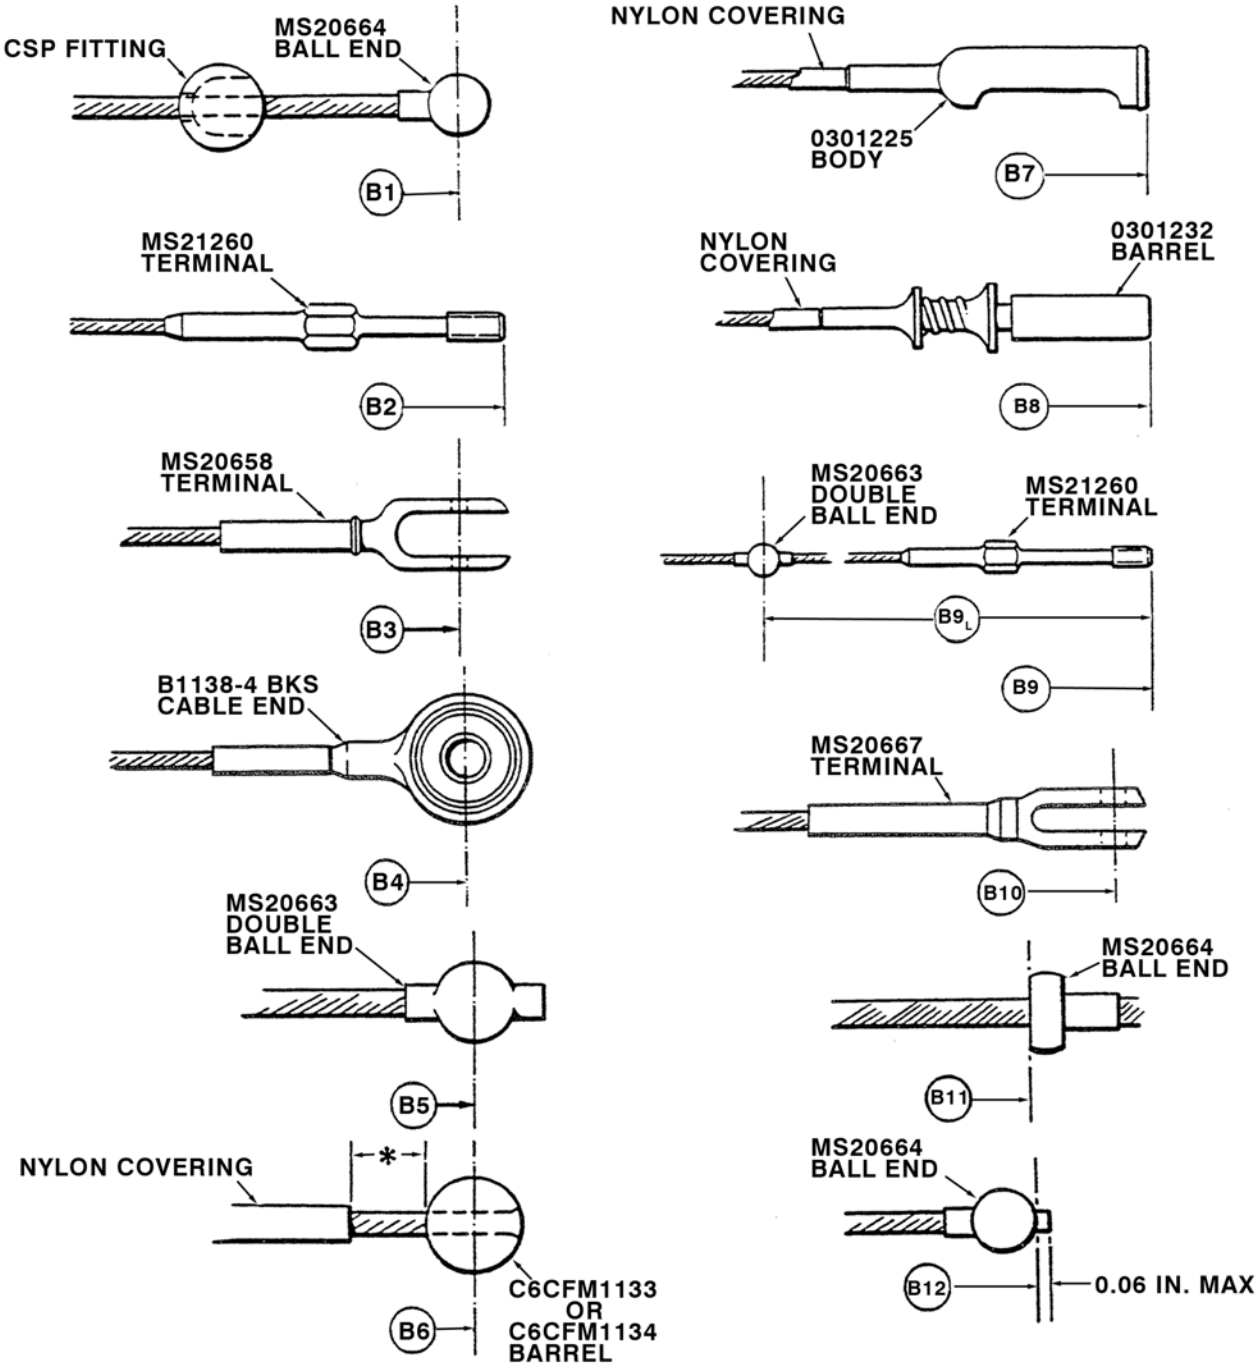

Right-hand Cable Terminations
Figure 2

This Page Intentionally Left Blank