

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Mobile Gold Standard Document

This document provides the parameters, aka "The Gold Standard", for the Ericsson LTE Network. The AT&T Gold Standard for the parameters defined in this document must be used by all nodes of this type. Any change to these parameters must be approved by the Gold Standard Change Control Governance Board.

Creation History

Network Element: eNodeB

Software Version

Application major release:	L14A
Application patch level:	CP2
OS type & major release:	
OS patch level:	
DB type & major release:	
DB patch level:	
Veritas / other major release:	
Veritas / other patch level:	

Network Element:

Software Version

Application major release:	
Application patch level:	
OS type & major release:	
OS patch level:	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

DB type & major release:	
DB patch level:	
Veritas / other major release:	
Veritas / other patch level:	





Document Revision History - RAN E

Date	Rev.
11/8/2010	0.1.0
2/9/2011	0.1.0_1
2/17/2011	0.1.0_2

3/1/2011	0.1.0_3
3/2/2011	0.1.0_4

3/17/2011	1.0
3/31/2011	1.0
V0.1.0_4	

3/7/2011
3/7/2011

V0.1.0_5

3/17/2011

V0.1.0_6

3/25/2011

V0.1.0_7

3/29/2011

V0.1.0_8

3/29/2011

V0.1.0_9

4/7/2011

V0.1.0_10

4/14/2011

V0.1.0_11

4/21/2011

V0.1.0_12

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

V0.1.0_13

V0.1.0_13

5/2/2011	V0.1.0_14	
5/27/2011	V0.1.0_15	
6/6/2011	V0.1.1.0	
6/7/2011	V.0.1.1.1	
6/9/2011		11.50

6/14/2011

6/16/2011

6/16/2011

6/17/2011

6/20/2011
6/23/2011
6/30/2011
7/21/2011

11.51

11.52

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

7/18/2011	
7/18/2011	
7/18/2011	
7/20/2011	11.52
7/20/2011	11.52

7/28/2011

11.52-1

8/2/2011

11.52-2

8/4/2011

11.53

9/1/2011

11.54

9/1/2011

11.54

9/6/2011

11.55

9/23/2011	11.56
-----------	-------

10/13/2011	11.57
------------	-------

10/27/2011	11.58
------------	-------

12/15/2011	11.59
------------	-------

1/2/2012	11.59
----------	-------

1/19/2012	11.60
-----------	-------

1/19/2012	11.60
-----------	-------

2/2/2012	11.61
----------	-------

2/2/2012	11.61
----------	-------

2/15/2012	11.62
-----------	-------

4/12/2012

11.63

4/12/2012 11.63

4/12/2012 11.63

4/18/2012	11.64
-----------	-------

5/2/2012	11.64
----------	-------

6/7/2012	12.0
----------	------

6/21/2012	12..01
-----------	--------

6/21/2012	12.01
-----------	-------

6/21/2012	12.01
-----------	-------

7/5/2012 12.02

7/5/2012 12.02

7/16/2012 12.02

8/20/2012 12.03

8/20/2012 12.03

8/29/2012 12.03

9/4/2012 12.04

9/4/2012	12.04
----------	-------

9/13/22012	12.05
------------	-------

9/17/2012	12.05
-----------	-------

9/27/2012	12.06
-----------	-------

9/27/2012	12.06
-----------	-------

10/11/2012	12.06
------------	-------

10/18/2012	12.06
------------	-------

10/29/2012	12.06
------------	-------

11/1/2012	12.06
-----------	-------

12/7/2012	12.07
-----------	-------

12/13/2012	12.07
------------	-------

12/13/2012	12.07
------------	-------

12/13/2012

12.07

1/7/2013

12.08

1/7/2013	12.08
----------	-------

1/11/2013	12.08
-----------	-------

1/22/2013	12.09
-----------	-------

2/14/2013 12.09

2/14/2013 12.09

2/14/2013 12.09

2/20/2013

12.10

2/23/2013

12.10

2/26/2013

12.10

12.10

2/27/2013

12.10

3/1/2013

12.10

3/1/2013 12.10

3/7/2013 12.11

3/7/2013 12.11

3/7/2013 12.11

3/21/2013 12.12

3/12/2013 12.12

3/12/2013 12.12

3/29/2012	12.12
-----------	-------

3/29/2013	12.12
-----------	-------

4/11/2013	12.13
-----------	-------

4/17/2013	12.13
-----------	-------

4/18/2013	12.13
-----------	-------

4/23/2013	12.13
-----------	-------

4/23/2013	12.13
-----------	-------

5/6/2013

12.14

5/6/201312.14

5/6/201312.14

5/6/201312.14

5/6/201312.14

5/6/201312.14

5/9/201312.14

6/4/2013

12.15

6/4/2013

12.15

6/6/2013

12.15

6/7/2013

12.15

6/12/2013

13.00

6/18/2013

13.01

6/18/2013

13.01

7/2/2013

13.02

7/2/2013

13.02

7/2/2013

13.02

7/2/2013

13.02

7/2/2013

13.02

7/2/2013

13.02

7/2/2013

13.02

7/2/2013

13.02

7/2/2013

13.02

7/2/2013

13.02

7/23/2013 13.03

7/24/2013 13.03

7/30/2013 13.03

8/13/2013 13.04

8/23/2013 13.04

8/23/2013 13.04

8/29/2013

13.05

8/29/2013	13.05
-----------	-------

8/29/2013	13.05
-----------	-------

8/29/2013	13.05
-----------	-------

8/29/2013	13.05
-----------	-------

8/29/2013	13.05
-----------	-------

9/10/2013	13.06
-----------	-------

9/10/2013	13.06
-----------	-------

9/12/2013	13.06
-----------	-------

9/12/2013	13.06
-----------	-------

9/20/2013	13.06
9/21/2013	13.06
9/21/2013	13.06
9/23/2013	13.06
9/23/2013	13.06
9/23/2013	13.06
9/23/2013	13.06
9/23/2013	13.06
9/30/2013	13.07
10/18/2013	13.08
12/5/2013	13.09

12/5/2013

13.09

12/5/2013

13.09

12/5/2013

13.09

12/5/2013 13.09

12/10/2013 13.09

1/22/2014

13.10

1/22/2014

13.10

1/22/2014	13.10
-----------	-------

1/29/2014	13.10
-----------	-------

1/31/2014

13.11

1/31/2014	13.11
-----------	-------

1/31/2014	13.11
-----------	-------

1/31/2014	13.11
-----------	-------

1/31/2014

1/31/2014

13.11

13.11

1/31/2014	13.11
-----------	-------

2/10/2014	13.12
-----------	-------

2/10/2014	13.12
-----------	-------

2/11/2014	13.12
-----------	-------

3/7/2014

13.13

3/7/2014

13.13

3/7/2014 13.13

3/7/2014 13.13

3/7/2014 13.13

3/7/2014 13.13

3/7/2014 13.13
3/7/2014 13.13

3/7/2014 13.13

3/7/2014 13.13

3/18/2014 13.13

3/18/2014 13.13

3/27/2014 13.14

3/27/2014 13.14

3/27/2014 13.14

3/27/2014 13.14

5/8/2014 13.15

5/8/2014 13.15

5/8/2014 13.15

5/8/2014 13.15

5/8/2014

13.15

5/8/2014

13.15

5/8/2014

13.15

5/8/2014

13.15

5/8/2014

13.15

5/8/2014

13.15

5/8/2014

13.15

5/8/2014 13.15

5/8/2014 13.15

5/16/2014 13.16

5/16/2014 13.16

5/16/2014 13.16

5/27/2014 13.17

5/27/2014 13.17

6/12/2014 13.18

6/12/2014

13.18

6/12/2014

13.18

6/12/2014 13.18

6/12/2014 13.18

6/12/2014 13.18

6/12/2014

13.18

6/24/2014	13.19
-----------	-------

6/24/2014	13.19
-----------	-------

6/24/2014	13.19
-----------	-------

6/24/2014	13.19
-----------	-------

6/24/2014	13.19
-----------	-------

6/24/2014	13.19
-----------	-------

6/24/2014

13.19

6/26/2014

13.20

6/26/2014

13.20

6/26/2014 13.20

710/2014 13.21

7/10/2014 13.21

7/10/2014 13.21

7/30/2014 13.22

8/1/2014 13.23

8/1/2014 13.23

8/1/2014 13.23

8/12/2014 13.23

8/25/2014 13.24

8/25/2014 13.24

8/25/2014 13.24

8/25/2014 13.24

8/29/2014 13.25

9/18/2014 13.25

10/9/2014 14.0

10/9/2014

14.0

10/9/2014

14.0

10/9/2014

14.0

10/9/2014

14.0

10/9/2014

14.0

10/9/201414.0

10/9/201414.0

10/9/201414.0

10/9/2014	14.0
-----------	------

10/9/2014	14.0
-----------	------

10/20/2014	14.01
------------	-------

10/20/2014 14.01

10/20/2014 14.01

10/20/2014 14.01

10/20/2014	14.01
------------	-------

10/20/2014	14.01
------------	-------

10/20/2014	14.01
------------	-------

10/20/2014	14.01
------------	-------

11/3/2014	14.02
-----------	-------

11/11/2014	14.03
------------	-------

11/11/2014	14.03
------------	-------

11/11/2014	14.03
------------	-------

11/20/2014	14.04
------------	-------

11/20/2014

14.04

12/8/2014

14.05

12/8/2014

14.05

12/8/2014

14.05

12/8/2014	14.05
-----------	-------

1/14/22015	14.06
------------	-------

1/14/22015	14.06
------------	-------

1/14/22015	14.06
------------	-------

1/29/2015	14.07
-----------	-------

1/29/2015

14.07

1/29/2015

14.07

1/29/2015

14.07

1/29/2015

14.07

1/29/2015 14.07

1/29/2015 14.07

1/29/2015	14.07
-----------	-------

2/5/2015	14.08
----------	-------

2/5/2015 14.08

2/5/2015 14.08

9/Feb/15

14.09



AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Ericsson LTE	
Revision	Description
	Initial draft. Based on Ericsson E-UTRAN L11A CPI.
	Updated Mos for struct parameters
	Remove "global fixed range" legend . Remove parameter definitions from definition tab . Moved the definition of column legends to definition tab
	Updated values of following parameters
	MOC/Parameter
	EUtranFreqRelation/qRxLevMin
	EUtranCellFDD/qRxLeMin
	UeMeasControl/bestCellReleaseActive
	EUtranCellFDD/pZeroNominalPusch
	Rcs/pZeroNominalPusch
	EUtranCellFDD/noOfPucchCqiUsers
	EUtranCellFDD/noOfPucchSrUsers
	SecurityHandling/cipheringAlgorithms
	SecurityHandling/integrityProtectionAlgorithms
	Mapped node group functional category to new list. Sorted the MOCs. Separated all structured parameters.
	updated following sctp parameter values
	MOC/Parameter
	Sctp/heartbeatInterval
	Sctp/heartbeatPathProbingInterval
	Formatted for Initial GSGB Approval. E911 Parameters not supported until Release L11B.
	Added link for Performance Counters.
	Change feature state for the following features to "ACTIVATE"
	DI64Qam
	DualAntDIPerfPkg
	GsmSessionContinuity
	IntraLTEHandover
	MultiErabsPerUser

PmInitiatedUeMeasurements
UI16Qam
VswrSupervision
WcdmaSessionContinuity

Change the enum values to proper integer in ATT GS and vendor recommended column.
changed parameter's type in Parameters Master List to proper integer or string values

Updated IpInterface.rps to FALSE
Changed the following parameters from Global to Local

- GigaBitEthernet.protectiveMode
- ManagedElementData.autoConfigurationAllowed
- ManagedElementData.minimumHdVolumeCFreespace
- ManagedElementData.ntpBurstFlagPrimary
- ManagedElementData.ntpMinPollPrimary
- ManagedElementData.ntpServiceActivePrimary
- PlugInUnit.allowedSeqRestarts
- SectorEquipmentFunction.confOutputPower

Changed the following parameters from Global to Non-Auditable

- AuxPlugInUnit.positionInformation
- Ip.defDomainName
- IpInterface.ownIpAddressActive
- IpInterface.ownIpAddressPassive
- Program.startState
- ReliableProgramUniter.normalisation
- UpgradeTrace.typeOfStorage

Added all enumeration parameters with their values
EUtranFreqRelation
EUtranCellFDD
values changed back to -120 from -140

A3offset (from 0 to 3) hysteresisA3 (from 10 to 1) timeToTriggerA3 (from 640 to 80) filterCoefficientEUtraRsrp (4 to 9)

A3offset (from 3 to 30) hysteresisA3 (from 1 to 10) since the units are in 0.1db.

Updated L11A parameters to L11B.
Added L11B parameters
Changed the HW/SW load to L11B from L11A for all MOC.

Updated all global parameter values to match with CPI.

Changed the following paramters to Local

AntennaSubunit maxTotalTilt

AntennaSubunit minTotalTilt

EUtranCellFDD partOfSectorPower

EUtranFreqRelation connectedModeMobilityPrio

GeranFreqGroupRelation connectedModeMobilityPrio

Paging defaultPagingCycle

RetCascading featureStateRetCascading

RetConfigurationMgt featureStateRetConfigurationMgt

RetSupport featureStateRetSupport

UtranFreqRelation connectedModeMobilityPrio

ChangeNotificationSIBs.changeNotificationSIB3
ChangeNotificationSIBs.changeNotificationSIB4
ChangeNotificationSIBs.changeNotificationSIB5
ChangeNotificationSIBs.changeNotificationSIB6
ChangeNotificationSIBs.changeNotificationSIB7
ChangeNotificationSIBs.changeNotificationSIB8
FrameStartOffset.subFrameOffset
MappingInfoSIBs.mappingInfoSIB3
MappingInfoSIBs.mappingInfoSIB4
MappingInfoSIBs.mappingInfoSIB5
MappingInfoSIBs.mappingInfoSIB6
MappingInfoSIBs.mappingInfoSIB7
MappingInfoSIBs.mappingInfoSIB8
PlmnIdentity.mcc
PlmnIdentity.mnc
PlmnIdentity.mncLength
SIB3.nCellChangeHigh
SIB3.nCellChangeMedium
SIB3.qHyst
SIB3.qHystSfHigh
SIB3.qHystSfMedium
SIB3.sIntraSearch
SIB3.sNonIntraSearch
SIB3.tEvaluation
SIB3.threshServingLow
SIB3.tHystNormal
SIB6.tReselectionUtra
SIB6.tReselectionUtraSfHigh
SIB6.tReselectionUtraSfMedium
SIB7.tReselectionGeran
SIB7.tReselectionGeranSfHigh
SIB7.tReselectionGeranSfMedium
SIB8.searchWindowSizeCdma
SIB8.tReselectionCdmaHrpd
SIB8.tReselectionCdmaHrpdSfHigh
SIB8.tReselectionCdmaHrpdSfMedium

pZeroNominalPusch AT&T recommended value changed to -103 from -96

EUtranCellFDD systemInformationBlock3.nCellChangeHigh
EUtranCellFDD systemInformationBlock3.nCellChangeMedium
EUtranCellFDD systemInformationBlock3.qHyst
EUtranCellFDD systemInformationBlock3.qHystSfHigh
EUtranCellFDD systemInformationBlock3.qHystSfMedium
EUtranCellFDD systemInformationBlock3.sIntraSearch
EUtranCellFDD systemInformationBlock3.tEvaluation
EUtranCellFDD systemInformationBlock3.tHystNormal
EUtranCellFDD systemInformationBlock6.tReselectionUtra
EUtranCellFDD systemInformationBlock6.tReselectionUtraSfHigh
EUtranCellFDD systemInformationBlock6.tReselectionUtraSfMedium
EUtranCellFDD systemInformationBlock7.tReselectionGeran
EUtranCellFDD systemInformationBlock7.tReselectionGeranSfHigh
EUtranCellFDD systemInformationBlock7.tReselectionGeranSfMedium
EUtranCellFDD systemInformationBlock8.searchWindowSizeCdma
EUtranCellFDD systemInformationBlock8.tReselectionCdmaHrpd
EUtranCellFDD systemInformationBlock8.tReselectionCdmaHrpdSfHigh
EUtranCellFDD systemInformationBlock8.tReselectionCdmaHrpdSfMedium
GeranFreqGroupRelation qRxLevMin
GigaBitEthernet protectiveMode
Ip dscp
Ip nodeInterfaceName
IpInterface vLan
ManagedElementData daylightSavingTime
ManagedElementData minimumHdVolumeCFreespace
ManagedElementData ntpMinPollPrimary
ManagedElementData ntpServiceActivePrimary
ManagedElementData ntpServiceActiveSecondary
Paging defaultPagingCycle
Program heapSize
RbsConfiguration configurationReport
RbsConfiguration ossCorbaNameServiceAddress
RbsConfiguration rbsConfigLevel
ReportConfigEUtraIntraFreqPm measSelectionEUtraPm
RfPort vswrSupervisionActive
SectorEquipmentFunction confOutputPower

Added new sheet "Parameter for Testing", values in this sheet for testing purpose

EUtranCellTDD ChangeNotificationSIBs.changeNotificationSIB1
EUtranCellTDD ChangeNotificationSIBs.changeNotificationSIB2
EUtranCellTDD ChangeNotificationSIBs.changeNotificationSIB3
EUtranCellTDD ChangeNotificationSIBs.changeNotificationSIB4
EUtranCellTDD ChangeNotificationSIBs.changeNotificationSIB5
EUtranCellTDD ChangeNotificationSIBs.changeNotificationSIB6
EUtranCellTDD ChangeNotificationSIBs.changeNotificationSIB7
EUtranCellTDD ChangeNotificationSIBs.changeNotificationSIB8
EUtranCellTDD EutranCellArea.posCellBearing
EUtranCellTDD EutranCellArea.posCellOpeningAngle
EUtranCellTDD EutranCellArea.posCellRadius
EUtranCellTDD EutranCellCorner.cornerLatitude
EUtranCellTDD EutranCellCorner.cornerLongitude
EUtranCellTDD FrameStartOffsetTDD.subFrameOffset
EUtranCellTDD FrameStartOffsetTDD.symbolOffset
EUtranCellTDD FrameStartOffsetTDD.timeOffset
EUtranCellTDD MappingInfoSIBs.mappingInfoSIB3
EUtranCellTDD MappingInfoSIBs.mappingInfoSIB4
EUtranCellTDD MappingInfoSIBs.mappingInfoSIB5
EUtranCellTDD MappingInfoSIBs.mappingInfoSIB6
EUtranCellTDD MappingInfoSIBs.mappingInfoSIB7
EUtranCellTDD MappingInfoSIBs.mappingInfoSIB8
EUtranCellTDD PeriodicitySI.siPeriodicitySI1
EUtranCellTDD PeriodicitySI.siPeriodicitySI2
EUtranCellTDD PeriodicitySI.siPeriodicitySI3
EUtranCellTDD PeriodicitySI.siPeriodicitySI4
EUtranCellTDD PeriodicitySI.siPeriodicitySI5
EUtranCellTDD PeriodicitySI.siPeriodicitySI6
EUtranCellTDD PeriodicitySI.siPeriodicitySI7

EUtranCellFDD initCdma2000SysTimeType
EUtranCellFDD systemInformationBlock8.searchWindowSizeCdma
EUtranCellFDD systemInformationBlock8.tReselectionCdmaHrpd
EUtranCellFDD systemInformationBlock8.tReselectionCdmaHrpdSfHigh
EUtranCellFDD systemInformationBlock8.tReselectionCdmaHrpdSfMedium
UeMeasControl maxMeasCdma2000eHrpd

EUtranCellFDD nrOfSymbolsPdcch 2 - Value changed from 1 to 2
Some parameters permission changed from Non-Auditable to Auditable
Changes from different reviews
Ready for AT&T GS approval
change timeForAutoCreatedCV to global.

Changes for eNodeB L11B UM5 (R15AC) for the Phase 1 Launch. This is the initial production version of the Hardware and Software. This will be considered the second GSGB Approval and the document will be posted to the GS Document Libray. All future changes will be processed through GSGB Change Control.

- Removed anrCreated - It has been deprecated
- Removed all duplicate parameters
- Added comments for primaryPlmnReserved

- Following parameters changed to Non Auditable.

Sctp numberOfAssociations

UtranFrequency arfcnValueUtranDI

- Following parameters changed to Local

UtranFreqRelation connectedModeMobilityPrio initial value is 3

UtranFreqRelation csFallbackPrio initial value is 3

UtranFreqRelation csFallbackPrioEC initial value is 3

UtranFreqRelation cellReselectionPriority initial value is 3

- Added following qci dscp mapping in the comment section for dscp parameter of QciProfilePredefined.

qci = 0 dscp 0

qci = 1 dscp 46

qci = 2 dscp 34

qci = 3 dscp 40

qci = 4 dscp 26

qci = 5 dscp 32

qci = 6 dscp 28

qci = 7 dscp 18

qci = 8 dscp 20

qci = 9 dscp 0

Following parameters permission changed to Not Auditable.

RetCascading featureStateRetCascading

RetConfigurationMgt featureStateRetConfigurationMgt

RetSupport featureStateRetSupport

DI64Qam licenseStateDI64Qam - Value changed from 0 to 1

ConfigurationVersion rollbackOn - value changed from True to False
Ip workingMode - Value changed from string to value

Minor changes for following parameter
SectorEquipmentFunction confOutputPower

Following parameters Deprecated
UeMeasControl badCoverageMeasSelection

Following parameters Permission changed from local to Global
ReportConfigEUtraBestCell a3offset
ReportConfigEUtraBestCell hysteresisA3
ReportConfigEUtraBestCell timeToTriggerA3
QciProfilePredefined dscp - Permission changed to Global and values provided for all types.
Phase I Launch Drop 2.5. Newest Changes 6/14 - 6/20 above. Presenting to 6/23 GSGB.
Includes new columns for CNPT Audit Tool.
Following parameters permission changed to Global from Local.

AntennaSubunit maxTotalTilt
AntennaSubunit minTotalTilt
BatteryBackup testStartDay
BatteryBackup testStartMonths
Cabinet climateSystem
DIBasebandCapacity licDIBbPercentileConf
EUtranCellFDD ailgActive
EUtranCellFDD partOfSectorPower
EUtranCellFDD systemInformationBlock3.nCellChangeHigh
EUtranCellFDD systemInformationBlock3.nCellChangeMedium
EUtranCellFDD systemInformationBlock3.qHystSfHigh
EUtranCellFDD systemInformationBlock3.qHystSfMedium
EUtranCellFDD systemInformationBlock3.tEvaluation
EUtranCellFDD systemInformationBlock3.tHystNormal
EUtranCellFDD systemInformationBlock6.tReselectionUtraSfHigh
EUtranCellFDD systemInformationBlock6.tReselectionUtraSfMedium
EUtranCellFDD systemInformationBlock7.tReselectionGeranSfHigh
EUtranCellFDD systemInformationBlock7.tReselectionGeranSfMedium
EUtranCellRelation cellIndividualOffsetEUtran
EUtranCellRelation qOffsetCellEUtran

EUtranFreqRelation connectedModeMobilityPrio
EUtranFreqRelation tReselectionEutraSfHigh
EUtranFreqRelation tReselectionEutraSfMedium
IpInterface=1 trafficType
IpInterface=2 trafficType
IpInterface vLan
ManagedElementData daylightSavingTime
ManagedElementData minimumHdVolumeCFreespace
ManagedElementData ntpBurstFlagPrimary
ManagedElementData ntpMinPollPrimary
ManagedElementData ntpServiceActivePrimary
PlugInUnit allowedSeqRestarts
ReportConfigA1Prim a1ThresholdRsrqPrim
ReportConfigA1Prim hysteresisA1Prim
ReportConfigA1Prim timeToTriggerA1Prim
ReportConfigA1Sec a1ThresholdRsrpSec
ReportConfigA1Sec a1ThresholdRsrqSec
ReportConfigA1Sec hysteresisA1Sec
ReportConfigA1Sec timeToTriggerA1Sec
ReportConfigA5 a5Threshold1Rsrp
ReportConfigA5 a5Threshold1Rsrq
ReportConfigA5 a5Threshold2Rsrp
ReportConfigA5 a5Threshold2Rsrq
ReportConfigA5 hysteresisA5
ReportConfigA5 timeToTriggerA5
ReportConfigEUtraBadCovPrim a2ThresholdRsrpPrim
ReportConfigEUtraBadCovPrim hysteresisA2Prim
ReportConfigEUtraBadCovPrim timeToTriggerA2Prim
ReportConfigEUtraBadCovSec a2ThresholdRsrpSec
ReportConfigEUtraBadCovSec hysteresisA2Sec
ReportConfigEUtraBadCovSec timeToTriggerA2Sec
SectorEquipmentFunction confOutputPower
SectorEquipmentFunction confOutputPower
UpgradeTrace outputMode
UtranFreqRelation cellReselectionPriority
UtranFreqRelation cellReselectionPriority
AntennaNearUnit iuantDeviceType
BatteryBackup sharedBattery
ManagedElementData autoConfigurationAllowed

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

PlugInUnit piuGroupNumber

Ranges for the following parameters are changed.

EthernetLink metric

EUtranCellFDD cellRange

GeranFreqGroupRelation csFallbackPrioEC

IpInterface=1 trafficType

ReportConfigA1Prim a1ThresholdRsrpPrim

ReportConfigEUtraBadCovPrim a2ThresholdRsrqPrim

ReportConfigEUtraBadCovSec a2ThresholdRsrqSec

ReportConfigEUtraIntraFreqPm a2ThresholdRsrqPm

UtranFreqRelation connectedModeMobilityPrio

UtranFreqRelation csFallbackPrio

UtranFreqRelation csFallbackPrioEC

This has been deprecated

EUtranCellFDD partOfRadioPower

Following parameters permission changed from local to Global and used the Ericsson default value.

ReportConfigEUtraIntraFreqPm a1ThresholdRsrpPm

ReportConfigEUtraIntraFreqPm a1ThresholdRsrqPm

ReportConfigEUtraIntraFreqPm a2ThresholdRsrpPm

ReportConfigEUtraIntraFreqPm a2ThresholdRsrqPm

ReportConfigEUtraIntraFreqPm a3OffsetPm

ReportConfigEUtraIntraFreqPm a3ReportOnLeavePm

ReportConfigEUtraIntraFreqPm a4ThresholdRsrpPm

ReportConfigEUtraIntraFreqPm a4ThresholdRsrqPm

ReportConfigEUtraIntraFreqPm a5ThresholdRsrpPm1

ReportConfigEUtraIntraFreqPm a5ThresholdRsrpPm2

ReportConfigEUtraIntraFreqPm a5ThresholdRsrqPm1

ReportConfigEUtraIntraFreqPm a5ThresholdRsrqPm2

ReportConfigEUtraIntraFreqPm hysteresisPm

ReportConfigEUtraIntraFreqPm maxReportCellsPm

ReportConfigEUtraIntraFreqPm measSelectionEUtraPm

ReportConfigEUtraIntraFreqPm reportAmountPm

ReportConfigEUtraIntraFreqPm reportIntervalPm

ReportConfigEUtraIntraFreqPm reportQuantityPm

ReportConfigEUtraIntraFreqPm timeToTriggerPm

UtranFreqRelation cellReselectionPriority Make this parameter to one for all 6(UMTS Femto),3(UMTS 850),2 (UMTS 1900)
Corrected ATTGS value of EUTranCellFDD ailgActive from 0 to FALSE
Corrected ATTGS value of EUTranCellFDD acBarringInfo.acBarringSpecialAcForMoData from false false false false false to false:false:false:false:false
Corrected ATTGS value of EUTranCellFDD acBarringInfo.acBarringSpecialAcForMoSignalling from from false false false false false to false:false:false:false:false
Change ATTGS value of Manged Element Data minimumHdVolumeCFreespace to 200.
Change ATTGS value of AirlLoadProfile OcngPrbSerie.usedSubFrameNoProfile to false:false:false:false:false:false:false:false:false:false

UeMeasControl ueMeasurementsActive TRUE - Value changed from false to true

Added different values for branches and RET
RfPort=R vswrSupervisionActive FALSE
RfPort=A vswrSupervisionActive TRUE
RfPort=B vswrSupervisionActive TRUE

GeranFreqGroupRelation csFallbackPrio - Change permission to local and set the initial value at 0
GeranFreqGroupRelation csFallbackPrioEC - Change the initial value of to 0.

Removed following deprecated parameters
ExternalENodeBFunction ctrlMode
ExternalEUTranCellFDD ctrlMode
TermPointToENB ctrlMode

Includes all 11.52 -1 and 11.52-2 Changes listed above.

Change ATTGS value of EcsCsfb featureStateEcsCsfb from 1 to 0. Identify as E911 parameter.
Change ATTGS value of ReportConfigEUTranBadCovPrim from -110 to -110, -100. Set parameter to "Local" and add Suffix 1 -110 (IRAT scenario), -100(IFHO scenario)
Change ATTGS value of RfPort vswrSupervisionSensitivity from 1 to 70.

Eliminate duplicates for EUTranFreqRelation cellReselectionPriority and SectorEquipmentFunction confOutputPower. Clean-up these parameters to include both suffixs.

Ericsson revisions and document corrections 11.53-3. Changes in this version:
Add ATTGS parameter EnodeBFunction oaMLinkSuperVision value "true"
Add ATTGS parameter GigaBitEthernet masterMode value "true"
Correct ATTGS parameter ExternalUtranCellFDD CellIdentityUtra.cld - Parameter name changed to CellIdentity.cld.
Correct ATTGS parameter ExternalUtranCellFDD CellIdentityUtra.rncld - Parameter name changed to CellIdentity.rncld.

Add two system constants to activate multiple SEs per TTI in scheduler.

SysConst dlMaxNrOfSePerTtiAndCell 2

SysConst ulMaxNrOfSePerTtiAndCell 4

Add suffix 1 to indicate depolyment scenarios.

ReportConfigEutraBadCovPrim a2ThresholdRsrqSec change the suffix 1 to "-195 (IRAT scenario), -160..-80 (IFHO scenario)"

Activate Inter-frequency ANR feature:

AnrFunctionEUTran anrInterFreqState is set to 1.

Activate DL data forwarding feature and set corresponding parameters:

IntraLTEHODataFwd featureStateIntraLTEHODataFwd set to 1

ENodeBFunction tHODataFwdReordering set to 50

QciProfilePredefined dataFwdPerQciEnabled set to TRUE

Set IRAT and IFHO measurement parameters

ReportConfigB2Utra b2Threshold1Rsrp set to -110 dBm

ReportConfigB2Geran b2Threshold1Rsrp set to -110 dBm

ReportConfigA5 a5Threshold1Rsrp set to -95 dBm

ReportConfigA5 a5Threshold2Rsrp set to -95 dBm

ReportConfigA1Prim a1ThresholdRsrpPrim set to local with two values (-103, -93). The initial value is -103.

Update csFallback priority for LTE to UMTS. Added 0 for No UMTS scenario.

UtranFreqRelation csFallbackPrioEC 3,2,0 3

UtranFreqRelation csFallbackPrio 3,2,0 3

Clean up two parameters to Ericsson default. They are not used based on current configuration.

ReportConfigEutraBadCovPrim a2ThresholdRsrqPrim change the value from -195..-50 to Ericsson default = 195 and set permission as global ;

ReportConfigEutraBadCovPrim a2ThresholdRsrqSec a2ThresholdRsrqSec change the value from -110 to -140

Various Changes

1. ThreshXHigh: change from 10 dB to 14 dB. (Reselect to 3G Femto)

2. AntennaNearUnit iuantDeviceType change value from 1 -> 1,2,17 and change Permission to Local. "Parameter iuantDevice type is changed due to occurrence of antennas in the field with type 17, since we have antennas with different type it is going to be changed to Local."

3. Update the MOC name for dlMaxNrOfSePerTtiAndCell and ulMaxNrOfSePerTtiAndCell to SystemConstants. This is a cleanup.

4. Remove ReportAmountA3 from ReportConfigEutraBestCell since it is deprecated. This is a cleanup.

1. Change the value of the EUTranCellFDD::ulInterferenceManagementActive parameter from FALSE to TRUE.

2. EUTranFreqRelation.allowedMeasBandwidth value changed: 6-> 50,25;Initial value set to 50; Permission changed to Local; Suffix added: 50 (10 MHz channel bandwidth); 25 (5MHz channel bandwidth)

The following parameter value changes are being made to reduce the number of audit mismatches in the network in preparation for MNT assuming eNb configuration. No formal results are available to justify the changes. Without these changes, a national remediation to be completed by Ericsson before EOY would erase any gains achieved through these adjustments.

Updated EUTranCellFDD:systemInformationBlock3.sNonIntraSearch ATTGS value from Global 10 to Local 4..10 with Initial Value of 10.

Updated EUTranCellFDD:systemInformationBlock3.threshServingLow ATTGS value from Global 10 to Local 4..10 with Initial Value of 10.

Updated EUTranCellRelation:isRemoveAllowed ATTGS value from FALSE to TRUE

Updated ExternalEUTranCellFDD:isRemoveAllowed ATTGS value from FALSE to TRUE

Updated ReportConfigEutraBadCovPrim:a2ThresholdRsrpPrim ATTGS value from Global -110, -100 to Local -110..-116 with Initial Value of -110.

Updated ReportConfigEutraBestCell:hysteresisA3 ATTGS value from Global 10 to Local 10,30 with Initial Value of 10.

Updated ReportConfigEutraBestCell:timeToTriggerA3 ATTGS value from Global 80 to Local 80,320,512 with Initial Value of 320.

Updated ReportConfigEutraBestCellAnr:hysteresisA3 ATTGS value from Global 10 to Local 10,30 with Initial Value of 10.

Updated ReportConfigEutraBestCellAnr:timeToTriggerA3 ATTGS value from Global 80 to Local 80,320,512 with Initial Value of 320.

Corrected ReportConfigEutraIntraFreqPm:triggerQuantityPm ATTGS value from RSRP to 0

Updated UtranFreqRelation:connectedModeMobilityPrio ATTGS value from 3,2 to 3,2,1,0

Updated UtranFreqRelation:csFallbackPrio ATTGS value from 3,2,0 to 3,2,1,0

Updated UtranFreqRelation:csFallbackPrioEC ATTGS value from 3,2,0 to 3,2,1,0

Corrected Cdma2000SessionContinuity:licenseStateCdma2000SessionContinuity ATTGS value from 1 to 0.

Corrected ManagedElementData:ntpServiceActiveSecondary ATTGS value from false to true.

Updated Software Version on Cover to L11B ICP4 (R20T).

Gold Tab Clean-up.

Change ATTGS value of Sctp numberOfAssociations from "blank" to "320" and Permissions from "Not Auditable" to "Global."

Correct ATTGS value for EcsCsfb:serviceStateEcsCsfb from "inoperable" to "0" and change NGFC to "Positioning/911".

Correct NGFC value for EcsCsfb:featureStateEcsCsfb from "Software" to "Positioning/911".

Correct NGFC value for EcsCsfb:licenseStateEcsCsfb from "Software" to "Positioning/911".

FGA W11B- FGA01 - Automated Neighbor Relations (ANR) adjustment

removeNrelTime [eNB,7,days,Global] is **changed from 1000 to 7**. The parameter defines the length of time that neighbor cells without any neighbor relations remain in the RBS. With new setting the ANR neighbor removal function is enabled and set to 7 days.

The objective is to reduce number of neighbors which are defined in eNobeB and not used by the system for some time.

The result summary:

⇒ reduce (~20%) and stabilizing neighbor counts

⇒ reduce the number of sectors with full neighbor lists

Study Conducted in LA market

Correct ATTGS Permissions Value of ReportConfigEutraBestCell hysteresisA3 from Global to Local because there are two values.

Correct ATTGS Permissions Value of ReportConfigEutraBestCellAnr hysteresisA3 from Global to Local because there are two values.

Added Tab for the Ericsson LTE Counter Activation Standard version 11.50 to the Ericsson LTE Gold Standard.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

FGA L11B-002 RACH Preamble Change. The objective is to prevent unnecessary processing when the UE sends out a preamble and multiple eNBs within the range receive/process the request. Out of total 838 available Zadoff-Chu root sequences, only 10 are used at this point. The same 10 root sequences are used in every cell, which generate the same 64 preambles in every cell which requires proper RACH planning. The parameter defines the first root sequence number for Random Access Channel (RACH) preamble generation. RACH root sequence is broadcast as a part of system information distribution and used for preamble detection.

The logic used to determine the settings for rachRootSequence:

Use the SSS = floor (PCI/3)

If $SSS * 10 < 838$

Then rachRootSequence = $SSS * 10$;

Else rachRootSequence = $SSS * 10 - 840$

Change ATTGS for EUTRANCellFDD rachRootSequence value from 384 to 0..837 and Permissions from Global to Local.

The result summary:

- ⇒ Significant improvement of RACH Success Rate
- ⇒ Paging performance improvement
- ⇒ Intra LTE Handover performance and retainability improvement

The parameter defines the threshold that the signal strength of the serving cell must be below for cell reselection towards a lower priority Inter-Frequency or Inter-RAT frequency.

ReportConfigEutraBadCovPrim. a2ThresholdRsrpPrim [eNB, , -116 ,dBm, Global] is changed from [-110..-116] to -116dB and the permission is changed from Local to Global. The parameter defines threshold value for eventA2.

b) intrerLTE_10 Cell Designations

EUTRANCellFDD. systemInformationBlock3.sNonIntraSearch [eNB, , 10 ,dB, Global] is changed from [4..10] to 10dB and the permission is changed from Local to Global. The parameter defines the threshold (in dB) for EUTRAN inter-frequency and inter-RAT measurements.

EUTRANCellFDD. systemInformationBlock3. threshServingLow [eNB, , 10 ,dB, Global] is changed from [4..10] to 10dB and the permission is changed from Local to Global. The parameter defines the threshold that the signal strength of the serving cell must be below for cell reselection towards a lower priority Inter-Frequency or Inter-RAT frequency.

ReportConfigEutraBadCovPrim. a2ThresholdRsrpPrim [eNB, , -112 ,dBm, Global] is changed from [-110..-116] to -112dB and the permission is changed from Local to Global. The parameter defines threshold value for eventA2.

c) intrerLTE_5 Cell Designations

EUTRANCellFDD. systemInformationBlock3.sNonIntraSearch [eNB, , 12 ,dB, Global] is changed from [4..10] to 12dB and the permission is changed from Local to Global. The parameter defines the threshold (in dB) for EUTRAN inter-frequency and inter-RAT measurements.

EUTRANCellFDD. systemInformationBlock3. threshServingLow [eNB, , 12 ,dB, Global] is changed from [4..10] to 12dB and the permission is changed from Local to Global. The parameter defines the threshold that the signal strength of the serving cell must be below for cell reselection towards a lower priority Inter-Frequency or Inter-RAT frequency.

ReportConfigEutraBadCovPrim. a2ThresholdRsrpPrim [eNB, , -110 ,dBm, Global] is changed from [-110..-116] to -110dB and the permission is changed from Local to Global. The parameter defines threshold value for eventA2.

UMTS parameters *These have been updated in the RAN 3G Ericsson GS Document.**

EUTRANFreqRelation. qRxLevMin [eNB, , -122 ,dBm, Global] is changed from -120 dBm to -122dBm. The parameter defines the minimum required Rx level, expressed in RSRP [dBm], for cell reselection from the Utran serving cell to an E-UTRAN cell using the frequency channel referred to with eutranFrequencyRef.

EUTRANFreqRelation. threshHigh [eNB, , 12..16..18 ,dB, Local] is changed from 16dB to 12..16..18 dB and the permission is changed from Global to Local. The parameter defines Srxlev based threshold for a UE to perform absolute priority based cell reselection to an E-UTRAN cell that has a higher priority than the Utran serving cell.

The result summary:

- Significant reduction in % IRAT (~40%)
- Degradation in retainability up to 0.08%
- Overall reduction in Accessibility by ~0.1%
- ~3.5% degradation in the DL cell level throughput

Corrected IpSec:featureState ATTGS value from null to 0 and Permission from Not Auditable to Global.

Corrected IpSec:licenseState ATTGS value from null to 1 and Permission from Not Auditable to Global.

Corrected ATTGS parameter ReportConfigEUTranBadCovPrim to add Initial Value -116.
Corrected ATTGS parameter EUTranCellFDD qRxLevMin to add Initial Value -122.
Corrected ATTGS parameter EUTranFreqRelation qRxLevMin to add Initial Value -122.
Corrected ATTGS parameter EUTranCellFDD systeminformationBlock3.sNonIntraSearch to add Initial Value 6.
Corrected ATTGS parameter EUTranCellFDD systeminformationBlock3.sNonIntraSearch to add Initial Value 6.
Add missing ATTGS parameter ReportConfigEUTranBadCovPrim a2ThresholdRsrpPrim with Value -112.
Add missing ATTGS parameter EUTranCellFDD systeminformationBlock3.sNonIntraSearch with value 10.
Add missing ATTGS parameter EUTranCellFDD systeminformationBlock3.threshSrvngLow with Value 10.

Added AT&T Proprietary Restricted Headers and Footers to the document.

PMATT 106000 Ericsson LTE L12a project. Includes all Doc Rev items 12.0 - 12.22 above. Introduce Ericsson LTE L12a RAN (eNB) SW via Lab/Field FFA and deployment. Critical features to provide major improvement for the ATT LTE network such as capacity enhancement, IRAT, SON (e.g. IRAT ANR), scheduler (Proportional fair and UL Frequency Selective Scheduling), Voice support (CSFB, IMS), ARP based admission control, and enhanced observability, etc.

LTE L11B FGA04 – eUTRAN PresenceAntennaPort1 Change. The objective is to improve Handover Performance by making more accurate signal strength measurements. The parameter PresenceAntennaPort1 is used to indicate whether all the neighbouring cells use Antenna Port 1 and R1 in addition to R0 to determine RSRP value. When set to TRUE, the UE may assume that at least two cell-specific antenna ports are used in all neighbouring cells. In short setting it to true assists the device in making accurate signal strength measurements.

Change ATTGS parameter EUTranFreqRelationPresenceAntennaPort1 from false to true.

The result summary:

- Intra LTE Handover performance improvement

- Improvement in RACH Success Rate

- In cases when cells became SIMO unexpectedly, simulated test showed no degradation in HO when PresenceAntennaPort1=True is set.

FFA changes to L12A:

Change ATTGS parameter ReportConfigEUTranIntraFreqPm reportIntervalPM from 2 to 5.

Change ATTGS parameter UIPrbCapacity licenseCapacityUIPrbCapacity to 50,150 and from Global to Local.

Change ATTGS parameter EUTRANCellFDD pdccchCfiMode to add 0 CFI_STATIC_BY_BW, 1 CFI_STATIC_1,2 CFI_STATIC_2,3 CFI_STATIC_3,4 CFI_AUTO_MAXIMUM_2 and 5 CFI_AUTO_MAXIMUM_3 to Range.

Change ATTGS parameter UIFss FeatureStateUiFss from deactivated to activated.

Change ATTGS parameter RbsEventStreamer featureStateEventStreaming from 0 to 1.

Change ATTGS parameter BatteryBackup sharedBattery from Global to Not Auditable.

Change ATTGS parameter BatteryBackup testMode from Global to Not Auditable.

Change ATTGS parameter QciProfilePredefined dMinBitRate to GS Value 0 with Permissions Global.

Change ATTGS parameter DBSAndSabe licenseStateDBSAndSabe from 0 (disabled) to 1 (enabled).

Change ATTGS parameter Equipment lastHwPiChange to Permissions Not Auditable.

Change ATTGS parameter IpAccessSctp portDistribution to GS Value to true.

Change ATTGS parameter UsrPrcBasedKpi licenseStateUsrPrcBasedKpi from 0 (disabled) to 1 (enabled).

PMATT Project 121213 Ericsson 850/1900 RRH (RRUS11)

Change ATTGS parameter EUTranFreqRelation cellReselectionPriority to remove Suffix 5(LTE 700), 5 (LTE_AWS).

Change ATTGS parameter EUTranCellFDD pZeroNominalPucch to -117,-120 and from Global to Local to accommodate L11B and L12A values until L12A Deployment is complete.

Change ATTGS parameter EUTranCellFDD pZeroNominalPusch to -103,-106 and from Global to Local to accommodate L11B and L12A values until L12A Deployment is complete.

Update Counter Activation standard remove 4 counters that are restricted:

EUTranCellFDD:pmErabRelAbnormalEnbActPe

EUTranCellFDD:pmErabRelAbnormalEnbPe

EUTranCellFDD:pmUeCtxtRelAbnormalEnbActPe

EUTranCellFDD:pmUeCtxtRelAbnormalEnbPe

Clean-up of incorrect format for L12A parameter changes.GS Values.

Replace Counter Activation STD L12A with newly updated Tab submitted by Mike Noah.

Change ATTGS parameter TrafficScheduler dscpMap from

0,5;1,5;2,5;3,5;4,5;5,5;6,5;7,5;8,3;9,5;10,6;11,5;12,4;13,5;14,4;15,5;16,3;17,5;18,4;19,5;20,5;21,5;22,6;23,6;24,2;25,5;26,3;27,5;28,3;29,5;30,5;31,5;32,1;33,5;34,2;35,5;
36,3;37,5;38,2;39,5;40,1;41,5;42,5;43,5;44,5;45,5;46,2;47,5;48,2;49,5;50,5;51,1;52,5;53,5;54,1;55,5;56,5;57,5;58,5;59,5;60,5;61,5;62,5;63,5; , to
0,5;1,5;2,5;3,5;4,5;5,5;6,5;7,5;8,3;9,5;10,6;11,5;12,4;13,5;14,4;15,5;16,3;17,5;18,4;19,5;20,5;21,5;22,6;23,6;24,2;25,5;26,3;27,5;28,3;29,5;30,5;31,5;32,1;33,5;34,2;35,5;
36,3;37,5;38,2;39,5;40,1;41,5;42,5;43,5;44,5;45,5;46,2;47,5;48,2;49,5;50,5;51,1;52,5;53,5;54,1;55,5;56,5;57,5;58,5;59,5;60,5;61,5;62,5;63,5; ,
0,6;1,6;2,6;3,6;4,6;5,6;6,6;7,6;8,6;9,6;10,6;11,6;12,6;13,6;14,6;15,6;16,6;17,6;18,4;19,6;20,5;21,6;22,6;23,6;24,6;25,6;26,6;27,6;28,6;29,6;30,6;31,6;32,1;33,6;34,6;35,6;
36,3;37,6;38,6;39,6;40,1;41,6;42,6;43,6;44,6;45,6;46,2;47,6;48,6;49,6;50,6;51,6;52,6;53,6;54,6;55,6;56,6;57,6;58,6;59,6;60,6;61,6;62,6;63,6; and from Global to Local.

LTE L11B FGA05 – Max RLC Retransmission Change. The objective is to improve Retainability and Accessibility by increasing maximum number of attempts before RLC Failure is occurred for Data Radio Bearer (DRB) and Signaling Radio Bearer (SRB).

Change ATTGS parameter RadioBearerTable=default,SignalingRadioBearer=1 dlMaxRetxThreshold from 8 to 32.

Change ATTGS parameter RadioBearerTable=default,SignalingRadioBearer=1 ulMaxRetxThreshold from 8 to 32.

Change ATTGS parameter RadioBearerTable=default,DataRadioBearer=1 dlMaxRetxThreshold from 8 to 16.

Change ATTGS parameter RadioBearerTable=default,DataRadioBearer=1 dlMaxRetxThreshold from 8 to 16.

LTE L12A FGA06 is dealing with CDRX parameter optimization to improve the UE battery life.

Change ATTGS SystemConstant RadioBearerTable=default,SignalingRadioBearer=1 tPollRetransmitDI from 45 to 80.

Change ATTGS SystemConstant RadioBearerTable=default,SignalingRadioBearer=1 tPollRetransmitUI from 45 to 80.

Change ATTGS SystemConstant RadioBearerTable= default,DataRadioBearer=1 tPollRetransmitDI from 50 to 80.

Change ATTGS SystemConstant RadioBearerTable= default,DataRadioBearer=1 tPollRetransmitUI from 50 to 80

Change ATTGS parameter SystemConstant 234 (onDurationTimer) from 2 to 10.

Change ATTGS parameter SystemConstant235 (drxInactivityTimer) from 100 to 200.

Change ATTGS parameter SystemConstant237 (longDrxCycle) from 40 to 320.

Change ATTGS Parameter SystemConstant238 (shortDrxCycle) to 80.

Change ATTGS Parameter SystemConstant239 (drxShortCycleTime)r to 1

PMATT 118863 Ericsson L12B. Enhancements include RRC connection re-establishment - improve RET KPI by 0.2% - 0.5%; PCI conflict reporting; ANR improvement; enhanced cell ID in trace; basic functionalities provide system and capacity improvements; several features that are available and tested but remain disabled at initial rollout.

Change ATTGS Parameter ReportConfigEutraIntraFreqPm reportIntervalPm AT&T Defaultfrom 2 to 7 (MIN_1).

Change ATTGS Parameter EUTranCellFDD cellSubscriptionCapacity AT&T Default from 72 to 1000.

Change ATTGS Parameter EUTranCellFDD noOfPucchCqiUsers from 108,120,160,240 to 320 with Suffix2 RX FDD 10 Mhz.

Change ATTGS Parameter EUTranCellFDD noOfPucchCqiUsers from 108,120,160,240 to 640 with Suffix2 RX FDD 5 Mhz.

Change ATTGS Parameter EUTranCellFDD noOfPucchSrUsers from 108,120,140,230 to 500 with Suffix2 RX FDD 5 Mhz.

Change ATTGS Parameter EUTranCellFDD noOfPucchSrUsers from 108,120,140,230 to 600 with Suffix2 RX FDD 10 Mhz.

Change ATTGS Parameter ENodeBFunction rrcConnReestActive from false to true.

Add 187 new new L12B parameters.

Add New L12B Counter Tab.

Change ATTGS Parameter ReportConfigEutraBadCovSec triggerQuantityA2Sec from 0 to 1 to match A2ThresholdRsrqSec.

Change ATTGS Parameter DrxProfile=0 onDurationTimer from 1 to 7.

Change TDD Counters to No for Activation.

Revert back the change on version 12.02 for pZeroNominalPucch and pZeroNominalPusch since L12A deployment is completed, we do not need to keep the L11B value in GS.

Change ATTGS parameter EUTranCellFDD pZeroNominalPucch to -120 and from Local to Global since L12A Deployment is completed.

Change ATTGS parameter EUTranCellFDD pZeroNominalPusch to -106 and from Local to Global since L12A Deployment is completed.

Added tab for Ericsson CTR/CCTR event profile standard

Change ATTGS Parameter AlarmPort normallyOpen from true to false,true with Initial Value false and from Global to Local. Is Global parameter since L11B.

We are getting feedback from the field that they think this should be set to False initially and maybe Local. I don't have too much input from the market but :

In the document LTE External Alarms it seems to recommend using normally Closed alarm contacts. Page 4: External alarms (except generator alarms) shall be implemented using NC normal (open contact indicates alarm condition). Page 5:Use normally closed alarm contacts and integrate the alarm using the standard.

Change ATTGS Parameter Paging maxNoOfPagingRecords to 7, Global and Suffix 5 Mhz.
Change ATTGS Parameter Paging maxNoOfPagingRecords to 16, Global and Suffix 10 Mhz.
Change EUTRANCellFDD noOfPucchCqiUsers to 320 with Suffix 2 RX FDD 5 an 10 Mhz.
Change EUTRANCellFDD noOfPucchSrUsers to 590 with Suffix 2 RX FDD 5 an 10 Mhz.
Change ENodeBFunction x2SetupTwoWayRelations to false and Global.
Updated Counter Profile Tab with input from Wen and Marcus.

Updated Counter Activation STD L12B Tab. Corrected the following counters by removing them from the National_PM_Standard_eNodeB_L12B_GS_12.06 profile as they now exist in the "System ERBS PRIMARY" profile. Updated the profile name to National_PM_Standard_eNodeB_L12B_GS_12.07. EUTRANCellFDD:pmPrbAvailDI
EUTRANCellFDD:pmPrbAvailUI

License Changes from CNS Audit Request.

Leave ATTGS Parameter CapacityChannelBandwidth licenseCapacityChannelBandwidth set to "blank".
Change ATTGS Parameter CapacityChannelBandwidth licenseStaeChannelBandwidth from "blank" to 1 and Not Auditable to Global.
Change ATTGS Parameter CapacityConnectedUsers licenseCapacityConnectedUsers from "blank" to 1500 and Not Auditable to Global.
Change ATTGS Parameter CapacityConnectedUsers licenseStateConnectedUsers from "blank" to 1 and Not Auditable to Global.
Change ATTGS Parameter CapacityOutputPower licenseCapicityOutputPower set to "blank" .
Change ATTGS Parameter CapacityOutputPower licenseStateOutputPower from "blank" to 1 and Not Auditable to Global.
Change ATTGS Parameter Ipv6 licenseState from 0 to 1.
Change ATTGS Parameter DynamicQoSModification licenseStateDynamicQoSModification from 0 to 1.
Change ATTGS Parameter ServiceTriggeredMobility licenseStateServiceTriggeredMobility from "blank" to 1 and Not Auditable to Global.
Change ATTGS Parameter SpidRATFreqPrio licenseStateSpidRATFreqPrio from "blank" to 1 and Not Auditable to Global.
Change ATTGS Parameter UIPrbCapacity licenseStateUIPrbCapacity from "blank" to 1 and Not Auditable to Global.
Change ATTGS Parameter Ippm responderLicenseState from 0 to 1.
Change ATTGS Parameter Synchronization ptpTimeLicenseState from 1 to "blank" and Not Auditable to Global.
Change ATTGS Parameter ServiceSpecificDRX licenseStateServiceSpecificDRX from "blank" to 1 and Not Auditable to Global.
Change ATTGS Parameter DIFss licenseStateDIFss from 1 to 0.
Change ATTGS Parameter DualLayBeamfPerfPkg licenseStateDualLayBeamfPerfPkg from 1 to 0.
Change ATTGS Parameter HighSpeedUE licenseStateHighSpeedUE fom 1 to 0.
Change ATTGS Parameter OctAntUIPerfPkg licenseStateOctAntUIPerfPkg from 1 to 0.
Change ATTGS Parameter SingLayBeamfPerfPkg licenseStateSingLayBeamfPerfPkg from 1 to 0.
Change ATTGS Parameter TdScdmaSessionContinuity licenseStateTdScdmaSessionContinuity from 1 to 0.
Change ATTGS Parameter Tm7ModeSwitching licenseStateTm7ModeSwitching from 1 to 0.

Correct ATTGS parameter EUTRANCellFDD cellSubscription to be 1000 as per 9/13 changes.
Change ATTGS parameter EUTRANCellFDD cfraEnable from true to false to deactivate CFRA feature that is not activated until L13A.

FGA L12A-E-007 EUTRAN Event A2 Time to Trigger Changes. The FGA07 is dealing with Inter - RAT LTE mobility and the way eventA2 is triggered. This change is needed to reduce %TnoL and IRAT% and is in line with AT&T LTE Guiding Principles. The parameter defines the time the primary Event A2 criterion must be fulfilled before the first measurement report is sent. The FGA07 will have following impact on network performance:

- Helps %IRAT and %TNoL.
- Some of the cells having high number of IRATs can experience slight reduction in retainability with the change but on market level no degradation is expected.
- The slight degradation in LTE (only) throughput can be expected on the cells having high number of IRATs. The overall (LTE+UMTS) customer experience is better with new TimeToTriggerA2 setting though.

Change ATTGS Parameter ReportConfigEutraBadCovPrim timeToTriggerA2Prim from 640msec to 1280msec.

PMATT 129145 The Antenna Integrated Radio (AIR) is a dual transmit Remote Radio Unit (RRU) integrated into a dual band cross pole Antenna. This project is for the AIR used for LTE configurations with the Digital Unit LTE (DUL) 20. By combining the RRU and Antenna elements this unit will allow for a much smaller site footprint than conventional distributed deployments. The 4 way uplink capability of the RRU will allow for future software development for some limited beam shaping and steering capability. This project covers the band 4 (AWS) active versions of the AIR for LTE with 80 Watts (2 x 40 Watts) equivalent output power.

The RAN features and functionality supported by the AIR are identical to those of RBS6601, which is currently in operation in the AT&T LTE network, and has recently been through FFA.

Change ATTGS Parameter RfBranch dlAttenuation from Blank to 0.

Change ATTGS Parameter RfBranch ulAttenuation from Blank to 0

Change ATTGS Parameter RfBranch dlTrafficDelay from Blank to 0.

Change ATTGS Parameter RfBranch ulTrafficDelay from Blank to 0.

Change ATTGS Parameter QuadAntUIPerfPkg featureStateQuadAntUIPerfPkg to add two parameters - ATTGS Parameter QuadAntUIPerfPkg=2RX featureStateQuadAntUIPerfPkg set to 0 and ATTGS Parameter QuadAntUIPerfPkg=4RX featureStateQuadAntUIPerfPkg set to 1.

ATTGS Parameter QuadAntUIPerfPkg license StateQuadAntUIPerfPkg stays set to 1.

ATTGS Parameter EUTranCellFDD noOfPucchCqiUsers stays set to 320.

Change ATTGS Parameter EUTranCellFDD noOfPucchSr to add two parameters - EUTranCellFDD= 4RX 5Mhz set to 540 and EUTranCellFDD=4RX 10Mhz noOfPucchSr set to 450.

Change ATTGS Parameter EUTranCellFDD pZeroNominalPucch to add two parameters - EUTranCellFDD=2RX pZeroNominalPucch set to -120 and EUTranCellFDD=4RX pZeroNominalPucch set to -120.

Change ATTGS Parameter EUTranCellFDD pZeroNominalPusch to add two parameters - EUTranCellFDD=2RX pZeroNominalPusch set to -106 and EUTranCellFDD=4RX pZeroNominalPucch set to -109..

Change ATTGS Parameter lppm respondentLicenseState from 0 to 1.

Change ATTGS Parameter QuadAntUIPerfPkg serviceStateQuadAntUIPerfPkg to add two parameters - ATTGS Parameter QuadAntUIPerfPkg=2RX serviceStateQuadAntUIPerfPkg set to 0 and ATTGS Parameter QuadAntUIPerfPkg=4RX serviceStateQuadAntUIPerfPkg set to 1.

Change ATTGS Parameter RfPort=A vswrSupervisionActive from true to false.

Change ATTGS Parameter RfPort=B vswrSupervisionActive from true to false.

PMATT 118084 CMAS Changes

Add ATTGS Parameter EUtranCellFDD mappinginfo.mappinginfoSB12 set to 7.

Change ATTGS Parameter Pws featureStatePws from 0 to 1.

Correct AT&T license settings. AT&T has purchased licenses up to 80Watt. This is the reason licenses for 100Watt and for 120Watt are disabled. AT&T is not using these at this point.

Add ATTGS Parameter CapacityOutputPower=40 licenseStateOutputPower set to 1.

Add ATTGS Parameter CapacityOutputPower=60 licenseStateOutputPower set to 1

Add ATTGS Parameter CapacityOutputPower=80 licenseStateOutputPower set to 1

Add ATTGS Parameter CapacityOutputPower=100 licenseStateOutputPower set to 0

Add ATTGS Parameter CapacityOutputPower=120 licenseStateOutputPower set to 0

Corrected ATTGS value for ReportConfigA4:triggerQuantityA4 from "RSRP" to "0". Change Permissions from Not Auditable to Global.

Add ATTGS Parameter ReportConfigA5=AWS 2C 6cell 2RX 700/5 AWS a5Threshold2Rsrp set to -112.
 Add ATTGS Parameter ReportConfigB2Geran=AWS 2C 6cell 2RX 700/5 AWS b2Threshold1Rsrp set to -116.
 Add ATTGS Parameter ReportConfigB2Utra=AWS 2C 6cell 2RX 700/5 AWS b2Threshold1Rsrp set to -116.
 Add ATTGS Parameter EUtranFreqRelation=From AWS to AWS, 2C 6cell 2RX 700/5 AWS cellReselectionPriority set to 5.
 Add ATTGS Parameter EUtranFreqRelation=From AWS to 700, 2C 6cell 2RX 700/5 AWS cellReselectionPriority set to 4.
 Add ATTGS Parameter EUtranFreqRelation=From 700 to 700, 2C 6cell 2RX 700/5 AWS cellReselectionPriority set to 4.
 Add ATTGS Parameter EUtranFreqRelation=From 700 to AWS, 2C 6cell 2RX 700/5 AWS cellReselectionPriority set to 5.
 Add ATTGS Parameter EUtranCellFDD=AWS in 2C 6cell 2RX 700/5 AWS/5 cellSubscriptionCapacity set to 12000.
 Add ATTGS Parameter EUtranCellFDD=AWS in 2C 6cell 2RX 700/5 AWS/10 cellSubscriptionCapacity set to 20000.
 Add ATTGS Parameter EUtranCellFDD=700 in 2C 6cell 2RX 700/5 AWS/5 cellSubscriptionCapacity set to 8000.
 Add ATTGS Parameter EUtranCellFDD=700 in 2C 6cell 2RX 700/10 AWS/5 cellSubscriptionCapacity set to 10000.
 Add ATTGS Parameter EUtranFreqRelation=From AWS to AWS, 2C 6cell 2RX 700/5 AWS connectedModeMobilityPrio set to 5.
 Add ATTGS Parameter EUtranFreqRelation=From AWS to 700, 2C 6cell 2RX 700/5 AWS connectedModeMobilityPrio set to 1.
 Add ATTGS Parameter EUtranFreqRelation=From 700 to 700, 2C 6cell 2RX 700/5 AWS connectedModeMobilityPrio set to 5.
 Add ATTGS Parameter EUtranFreqRelation=From 700 to AWS, 2C 6cell 2RX 700/5 AWS connectedModeMobilityPrio set to 1.
 Add ATTGS Parameter ReportConfigEUtraInterFreqFreqLb=2C 6cell 2RX 700/5 AWS hysteresisA4 set to 10.
 Add ATTGS Parameter LoadBalancingFunction=2C 6cell 2RX 700/5 AWS lbCeiling set to 200.
 Add ATTGS Parameter EUtranCellRelation=collocated cell relation loadBalancing set to 1.
 Add ATTGS Parameter EUtranCellRelationisremovedAllowed=not collocated cell relation loadBalancing set to 0.
 Add ATTGS Parameter EUtranCellRelation=not collocated cell relation isRemovedAllowed set to true.
 Add ATTGS Parameter EUtranCellFDD=2C 6cell 2RX 700/5 AWS/5 noOfPucchSrUsers set to 500.
 Add ATTGS Parameter EUtranCellFDD=700 in 2C 6cell 2RX 700/5 AWS/10 noOfPucchSrUsers set to 500.
 Add ATTGS Parameter EUtranCellFDD=AWS in 2C 6cell 2RX 700/5 AWS/10 noOfPucchSrUsers set to 280.
 Add ATTGS Parameter QciProfileOperatorDefined=QC18 2C 6cell 2RX 700/5 AWS qciSubscriptionQuanta set to 100.
 Add ATTGS Parameter EUtranFreqRelation=From 700 to AWS, 2C 6cell 2RX 700/5 AWS threshXHigh set to 12.
 Add ATTGS Parameter EUtranFreqRelation=From AWS to 700, 2C 6cell 2RX 700/5 AWS threshXLow set to 8.
 Add ATTGS Parameter ReportConfigEUtraBadCovSec=2C 6cell 2RX 700/5 AWS triggerQuantityA2Sec set to 0.
 Add ATTGS Parameter AnrFunctionEUtran=2C 6cell 2RX 700/5 AWS, AWS reserved anrInterFreqState set to 0.

Suffix Examples include:

- “2C 6cell 2RX 700/5 AWS” – Used in a two carrier eNb with 6 cells on one DUL each having two receive antennas using a 5MHz wide carrier in the 700MHz band or any bandwidth in the AWS band.
- “AWS in 2C 6cell 2RX 700/5 AWS” – Used in the AWS cells of a two carrier eNb with 6 cells on one DUL each having two receive antennas using a 5MHz wide carrier in the 700MHz band or any bandwidth in the AWS band.

Updated Counter Activation STD L12B. CAS 12.08.

Removed the following counters from the import text file. They were correctly labeled in the spreadsheet.

EUtranCellFDD:pmPrbAvailDI

EUtranCellFDD:pmPrbAvailUI

Add back in several parameters deleted when AIR changes were made.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Changed EUTRANCellFDD::EUTRANCellArea.PosCellBearing Permission Global to Not Auditable per Feedback from Ericsson SON VIZ Project Team.
Changed EUTRANCellFDD::EUTRANCellArea.PosCellOpening Angle Permission Global to Not Auditable.
Changed EUTRANCellFDD::EUTRANCellArea.PosCellRadius Permission Global to Not Auditable.
Remove Parameter values.

Corrected ENodeBFunction::GlobalEnbId.mcc Parameter name from GlobalEnbId.mcc to x2BlackList.mcc
Corrected ENodeBFunction::GlobalEnbId.mnc Parameter name from GlobalEnbId.mnc to x2BlackList.mnc
Corrected ENodeBFunction::GlobalEnbId.mncLength Parameter name from GlobalEnbId.mncLength to x2BlackList.mncLength
Corrected-Added ENodeBFunction::x2WhiteList.mcc
Corrected-Added ENodeBFunction::x2WhiteList.mnc
Corrected-Added ENodeBFunction::x2WhiteList.mncLength
Corrected ENodeBFunction::PlmnIdentity.mcc Parameter name from PlmnIdentity.mcc to eNodeBPlmnId.mnc
Corrected ENodeBFunction::PlmnIdentity.mnc Parameter name from PlmnIdentity.mnc to eNodeBPlmnId.mcc
Corrected ENodeBFunction::PlmnIdentity.mncLength Parameter name from PlmnIdentity.mncLength to eNodeBPlmnId.mncLength
Corrected EUTRANCellFDD::PlmnIdentity.mcc Parameter name from PlmnIdentity.mcc to activePlmnList.mcc
Corrected EUTRANCellFDD::PlmnIdentity.mnc Parameter name from PlmnIdentity.mnc to activePlmnList.mnc
Corrected EUTRANCellFDD::PlmnIdentity.mncLength Parameter name from PlmnIdentity.mncLength to activePlmnList.mncList
Corrected-Added EUTRANCellFDD::additionalPlmnList.mcc
Corrected-Added EUTRANCellFDD::additionalPlmnList.mnc
Corrected-Added EUTRANCellFDD::additionalPlmnList.mncLength
Corrected EUTRANCellFDD::PeriodicitySI.siPeriodicitySI1 Parameter name from PeriodicitySI.siPeriodicitySI1 to siPeriodicity.siPeriodicitySI1
Corrected EUTRANCellFDD::PeriodicitySI.siPeriodicitySI2 Parameter name from PeriodicitySI.siPeriodicitySI2 to siPeriodicity.siPeriodicitySI2
Corrected EUTRANCellFDD::PeriodicitySI.siPeriodicitySI3 Parameter name from PeriodicitySI.siPeriodicitySI3 to siPeriodicity.siPeriodicitySI3
Corrected EUTRANCellFDD::PeriodicitySI.siPeriodicitySI4 Parameter name from PeriodicitySI.siPeriodicitySI4 to siPeriodicity.siPeriodicitySI4
Corrected EUTRANCellFDD::PeriodicitySI.siPeriodicitySI5 Parameter name from PeriodicitySI.siPeriodicitySI5 to siPeriodicity.siPeriodicitySI5
Corrected EUTRANCellFDD::PeriodicitySI.siPeriodicitySI6 Parameter name from PeriodicitySI.siPeriodicitySI6 to siPeriodicity.siPeriodicitySI6
Corrected EUTRANCellFDD::PeriodicitySI.siPeriodicitySI7 Parameter name from PeriodicitySI.siPeriodicitySI7 to siPeriodicity.siPeriodicitySI7
Corrected ExternalENodeBFunction::GUGroupId.mcc Parameter name from GUGroupId.mcc to gUGroupIdList.mcc
Corrected ExternalENodeBFunction::GUGroupId.mnc Parameter name from GUGroupId.mnc to gUGroupIdList.mnc
Corrected ExternalENodeBFunction::GUGroupId.mncLength Parameter name from GUGroupId.mncLength to gUGroupIdList.mncLength
Corrected ExternalENodeBFunction::PlmnIdentity.mcc Parameter name from PlmnIdentity.mcc to eNodeBPlmnId.mnc
Corrected ExternalENodeBFunction::PlmnIdentity.mnc Parameter name from PlmnIdentity.mnc to eNodeBPlmnId.mcc
Corrected ExternalENodeBFunction::PlmnIdentity.mncLength Parameter name from PlmnIdentity.mncLength to eNodeBPlmnId.mncLength
Corrected ExternalEUTRANCellFDD::PlmnIdentity.mcc Parameter name from PlmnIdentity.mcc to activePlmnList.mcc
Corrected ExternalEUTRANCellFDD::PlmnIdentity.mnc Parameter name from PlmnIdentity.mnc to activePlmnList.mnc
Corrected ExternalEUTRANCellFDD::PlmnIdentity.mncLength Parameter name from PlmnIdentity.mncLength to activePlmnList.mncList
Corrected TermPointToMme::PlmnIdentity.mcc Parameter name from PlmnIdentity.mcc to servedPlmnListLTERelated.mcc
Corrected TermPointToMme::PlmnIdentity.mnc Parameter name from PlmnIdentity.mnc to servedPlmnListLTERelated.mnc
Corrected TermPointToMme::PlmnIdentity.mncLength Parameter name from PlmnIdentity.mncLength to servedPlmnListLTERelated.mncLength

FGA L12B 008 EUTRAN Maximum Cell Range Change. The FGA08 introduces Maximum Cell Range feature and deals with the maximum distance between the UE and the cell. For the qualified cells, the FGA08 will increase the maximum distance between the UE and the cell from 15km to 18km.

The Maximum Cell Range feature provides support for a maximum cell range up to 100 km assuming that the radio conditions are adequate. Without this feature the maximum cell range is 15 km. The Maximum Cell Range feature also includes use of the random access preamble format 1 that is appropriate for the large round trip times in cells with cell range larger than 15 km.

In the LTE networks, the UE employs the random access process to gain new or renewed access to the network, to perform uplink time synchronization and during HO and paging processes. The random access process allows multiple UEs to simultaneously obtain access to a cell by using different random access preamble sequences. The FGA08 introduces Maximum Cell Range feature and deals with the maximum distance between the UE and the cell. For the qualified cells, the FGA08 will increase the maximum distance between the UE and the cell from 15km to 18km.

The Maximum Cell Range feature provides support for a maximum cell range up to 100 km assuming that the radio conditions are adequate. Without this feature the maximum cell range is 15 km. The Maximum Cell Range feature also includes use of the random access preamble format 1 that is appropriate for the large round trip times in cells with cell range larger than 15 km.

In the LTE networks, the UE employs the random access process to gain new or renewed access to the network, to perform uplink time synchronization and during HO and paging processes. The random access process allows multiple UEs to simultaneously obtain access to a cell by using different random access preamble sequences. The FGA08 introduces Maximum Cell Range feature and increases the maximum distance between the UE and the cell from 15km to 18km for the qualified cells.

Change EUtranCellFDD::cellrange from 15 to 15..18 the permission of the parameter is changed from Global to Local. The parameter defines the maximum distance from the RBS where a connection to a UE can be setup and/or maintained. The initial value for the parameter is 18km.

Change MaximumCellRange::featureStateMaximumCellRange is changed from 0 to 0,1 and the permission of the parameter is changed from Global to Local. The parameter indicates whether the licensed feature Maximum Cell Range is ACTIVATED or DEACTIVATED. The value of the attribute is irrelevant when no valid license key is installed for the Maximum Cell Range feature. The initial value for the parameter is 1(activated).

Change MaximumCellRange::serviceStateMaximumCellRange is changed from 0 to 0,1 and the permission of the parameter is changed from Global to Local. The parameter indicates if the feature Maximum Cell Range is operable or inoperable. The initial value for the parameter is 1(OPERABLE).

This change is needed to improve RACH performance and customer experience beyond 15km. The venue, hicap and high loaded cells will be excluded from the change since cellrange increase causes preamble format change and UL RACH overhead increase. Note that the parameter will be defined as a Local allowing its adjustment if capacity is needed.

The FGA08 will have following impact on network performance:

- Improvements in RACH, RRC, Retainability and HO performances.
- No visible degradation in UL throughput at this point. There is an increase in TTFB though.

Once TA information is available in Ericsson performance reporting, the FGA08 will be updated and cellrange setting will be

Change ATTGS Parameter Pws::ServiceStatePws from 0 to 1. This is part of activating the featureStatePWS.

ReportConfigA1Prim. A1ThresholdRsrpPrim [eNB, , -104 , dBm, Global] is changed from [-93dBm,-103dBm] to -104dBm and the permission is changed from Local to Global. The parameter defines RSRP threshold value for the primary eventA1.

ReportConfigA1Sec. A1ThresholdRsrpSec [eNB, , -110 ,dBm, Global] is changed from 136dBm to -110dBm. The parameter defines RSRP threshold value for the secondary eventA1.

ReportConfigEutraBadCovSec. TriggerQuantityA2Sec [eNB, , 0(RSRP) , , Global] is changed from 1(RSRQ) to 0(RSRP). The parameter defines the quantity that triggers the eventA2 and eventA1 for the secondary eventA2 and eventA1 measurement.

EUTranCellFDD. systemInformationBlock3.sNonIntraSearch [eNB, , 16 ,dB, Global] is changed from 10dB to 16dB. The parameter defines the threshold (in dB) for EUTRAN inter-frequency and inter-RAT measurements.

ReportConfigEutraBadCovPrim.timeToTriggerA2Prim [eNB, 640, msec, Global] is changed from 1280msec to 640msec. The parameter defines the time the primary Event A2 criterion must be fulfilled before the first measurement report is sent.

ReportConfigEutraBadCovSec.timeToTriggerA2Sec [eNB, 1280, msec, Global] is changed from 640msec to 1280msec. The parameter defines the time to trigger value for the secondary eventA2 measurement.

EUTranFreqRelation.connectedModeMobilityPrio [eNB, (1,5), , Local] is changed from 5 to (1,5) and the permission is changed from Global to Local. The parameter prioritizes EUTRAN frequencies among all frequencies related to the cell for UEs in connected mode. EUTranFreqRelation.connectedModeMobilityPrio=1 is used for inter-frequency relation while EUTranFreqRelation.connectedModeMobilityPrio=5 is used for intra-frequency relation.

enhancedBadCovDetectionActive (Ericsson System Constant 484) [eNB, (0,1), , Local] is introduced to the GS with the FGA09. The parameter needs to be set to '1' in order to have the IFHO/IRAT enhancement feature enabled. The value 1(enable) will be used for the sites located at the inter-frequency border, while the value 0(disable) will be used for all other sites. The setting will apply on all cells at the same enodeB.

b) intraLTE Cell Designations

ReportConfigEutraBadCovSec. a2ThresholdRsrpSec [eNB, , (-140,-116), dBm, Local] is changed from -140dBm to (-140dBm,-116dBm) and the permission is changed from Global to Local. The parameter defines the secondary RSRP threshold value for eventA2. The value -116dBm will be used when Enhance IRAT/IFHO feature is used (enhancedBadCovDetectionActive =1), while the value -140dBm will be used when Enhance IRAT/IFHO feature is NOT used (enhancedBadCovDetectionActive =0).

ReportConfigEutraBadCovSec.TriggerQuantityA2Sec [eNB, , (0(RSRP), 1(RSRQ)) , , Global] is changed from 1(RSRQ) to (0(RSRP), 1(RSRQ)) and the permission is changed from Global to Local. The parameter defines the quantity that triggers the eventA2 and eventA1 for the secondary eventA2 and eventA1 measurement. Primary and secondary measurement parameters refer to the option to use different settings for two simultaneous measurements for eventA2 and eventA1. The value 0(RSRP) will be used when Enhance IRAT/IFHO feature is used (enhancedBadCovDetectionActive =1), while the value 1(RSRQ) will be used when Enhance IRAT/IFHO feature is NOT used (enhancedBadCovDetectionActive =0).

ReportConfigEutraBadCovSec.timeToTriggerA2Sec [eNB, (640, 1280), msec, Global] is changed from 640msec to (640msec, 1280msec) and the permission is changed from Global to Local. The parameter defines the time to trigger value for the secondary eventA2 measurement. The value 1280msec will be used when Enhance IRAT/IFHO feature is used (enhancedBadCovDetectionActive =1), while the value 640msec will be used when Enhance IRAT/IFHO feature is NOT used (enhancedBadCovDetectionActive =0).

Add new Counter Activation STD L12B Tab. CAS version12.10. Release notes:

Added the following counters to the National_PM_Standard_eNodeB_L12B_GS_12.10 scanner

EUTranCellFDD:pmPdcchCceUsedDIQci

EUTranCellFDD:pmPdcchCceUsedUIQci

EUTranCellFDD:pmPdcchMaxCceAvail

EUTranCellFDD:pmPrbUsedDIAIlgTot

Removed Counter Activation STD12A Tab.

Updated EUTranFreqRelation::allowedMeasured Bandwidth to include 10Mhz and 5Mhz as follows:
Add EUTranFreqRelation=10Mhz::allowedMeasured Bandwidth set to 50 and Permissions set to Global.
Add EUTranFreqRelation=5Mhz::allowedMeasured Bandwidth set to 25 and Permissions set to Global.

L12B IP10 is the next and last maintenance release SW for rollout on L12B, it contains critical fixes for various project such as RIM/eCSFB and high-cap, as well as fix for the x2SetupTwoWayRelations used by PCI conflict reporting feature, FFA is ongoing in Tulsa, Oklahoma. Changes:

Change ENodeBFunction::x2SetupTwoWayRelations from false to true.
Change SystemConstant::enhancedBadCovDectionActive484 from 0 to 0,1 and Permissions from Global to Local.
Add SystemConstant::dlMaxNrOfDtxinARowDI871 set to 0 and Permissions Not Auditable.
Add SystemConstant::timingAlignementEventReport503 set to 1 and Permissions Not Auditable.
Add SystemConstant::forcedSITunneling446 set to 1 and Permissions Not Auditable.
Add SystemConstant::maxnocellsnaccsf314 set to 6 and Permissions Not Auditable.
Add SystemConstant::maxnocellsnaccirat315 set to 6 and Permissions Not Auditable.
Add SystemConstant::threshold2RscpUtraAnr336 set to 7 and Permissions Not Auditable.
Add SystemConstant::ulPdcPduTimerDiscardEnabled998 set to 1 and Permissions Not Auditable.

eCSFB is enhanced CSFB which use the RIM procedure to get SIB information from RNC to eNB then pass it to UE in RRC connection release message, it has the benefit of reducing call setup delay for CSFB due to skipping of SIB reading on UMTS, FFA ongoing in Dallas, Texas. Changes:

Change AnrFunctionUtran::anrStateUtran from 0 to 1.
Change UtranCellRelation::isRemoveAllowed from false to true,false and Permissions from Global to Local.
Change UtranCellRelation::coverageindicator from 0 to 0,1 and Permissions from Global to Local.
Change RedirectWithNacc::featureStateRedirectWithNacc from 0 to 1.
Change UtranFreqRelation::mobilityAction from 0 to 1.
Change UtranFreqRelation::mobilityActionCsf3 from 0 to 1.
Change ReportConfigEUTranBadCovPrim::timeToTriggerA2Prim from 1280 to 640.
Remove ReportConfigEUTranBadCovPrim=intralTE::timeToTriggerA2Prim.
Remove ReportConfigEUTranBadCovPrim=interLTE::timeToTriggerA2Prim.
Remove ReportConfigEUTranBadCovPrim=interRAT_10::timeToTriggerA2Prim.
Remove ReportConfigEUTranBadCovPrim=interRAT_5::timeToTriggerA2Prim.

Correct QciProfilePredefined=default::qci from 10 to 0.

FGA L12B-E-010 introduces LTE High Capacity parameter settings for venue sites. The main purpose of these Hi Cap settings is to alleviate PDCCH scheduling congestion for DRB traffic by reducing SRB traffic for the event and venue sites. For eNBs without Hi Cap settings, the SRB traffic is using the majority of the scheduling opportunities and leaves very little opportunities for the DRB traffic under high load conditions; the eNodeB is limited on CCEs during low throughput.

The FGA10 will have following impact on network performance:

- Improved high/over loaded sites' Accessibility, Retainability, throughput, and reduce high/overload.
- In some cases %IRAT and TNOL are increased, and numbers of Max and Average RRC connected users are reduced.

Changes:

Added RadioBearerTable=default,DataRadioBearer=1::dlMaxRetxThreshold(hicap) ATTGS value in Radio of 8 per FGA10.

Added RadioBearerTable=default,SignalingRadioBearer=1::dlMaxRetxThreshold(hicap) ATTGS value in Radio of 8 per FGA10.

Added RadioBearerTable=default,DataRadioBearer=1::ulMaxRetxThreshold(hicap) ATTGS value in Radio of 8 per FGA10.

Added RadioBearerTable=default,SignalingRadioBearer=1::ulMaxRetxThreshold(hicap) ATTGS value in Radio of 8 per FGA10.

Added RadioBearerTable=default,DataRadioBearer=1::tPollRetransmitDI(hicap) ATTGS value in Radio of 160 per FGA10.

Added RadioBearerTable=default,SignalingRadioBearer=1::tPollRetransmitDI(hicap) ATTGS value in Radio of 160 per FGA10.

Added RadioBearerTable=default,DataRadioBearer=1::tPollRetransmitUI(hicap) ATTGS value in Radio of 160 per FGA10.

Added RadioBearerTable=default,SignalingRadioBearer=1::tPollRetransmitUI(hicap) ATTGS value in Radio of 160 per FGA10.

Added SystemConstants=1 systConstants::deltaPsdRs2Tx(hicap) ATTGS value in Radio of 0 per FGA10.

Added SystemConstants=1 systConstants::numInitialAccessAndIncomingHo(hicap) ATTGS value in Radio of 10 per FGA10.

Added SystemConstants=1 systConstants::pdcchLaGinrMargin(hicap) ATTGS value in Radio of 30 per FGA10.

Added EUTranCellFDD::ulSrsEnable(hicap) ATTGS value in Radio of False per FGA10.

Added QciProfilePredefined::srsAllocationStrategy(hicap) ATTGS value in Radio of 0 per FGA10.

Added Pfs::featureStatePfs(hicap) ATTGS value in Radio of 0 per FGA10.

Added UIFss::featureStateUIFss(hicap) ATTGS value in Radio of 0 per FGA10.

Added QciProfilePredefined::schedulingAlgorithm(hicap) ATTGS value in Radio of 0 per FGA10.

Added ReportConfigA5Anr::a5Threshold1RsrpAnrDelta(700 in 2C 6cell 2RX 700/5 AWS) ATTGS value of 10 per PMATT #118863.

Added ReportConfigA5Anr::a5Threshold2RsrpAnrDelta(700 in 2C 6cell 2RX 700/5 AWS) ATTGS value of 5 per PMATT #118863.

Removed AnrFunctionEUTran::anrInterFreqState(2C 6cell 2RX 700/5 AWS, AWS reserved) per PMATT #118863.

Added AnrFunctionEUTran::anrUesThreshInterFDecr(2C 6cell 2RX 700/5 AWS) ATTGS value of 20 per PMATT #118863.

Added AnrFunctionEUTran::anrUesThreshInterFMax(2C 6cell 2RX 700/5 AWS) ATTGS value of 2 per PMATT #118863.

Added AnrFunctionEUTran::anrUesThreshInterFMin(2C 6cell 2RX 700/5 AWS) ATTGS value of 0 per PMATT #118863.

Added EUTranCellFDD: systemInformationBlock3.sNonIntraSearch(2C 6cell 2RX 700/5 AWS) ATTGS value of 10 per PMATT #118863.

Added EUTranCellFDD: threshServingLow (2C 6cell 2RX 700/5 AWS) ATTGS value of 10 per PMATT #118863.

Change Support6Cells::featureStateSupport6Cells from "null" to 0,1 and from Not Auditable to Global.

Change ENodeBFunction::x2BlackList to ENodeBFunction::x2BlackList.enbld

Change ENodeBFunction::x2WhiteList to ENodeBFunction::x2WhiteList.enbld

Delete

Added EUTranCellFDD::noOfPucchSrUsers(700 in 2C 6cells 2RX 700/10 AWS/5) ATTGS value of 280 per PMATT #118863
Added EUTranCellFDD::noOfPucchSrUsers(AWS in 2C 6cells 2RX 700/10 AWS/5) ATTGS value of 500 per PMATT #118863
Added paging::maxNoOfPagingRecords (5Mhz&10Mhz Mix BW) ATTGS value of 7 per PMATT #118863

Changing Key L12B Parameters from Global to Local until Deployment is complete. This will ensure L12B Global Values are not used by all until Deployment is complete.
The Initial Value should be used till L12B if not on L12B.

Change AnrFunctionUtran::anrStateUtran from 1 to 0,1, Global to Local and Initial Value set to 0.
Change RedirectWithNacc::featureStateRedirectWithNacc from 1 to 0,1, Global to Local and Initial Value set to 0.
Change UtranFreqRelation::mobilityAction from 1 to 0,1, Global to Local and Initial Value set to 0.
Change UtranFreqRelation::mobilityActionCsf from 1 to 0,1, Global to Local and Initial Value set to 0.
Change ReportConfigEutranBadCovPrim::timeToTriggerA2Prim to 1280,640, Global to Local and Initial Value set to 1280.
Change ENodeBFunction::x2SetupTwoWayRelations to true,false, Global to Local and Initial Value set to false.

Corrected EUTranCellFDD::primaryPlmnReserved Suffix from null to "post-production".
Added EUTranCellFDD::primaryPlmnReserved ATTGS value of "true" and Suffix value of "pre-production"
Added EUTranCellFDD::cellRange(2C 6cell) ATTGS value of 15 and Permission of Global per FGA08.
Corrected UtranFreqRelation=non-femto frequency::anrMeasOn Suffix from null to "non-femto frequency".
Added UtranFreqRelation=Femto Frequency::anrMeasOn ATTGS value of "FALSE" and Suffix value of "Femto Frequency"

Corrected/Removed IpInterface::trafficType. It is a duplicate and not required.

Add General Rules and Cautions Tab

Corrected/Removed ConfigurationVersion::configCountdownActivated. Ref Changes Required LTE01.

Added EUTranFreqRelation::cellReselectionPriority(From 700 to 700, 2C 700/10 AWS) set to 5 per PMATT #118863
Added EUTranFreqRelation::cellReselectionPriority(From AWS to 700, 2C 700/10 AWS) set to 5 per PMATT #118863

LTE03 - TWAMP is an IETF standard based on RFC 5357. It is used for Active Performancing of Layer-3 reference connections. - Added

IpSystem=1,lppm=1::responderFeatureState ATTGS value of 1,0 Initial Value 0 Range 0..1 Unit Boolean Permission Local Resolution eNb NG Transport (OSS) Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=1::administrativeState ATTGS value of 1 Range 0..2 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=1::udpPort ATTGS value of 12401 Range 1..49151 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=2: administrativeState ATTGS value of 1 Range 0..2 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=2::udpPort ATTGS value of 12402 Range 1..49151 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=3::administrativeState ATTGS value of 1 Range 0..2 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=3::udpPort ATTGS value of 12403 Range 1..49151 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=4::administrativeState ATTGS value of 1 Range 0..2 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=4::udpPort ATTGS value of 12404 Range 1..49151 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=5::administrativeState ATTGS value of 1 Range 0..2 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=5::udpPort ATTGS value of 12405 Range 1..49151 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=6:: administrativeState ATTGS value of 1 Range 0..2 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=6:: udpPort ATTGS value of 12406 Range 1..49151 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=7::administrativeState ATTGS value of 1 Range 0..2 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=7::udpPort ATTGS value of 12407 Range 1..49151 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

Added IpSystem=1,lppm=1,TwampResponder=8::administrativeState ATTGS value of 1 Range 0..2 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport.

Added IpSystem=1,lppm=1,TwampResponder=8::udpPort ATTGS value of 12408 Range 1..49151 Unit Integer Permission Global Resolution eNb NG Transport (OSS)

Operator ReadWrite NGFC IP Transport per Ericsson LTE EnodeB Enable TWAMP Responder MOP v1 0.docx.

LTE04 - Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringFactorForMoData
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringFactorForMoSignalling
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringForEmergency
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringInfoPresent
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringMoDataPresent
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringMoSignallingPresent
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringSpecialAcForMoData
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringSpecialAcForMoSignalling
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringTimeForMoData
Corrected/Removed EUTranCellFDD::acBarringInfo.acBarringTimeForMoSignalling

LTE06 - Corrected EUTranCellFDD::administrativeState ATTGS value from 'null' to 0,1,2 and Initial Value from 'null' to 0 and Permission from 'Not Auditable' to Local.
Corrected EUTranCellFDD::partOfSectorPower Suffix from null to "post-production".
Corrected/Added EUTranCellFDD::partOfSectorPower ATTGS value 7,100 and Permission of Local and Suffix value of "pre-production"
Corrected/Removed EUTranCellFDD::pZeroNominalPucch; this is unnecessary given the 2RX and 4RX suffixes cover everything.
Corrected EUTranCellFDD::pZeroNominalPucch(2RX) ATTGS value from -120 to -120,-110,-108 and Initial Value from null to -120 and Permission from Global to Local.
Corrected EUTranCellFDD::pZeroNominalPucch(4RX) ATTGS value from -123 to -123,-110,-108 and Initial Value from null to -123 and Permission from Global to Local.
Corrected EUTranCellFDD::pZeroNominalPucch(4RX) Node Group from "Power Control" to "Radio (OSS) Operator Read/Write"
Add EUTranCellFDD=700 in 2C 6 cell 2RX 700/10 AWS/5::cellSubscriptionCapacity value 18000 and Permission Global per PMATT118863.
Add EUTranCellFDD=AWS in 2C 6 cell 2RX 700/10 AWS/5::cellSubscriptionCapacity value 12000 and Permission Global per PMATT 118863.
PMATT 031365 IPv6 Transport Change. Add Sctp=IPv6::maxUserDataSize set to 1460 Permission Global with Suffix IPv6.
Change Sctp::maxUserDataSize set to 1480 to add Suffix IPv4; parameter is now Sctp=IPv4::maxUserDataSize set to 1480.

LTE05 - Activated the following in the National_PM_Standard_eNodeB_L12B_GS_12.14 profile.
EUTranCellFDD:pmErabEstabAttAddedQci
EUTranCellFDD:pmErabEstabAttInitQci
EUTranCellFDD:pmErabEstabSuccAddedQci
EUTranCellFDD:pmErabEstabSuccInitQci
EUTranCellFDD:pmErabRelAbnormalEnbActQci
EUTranCellFDD:pmErabRelNormalEnbQci
EUTranCellFDD:pmPdcpVolDIDrbQci
LTE07 - Corrected/Removed IpAccessSctp::portDistribution

LTE09 Changes for Cell Range:

Correction to the Ericsson LTE GS.

Corrected/Added EUTRANCellFDD::cellRange(iDAS_BAU) ATTGS value 15 Permission Global.

Corrected/Added EUTRANCellFDD::cellRange(iDAS_HiCap) ATTGS value 15 Permission Global.

Corrected/Added EUTRANCellFDD::cellRange(HiCap) ATTGS value 15 Permission Global.

Corrected/Added EUTRANCellFDD::featureStateMaximumCellRange(2C 6cell) ATTGS value 0 Permission Global.

Corrected/Added EUTRANCellFDD::featureStateMaximumCellRange(iDAS_BAU) ATTGS value 0 Permission Global.

Corrected/Added EUTRANCellFDD::featureStateMaximumCellRange(iDAS_HiCap) ATTGS value 0 Permission Global.

Corrected/Added EUTRANCellFDD::featureStateMaximumCellRange(HiCap) ATTGS value 0 Permission Global.

Corrected/Added EUTRANCellFDD::serviceStateMaximumCellRange(2C 6cell) ATTGS value 0 Permission Global.

Corrected/Added EUTRANCellFDD::serviceStateMaximumCellRange(iDAS_BAU) ATTGS value 0 Permission Global.

Corrected/Added EUTRANCellFDD::serviceStateMaximumCellRange(iDAS_HiCap) ATTGS value 0 Permission Global.

Corrected/Added EUTRANCellFDD::serviceStateMaximumCellRange(HiCap) ATTGS value 0 Permission Global.

FGA L12B-E-011 LTE UL Power Control Parameters Change. This approved Field Guide Alert is sent as part of the normal Field Guide Alert process to communicate a change in the National recommendation for Ericsson LTE configurable parameters. This FGA is dealing only with the UL power control parameters pZeroNominalPusch and pZeroNominalPucch which defines the target Power spectral density (PSD in short) for PUSCH and PUCCH. By setting pZeroNominalPusch and pZeroNominalPucch to higher value, we are providing better SINR result for PUCCH and PUSCH, thus more UEs will be able to meet the minimum SINR request for PUSCH and PUCCH respectively, provide better throughput and signaling continuity.

Removed EUTRANCellFDD::pZeroNominalPusch

Changed EUTRANCellFDD::pZeroNominalPusch(2RX) ATTGS value from -106 to -100 and Permission from Local to Global per FGA11.

Changed EUTRANCellFDD::pZeroNominalPusch(4RX) ATTGS value from -109 to -104 and NG from "Power Control" to "Radio (OSS) Operator Read/Write" per FGA11.

Changed EUTRANCellFDD::pZeroNominalPucch(2RX) ATTGS value from -120,-110,-108 to -116,-110,-108 with Initial Value of -116 and Permission from Global to Local per FGA11.

Changed EUTRANCellFDD::pZeroNominalPucch(4RX) ATTGS value from -123,-110,-108 to -120,-110,-108 with initial value of -120 and Permission from Global to Local per FGA11.

Changed ReportConfigA5::a5Threshold2Rsrp (AWS in 2C 6cell 2RX 700 AWS) Suffix from AWS in 2C 6cell 2RX 700/5 AWS to value of AWS in 2C 6cell 2RX 700 AWS per PMATT #118863

Changed ReportConfigB2Geran::b2Threshold1Rsrp(AWS in 2C 6cell 2RX 700 AWS) Suffix from AWS in 2C 6cell 2RX 700/5 AWS to value of AWS in 2C 6cell 2RX 700 AWS per PMATT #118863

Changed ReportConfigB2Utra::b2Threshold1Rsrp(AWS in 2C 6cell 2RX 700 AWS) Suffix from AWS in 2C 6cell 2RX 700/5 AWS to value of AWS in 2C 6cell 2RX 700 AWS per PMATT #118863

Changed EUTranFreqRelation::cellReselectionPriority(From 700 to AWS, 2C 6cell 2RX 700 AWS) Suffix from From 700/5 to AWS, 2C 6cell 2RX 700/5 AWS to value of From 700 to AWS, 2C 6cell 2RX 700 AWS per PMATT #118863

Changed EUTranFreqRelation::cellReselectionPriority(From AWS to AWS, 2C 6cell 2RX 700 AWS) Suffix from From AWS to AWS, 2C 6cell 2RX 700/5 AWS to value of From AWS to AWS, 2C 6cell 2RX 700 AWS per PMATT #118863

Changed EUTranFreqRelation::connectedModeMobilityPrio(From 700/5 to 700/5, 2C 6cell 2RX 700/5 AWS) Suffix from (From 700/5 to 700/5, 2C 6cell 2RX 700/5 AWS) to value of (From 700 to 700, 2C 6cell 2RX 700 AWS) per PMATT #118863

Changed EUTranFreqRelation::connectedModeMobilityPrio(From 700 to AWS, 2C 6cell 2RX 700 AWS) Suffix from From 700/5 to AWS, 2C 6cell 2RX 700/5 AWS to value of From 700 to AWS, 2C 6cell 2RX 700 AWS per PMATT #118863

Changed EUTranFreqRelation::connectedModeMobilityPrio(From AWS to 700, 2C 6cell 2RX 700 AWS) Suffix from From AWS to 700/5, 2C 6cell 2RX 700/5 AWS to value of From AWS to 700, 2C 6cell 2RX 700 AWS per PMATT #118863

Changed EUTranFreqRelation::connectedModeMobilityPrio(From AWS to AWS, 2C 6cell 2RX 700 AWS) Suffix from From AWS to AWS, 2C 6cell 2RX 700/5 AWS to value of From AWS to AWS, 2C 6cell 2RX 700 AWS per PMATT #118863

Changed System Constant::enhancedBadCovDetectionActive (2C 6cell 2RX 700 AWS) Suffix from 2C 6cell 2RX 700/5 AWS to value of 2C 6cell 2RX 700 AWS per PMATT #118863

Changed ReportConfigEutraInterFreqLb::hysteresisA4(2C 6cell 2RX 700 AWS) Suffix from 2C 6cell 2RX 700/5 AWS to value of 2C 6cell 2RX 700 AWS per PMATT #118863

Changed LoadBalancingFunction::lbCeiling(2C 6cell 2RX 700 AWS) Suffix from 2C 6cell 2RX 700/5 AWS to value of 2C 6cell 2RX 700 AWS per PMATT #118863

Changed LoadBalancingFunction::lbThreshold(2C 6cell 2RX 700 AWS) Suffix from 2C 6cell 2RX 700/5 AWS to value of 2C 6cell 2RX 700 AWS per PMATT #118863

Changed EUTranCellRelation::loadBalancing(Collocated cell relation) Suffix from Collocated cell relation to value of Collocated cell relation per PMATT #118863

Changed EUTranCellRelation::loadBalancing(not collocated cell relation) Suffix from not collocated cell relation to value of not collocated cell relation per PMATT #118863

Changed QciProfilePredefined::qciSubscriptionQuanta(2C 6cell 2RX 700 AWS) Suffix from 2C 6cell 2RX 700/5 AWS to value of 2C 6cell 2RX 700 AWS per PMATT #118863

Changed EUTranCellFDD::threshServingLow(AWS in 2C 6 cell 2RX 700 AWS) Suffix from AWS in 2C 6 cell 2RX 700/5 AWS to value of AWS in 2C 6 cell 2RX 700 AWS per PMATT #118863

Changed EUTranFreqRelation::threshXHigh(From 700 to AWS, 2C 6cell 2RX 700 AWS) Suffix from From 700/5 to AWS, 2C 6cell 2RX 700/5 AWS to value of From 700 to AWS, 2C 6cell 2RX 700 AWS per PMATT #118863

Changed EUTranFreqRelation::threshXLow(From AWS to 700, 2C 6cell 2RX 700 AWS) Suffix from From AWS to 700/5, 2C 6cell 2RX 700/5 AWS to value of From AWS to 700, 2C 6cell 2RX 700 AWS per PMATT #118863

Changed ReportConfigEutraBadCovSec::triggerQuantityA2Sec(2C 6cell 2RX 700 AWS) Suffix from 2C 6cell 2RX 700/5 AWS to value of 2C 6cell 2RX 700 AWS per PMATT #118863

LTE10 Corrected all instances of "Positioning/e911" in the NGFC column to "Emergency Services" per responses from email sent 23 May

Added TtiBundling::keyIdTtiBundling Permission value of Not_Auditable
Added ENodeBFunction::s1HODirDataPathAvail ATTGS value of false, Permission value of Global
Added EUTranCellFDD::mobCtrlAtPoorCovActive ATTGS value of false, Permission value of Global
Added EUTranCellFDD::advCellSupAction ATTGS value of 0, Permission value of Global
Added EUTranCellFDD::advCellSupSensitivity ATTGS value of 0, Permission value of Global
Added EUTranCellFDD::sdmActive ATTGS value of false, Permission value of Global
Added EUTranCellFDD::sectorCarrierRef Permission value of Not_Auditable
Added EUTranFreqRelation::interFreqMeasType ATTGS value of 0 (EVENT_5), Permission value of Global
Added AnrFunctionUtran::cellAddRscpThresholdUtranDelta ATTGS value of 7, Permission value of Global
Removed System Constant::threshold2RscpUtraAnr336, Per Replaced by AnrFunctionUtran::cellAddRscpThresholdUtranDelta
Added AnrFunctionUtran::cellAddEcNoThresholdUtranDelta ATTGS value of -10, Permission value of Global
Removed System Constant::threshold2EcNoUtraAnr335, Per Replaced by AnrFunctionUtran::cellAddEcNoThresholdUtranDelta
Added SecurityHandling::cipheringAlgoPrio ATTGS value of 2:1:0 and Permission value of Global
Removed SecurityHandling::cipheringAlgorithms (deprecated) per Replaced by SecurityHandling::cipheringAlgoPrio
Added SecurityHandling::integrityProtectAlgoPrio ATTGS value of 2:1, Permission value of Global
Removed SecurityHandling::integrityProtectionAlgorithms (deprecated) per Replaced by SecurityHandling::integrityProtectAlgoPrio
Added AdmissionControl::dlMbmGbrRatio ATTGS value of 200, Permission value of Global
Added Ipv6Interface::vlanRef Permission value of Not_Auditable
Changed ExternalUtranCellFDD::isRemoveAllowed ATTGS value from false to true

In L13A Cqi and Sr Users have been consolidated as follows::

Added EUTranCellFDD::noOfPucchCqiUsers (5Mhz or 10Mhz or mix) ATTGS value of 320, Permission value of Global.
Added EUTranCellFDD::noOfPucchSrUsers (5Mhz or mix 5/10Mhz) ATTGS value of 850, Permission value of Global
Added EUTranCellFDD::noOfPucchSrUsers (10Mhz or mix 10/5Mhz) ATTGS value of 640, Permission value of Global
Due to above addition on regards of consolidation of Cqi/Sr Users in L13A, the following removal is needed::
Removed EUTranCellFDD::noOfPucchCqiUsers ATTGS value of 320, Suffix value of 2 RX FDD 5 and 10 Mhz.
Removed EUTranCellFDD::noOfPucchCqiUsers (4RX 5Mhz) ATTGS value of 320, Suffix value of 4RX 5Mhz.
Removed EUTranCellFDD::noOfPucchSrUsers ATTGS value of 590, Suffix value of 2 RX FDD 5 and 10 Mhz
Removed EUTranCellFDD::noOfPucchSrUsers (4RX 5Mhz) ATTGS value of 540, Suffix value of 3cells 4RX FDD 5Mhz.
Removed EUTranCellFDD::noOfPucchSrUsers (4RX 10Mhz) ATTGS value of 450, Suffix value of 3cells 4RX FDD 10Mhz.

Removed UsrPrcBasedKpi::featureStateUsrPrcBasedKpi (deprecated)
Removed UsrPrcBasedKpi::keyIdUsrPrcBasedKpi (deprecated)
Removed UsrPrcBasedKpi::licenseStateUsrPrcBasedKpi (deprecated)
Removed UsrPrcBasedKpi::serviceStateUsrPrcBasedKpi (deprecated)
Removed UsrPrcBasedKpi::UsrPrcBasedKpild (deprecated)
Removed UeMeasControl::measurementPriority (parameter deprecated)

LTE FGA L12B-E-012 cellIndividualOffsetEUTran change. FGA12 introduces locally configurable settings for the cellIndividualOffsetEUTran parameter. The recommended setting will change from a global value of 0dB to a local range of values from 0dB to 3dB. This change will allow handovers between cells at a lower RSRP or RSRQ difference, which has been shown to improve handover and drop call performance for fast moving Ue's. The cellIndividualOffsetEUTran parameter influences the IntraLTE handover behavior by applying an offset to the measured neighbor cells' RSRP or RSRQ. The offsets are defined for each neighbor relation, in contrast to the parameter a3offset, which is defined for each cell. Once the serving and measured cells meet the criteria given in Equation 1 for a period given by timeToTriggerA3, the Ue enters EventA3 and a measurement report is sent to the eNodeB in order to trigger a handover. FGA12 will have following impact on network performance:

- Improvements in Retainability and IntraLTE Handover Execution Success Rate.
- Increase in IntraLTE Handover attempts

The following KPIs need to be closely monitored by the market once the change is made:

- Retainability
- Accessibility
- Handover Execution and Preparation Success Rate and Attempts
- Oscillating Handover Rate/Volume
- UL/DL Throughput
- UL RSSI
- RACH Success Rate

Change L12B EUTranCellRelation::cellIndividualOffsetEUTran ATTGS value from 0 to 0..3 and from Global to Local as per FGA.

Change L13A EUTranCellRelation::cellIndividualOffsetEUTran ATTGS value from 0 to 0..3 and from Global to Local as per FGA.

LTE FGA L12B-E-013 ANR isHoAllowed and isRemoveAllowed Settings. FGA13 introduces market configurable settings for the Automatic Neighbor Relations (ANR) feature isHoAllowed and isRemoveAllowed parameters. For undesired eutrancell relations, these settings will disable the handover and disable the removal of these relations. Both of these parameters can be found in class EutranCellRelation under the following hierarchy:

ManagedElement
 EnodeBFunction
 EUTranCellFDD
 EutranFreqRelation
 EUTranCellRelation

This managed object represents the handover relationship between two neighboring eUtran cells. Parameter “isHoAllowed” is initially set to “true” when an ANR relation is created and indicates whether a handover between cells in the relation is allowed. Parameter “isRemoveAllowed” is initially set to “true” when an ANR relation is created and indicates whether the ANR function is allowed to remove the relation automatically. It does not restrict the operator from removing it manually. General ANR Description: The UE performs handover measurements based on Measurement Configuration (MC) as described in Intra-LTE Handover. These measurements can be used by ANR and handover. The maximum number of cells returned in the PCI reports is limited and controlled by the operator using MOM parameters. The Automated Neighbor Relations feature requests the CGI measurements from the UE when unknown PCIs are reported with signal strength and quality above the thresholds for Event A3. The thresholds are controlled by the operator using MOM parameters. The UE must have the capability to send, read, and report CGI. When the CGI is successfully reported, the neighbor cell is added and the relation is configured. The Automatic Neighbor Relation feature always performs CGI reading before adding a relation. The FGA13 will have following impact on network performance: • Improvements were seen in eutrancell HO performance, Retainability, number of drops due to eNodeB and MME, along with a reduction in the pmRadioRecInterferencePwr. • No visible degradation in other performances. The following KPIs need to be closely monitored by the market once the change is made:

- Handover performance.
- Drop call rate.
- RACH Success Rate.
- Paging performance.
- UL/DL Throughput
- UL RSSI

Change L12B EUTranCellRelation::isHoAllowed ATTGS value from true to true,false and from Global to Local and Initial value set to true per FGA
Change L13A EUTranCellRelation::isHoAllowed ATTGS value from true to true,false and from Global to Local and Initial value set to true per FGA
Change L12B EUTranCellRelation::isRemoveAllowed ATTGS value from true to true,false and from Global to Local and Initial value set to true per FGA
Change L13A EUTranCellRelation::isRemoveAllowed ATTGS value from true to true,false and from Global to Local and Initial value set to true per FGA

EUtranCellFDD:pmActiveUeUISectorCarrierDistr
EUtranCellFDD:pmPrbAvailDIMbms
EUtranCellFDD:pmPrbUsedDIMbms
Ipv6Interface:pmIfStatsHCIPInMcastOctets
Ipv6Interface:pmIfStatsHCIPInMcastPkts
Ipv6Interface:pmIfStatsHCIPOutMcastOctets
Ipv6Interface:pmIfStatsHCIPOutMcastPkts
PlugInUnit:pmSwitchIngressLoad
EUtranCellFDD:pmErabRelNormalEnbArp
EUtranCellFDD:pmRrcConnTuneOutLevSum
Cell:pmAdvCellSupRecoveryCellAtt
Cell:pmAdvCellSupRecoveryNodeAtt
Cell:pmAdvCellSupDetection
Cell:pmAdvCellSupRecoveryCellSucc
Cell:pmAdvCellSupRecoveryNodeSucc
Cell:pmRrcConnReestAttUeUnknown
Cell:pmRrcConnReestSuccUeUnknown
Cell:pmHoExeInSuccTdScdmaQci
Cell:pmAnrNeighbreIDelGeran
Cell:pmAnrNeighbreIDelUtran
EUtranCellFDD:pmRrcConnTuneOutLevSamp
EUtranCellFDD:pmUeCtxtRelNormalEnbTuneOut
EUtranCellFDD:pmUeCtxtRelAbnormalEnbTuneOut
EUtranCellRelation:pmHoExeAttLteIntraFTuneOut
EUtranCellRelation:pmHoExeSuccLteIntraFTuneOut
EUtranCellFDD:pmRrcConnReestAttHo
EUtranCellFDD:pmRrcConnReestSuccHo
PlugInUnit:pmSwitchIngressDiscards

BbProcessingResource:pmZtemporary51
BbProcessingResource:pmZtemporary52
BbProcessingResource:pmZtemporary53
BbProcessingResource:pmZtemporary54
EUtranCellFDD:pmRadioUeRepCqi2Subband0Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband10Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband11Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband12Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband1Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband2Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband3Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband4Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband5Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband6Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband7Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband8Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband9Sum
EUtranCellFDD:pmRadioUeRepCqi2SubbandSamp
EUtranCellFDD:pmRadioUeRepCqiSubband0Sum
EUtranCellFDD:pmRadioUeRepCqiSubband10Sum
EUtranCellFDD:pmRadioUeRepCqiSubband11Sum
EUtranCellFDD:pmRadioUeRepCqiSubband12Sum
EUtranCellFDD:pmRadioUeRepCqiSubband1Sum
EUtranCellFDD:pmRadioUeRepCqiSubband2Sum
EUtranCellFDD:pmRadioUeRepCqiSubband3Sum
EUtranCellFDD:pmRadioUeRepCqiSubband4Sum
EUtranCellFDD:pmRadioUeRepCqiSubband5Sum
EUtranCellFDD:pmRadioUeRepCqiSubband6Sum
EUtranCellFDD:pmRadioUeRepCqiSubband7Sum
EUtranCellFDD:pmRadioUeRepCqiSubband8Sum
EUtranCellFDD:pmRadioUeRepCqiSubband9Sum
EUtranCellFDD:pmRadioUeRepCqiSubbandSamp
TwampResponder:pmTestInDiscards
TwampResponder:pmTestInErrors
TwampResponder:pmTestInReceives
TwampResponder:pmTestOutTransmits
TwampResponder:pmTestSessions

BbProcessingResource:pmZtemporary53
BbProcessingResource:pmZtemporary54
EUtranCellFDD:pmRadioUeRepCqi2Subband0Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband10Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband11Sum

EUtranCellFDD:pmRadioUeRepCqi2Subband1Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband2Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband3Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband4Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband5Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband6Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband7Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband8Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband9Sum
EUtranCellFDD:pmRadioUeRepCqi2SubbandSamp
EUtranCellFDD:pmRadioUeRepCqiSubband0Sum
EUtranCellFDD:pmRadioUeRepCqiSubband10Sum
EUtranCellFDD:pmRadioUeRepCqiSubband11Sum
EUtranCellFDD:pmRadioUeRepCqiSubband12Sum
EUtranCellFDD:pmRadioUeRepCqiSubband1Sum
EUtranCellFDD:pmRadioUeRepCqiSubband2Sum
EUtranCellFDD:pmRadioUeRepCqiSubband3Sum
EUtranCellFDD:pmRadioUeRepCqiSubband4Sum
EUtranCellFDD:pmRadioUeRepCqiSubband5Sum
EUtranCellFDD:pmRadioUeRepCqiSubband6Sum
EUtranCellFDD:pmRadioUeRepCqiSubband7Sum
EUtranCellFDD:pmRadioUeRepCqiSubband8Sum
EUtranCellFDD:pmRadioUeRepCqiSubband9Sum
EUtranCellFDD:pmRadioUeRepCqiSubbandSamp
TwampResponder:pmTestInDiscards
TwampResponder:pmTestInErrors
TwampResponder:pmTestInReceives
TwampResponder:pmTestOutTransmits
TwampResponder:pmTestSessions

Continue "Counters included in "National_PM_Standard_eNb" Profile for L13A"

EUtranCellFDD:pmRadioUeRepCqi2Subband12Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband1Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband2Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband3Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband4Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband5Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband6Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband7Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband8Sum
EUtranCellFDD:pmRadioUeRepCqi2Subband9Sum
EUtranCellFDD:pmRadioUeRepCqi2SubbandSamp
EUtranCellFDD:pmRadioUeRepCqiSubband0Sum
EUtranCellFDD:pmRadioUeRepCqiSubband10Sum
EUtranCellFDD:pmRadioUeRepCqiSubband11Sum
EUtranCellFDD:pmRadioUeRepCqiSubband12Sum
EUtranCellFDD:pmRadioUeRepCqiSubband1Sum
EUtranCellFDD:pmRadioUeRepCqiSubband2Sum
EUtranCellFDD:pmRadioUeRepCqiSubband3Sum
EUtranCellFDD:pmRadioUeRepCqiSubband4Sum
EUtranCellFDD:pmRadioUeRepCqiSubband5Sum
EUtranCellFDD:pmRadioUeRepCqiSubband6Sum
EUtranCellFDD:pmRadioUeRepCqiSubband7Sum
EUtranCellFDD:pmRadioUeRepCqiSubband8Sum
EUtranCellFDD:pmRadioUeRepCqiSubband9Sum
EUtranCellFDD:pmRadioUeRepCqiSubbandSamp
TwampResponder:pmTestInDiscards
TwampResponder:pmTestInErrors
TwampResponder:pmTestInReceives
TwampResponder:pmTestOutTransmits
TwampResponder:pmTestSessions

EUtranCellFDD:pmS1SigConnEstabSuccMta
BbProcessingResource:pmLicDICapActual
BbProcessingResource:pmLicDICapDistr
BbProcessingResource:pmLicDIPrbCapActual
BbProcessingResource:pmLicDIPrbCapDistr
BbProcessingResource:pmLicUICapActual
BbProcessingResource:pmLicUICapDistr
BbProcessingResource:pmLicUIPrbCapActual
BbProcessingResource:pmLicUIPrbCapDistr
BbProcessingResource:pmPdcPktDiscDIEth
BbProcessingResource:pmPdcPktDiscUIEthPacing
EUtranCellFDD:pmUeCtxtRelAbnormalMmeAct
EUtranCellFDD:pmUeCtxtRelCsfbTdScdma
EUtranCellFDD:pmUeCtxtRelCsfbTdScdmaEm
UtranCellRelation:pmHoExeAttTdScdma
UtranCellRelation:pmHoExeSuccTdScdma
UtranCellRelation:pmHoPrepAttTdScdma
UtranCellRelation:pmHoPrepSuccTdScdma
EUtranCellTDD:pmErabEstabAttAddedArp
EUtranCellTDD:pmErabEstabAttInitArp
EUtranCellTDD:pmErabEstabSuccAddedArp
EUtranCellTDD:pmErabEstabSuccInitArp
EUtranCellTDD:pmErabRelAbnormalMmeAct
EUtranCellTDD:pmS1SigConnEstabAttEm
EUtranCellTDD:pmS1SigConnEstabAttHpa
EUtranCellTDD:pmS1SigConnEstabAttMod
EUtranCellTDD:pmS1SigConnEstabAttMos
EUtranCellTDD:pmS1SigConnEstabAttMta
EUtranCellTDD:pmS1SigConnEstabSuccEm
EUtranCellTDD:pmS1SigConnEstabSuccHpa
EUtranCellTDD:pmS1SigConnEstabSuccMod
EUtranCellTDD:pmS1SigConnEstabSuccMos
EUtranCellTDD:pmS1SigConnEstabSuccMta
EUtranCellTDD:pmUeCtxtRelAbnormalMmeAct
EUtranCellTDD:pmUeCtxtRelCsfbTdScdma
EUtranCellTDD:pmUeCtxtRelCsfbTdScdmaEm

Counters Move from "System_ERBS_PRIMARY" to "National_PM_Standard_eNb" Profile in L13A:

- EUtranCellFDD:pmPrbAvailDI
- EUtranCellFDD:pmPrbAvailUI
- EUtranCellFDD:pmErabRelAbnormalEnbActArp
- EUtranCellFDD:pmErabRelAbnormalEnbArp
- EUtranCellFDD:pmErabRelAbnormalMmeActArp
- EUtranCellFDD:pmErabRelNormalEnbActArp
- EUtranCellFDD:pmErabRelAbnormalMmeActQci

Counters Move from "National_PM_Standard_eNb" to "System_ERBS_PRIMARY" Profile in L13A:
None

Counters that Move off (No) from "System_ERBS_PRIMARY" Profile in L13A:

CapacityConnectedUsers:pmLicConnectedUsersHardLimit.....deprecated
DIBasebandCapacity:pmLicDICapActual.....deprecated
DIBasebandCapacity:pmLicDICapDistr.....deprecated
DIPrbCapacity:pmLicDIPrbCapActual.....deprecated
DIPrbCapacity:pmLicDIPrbCapDistr.....deprecated
ENodeBFunction:pmPdcPktDiscDIEth.....deprecated
EUTranCellFDD:pmPdcPVolUIDrbLastTTI.....deprecated
EUTranCellFDD:pmPrbUsedDI.....deprecated
EUTranCellFDD:pmPrbUsedUI.....deprecated
EUTranCellTDD:pmPdcPVolUIDrbLastTTI.....deprecated
EUTranCellTDD:pmPrbUsedDI.....deprecated
EUTranCellTDD:pmPrbUsedUI.....deprecated
UIBasebandCapacity:pmLicUICapActual.....deprecated
UIBasebandCapacity:pmLicUICapDistr.....deprecated
UIPrbCapacity:pmLicUIPrbCapActual.....deprecated
UIPrbCapacity:pmLicUIPrbCapDistr.....deprecated

Counters that Move off (No) from "National_PM_Standard_eNb" Profile in L13A:

IpAccessHostEt:pmMeanAtmConnSetupIntensity....restricted
IpAccessHostEt:pmPeakAtmConnSetupIntensity....restricted
IpAccessHostEt:pmStdDevAtmSetupIntensity.....restricted
IpAccessHostEt:pmInAppLayerError.....restricted

EUtranCellFDD:pmPdcplLatTimeDINoDrxSync
EUtranCellFDD:pmRaAllocCfra
EUtranCellFDD:pmRaAttCfra
EUtranCellFDD:pmRaFailCfraMsg2Disc
EUtranCellFDD:pmRaSuccCfra
EUtranCellFDD:pmRaSuccTa
EUtranCellFDD:pmSchedRestrictUeCatDI
EUtranCellFDD:pmSchedRestrictUeCatUI
EUtranCellFDD:pmUeCtxtTa
IpAccessHostEt:pmMeanAtmConnSetupIntensity
IpAccessHostEt:pmPeakAtmConnSetupIntensity
IpAccessHostEt:pmStdDevAtmSetupIntensity
EUtranCellFDD:pmRachNumContentionReport
EUtranCellFDD:pmRachPreambleDist
EUtranCellFDD:pmRrcConnLevSumUIOutOfSync
EUtranCellFDD:pmUeCtxtRelSCTdScdma
EUtranCellRelation:pmHoTooEarlyHoInterF
EUtranCellRelation:pmHoTooEarlyHoIntraF
EUtranCellRelation:pmHoTooLateHoInterF
EUtranCellRelation:pmHoTooLateHoIntraF
EUtranCellRelation:pmHoWrongCellInterF
EUtranCellRelation:pmHoWrongCellIntraF
EUtranCellRelation:pmHoWrongCellReestInterF
EUtranCellRelation:pmHoWrongCellReestIntraF
IpAccessHostEt:pmInAppLayerError
EUtranCellFDD:pmErabQciMax
EUtranCellFDD:pmErabQciLevSum
EUtranCellFDD:pmDrxTotalTimeCfgIdx
EUtranCellFDD:pmDrxSleepTimeCfgIdx
EUtranCellFDD:pmDrxSleepTimeAvailDataDICfgIdx
EUtranCellFDD:pmRaUnassignedCfraFalse
EUtranCellFDD:pmRaUnassignedCfraSum
EUtranCellFDD:pmPucchSrMax
EUtranCellFDD:pmPucchSr
EUtranCellFDD:pmHoExeAttQci
EUtranCellFDD:pmHoExeSuccQci
EUtranCellFDD:pmRrcConnTuneOutLevSamp

EUtranCellFDD:pmMacHarqUIAck
EUtranCellFDD:pmMacHarqUIDtx
EUtranCellFDD:pmMacHarqUINack
EUtranCellFDD:pmPdcchResUtil
EUtranCellFDD:pmPdcpcDelayTimeDI
EUtranCellFDD:pmPdcpcVolUIDrbLastTTI
EUtranCellFDD:pmPrbUsedDI
EUtranCellFDD:pmPrbUsedDICcch
EUtranCellFDD:pmPrbUsedDISrb
EUtranCellFDD:pmPrbUsedUI
EUtranCellFDD:pmPrbUsedUICcch
EUtranCellFDD:pmRadioThpResDISelTbs
EUtranCellFDD:pmRadioThpResUISelTbs
EUtranCellFDD:pmRadioThpVolDISelTbs
EUtranCellFDD:pmRadioThpVolUISelTbs
EUtranCellTDD:pmErabEstabAttGbr
EUtranCellTDD:pmErabEstabFailGbrDICell
EUtranCellTDD:pmErabEstabFailGbrUICell
EUtranCellTDD:pmErabEstabSuccGbr
EUtranCellTDD:pmPdcpcVolUIDrbLastTTI
EUtranCellTDD:pmPrbUsedDI
EUtranCellTDD:pmPrbUsedUI
UIBasebandCapacity:pmLicUICapActual
UIBasebandCapacity:pmLicUICapDistr
UIBasebandCapacity:pmLicUICapMax
UIPrbCapacity:pmLicUIPrbCapActual
UIPrbCapacity:pmLicUIPrbCapDistr
EUtranCellFDD:pmRadioRecInterferencePwrPrb
EUtranCellFDD:pmUeThpTimeUIRs
EUtranCellRelation:pmHoPrepTNotAllowedLteInterF
LoadBalancingFunction:pmAvSubRatioSamp
LoadBalancingFunction:pmAvSubRatioSum
EUtranCellRelation:pmHoPrepTNotAllowedLteIntraF
ENodeBFunction:pmRohcCidDISamp
ENodeBFunction:pmRohcCidDISum
ENodeBFunction:pmRohcCidUISamp
ENodeBFunction:pmRohcCidUISum
Corrected/L13A EUtranCellFdd::eutranCellCoverage.posCellBearing Range from 0.3599 to -1..3599
Corrected/L13A EUtranCellFdd::eutranCellCoverage.posCellOpening Angle Range from 0.3599 to -1..3599
Corrected/L13A EUtranCellFdd::eutranCellArea.posCellRadius to eutranCellCoverage.posCellRadius

L12B FGA-14 LTE DAS Site/ Cell Naming field change
Add L12B ENodeBFunction::userlabel from blank to DAS, DAS_ISE
Add L12B EUTranCellFDD::userlabel from blank to DAS_ISE, iDAS_BAU, iDAS_HiCap, oDAS_BAU, oDAS_HiCap
Add L13A ENodeBFunction::userlabel from blank to DAS, DAS_ISE
Add L13A EUTranCellFDD::userlabel from blank to DAS_ISE, iDAS_BAU, iDAS_HiCap, oDAS_BAU, oDAS_HiCap
Corrected L13A BestNeighborSI::featureStateBestNeighborSI ATTGS value from 1 to 0.
Corrected L12B ReportConfigA5Anr::a5Threshold2RsrpAnrDelta from 5 to 1.
Corrected L13A UeMeasControl::zzzTemporary6 from -2000000000 to -1.
Correct/Add L12B SectorEquipmentFunction::confOutputPower ATTGS Value 60 Permission Global and Suffix 1 AIR.
Correct/Add L13A SectorEquipmentFunction::confOutputPower ATTGS Value 60 Permission Global and Suffix 1 AIR.

FGA L13A-E-015 EUTRAN RS Power Boost Change. National recommendation for Ericsson LTE system constant parameter deltaPsdRs2Tx (RS Power Boost). RS Power Boost of 3db is activated by default in AT&T's network, but as the network matures it can be reduced in areas with adequate overlapping coverage with very minimal impact to the Time Not On LTE (TNOL) metric. FGA15 introduces Reference Signal Power Boost reduction from 3db to 1.7db for sites meeting the qualification threshold below.
This reduction in Reference Signal Power Boost is needed for sites with less than or equal to 0.6% IRAT and greater than 60 Average RRC Connected Users measured over a week timespan. Field Trials concluded these sites will improve in retainability, DL User Throughput, DL CQI, UL/DL NACK/ACK Ratios, and greater 16/64QAM utilization with slight increases to TNOL not affecting overall market performance.
Add L13A SystemConstants=1::deltaPsdRs2Tx value = 1.7..3 and Initial Value 3.
Corrected L12B SystemConstants=1,SystConstants=hip Node Group=Radio (OSS) Operator Restricted and NGFC=Power Control
Corrected L13A SystemConstants=1,SystConstants=hip Node Group=Radio (OSS) Operator Restricted and NGFC=Power Control

Corrected L13A ReportConfigA5Anr::a5Threshold2RsrpAnrDelta from 5 to 1.

Added QciProfilePredefined=qci5::drxPriority (VoLTE) ATTGS value of 0, Permission value of Global.
Added QciProfilePredefined=qci8::drxPriority (VoLTE) ATTGS value of 0, Permission value of Global.
Added QciProfilePredefined=qci1::drxProfileRef (VoLTE) ATTGS value of ManagedElement=1,ENodeBFunction=1,DrxProfile=1, Permission value of Global.
Added QciProfilePredefined=qci5::drxProfileRef (VoLTE) ATTGS value of ManagedElement=1,ENodeBFunction=1,DrxProfile=0, Permission value of Global.
Added QciProfilePredefined=qci8::drxProfileRef (VoLTE) ATTGS value of ManagedElement=1,ENodeBFunction=1,DrxProfile=0, Permission value of Global.
Added UtranFreqRelation::voicePrio (VoLTE) ATTGS value of 3,2,-1, Permission value of Local.
Added EUtranFreqRelation::voicePrio (VoLTE) ATTGS value of 0, Permission value of Local.
Added ExternalUtranCellFDD::srvccCapability (VoLTE) ATTGS value of 1, Permission value of Global.
Changed ROHC::featureStateROHC (VoLTE) ATTGS value from 0 to 1.
Changed ROHC::serviceStateROHC (VoLTE) ATTGS value from 0 to 1.
Changed SRVCCtoUTRAN::featureStateSRVCCtoUTRAN (VoLTE) ATTGS value from 0 to 1.
Changed SRVCCtoUTRAN::serviceStateSRVCCtoUTRAN (VoLTE) ATTGS value from 0 to 1.
Changed TtiBundling::featureStateTtiBundling (VoLTE) ATTGS value from 0 to 1.
Changed TtiBundling::serviceStateTtiBundling (VoLTE) ATTGS value from 0 to 1.
Added WcdmaHandover::featureStateWcdmaHandover (VoLTE) ATTGS value of 0, Permission value of Global.
Added UtranFreqRelation::mobilityAction (VoLTE) ATTGS value of 2, Permission value of Global.
Added AnrFunctionUtran::anrStateUtran (VoLTE) ATTGS value of 1, Permission value of Global.
Changed DynamicQoSModification::featureStateDynamicQoSModification (VoLTE) ATTGS value from 0 to 1.
Changed DynamicQoSModification::serviceStateDynamicQoSModification (VoLTE) ATTGS value from 0 to 1.
Added AnrFunction::zzzTemporary1 (VoLTE) ATTGS value of 1, Permission value of Global.
Added ENodeBFunction::zzzTemporary5 (VoLTE) ATTGS value of 1, Permission value of Global.
Added QciProfilePredefined=qci1::resourceType (VoLTE) ATTGS value of 1, Permission value of Not Auditable.
Added QciProfilePredefined=qci5::resourceType (VoLTE) ATTGS value of 0, Permission value of Not Auditable.
Added QciProfilePredefined=qci1::resourceAllocationStrategy (VoLTE) ATTGS value of 1, Permission value of Global.
Added QciProfilePredefined=qci5::resourceAllocationStrategy (VoLTE) ATTGS value of 1, Permission value of Global.
Added QciProfilePredefined=qci1::relativePriority (VoLTE) ATTGS value of 1, Permission value of Global.
Added QciProfilePredefined=qci5::relativePriority (VoLTE) ATTGS value of 1, Permission value of Global.
Added QciProfilePredefined=qci1::dscp (VoLTE) ATTGS value of 46, Permission value of Global.
Added QciProfilePredefined=qci5::dscp (VoLTE) ATTGS value of 32, Permission value of Global.
Added QciProfilePredefined=qci1::srsAllocationStrategy (VoLTE) ATTGS value of 1, Permission value of Global.
Added QciProfilePredefined=qci5::srsAllocationStrategy (VoLTE) ATTGS value of 1, Permission value of Global.
Added QciProfilePredefined=qci1::dlMinBitRate (VoLTE) ATTGS value of 0, Permission value of Global.
Added QciProfilePredefined=qci5::dlMinBitRate (VoLTE) ATTGS value of 0, Permission value of Global.
Added QciProfilePredefined=qci1::ulMinBitRate (VoLTE) ATTGS value of 0, Permission value of Global.
Added QciProfilePredefined=qci5::ulMinBitRate (VoLTE) ATTGS value of 0, Permission value of Global.
Changed ReportConfigEutraBadCovPrim::timeToTriggerA2Prim from 1280,640 to 640, Permission from Local to Global

New Tab "Trial_New_2C-GS"

Proposal of 2C settings on 700 Freq.Band from FFA Market 2C sites... after GS meeting following lines will be updated.

Changed EUTranFreqRelation::connectedModeMobilityPrio(EUTranFreqRelation=From 700 to AWS, 2C 6cell 2RX 700 AWS) ATTGS value from 1 to -1

Added EUTranFreqRelation::voicePrio(From 700 to AWS, 2C 6cell 2RX 700 AWS) ATTGS value of -1, Permission value of Global, Suffix value of From 700 to AWS, 2C 6cell 2RX 700 AWS

Changed ReportConfigA1Prim::a1ThresholdRsrpPrim(AWS in 2C 6cell 2RX 700 AWS) Suffix from AWS in 2C 6cell 2RX 700 AWS to value of 2C 6cell 2RX 700 AWS

Changed ReportConfigEUTraBadCovPrim::a2ThresholdRsrpPrim((AWS in 2C 6cell 2RX 700 AWS) Suffix from AWS in 2C 6cell 2RX 700 AWS to value of 2C 6cell 2RX 700 AWS

Removed ReportConfigEUTraBadCovPrim::a2ThresholdRsrpPrim(700 in 2C 6cell 2RX 700 AWS)

Changed ReportConfigA5::a5Threshold1Rsrp(AWS in 2C 6cell 2RX 700 AWS) Suffix from AWS in 2C 6cell 2RX 700 AWS to value of 2C 6cell 2RX 700 AWS

Changed ReportConfigA5::a5Threshold2Rsrp(AWS in 2C 6cell 2RX 700 AWS) Suffix from AWS in 2C 6cell 2RX 700 AWS to value of 2C 6cell 2RX 700 AWS

Changed ReportConfigB2Utra::b2Threshold1Rsrp(AWS in 2C 6cell 2RX 700 AWS) Suffix from AWS in 2C 6cell 2RX 700 AWS to value of 2C 6cell 2RX 700 AWS

In L13A After IP6, Vendor recommends parameter noOfPucchSrUsers to be 810.

Changed EUTranCellFDD::noOfPucchSrUsers (5Mhz or mix 5/10Mhz) ATTGS value from 850 to 810.

Correct L12B QciProfilePredefined=2C 6cell 2RX 700 AWS::qciSubscriptionQuanta to QciProfilePredefined=qci8=2C 6cell 2RX 700 AWS::qciSubscriptionQuantavalue 100.

Correct L13A QciProfilePredefined=2C 6cell 2RX 700 AWS::qciSubscriptionQuanta to QciProfilePredefined=qci8=2C 6cell 2RX 700 AWS::qciSubscriptionQuantavalue 100.

Add Event Profile Std L13A Tab.

LTE 11

Corrected AdmissionControl::dIMBmsGbrRatio Parameter to dIMbmsGbrRatio - removed extra M in dIMbmsGbrRatio

Removed all L12B parameters.

LTE12 Corrections

Corrected IpSystem=1,lppm=1::responderFeatureState ATTGS from 1,0 to 1 and Initial Value from 0 to null and Permission from Local to Global

Corrected/Removed IpSystem=1,lppm=1,TwampResponder=5::administrativeState

Corrected/Removed IpSystem=1,lppm=1,TwampResponder=5::udpPort

Corrected/Removed IpSystem=1,lppm=1,TwampResponder=6::administrativeState

Corrected/Removed IpSystem=1,lppm=1,TwampResponder=6::udpPort

Corrected/Removed IpSystem=1,lppm=1,TwampResponder=7::administrativeState

Corrected/Removed IpSystem=1,lppm=1,TwampResponder=7::udpPort

Corrected/Removed IpSystem=1,lppm=1,TwampResponder=8::administrativeState

Corrected/Removed IpSystem=1,lppm=1,TwampResponder=8::udpPort

Removed Counter Activation STD12B Tab and Event Profile Std L12B. In Counter Activation STD13A changed all the L12B to L13A.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

VoLTE change to add, for only 700 layer of the 2C site, to lineup the time to trigger for “B2” with the “A2 critical” to eliminate any irat % increase due to the 2C parameter change.

Add ReportConfigB2Utra=700 in 2C 6cell 2RX 700 AWS::timeToTriggerB2 value 1280 permission Global.

Add 2nd MOC Column for Nakina format.

Doublecheck VoLTE changes and re-enter parameters removed.

Correct/Change TrafficManagementQueue=1::queueLength value 125000. Removed commas and spaces.

Correct/Change TrafficManagementQueue=2::queueLength value 125000. Removed commas and spaces.

Correct/Change TrafficManagementQueue=3::queueLength value 125000. Removed commas and spaces.

Correct/Change TrafficManagementQueue=4::queueLength value 1000000. Removed commas and spaces.

Correct/Change TrafficManagementQueue=5::queueLength value 1000000. Removed commas and spaces.

Correct/Change TrafficManagementQueue=6::queueLength value 1000000. Removed commas and spaces.

Remove LogicalChannelGroup::absPrioOverride.

Remove LogicalChannelGroup::ulMinBitRate.

Change NodeManagementFunction::technicalPresent from Global to Not Auditable

Change PacketTimeSyncRef::asymmetryCompensation from Global to Not Auditable.

Remove PmEventService::cellTraceDataLevel.

Remove PmEventService::rbsUeTraceEventStreamingPort,

Corrected QciProfilePredetermined::dlResourceAllocationStrategy to move "qci8" to the MOC from the parameter

Correct CsfbToGeranUtran::serviceStateCsfbToGera to add "n" on Geran

FGA L13A 021 EUTRAN EventA2 Time to Trigger Change. This FGAs deals with eventA2 time to trigger which normally used in LTE IRAT mobility and the way eventA2 is triggered. Please note that eventA2 has different meaning if IFHO/IRAT Enhancement (L13A) feature is enabled. Hence, this FGA only applies to the cell with IFHO/IRAT Enhancement disabled and IRAT ANR enabled.

Parameter ReportConfigEutraBadCovPrim::timeToTriggerA2Prim is set to 640. This change was actually done in Version 13.05 as part of the VoLTE changes. This is being noted here to correspond with FGA L13A 021. This Field Guide Alert supersedes L12A LTE FGA07.

FGA L13A-E-022 EUTRAN ANR RSRP Threshold and Remove Relation Timers. change in the National recommendation for Ericsson LTE Operator configurable parameters AnrFunction.removeNcellTime, AnrFunction.removeNenbTime, AnrFunction.removeNrelTime, and AnrFunctionEUTran.cellAddRsrpThresholdEutran.

Market wide trials conducted in San Francisco and South Florida concluded a 50% reduction in unuseddefined relations will occur when reducing cellAddRsrpThresholdEutran from a -144dbm to a -116dbm. Reducing the three removal timers from 7 days to 1 day also allows the network to self-optimize on a daily basis with no significant increase to eNodeB processor loading or degradation due to missing handovers. ANR RSRP values should be set for the entire market before changing the timers.

Change AnrFunction::removeNcellTime from 7 to 1.

Change AnrFunction::removeNenBTime from 7 to 1.

Change AnrFunction::removeNrelTime from 7 to 1.

Change AnrFunctionEUTran.cellAddRsrpThresholdEutran from -1440 to -1060..-1220, set Initial Value to -1160 with Range set to -1440..0 and Permissions from Global to Local.

Tiger Team Document Clean-up

Deprecated AgpsSupl::licenseStateAgpsSupl
Deprecated AppsSupl::licenseStateAgpsSup
Deprecated Dl64Qam::licenseStateDl64Qam
Deprecated Dl64Qam::featureStateDl64Qam
Deprecated ENodeBFuncio::minBestCellHoAttempts
Deprecated EUtranCellFDD::nrOfSymbolsPdcch
Deprecated EUtranCellRelation::supportedMobilityRelationType
Deprecated HoOscCtrlRel::featureStateHoOscCtrlRel
Deprecated HoOscCtrlRel::licenseStateHoOscCtrlRel
Deprecated HoOscCtrlRel::serviceStateHoOscCtrlRel
Deprecated ImLoadBalancing::licenseStateImLoadBalancing
Deprecated ImLoadBalancing::serviceStateImLoadBalancing
Sepricate ImLoadBalancing::featureStateImLoadBalancing
Deprecated IntraLTEHandover::licenseStateIntraLTEHandover
Deprecated IntraLTEHandover::featureStateIntraLTEHandover
Deprecated Ip::connectionAttemptTimer
Deprecated Ip::maxRetransmissionAttempts
Deprecated ReportConfigEutraBestCell::reportAmountA3
Deprecated TimeAndPhaseSynchWithGPS::featureStateTimeAndPhaseSynchWithGPS
Deprecated UeMeasControl::bestCellReleaseActive
Deprecated UI16Qam::featureStateUI16Qam

Change ReportConfigEutraIntraFreqPm::a5ThresholdRsrpPm2 from Global to GlobalOptional
Change ReportConfigEutraIntraFreqPm::a5ThresholdRsrqPm1 from Global to GlobalOptional
Change ReportConfigEutraIntraFreqPm::a5ThresholdRsrqPm2 from Global to GlobalOptional
Change AirlfLoadProfile::ailgChangePeriod from Global to GlobalOptional
Change AirlfLoadProfile::ailgHighPrio from Global to GlobalOptional
Change AirlfLoadProfile::ailgLoadType from Global to GlobalOptional
Change AirlfLoadProfile::ailgLowPrioModType from Global to GlobalOptional
Change AirlfLoadProfile::dlPrbLoadLevel from Global to GlobalOptional
Change ReportConfigEutraIntraFreqPm::hysteresisPm from Global to GlobalOptional
Change ReportConfigEutraIntraFreqPm::maxReportCellsPm from Global to GlobalOptional
Change ReportConfigEutraIntraFreqPm::measSelectionEutraPm from Global to GlobalOptional
Change AirlfLoadProfile::minLoadLevelPdcch from Global to GlobalOptional
Change GeranFreqGroupRelation::mobilityAction from Global to GlobalOptional
Change GeranFreqGroupRelation::mobilityActionCsfb from Global to GlobalOptional
Change GeranFreqGroupRelation::nccPermitted from Global to GlobalOptional
Change AirlfLoadProfile::OcngPrbSerie.pdschModType from Global to GlobalOptional
Change AirlfLoadProfile::OcngPrbSerie.prbFirst from Global to GlobalOptional
Change AirlfLoadProfile::OcngPrbSerie.prbLast from Global to GlobalOptional
Change AirlfLoadProfile::OcngPrbSerie.usedSubFrameNo from Global to GlobalOptional
Change GeranFreqGroupRelation::pMaxGeran from Global to GlobalOptional
Change GeranFreqGroupRelation::qOffsetFreq from Global to GlobalOptional
Change GeranFreqGroupRelation::qRxLevMin from Global to GlobalOptional
Change ReportConfigEutraIntraFreqPm::reportAmountPm
Change ReportConfigEutraIntraFreqPm::reportIntervalPm
Change ReportConfigEutraIntraFreqPm::reportQuantityPm
Change GeranFreqGroupRelation::threshXHigh
Change GeranFreqGroupRelation::threshXLow
Change ReportConfigEutraIntraFreqPm::timeToTriggerPm
Change AirlfLoadProfile::TrafficModelPrb.bitRatePerQci
Change AirlfLoadProfile::TrafficModelPrb.bufferStatus
Change AirlfLoadProfile::TrafficModelPrb.noOfArtificialUsers
Change AirlfLoadProfile::TrafficModelPrb.qciDistSinrHigh
Change AirlfLoadProfile::TrafficModelPrb.qciDistSinrLow
Change AirlfLoadProfile::TrafficModelPrb.qciDistSinrMedium
Change AirlfLoadProfile::TrafficModelPrb.ulDIRatioPerQci
Change ReportConfigEutraIntraFreqPm::triggerQuantityPm

LTE13 Corrections:

Change/Corrected last character in all instances of tPollRetransmitDI and tPollRetransmitUI from a capital i to a lower case L.

per Consolidation revL
Corrected ReportConfigEutraBadCovSec:timeToTriggerA2Sec Suffix from 'intrerLTE' to 'interLTE' per Consolidation revL
Corrected ReportConfigEutraBadCovSec:timeToTriggerA2Sec Suffix from 'intrerRAT_10' to 'interRAT_10' per Consolidation revL
Corrected ReportConfigEutraBadCovSec:timeToTriggerA2Sec from 'intrerRAT_5' to 'interRAT_5' per Consolidation revL
Added ReportConfigEutraBadCovSec:timeToTriggerA2Sec(multiCarrier) per Consolidation revL
Corrected ReportConfigEutraFBestCell:timetotriggerA3 capitalization to timeToTriggerA2 per Consolidation revL
Removed ReportConfigB2Utra:timeToTriggerB2(700 in 2C 6cell 2RX 700 AWS) per Consolidation revL
Corrected ReportConfigB2Utra:timeToTriggerB2 Suffix from 'null' to 'singleCarrier' per Consolidation revL
Corrected RadioBearerTable=default,DataRadioBearer=1:tPollRetransmitDI last letter from capital i to lower case L per Consolidation revL
Corrected RadioBearerTable=default,SignalingRadioBearer=1:tPollRetransmitDI last letter from capital i to lower case L per Consolidation revL
Corrected RadioBearerTable=default,DataRadioBearer=1:tPollRetransmitDI last letter from capital i to lower case L per Consolidation revL
Corrected RadioBearerTable=default,SignalingRadioBearer=1:tPollRetransmitDI last letter from capital i to lower case L per Consolidation revL
Corrected RadioBearerTable=default,DataRadioBearer=1:tPollRetransmitUI last letter from capital i to lower case L per Consolidation revL
Corrected RadioBearerTable=default,DataRadioBearer=1:tPollRetransmitUI last letter from capital i to lower case L per Consolidation revL
Corrected RadioBearerTable=default,SignalingRadioBearer=1:tPollRetransmitUI last letter from capital i to lower case L per Consolidation revL
Corrected RadioBearerTable=default,DataRadioBearer=1:tPollRetransmitUI last letter from capital i to lower case L per Consolidation revL
Corrected RadioBearerTable=default,SignalingRadioBearer=1:tPollRetransmitUI last letter from capital i to lower case L per Consolidation revL
Removed ReportConfigEutraBadCovPrim:triggerQuantityA2Prim(INTERRAT_10) per Consolidation revL
Added ReportConfigEutraBadCovPrim:triggerQuantityA2Prim() per Consolidation revL
Removed ReportConfigEutraBadCovSec:triggerQuantityA2Sec() per Consolidation revL
Removed ReportConfigEutraBadCovSec:triggerQuantityA2Sec(2C 6cell 2RX 700 AWS) per Consolidation revL
Corrected ReportConfigEutraBadCovSec:triggerQuantityA2Sec(intraLTE) ATTGS value from 1,0 to 1 per Consolidation revL
Added UtranFreqRelation:voicePrio(Femto) per Consolidation revL
Removed UtranFreqRelation:voicePrio(From 700 to AWS, 2C 6cell 2RX 700 AWS) per Consolidation revL
Added UtranFreqRelation:voicePrio(From LB to LB, multiCarrier) per Consolidation revL
Added UtranFreqRelation:voicePrio(From LB to MB, multiCarrier) per Consolidation revL
Added UtranFreqRelation:voicePrio(From MB to LB, multiCarrier) per Consolidation revL
Added UtranFreqRelation:voicePrio(From MB to MB, multiCarrier) per Consolidation revL
Added UtranFreqRelation:voicePrio(singleCarrier) per Consolidation revL
Added UtranFreqRelation:voicePrio(UMTS 1900) per Consolidation revL
Added UtranFreqRelation:voicePrio(UMTS 850) per Consolidation revL
Removed UtranFreqRelation:voicePrio() per Consolidation revL
Removed ENodeBFunction:zzzTemporary3(1(Inter-Frequency Border), Null(All Other Sites) per Consolidation revL
Added ENodeBFunction:zzzTemporary3(interFreq) per Consolidation revL
Added ENodeBFunction:zzzTemporary3(multiCarrier) per Consolidation revL
Added ENodeBFunction:zzzTemporary3(singleCarrier) per Consolidation revL

Correct NakinaMOC Column to Nakina MOC and added Permission of Global to threshXHigh parameters.

Corrected/Added QciProfilePredefined=qci3::MeasReportConfigParams.a5Threshold2RsrpOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci4::MeasReportConfigParams.a5Threshold2RsrpOffset() with ATTGS value of 0
Corrected QciProfilePredefined=qci5::MeasReportConfigParams.a5Threshold2RsrpOffset Suffix from (VoLTE) to null
Corrected/Added QciProfilePredefined=qci6::MeasReportConfigParams.a5Threshold2RsrpOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci7::MeasReportConfigParams.a5Threshold2RsrpOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci8::MeasReportConfigParams.a5Threshold2RsrpOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci9::MeasReportConfigParams.a5Threshold2RsrpOffset() with ATTGS value of 0
Corrected/Removed QciProfilePredefined::MeasReportConfigParams.a5Threshold2RsrqOffset()
Corrected/Added QciProfilePredefined=default::MeasReportConfigParams.a5Threshold2RsrqOffset() with ATTGS value of 0
Corrected QciProfilePredefined=qci1::MeasReportConfigParams.a5Threshold2RsrqOffset Suffix from (VoLTE) to null
Corrected/Added QciProfilePredefined=qci2::MeasReportConfigParams.a5Threshold2RsrqOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci3::MeasReportConfigParams.a5Threshold2RsrqOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci4::MeasReportConfigParams.a5Threshold2RsrqOffset() with ATTGS value of 0
Corrected QciProfilePredefined=qci5::MeasReportConfigParams.a5Threshold2RsrqOffset Suffix from (VoLTE) to null
Corrected/Added QciProfilePredefined=qci6::MeasReportConfigParams.a5Threshold2RsrqOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci7::MeasReportConfigParams.a5Threshold2RsrqOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci8::MeasReportConfigParams.a5Threshold2RsrqOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci9::MeasReportConfigParams.a5Threshold2RsrqOffset() with ATTGS value of 0
Corrected/Removed QciProfilePredefined::MeasReportConfigParams.b2Threshold1RsrpGeranOffset()
Corrected/Added QciProfilePredefined=default::MeasReportConfigParams.b2Threshold1RsrpGeranOffset() with ATTGS value of 0
Corrected QciProfilePredefined=qci1::MeasReportConfigParams.b2Threshold1RsrpGeranOffset Suffix from (VoLTE) to null
Corrected/Added QciProfilePredefined=qci2::MeasReportConfigParams.b2Threshold1RsrpGeranOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci3::MeasReportConfigParams.b2Threshold1RsrpGeranOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci4::MeasReportConfigParams.b2Threshold1RsrpGeranOffset() with ATTGS value of 0
Corrected QciProfilePredefined=qci5::MeasReportConfigParams.b2Threshold1RsrpGeranOffset Suffix from (VoLTE) to null
Corrected/Added QciProfilePredefined=qci6::MeasReportConfigParams.b2Threshold1RsrpGeranOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci7::MeasReportConfigParams.b2Threshold1RsrpGeranOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci8::MeasReportConfigParams.b2Threshold1RsrpGeranOffset() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci9::MeasReportConfigParams.b2Threshold1RsrpGeranOffset() with ATTGS value of 0
Corrected/Removed QciProfilePredefined::MeasReportConfigParams.b2Threshold1RsrpUtraOffset()
Corrected/Added QciProfilePredefined=default::MeasReportConfigParams.b2Threshold1RsrpUtraOffset() with ATTGS value of 0
Corrected QciProfilePredefined=qci1::MeasReportConfigParams.b2Threshold1RsrpUtraOffset Suffix from (VoLTE) to null

Corrected/Added QciProfilePredefined=qci7::serviceType() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci8::serviceType() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci9::serviceType() with ATTGS value of 0
Corrected/Removed QciProfilePredefined::srsAllocationStrategy(hicap)
Corrected/Removed QciProfilePredefined::srsAllocationStrategy(VoLTE)
Corrected/Removed QciProfilePredefined::srsAllocationStrategy(VoLTE)
Corrected/Removed QciProfilePredefined::srsAllocationStrategy()
Corrected/Added QciProfilePredefined=default::srsAllocationStrategy() with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci1::srsAllocationStrategy() with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci2::srsAllocationStrategy() with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci3::srsAllocationStrategy() with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci4::srsAllocationStrategy() with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci5::srsAllocationStrategy() with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci6::srsAllocationStrategy() with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci7::srsAllocationStrategy() with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci8::srsAllocationStrategy(non_HICAP) with ATTGS value of 1
Corrected/Added QciProfilePredefined=qci8::srsAllocationStrategy(HICAP) with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci9::srsAllocationStrategy() with ATTGS value of 1
Corrected/Removed QciProfilePredefined::ulMinBitRate()
Corrected/Added QciProfilePredefined=default::ulMinBitRate() with ATTGS value of 0
Corrected QciProfilePredefined=qci1::ulMinBitRate Suffix from (VoLTE) to null
Corrected/Added QciProfilePredefined=qci2::ulMinBitRate() with ATTGS value of 350
Corrected/Added QciProfilePredefined=qci3::ulMinBitRate() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci4::ulMinBitRate() with ATTGS value of 0
Corrected QciProfilePredefined=qci5::ulMinBitRate Suffix from (VoLTE) to null
Corrected/Added QciProfilePredefined=qci6::ulMinBitRate() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci7::ulMinBitRate() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci8::ulMinBitRate() with ATTGS value of 0
Corrected/Added QciProfilePredefined=qci9::ulMinBitRate() with ATTGS value of 0
Corrected/Removed QciProfilePredefined::userLabel()

Correct EUTranCellFDD::cellSubscriptionCapacity LB in multiCarrier LB/10 MB/10 16000..20000 Local
 Correct EUTranCellFDD::cellSubscriptionCapacity LB in multiCarrier LB/10 MB/5 16000..20000 Local
 Correct EUTranCellFDD::cellSubscriptionCapacity LB in multiCarrier LB/5 MB/10 6000..10000 Local
 Correct EUTranCellFDD::cellSubscriptionCapacity LB in multiCarrier LB/5 MB/5 8000..10000 Local
 Correct EUTranCellFDD::cellSubscriptionCapacity MB in multiCarrier LB/10 MB/10 20000..24000 Local
 Correct EUTranCellFDD cellSubscriptionCapacity MB in multiCarrier LB/10 MB/5 10000..14000 Local
 EUTranCellFDD=MB in multiCarrier LB/5 MB/10 EUTranCellFDD cellSubscriptionCapacity MB in multiCarrier LB/5 MB/10 20000..24000 Local
 EUTranCellFDD=MB in multiCarrier LB/5 MB/5 EUTranCellFDD cellSubscriptionCapacity MB in multiCarrier LB/5 MB/5 10000..12000 Local
 EUTranCellRelation EUTranCellRelation isHoAllowed true,false true true false, true Local
 UtranCellRelation UtranCellRelation isHoAllowed true true Global
 EUTranCellRelation EUTranCellRelation isRemoveAllowed true,false true true true, false Local
 UtranCellRelation UtranCellRelation isRemoveAllowed true,false true false true, false Local
 EUTranCellRelation=multiCarrier_InterFrequency EUTranCellRelation qOffsetCellEUTran multiCarrier_InterFrequency -10..10 0 Local
 Add parameter ReportConfigB2Utra::timeToTriggerB2 Suffix = multiCarrier 1280 Global
 Correct/Removed EUTranFreqRelation::voicePrio Suffix = null
 Correct/Removed EUTranFreqRelation::voicePrio Suffix = VOLTE
 Correct/Removed ReportConfigA5Anr::a5Threshold2RsrpAntDelta Suffix=multicarrier
 Correct/Removed Sctp::intervalLostUser
 Correct/Removed Sctp::maxdataSizelp
 Corrected parameters with "," to ":" for Nakina Audit Clean-up.
 Corrected QciProfilePredefined=qci6::srsAllocationStrategy() to QciProfilePredefined=qci6::srsAllocationStrategy(non_HICAP)
 Corrected/Added QciProfilePredefined=qci6::srsAllocationStrategy(HICAP) with ATTGS value of 0
 Corrected QciProfilePredefined=qci7::srsAllocationStrategy() to QciProfilePredefined=qci7::srsAllocationStrategy(non_HICAP)
 Corrected/Added QciProfilePredefined=qci7::srsAllocationStrategy(HICAP) with ATTGS value of 0
 Corrected QciProfilePredefined=qci9::srsAllocationStrategy() to QciProfilePredefined=qci9::srsAllocationStrategy(non_HICAP)
 Corrected/Added QciProfilePredefined=qci9::srsAllocationStrategy(HICAP) with ATTGS value of 0
 Add CAS L13A_GS_13.08. Removed previous CAS Tab.

FGA L13A-E-023 LTE Hicap Settings. This FGA is a Hi Cap setting recommendation update for L13A addressing accessibility concern with SC556 and introducing few more parameters comparing to previous LTE FGA10 recommendation. FGA23 supersedes LTE FGA10.

The main purpose of these Hi Cap settings is to alleviate PDCCH scheduling congestion for DRB traffic by reducing SRB traffic for the event and venue sites. For eNBs without Hi Cap settings, the SRB traffic is using the majority of the scheduling opportunities and leaves very little opportunities for the DRB traffic under high load conditions; the eNodeB is limited on CCEs during low throughput.

Corrected EUTranCellFDD::cellRange() Suffix from null to non_hicap

Corrected EUTranCellFDD::ulSrsEnable() Suffix from null to non_hicap

Corrected MaximumCellRange::featureStateMaximumCellRange() Suffix from null to non_hicap

Corrected MaximumCellRange::serviceStateMaximumCellRange() Suffix from null to non_hicap

Corrected Pfs::featureStatePfs() Suffix from null to non_hicap

Corrected RadioBearerTable=default,DataRadioBearer=1::tPollRetransmitDI() Suffix from null to non_hicap

Corrected RadioBearerTable=default,SignalingRadioBearer=1::tPollRetransmitDI() Suffix from null to non_hicap

Corrected RadioBearerTable=default,DataRadioBearer=1::tPollRetransmitUI() Suffix from null to non_hicap

Corrected RadioBearerTable=default,SignalingRadioBearer=1::tPollRetransmitUI() Suffix from null to non_hicap

Corrected RadioBearerTable=default,DataRadioBearer=1::dlMaxRetxThreshold() Suffix from null to non_hicap and ATTGS value from 16 to default

Corrected/Added RadioBearerTable=default,SignalingRadioBearer=1::dlMaxRetxThreshold() with ATTGS value of 8

Corrected/Added RadioBearerTable=default,SignalingRadioBearer=1::dlMaxRetxThreshold() with ATTGS value of default

Corrected RadioBearerTable=default,SignalingRadioBearer=1::ulMaxRetxThreshold() Suffix from null to non_hicap

Corrected RadioBearerTable=default,SignalingRadioBearer=1::ulMaxRetxThreshold(hicap) MO from SignalingRadioBearer=1 to DataRadioBearer=1

Corrected RadioBearerTable=default,SignalingRadioBearer=1::ulMaxRetxThreshold() MO from SignalingRadioBearer=1 to DataRadioBearer=1 and Suffix from null to non_hicap

Corrected SystemConstants=1::deltaPsdRs2Tx(hicap) Range from null to "0=0dB, 1=1.77dB, 3=3dB"

Corrected SystemConstants=1::deltaPsdRs2Tx() Suffix from null to non_hicap ATTGS value from 1,7..3 to 1,2 and Range from null to "0=0dB, 1=1.77dB, 3=3dB"

Changed SystemConstants=1::numInitialAccessAndIncomingHo(hicap) ATTGS value from 10 to 10,20 with Initial Value of 10 and Permission from Global to Local per L13A-E-FGA23

Corrected/Added SystemConstants=1::numInitialAccessAndIncomingHo(non_hicap) with ATTGS value of default

Corrected SystemConstants=1,systConstants=hicap::pdcchLaGinrMargin(hicap) MO value from SystemConstants=1,systConstants=hicap to SystemConstants=1,systConstants.

Corrected/Added SystemConstants=1,systConstants::pdcchLaGinrMargin(non_hicap) with ATTGS value of default

Corrected UIFss::featureStateUIFss() Suffix from null to non_hicap

FGA L13A-E-024 lte DL-FSS Feature Off. This FGA24 is addressing L13A DL-FSS (Downlink Frequency-Selective Scheduling) feature negatively impacting DL data throughput, and recommending turning off DL-FSS feature. DL throughput degradation at upgrade from L12B IP10 to L13A IP6 was identified. Trials to turn off DL-FSS were conducted in several markets and showed recovering some of DL throughput around 100 to 200 kpbs.

By turning off DL-FSS we also have seen:

- BLER improvement.
- Less RLC/MAC re-transmissions.
- CCE utilization reduction.
- Less TTI used for signaling.

Change DIFss::featureStateDIFss from 1 (activated) to 0 (deactivated).

Changed DIFss::featureStateDIFss(hicap) Suffix from hicap to null

Removed DIFss::featureStateDIFss()

FGA L13A-E-025 LTE Reduce UL SE/TTI from 6 to 4. This FGA25 is addressing negative impact on DL throughput due to increase UL SE/TTI from 4 to 6, and recommending reverting it back to 4. L13A brings in more UEs (6) on uplink, and more admitted users in uplink. DL throughput degradation at upgrade from L12B IP10 to L13A IP6 was identified. Trials to reduce UL SE/TTI from 6 to 4 were conducted in several markets and showed recovering some of DL throughput around 200 kpbs. The gain was seen only during BH hours and only on the high loaded cells. By reducing UL SE/TTI from 6 to 4 we have also seen CCE utilization reduction.

Added SystemConstants=1::ulMaxNrOfSePerTtiAndCell() with ATTGS value of 4 per L13A-E-FGA25

FGA L13A-E-026 LTE Mobility. This FGA is dealing with LTE handovers based on the evaluation reported by the UE to the RBS. These measurement reports are used by the RBS to select, prepare and execute the handover from the serving cell to the target cells. This sequence of events is called Event A3. The UE uses A3Offset, HysteresisA3 and TimeToTriggerA3 parameters to determine when to trigger Event A3 and for the UE to send Measurement Reports.

During the early deployment of LTE, we loosened up mobility parameters such as Event A3 to allow adequate optimization of the LTE network when the LTE sites were not initially built one to one. We had since built out the network and needed to speed up handovers to the best servers without causing handover oscillations.

No change ReportConfigEutraBestCell::A3Offset set to 30.

Change ReportConfigEutraBestCell::HysteresisA3 from 10,30 to 10 and Permissions from Local to Global.

Change ReportConfigEutraBestCell::TimeToTriggerA3 from 80,320, 512 to 80 and Permissions from Local to Global.

Change HoOscCtrlUE::featureStateHoOscCtrlUE from 0 to 1.

Change HoOscCtrlUE::serviceStateHoOscCtrlUE from 0 to 1.

Changes from Nakina Tiger Tean Review:

Correct/Remove CsfbToGsmWcdma::serviceStateCsfbToGsmWcdma

Correct/Remove CsfbToGsmWcdma::featureStateCsfbToGsmWcdma

Correct/Remove CsfbToGsmWcdma::licenseStateCsfbToGsmWcdma

Correct/Change ExternalEUTranCellFDD::activePlmnList.mcc to make "I" "I".

Correct/Change ExternalEUTranCellFDD::activePlmnList.mnc to make "I" "I".

Correct/Change ExternalEUTranCellFDD::activePlmnList.mncList to make "I" "I".

Change GeranCellRelation::coverageIndicator from Global to GlobalOptional.

Change GeranFreqGroupRelation::csFallbackPrio from Global to GlobalOptional.

Change GeranFreqGroupRelation::csFallbackPrioEC from Global to GlobalOptional.

Correct/Change ENodeBFunction::eNodeBPlmndId.mnc to make "I" "I".

Change ExternalGeranCell::isRemoveAllowed from Global to GlobalOptional.

Change GeranFreqGroupRelation::mobilityAction from Global to GlobalOptional.

Change GeranFreqGroupRelation::mobilityActionCsfb from Global to GlobalOptional.

Change GeranFreqGroupRelation::nccPermitted from Global to GlobalOptional.

Change QciProfilePredefined=default::pdcpSNLength from Global to Not Auditable.

Change ExternalGeranCell::PlmnIdentity.mcc from Global to GlobalOptional.

Change GeranFreqGroupRelation::pMaxGeran from Global to GlobalOptional.

Change GeranFreqGroupRelation::qOffsetFreq from Global to GlobalOptional.

Change GeranFreqGroupRelation::qRxLevMin from Global to GlobalOptional.

Change ExternalGeranCell::rac from Global to GlobalOptional.

Change ExternalGeranCell::rimCapable from Global to GlobalOptional.

Correct/Change QciProfilePredefined=default::rlcSNLength from Global to Not Auditable.

Correct/Change RATFreqPrio::spidList to change "," to ":".

Change GeranFreqGroupRelation::threshXHigh from Global to GlobalOptional.

Change GeranFreqGroupRelation:: threshXLow from Global to GlobalOptional.

PMATT 157212 Ericsson RRUS12. GS Settings for 4RX Configuration when using RRUS12+RRUSA2. This update is about enabling 4 way receive diversity in ATT LTE nodes. Currently ATT is using RRUS11 that supports 2Rx diversity. They will eventually be replacing some of this HW with RRUS12 and add RRUSA2 to it. This in return will allow them to enable 4Rx diversity to their nodes. In order to activate 4Rx we need to activate featureStateQuadAntUIPerfPkg. The description can be found below. Quad Antenna Uplink Performance Package feature: The Quad Antenna Uplink Performance Package feature provides support for four receive antennas used for 4-way receive diversity, to improve uplink coverage, capacity (bit rate) and throughput. Quad Antenna Uplink Performance is possible for all antenna configurations with four antennas and for any number of radio units. In addition to it, we need to set noOfUsedRxAntennas properly. For cells that will support 4Rx we need to manually set it to 4 and for the cells that will be supporting 2Rx it will remain 2. Keeping it to “0” will raise Service Degraded alarm in cells that support only 2Rx.

Change:

Change QuadAntUIPerfPkg=4RX::featureStateQuadAntUIPerfPkg to add RRUS12+RRUSA2 to 4RX Suffix.

Change SectorCarrier=2RX::noOfRxAntennas from 0 to 0,2 and Permissions from Global to Local.

Add SectorCarrier=4RXRRUS12+RRUSA2::noOfRxAntennas with Suffix 4RXRRUS12+RRUSA2 set to 4.

Additional Corrections and Changes

Change EUtranFreqRelation::threshXHighQ from 2 to 25

Change UtranFreqRelation::threshXHighQ from 0 to 25.

LTE16 Attached is the cleanup for the DrxProfile MO. Here are the text for the doc rev hist. Also, this correction/addition/change should facilitate removal of the "QCI2_Settings" sheet from within the latest L13B GS (RAN - Ericsson LTE Gold Standard_LTE_L13B xx yy_FirstDraft_PA10_12182013.xlsx).

Corrected/Removed DrxProfile=0::drxInactivityTimer(VoLTE)
Corrected/Removed DrxProfile=0::drxRetransmissionTimer(VoLTE)
Corrected/Removed DrxProfile=0::longDrxCycle(VoLTE)
Corrected/Removed DrxProfile=0::longDrxCycleOnly(VoLTE)
Corrected/Removed DrxProfile=0::onDurationTimer(VoLTE)
Corrected/Removed DrxProfile=0::shortDrxCycle(VoLTE)
Corrected/Removed DrxProfile=0::shortDrxCycleTimer(VoLTE)
Corrected DrxProfile=1::drxInactivityTimer(VoLTE) Suffix from (VoLTE) to null
Corrected DrxProfile=1::drxRetransmissionTimer(VoLTE) Suffix from (VoLTE) to null
Corrected DrxProfile=1::longDrxCycle(VoLTE) Suffix from (VoLTE) to null
Corrected DrxProfile=1::longDrxCycleOnly(VoLTE) Suffix from (VoLTE) to null
Corrected DrxProfile=1::onDurationTimer(VoLTE) Suffix from (VoLTE) to null
Corrected DrxProfile=1::shortDrxCycle(VoLTE) Suffix from (VoLTE) to null
Corrected DrxProfile=1::shortDrxCycleTimer(VoLTE) Suffix from (VoLTE) to null
Corrected/Added DrxProfile=2::drxInactivityTimer() with ATTGS value of 4 per L13B GS
Corrected/Added DrxProfile=2::drxRetransmissionTimer() with ATTGS value of 1 per L13B GS
Corrected/Added DrxProfile=2::longDrxCycle() with ATTGS value of 3 per L13B GS
Corrected/Added DrxProfile=2::longDrxCycleOnly() with ATTGS value of 3 per L13B GS
Corrected/Added DrxProfile=2::onDurationTimer() with ATTGS value of 4 per L13B GS
Corrected/Added DrxProfile=2::shortDrxCycle() with ATTGS value of 7 per L13B GS
Corrected/Added DrxProfile=2::shortDrxCycleTimer() with ATTGS value of 1
Corrected QciProfilePredefined=qci2::dataFwdPerQciEnabled ATTGS value from false to true.
Corrected QciProfilePredefined=qci2::dlMinBitRate ATTGS value from 0 to 350.
Corrected QciProfilePredefined=qci2::drxPriority ATTGS value from 0 to 20.

FGA L13A-E-028 LTE ENodeB GpsSyncRef. This Field Guide Alert focuses on activating GpsSyncRef, which replaces TuSyncRef as a synchronization reference in Ericsson LTE eNodeBs. As new location-based services are supported by the LTE network, the GpsSyncRef MO offers more detailed location information than the TuSyncRef. This detailed information will be necessary to support VoLTE e911.

Change Synchronization::syncReference from null to GpsSyncRef and Permissions from Not Auditable.

Removed TuSyncRef::TuSyncRef.

LTE17

Corrected Sctp::maxUserDataSize(IPv4) NAKINA MOC from Sctp=IPv4 to Sctp

Corrected Sctp::maxUserDataSize(IPv6) NAKINA MOC from Sctp=IPv6 to Sctp

Change/Correct EUTRANCellFDD=5MHz::noOfPUCCHSRUsers to change the "%MHz" to "5MHz" in the MOC.

Changed AirlfLoadProfile::TrafficModelPrb.ulDIRatioPerQciVoLTE) Suffix from VoLTE to null.

Changed AirlfLoadProfile::zzzTemporary4(VoLTE)Suffix from VoLTE to null.

Changed AirlfLoadProfile::zzzTemporary5(VoLTE)Suffix from VoLTE to null.

Changed AirlfLoadProfile::zzzTemporary6(VoLTE)Suffix from VoLTE to null.

Changed AirlfLoadProfile::zzzTemporary7(VoLTE)Suffix from VoLTE to null.

Changed Aisgv2FwDownload::featureStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.

Changed Aisgv2FwDownload::licenseStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.

Changed Aisgv2FwDownload::serviceStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.

Changed ENodeBFunction::s1HODirDataPathAvail(VoLTE)Suffix from VoLTE to null.

Changed LppaEcid::featureStateLppaEcid(VoLTE) Suffix from VoLTE to null.

Changed LppaEcid::licenseStateLppaEcid(VoLTE) Suffix from VoLTE to null.

Changed LppaEcid::LppaEcidId(VoLTE) Suffix from VoLTE to null.

Changed S1HODataFwd::featureStateS1HoDataFwd(VoLTE) Suffix from VoLTE to null.

Changed S1HODataFwd::keyIdS1HODataFwd(VoLTE) Suffix from VoLTE to null.

Changed S1HODataFwd::licenseStateS1HODataFwd(VoLTE) Suffix from VoLTE to null.

Changed S1HODataFwd::S1HODataFwdId(VoLTE) Suffix from VoLTE to null.Changed AirlfLoadProfile::TrafficModelPrb.ulDIRatioPerQciVoLTE) Suffix from VoLTE to null.

Changed AirlfLoadProfile::zzzTemporary4(VoLTE)Suffix from VoLTE to null.

Changed AirlfLoadProfile::zzzTemporary5(VoLTE)Suffix from VoLTE to null.

Changed AirlfLoadProfile::zzzTemporary6(VoLTE)Suffix from VoLTE to null.

Changed AirlfLoadProfile::zzzTemporary7(VoLTE)Suffix from VoLTE to null.

Changed Aisgv2FwDownload::featureStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.

Changed Aisgv2FwDownload::licenseStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.

Changed Aisgv2FwDownload::serviceStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.

Changed ENodeBFunction::s1HODirDataPathAvail(VoLTE)Suffix from VoLTE to null.

Changed LppaEcid::featureStateLppaEcid(VoLTE) Suffix from VoLTE to null.

Changed LppaEcid::licenseStateLppaEcid(VoLTE) Suffix from VoLTE to null.

Changed LppaEcid::LppaEcidId(VoLTE) Suffix from VoLTE to null.

Changed S1HODataFwd::featureStateS1HoDataFwd(VoLTE) Suffix from VoLTE to null.

Changed S1HODataFwd::keyIdS1HODataFwd(VoLTE) Suffix from VoLTE to null.

Changed S1HODataFwd::licenseStateS1HODataFwd(VoLTE) Suffix from VoLTE to null.

Changed S1HODataFwd::S1HODataFwdId(VoLTE) Suffix from VoLTE to null.

Changed DynamicGBRAdmCtrl::featureStateDynamicGBRAdmCtrl(VoLTE) Suffix from VoLTE to null.
Changed DynamicQoSModification::featureStateDynamicQoSModification(VoLTE) Suffix from VoLTE to null.
Changed LsmEcs::featureStateLsmEcs(VoLTE) Suffix from VoLTE to null.
Changed MultiErabsPerUser::featureStateMultiErabsPerUser(VoLTE) Suffix from VoLTE to null.
Changed QosAwareScheduler::featureStateQosAwareScheduler(VoLTE) Suffix from VoLTE to null.
Changed RlcUm::featureStateRlcUm(VoLTE) Suffix from VoLTE to null.
Changed ROHC::featureStateROHC(VoLTE) Suffix from VoLTE to null.
Changed ServiceSpecificDRX::featureStateServiceSpecificDRX(VoLTE) Suffix from VoLTE to null.
Changed ServiceTriggeredMobility::featureStateServiceTriggeredMobility(VoLTE) Suffix from VoLTE to null.
Changed SRVCCtoUTRAN::featureStateSRVCCtoUTRAN(VoLTE) Suffix from VoLTE to null.
Changed TtiBundling::featureStateTtiBundling(VoLTE) Suffix from VoLTE to null.
Changed TtiBundling::keyIdTtiBundling(VoLTE) Suffix from VoLTE to null.
Changed WcdmaHandover::featureStateWcdmaHandover(VoLTE) Suffix from VoLTE to null.
Changed UtranFreqRelation::mobilityAction(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::paArpOverride(VoLTE) Suffix from VoLTE to null.
Changed DBSAndSabe::serviceStateDBSAndSabe(VoLTE) Suffix from VoLTE to null.
Changed DynamicGBRAdmCtrl::serviceStateDynamicGBRAdmCtrl(VoLTE) Suffix from VoLTE to null.
Changed DynamicQoSModification::serviceStateDynamicQoSModification(VoLTE) Suffix from VoLTE to null.
Changed LsmEcs::serviceStateLsmEcs(VoLTE) Suffix from VoLTE to null.
Changed RlcUm::serviceStateRlcUm(VoLTE) Suffix from VoLTE to null.
Changed ROHC::serviceStateROHC(VoLTE) Suffix from VoLTE to null.
Changed ServiceSpecificDRX::serviceStateServiceSpecificDRX(VoLTE) Suffix from VoLTE to null.
Changed ServiceTriggeredMobility::serviceStateServiceTriggeredMobility(VoLTE) Suffix from VoLTE to null.
Changed SRVCCtoUTRAN::serviceStateSRVCCtoUTRAN(VoLTE) Suffix from VoLTE to null.
Changed TtiBundling::serviceStateTtiBundling(VoLTE) Suffix from VoLTE to null.
Changed ExternalUtranCellFDD::srvccCapability(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::ulNonGbrRatio(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::ulTransNwBandwidth(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::zzzTemp1(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::zzzTemp10(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::zzzTemp11(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::zzzTemp12(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::zzzTemp13(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::zzzTemp14(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::zzzTemp15(VoLTE) Suffix from VoLTE to null.
Changed AdmissionControl::zzzTemp16(VoLTE) Suffix from VoLTE to null.

Changed AdvCellSup::keyIdAdvCellSup (VoLTE)Suffix from VoLTE to null.
Changed AdvCellSup::licenseStateAdvCellSup(VoLTE) Suffix from VoLTE to null.
Changed AdvCellSup::serviceStateAdvCellSup(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadGenerator::featureStateAilg(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadGenerator::licenseStateAilg(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadGenerator::serviceStateAilg(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::dlPrbLoadLevel(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::minLoadLevelPdcch(VoLTE)Suffix from VoLTE to null.
Changed AirlfLoadProfile::noOfOcngPrbSeries(VoLTE)Suffix from VoLTE to null.
Changed AirlfLoadProfile::OcngPrbSerie.pdschModType(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::OcngPrbSerie.prbFirst(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::OcngPrbSerie.prbLast(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::OcngPrbSerie.usedSubFrameNo(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::reservedBy(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::TrafficModelPrb.bitRatePerQci(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::TrafficModelPrb.bufferStatus(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::TrafficModelPrb.noOfArtificialUsers(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::TrafficModelPrb.qciDistSinrHigh(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::TrafficModelPrb.qciDistSinrLow(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::TrafficModelPrb.qciDistSinrMedium(VoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::TrafficModelPrb.ulDirRatioPerQciVoLTE) Suffix from VoLTE to null.
Changed AirlfLoadProfile::zzzTemporary4(VoLTE)Suffix from VoLTE to null.
Changed AirlfLoadProfile::zzzTemporary5(VoLTE)Suffix from VoLTE to null.
Changed AirlfLoadProfile::zzzTemporary6(VoLTE)Suffix from VoLTE to null.
Changed AirlfLoadProfile::zzzTemporary7(VoLTE)Suffix from VoLTE to null.
Changed Aisgv2FwDownload::featureStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.
Changed Aisgv2FwDownload::licenseStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.
Changed Aisgv2FwDownload::serviceStateAisgv2FwDownload(VoLTE) Suffix from VoLTE to null.
Changed ENodeBFunction::s1HODirDataPathAvail(VoLTE)Suffix from VoLTE to null.
Changed LppaEcid::featureStateLppaEcid(VoLTE) Suffix from VoLTE to null.
Changed LppaEcid::licenseStateLppaEcid(VoLTE) Suffix from VoLTE to null.
Changed LppaEcid::LppaEcidId(VoLTE) Suffix from VoLTE to null.
Changed S1HODataFwd::featureStateS1HoDataFwd(VoLTE) Suffix from VoLTE to null.
Changed S1HODataFwd::keyIdS1HODataFwd(VoLTE) Suffix from VoLTE to null.
Changed S1HODataFwd::licenseStateS1HODataFwd(VoLTE) Suffix from VoLTE to null.
Changed S1HODataFwd::S1HODataFwdId(VoLTE) Suffix from VoLTE to null.

FGA LA13-E-029 RoHC Deactivation

Changed ROHC::featureStateROHC ATTGS Value from a 1 to a 0 per FGA L13A-E-029

Changed QciProfilePredefined=qci1::rohcEnabled ATTGS Value from true to false per FGA L13A-E-029

Add information to General Rules and Cautions Tab.

LTE19

Corrected all attributes within the MO AirIfLoadGenerator Permission from Global to GlobalOptional.
Corrected all attributes within the MO AirIfLoadProfile Permission from Global to GlobalOptional.
Corrected all attributes within the MO AnrFunctionGeran Permission from Global to GlobalOptional.
Corrected all attributes within the MO Cdma2000CellRelation Permission from Global to GlobalOptional.
Corrected all attributes within the MO Cdma2000SessionContinuity Permission from Global to GlobalOptional.
Corrected all attributes within the MO CsfbToGeranUtran Permission from Global to GlobalOptional.
Corrected all attributes within the MO ExternalGeranCell Permission from Global to GlobalOptional.
Corrected all attributes within the MO GeranCellRelation Permission from Global to GlobalOptional.
Corrected all attributes within the MO GeraNetwork Permission from Global to GlobalOptional.
Corrected all attributes within the MO GeranFreqGroup Permission from Global to GlobalOptional.
Corrected all attributes within the MO GeranFreqGroupRelation Permission from Global to GlobalOptional.
Corrected all attributes within the MO GeranFrequency Permission from Global to GlobalOptional.
Corrected all attributes within the MO GsmSessionContinuity Permission from Global to GlobalOptional.
Corrected all attributes within the MO ReportConfigB1Geran Permission from Global to GlobalOptional.
Corrected all attributes within the MO ReportConfigB2Geran Permission from Global to GlobalOptional.

Corrected/Delete ReportConfigA5ANR::a5THreshold2RsrpAnrDelta Suffix multicarrier
Corrected ReportConfigEUTraIfBestCell::timeToTriggerA3 to add "I" to MOC.

Nakina Tiger Team Changes

Corrected/Changed DIFss::serviceStateDIFss set 0.
Corrected/Changed ReportConfigEUTraIfBestCell::timeToTriggerA3 to add I.
Corrected/Added ReportConfigEUTraBestCell::A3offset set to 30.
Corrected/Changed S1HoDataFwd::featureStateS1HODataFwd to change "H0" to "HO"
Corrected/Changed S1HoDataFwd::keyIdS1HODataFwd to change "H0" to "HO"
Corrected/Changed S1HoDataFwd::licenseStateS1HODataFwd to change "H0" to "HO"
Corrected/Changed S1HoDataFwd::S1HODataFwdId to change "H0" to "HO"
Corrected/Changed S1HoDataFwd::serviceStateS1HODataFwd to change "H0" to "HO"
Corrected/Changed SectorCarrier::partOfSectorPower to move post-production to Suffix.
Corrected/Changed SectorCarrier::partOfSectorPower to move pre-production to Suffix.
Corrected/Changed SectorEquipmentFunction::confOutputPower to have Suffix AIR.
Corrected/Changed EUTranCellFDD::cellSubscriptionCapacity Suffix LB in multiCarrier LB/10 MB/10 to remove extra "I"
Corrected/Changed EUTranCellFDD::cellSubscriptionCapacity Suffix LB in multiCarrier LB/10 MB/5 to remove extra "I"
Corrected/Changed EUTranCellFDD::cellSubscriptionCapacity Suffix LB in multiCarrier LB/5 MB/10 to remove extra "I"
Corrected/Changed EUTranCellFDD::cellSubscriptionCapacity Suffix LB in multiCarrier LB/5 MB/5 to remove extra "I"
Corrected/Changed EUTranCellFDD::cellSubscriptionCapacity Suffix MB in multiCarrier LB/10 MB/10 to remove extra "I"
Corrected/Changed EUTranCellFDD::cellSubscriptionCapacity Suffix MB in multiCarrier LB/10 MB/5 to remove extra "I"
Corrected/Changed EUTranCellFDD::cellSubscriptionCapacity Suffix MB in multiCarrier LB/5 MB/10 to remove extra "I"
Corrected/Changed EUTranCellFDD::cellSubscriptionCapacity Suffix MB in multiCarrier LB/5 MB/5 to remove extra "I"

Corrected/Removed CapacityOutputPower=80W::licenseCapacityOutputPower.
Corrected CapacityOutputPower::licenseStateOutputPower to set NAKINA MOC to CapacityOutputPower=100
Corrected CapacityOutputPower::licenseStateOutputPower to set NAKINA MOC to CapacityOutputPower=120
Corrected CapacityOutputPower::licenseStateOutputPower to set NAKINA MOC to CapacityOutputPower=40
Corrected CapacityOutputPower::licenseStateOutputPower to set NAKINA MOC to CapacityOutputPower=60
Corrected CapacityOutputPower::licenseStateOutputPower to set NAKINA MOC to CapacityOutputPower=80

Version 13.14 of the CAS. A redeployment is not necessary for this correction. Changes include:

Corrected/Removed EUTranCellTDD:pmErabRelAbnormalEnbActArp from National_PM_Standard_eNodeB_L13A_GS_13.08
Corrected/Removed EUTranCellTDD:pmErabRelAbnormalEnbArp from National_PM_Standard_eNodeB_L13A_GS_13.08
Corrected/Removed EUTranCellTDD:pmErabRelAbnormalMmeActArp from National_PM_Standard_eNodeB_L13A_GS_13.08
Corrected/Removed EUTranCellTDD:pmErabRelAbnormalMmeActQci from National_PM_Standard_eNodeB_L13A_GS_13.08
Corrected/Removed EUTranCellTDD:pmErabRelNormalEnbActArp from National_PM_Standard_eNodeB_L13A_GS_13.08
Corrected/Removed EUTranCellTDD:pmPdcPVolUIDrbLastTTI from National_PM_Standard_eNodeB_L13A_GS_13.08
Corrected/Removed EUTranCellTDD:pmPrbUsedDI from National_PM_Standard_eNodeB_L13A_GS_13.08
Corrected/Removed EUTranCellTDD:pmPrbUsedUI from National_PM_Standard_eNodeB_L13A_GS_13.08

LTE18

Corrected QciProfilePredefined=qci1::dataFwdPerQciEnabled ATTGS value from false to true.
Corrected QciProfilePredefined=qci5::dataFwdPerQciEnabled ATTGS value from false to true.

Corrected/Changed GeranFreqGroupRelation::geranFreqGroupRef from Permission GlobalOptional to Not Auditable.
Corrected/Changed GeranFreqGroupRelation::GeranFreqGroupRelationId from Permission GlobalOptional to Not Auditable.
Corrected/Changed GsmSessionContinuity::GsmSessionContinuityId from Permission GlobalOptional to Not Auditable.
Corrected/Changed ReportConfigB1Geran::hysteresisB1 from Permission GlobalOptional to Not Auditable.
Corrected/Changed Cdma2000CellRelation::includeInSystemInformationRel9 from Permission GlobalOptional to Not Auditable.
Corrected/Changed GsmSessionContinuity::keyIdGsmSessionContinuity from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::lac from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::masterGeranCellId from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::ncc from Permission GlobalOptional to Not Auditable.
Corrected/Changed ReportConfigB1Geran::ReportConfigB1GeranId from Permission GlobalOptional to Not Auditable.
Corrected/Changed ReportConfigB2Geran::ReportConfigB2GeranId from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::reservedBy from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::reservedBy from Permission GlobalOptional to Not Auditable.
Corrected/Changed GeranFreqGroup::reservedBy from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::rimAssociationStatus from Permission GlobalOptional to Not Auditable.
Corrected/Changed GsmSessionContinuity::serviceStateGsmSessionContinuity from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::timeOfCreation from Permission GlobalOptional to Not Auditable.
Corrected/Changed GeranCellRelation::timeOfCreation from Permission GlobalOptional to Not Auditable.
Corrected/Changed ReportConfigB1Geran::timeToTriggerB1 from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::userLabel from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::userLabel from Permission GlobalOptional to Not Auditable.
Corrected/Changed GeraNetwork::userLabel from Permission GlobalOptional to Not Auditable.
Corrected/Changed GeranFreqGroup::userLabel from Permission GlobalOptional to Not Auditable.
Corrected/Changed GeranFreqGroupRelation::userLabel from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::zzzTemporary1 from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::zzzTemporary1 from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::zzzTemporary2 from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::zzzTemporary3 from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::zzzTemporary3 from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::zzzTemporary4 from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::zzzTemporary4 from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::zzzTemporary5 from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::zzzTemporary5 from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::zzzTemporary6 from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::zzzTemporary6 from Permission GlobalOptional to Not Auditable.
Corrected/Changed AirIfLoadProfile::zzzTemporary7 from Permission GlobalOptional to Not Auditable.
Corrected/Changed ExternalGeranCell::zzzTemporary7 from Permission GlobalOptional to Not Auditable.

LTE20

Corrected AdmissionControl::dlTransNwBandwidth ATTGS value from 1000 to 200 and NGFC from 'Admission Control and Capacity management' to VoLTE.
Corrected AdmissionControl::ulTransNwBandwidth NGFC from 'Admission Control and Capacity management' to VoLTE.

LTE21 Corrected ReportConfigEUTraInterFreqLb::a4ThresholdRsrp(multiCarrier) Suffix from multiCarrier to null. Removed suffix.

Clean-up

Change/Corrected SectorEquipmentFunction::confOutputPower to add Suffix Macro with GS Value 60 Permissions Global.

Added SectorEquipmentFunction::confOutputPower to add Suffix DAS with GS Value 20 and Permissions Global.

Added SectorEquipmentFunction::confOutputPower to add Suffix MBRadio with GS Value 80 and Permissions Global.

Corrected/Changed S1HODataFwd::licenseStateS1HODataFwd to add the missing "D" back to licenseStateS1HOataFwd.

Corrected/Changed IpInterface=1::trafficType to change Value from 3,7 to 8 and Permissions from Local to Global.

Corrected/Changed IpInterface=2::trafficType to change Value from 8 to 3,7 and Permissions from Global to Local.

LTE23 Corrections

Corrected L13A AnrFunctionEUTran::anrUesThreshInterFMin() ATTGS from 1 to 0.

Corrected L13A AnrFunctionEUTran::anrUesThreshInterFMax() ATTGS from 20 to 2.

Corrected L13B AnrFunctionEUTran::anrUesThreshInterFMin() ATTGS from 1 to 0.

Corrected L13B AnrFunctionEUTran::anrUesThreshInterFMax() ATTGS from 20 to 2.

Changed ENodeBFunction::timeAndPhaseSynchCritical to Add Suffix noGPS GS Value false.

Changed ENodeBFunction::timeAndPhaseSynchCritical to Add Suffix gpsSync GS Value true.

Remove SystemConstant::pmEventStreamingNotification(913)

Added RealTimeSecLog::extServerListConfig.extServProtocol, Permission value of Not Auditable
Added RealTimeSecLog::extServerListConfig.serverName, Permission value of Not Auditable
Added RealTimeSecLog::extServerListInfo.connectionStatus, Permission value of Not Auditable
Added RealTimeSecLog::extServerListInfo.connectionStatusInfo, Permission value of Not Auditable
Added RealTimeSecLog::extServerListInfo.extServerAddress, Permission value of Not Auditable
Added RealTimeSecLog::extServerListInfo.extServProtocol, Permission value of Not Auditable
Added RealTimeSecLog::extServerListInfo.serverName, Permission value of Not Auditable
Added RealTimeSecLog::extServerLogLevel ATTGS value of 7, Permission value of Not Auditable
Added RealTimeSecLog::featureState ATTGS value of 0, Permission value of Not Auditable
Added RealTimeSecLog::licenseState ATTGS value of 1, Permission value of Not Auditable
Added RealTimeSecLog::RealTimeSecLogId ATTGS value of 1, Permission value of Not Auditable
Added RealTimeSecLog::status ATTGS value of Feature is Deactivated, Permission value of Not Auditable
Added ReportConfigInterRatLb::ReportConfigInterRatLbId, Permission value of Not Auditable
Added ReportConfigInterRatLb::utranB1ThresholdRscp ATTGS value of -24, Permission value of Global
Added ReportConfigInterRatLb::utranHysteresisB1 ATTGS value of 10, Permission value of Global
Added ENodeBFunction::maxRandc ATTGS value of 255, Permission value of Global
Added ENodeBFunction::minRandc ATTGS value of 1, Permission value of Global
Added ENodeBFunction::randUpdateInterval ATTGS value of 200, Permission value of Global
Added ENodeBFunction::zzzTemporary13 ATTGS value of -2000000000, Permission value of Global
Added ENodeBFunction::zzzTemporary14 ATTGS value of -2000000000, Permission value of Global
Added ENodeBFunction::zzzTemporary15 ATTGS value of -2000000000, Permission value of Global
Added ENodeBFunction::zzzTemporary16 ATTGS value of -2000000000, Permission value of Global
Added ENodeBFunction::zzzTemporary17 ATTGS value of -2000000000, Permission value of Global
Added EUTranCellFDD::acBarringForCsfb.acBarringFactor ATTGS value of 95, Permission value of Global
Added EUTranCellFDD::acBarringForCsfb.acBarringForSpecialAC ATTGS value of false, false, false, false, false, Permission value of Global
Added EUTranCellFDD::acBarringForCsfb.acBarringTime ATTGS value of 64, Permission value of Global
Added EUTranCellFDD::acBarringForCsfbPresent ATTGS value of FALSE, Permission value of Global
Added EUTranCellFDD::commonSrPeriodicity ATTGS value of 10, Permission value of Global
Added EUTranCellFDD::lbUtranOffloadThreshold ATTGS value of 100, Permission value of Global
Added EUTranCellFDD::minBestCellHoAttempts ATTGS value of 1, Permission value of Global
Added EUTranCellFDD::pdccchAdmEnabled ATTGS value of FALSE, Permission value of Global
Added EUTranCellFDD::pdccchAdmThreshold ATTGS value of 1000, Permission value of Global
Added EUTranCellFDD::zzzTemporary13 ATTGS value of 1, Permission value of Global
Added EUTranCellFDD::zzzTemporary14 ATTGS value of -2000000000, Permission value of Global
Added EUTranCellFDD::zzzTemporary15 ATTGS value of -2000000000, Permission value of Global
Added EUTranCellFDD::zzzTemporary16 ATTGS value of -2000000000, Permission value of Global
Added EUTranCellFDD::zzzTemporary17 ATTGS value of -2000000000, Permission value of Global

Changed S1HODataFwd::featureStateS1HODataFwd ATTGS value from 0 to 1
Changed S1HODataFwd::serviceStateS1HODataFwd ATTGS value from 0 to 1
Added ENodeBFunction::s1HODirDataPathAvail ATTGS value of TRUE, Permission value of Global
Removed MultiTargetRRCConnReest::featureStateMultiTargetRRCConnReest
Removed MultiTargetRRCConnReest keyIdMultiTargetRRCConnReest
Removed MultiTargetRRCConnReest licenseStateMultiTargetRRCConnReest
Removed MultiTargetRRCConnReest MultiTargetRRCConnReestId
Removed MultiTargetRRCConnReest serviceStateMultiTargetRRCConnReest
Changed SystemConstant::maxNocellsNacccsfb314 ATTGS value from 6 to 3
Changed SystemConstant::maxNoCellsNaccSessionCont315 ATTGS value from 6 to 3
Added SectorCarrier::noOfTxAntennas ATTGS value of 1, Permission Global, Suffix value of DAS (SIMO) case Parameter configuredOutputPower should be set to HALF of the maximum output power
Added SystemConstant::cqiReportBufferThresholdAperiodic(1150) ATTGS value of 200, Permission value of Not Auditable
Added SystemConstant::srCqiTargetOffset(1144) ATTGS value of 4, Permission value of Not Auditable
Added SystemConstant::nrofMacPaddingsToDetectSid(1160) ATTGS value of 2, Permission value of Not Auditable
Changed DrxProfile=1::shortDrxCycleTimer ATTGS value from 5 to 0, Range value from 1..16 to 0..16.
Changed DrxProfile=1::longDrxCycle ATTGS value from 5 to 3
Changed DrxProfile=1::longDrxCycleOnly ATTGS value from 1 to 3
Added ENodeBFunction::timeAndPhaseSynchCritical ATTGS value of true, Permission value of Global, Suffix value of GpsSync
Added EUTranCellFDD=5MHZLppaOTDOAACTIVE::noConsecutiveSubframes ATTGS value of 1, Permission value of Global, Suffix value of 5MHZLppaOTDOAACTIVE
Added EUTranCellFDD=10MHZLppaOTDOAACTIVE::noConsecutiveSubframes ATTGS value of 0, Permission value of Global, Suffix value of 10MHZLppaOTDOAACTIVE
Added EUTranCellFDD::prsConfigIndex ATTGS value of 1, Permission value of Global, Suffix value of LppaOTDOAACTIVE
Added EUTranCellFDD::prsConfigIndexMapped ATTGS value of 1, Permission value of Not Auditable, Suffix value of LppaOTDOAACTIVE
Added EUTranCellFDD::prsPeriod ATTGS value of 0, Permission value of Global, Suffix value of LppaOTDOAACTIVE
Added EUTranCellFDD::otdoaSuplActive ATTGS value of True, Permission value of Global, Suffix value of LppaOTDOAACTIVE
Changed OtdoaSupl::featureStateOtdoaSupl Permission value from Global to Local
Added OtdoaSupl::featureStateOtdoaSupl ATTGS value of 0, Permission value of Local, Suffix value of LppaOTDOAACTIVE
Changed ROHC::featureStateROHC ATTGS value from 0 to 1, Reference value from FGA L13A-E-029 to Null.
Changed QciProfilePredefined=qci1::rohcEnabled ATTGS value from false to true, Reference value from FGA L13A-E-029 to Null.
Changed QciProfilePredefined=qci1::pdcpSNLength ATTGS value from 7 to 12
Added ReportConfigSearch::timeToTriggerA2Critical ATTGS value of 1280, Permission value of Global, Suffix value of InterLTE
Added ReportConfigSearch::timeToTriggerA2Critical ATTGS value of 640, Permission value of Global, Suffix value of InterRAT_10
Added ReportConfigSearch::timeToTriggerA2Critical ATTGS value of 640, Permission value of Global, Suffix value of InterRAT_5
Added ReportConfigSearch::timeToTriggerA2Critical ATTGS value of 640, Permission value of Global, Suffix value of IntraLTE
Added ReportConfigSearch::timeToTriggerA2Critical ATTGS value of 1280, Permission value of Global, Suffix value of multiCarrier

EUtranCellFDD:pmCaConfiguredDISum
EUtranCellFDD:pmCaConfiguredDISamp
EUtranCellFDD:pmCaActivatedDISum
EUtranCellFDD:pmCaScheduledDISum
EUtranCellFDD:pmRadioThpVolDISCell
EUtranCellFDD:pmUIGrantsTrans
EUtranCellFDD:pmUIGrantsWithDetectedPusch
EUtranCellFDD:pmDIAssigsTrans
EUtranCellFDD:pmDIAssigsWithDetectedHarqAck
EUtranCellFDD:pmDIAssigsWithUnknownReception
EUtranCellFDD:pmPdcchTxConservative
EUtranCellFDD:pmPdcchTxAggressive
EUtranCellFDD:pmCellAdmControlPdcchRej
EUtranCellFDD:pmCellAdmControlPdcchRejMeas
UtranCellRelation:pmHoExeAttLb
UtranCellRelation:pmHoExeSuccLb
UtranCellRelation:pmHoPrepAttLb
UtranCellRelation:pmHoPrepAttSrvccLb
UtranCellRelation:pmHoPrepSuccLb
UtranCellRelation:pmHoPrepSuccSrvccLb
UtranCellRelation:pmLbQualifiedUe
UtranCellRelation:pmHoPrepAttSrvcc
UtranCellRelation:pmHoPrepSuccSrvcc
UtranCellRelation:pmHoPrepAtt
UtranCellRelation:pmHoExeAtt
UtranCellRelation:pmHoPrepSucc
UtranCellRelation:pmHoExeSucc
SctpAssociation:pmTimeCongested
SctpAssociation:pmCongestions
SctpAssociation:pmPeerZeroWindows
SctpAssociation:pmShutdowns
SctpAssociation:pmAborteds
SctpAssociation:pmUnavailRetrans
SctpAssociation:pmTimePeerZeroWindow
EUtranCellFDD:pmAdvCellSupDetection
EUtranCellFDD:pmAdvCellSupRecoveryCellAtt
EUtranCellFDD:pmAdvCellSupRecoveryCellSucc

Draft that includes MO::Parameters and their value to be included (if approved) into AT&T GS document to support L13B EP10 Sw release.
Adding TAB for ""L13B_Draft_Counter_Standard_Act"
New Counters included in L13B:

-System ERBS_Primary Profile

EUtranCellFDD:pmUeCtxtRelCsfbCdma1xRtt
EUtranCellFDD:pmUeCtxtRelCsfbCdma1xRttEm
EUtranCellFDD:pmRrcConnEstabSuccGummeiNative
EUtranCellFDD:pmRrcConnEstabSuccDta
EUtranCellFDD:pmRrcConnEstabAttDta
EUtranCellFDD:pmRrcConnEstabAttReattDta
EUtranCellFDD:pmS1SigConnEstabSuccDta
EUtranCellFDD:pmS1SigConnEstabAttDta
GeranCellRelation:pmHoPrepAtt
GeranCellRelation:pmHoPrepSucc
GeranCellRelation:pmHoExeAtt
GeranCellRelation:pmHoExeSucc

Adding TAB for ""L13B_Draft_Counter_Standard_Act"
New Counters included in L13B:

-Not Assigned to any Profile

EUtranCellFDD:pmCompUIDeltaSinrPuschDistr
EUtranCellFDD:pmUeCtxtRelCsfbMeasTO1xRtt
EUtranCellFDD:pmUeCtxtRelCsfbMeasTO1xRttEm
EUtranCellFDD:pmUeCtxtRelCsfbHoPrepFail1xRtt
EUtranCellFDD:pmUeCtxtRelCsfbHoPrepFail1xRttEm
EUtranCellFDD:pmZtemporary57
EUtranCellFDD:pmZtemporary58
EUtranCellFDD:pmZtemporary59
EUtranCellFDD:pmZtemporary60
EUtranCellFDD:pmZtemporary61
EUtranCellFDD:pmZtemporary62
EUtranCellFDD:pmZtemporary63
EUtranCellFDD:pmZtemporary64
EUtranCellFDD:pmZtemporary65
EUtranCellFDD:pmZtemporary66
EUtranCellFDD:pmZtemporary67
EUtranCellFDD:pmZtemporary68
EUtranCellFDD:pmZtemporary69
EUtranCellFDD:pmZtemporary70
EUtranCellFDD:pmZtemporary71
EUtranCellRelation:pmZtemporary72
EUtranCellRelation:pmZtemporary73
EUtranCellRelation:pmZtemporary74
EUtranCellRelation:pmZtemporary75
EUtranCellRelation:pmZtemporary76
EUtranCellRelation:pmZtemporary77
EUtranCellRelation:pmZtemporary78
EUtranCellRelation:pmZtemporary79
Cdma20001xRttCellRelation:pmHoPrepAttCsfb
Cdma20001xRttCellRelation:pmHoPrepSuccCsfb
Cdma20001xRttCellRelation:pmHoPrepAttCsfbEm
Cdma20001xRttCellRelation:pmHoPrepSuccCsfbEm

Draft that includes MO::Parameters and their value to be included (if approved) into AT&T GS document to support L13B EP10 Sw release.
Adding TAB for ""L13B_Draft_Counter_Standard_Act"
New Counters included in L13B:

-Deprecated and Replaced by:

UtranCellRelation:pmHoExeAttWcdma Replaced by GeranCellRelation:pmHoExeAtt
UtranCellRelation:pmHoExeSuccWcdma Replaced by UtranCellRelation:pmHoExeSucc
UtranCellRelation:pmHoPrepAttWcdma Replaced by UtranCellRelation:pmHoPrepAttLb
UtranCellRelation:pmHoPrepSuccWcdma Replaced by UtranCellRelation:pmHoPrepSucc
UtranCellRelation:pmHoPrepAttWcdmaSrvcc Replaced by UtranCellRelation:pmHoPrepAttSrvcc
UtranCellRelation:pmHoPrepSuccWcdmaSrvcc Replaced by UtranCellRelation:pmHoPrepSuccSrvcc
UtranCellRelation:pmHoExeAttTdScdma Replaced by GeranCellRelation:pmHoExeAtt
UtranCellRelation:pmHoExeSuccTdScdma Replaced by UtranCellRelation:pmHoExeSucc
UtranCellRelation:pmHoPrepAttTdScdma Replaced by UtranCellRelation:pmHoPrepAttLb
UtranCellRelation:pmHoPrepSuccTdScdma Replaced by UtranCellRelation:pmHoPrepSucc
TermPointToENB:pmUeCtxtFetchAtt Replaced by EUTranCellFDD:pmZtemporary28
TermPointToENB:pmUeCtxtFetchSucc Replaced by EUTranCellFDD:pmZtemporary29

-Deprecated

EUTranCellFDD:pmPdcpVolDIDrbTransUm (Remove from Primary Profile)
EUTranCellFDD:pmPdcpVolDIDrbTrans (Remove from National Profile)

-Limitation/Restricted but asked to be included in National Profile:

EUTranCellFDD:pmCaCapableDISum
EUTranCellFDD:pmCaCapableDISamp
EUTranCellFDD:pmCaConfiguredDISum
EUTranCellFDD:pmCaConfiguredDISamp
EUTranCellFDD:pmDIAssigsWithUnknownReception
EUTranCellFDD:pmActiveUeUISum
EUTranCellFDD:pmMeasMissingNeighRel
EUTranCellRelation:pmHoOscInterF
EUTranCellFDD:pmActiveUeUISumLcg

Changed EUTranCellFDD::prsConfigIndexMapped NGFC from Radio Connection supervision to Emergency Services
Changed EUTranCellFDD::prsPeriod NGFC from Radio Connection supervision to Emergency Services
Changed EUTranCellFDD::uncertAltitude NGFC from Radio Connection supervision to Emergency Services
Changed EUTranCellFDD::uncertSemiMajor NGFC from Radio Connection supervision to Emergency Services
Changed EUTranCellFDD::uncertSemiMinor NGFC from Radio Connection supervision to Emergency Services
Changed GeranFreqGroupRelation::csFallbackPrioEC NGFC from null to Emergency Services
Changed LppaEcid::featureStateLppaEcid NGFC from Lppa_E-CID=LTE Positioning Protocol Annex to Emergency Services
Changed LppaEcid::ketIdLppaEcid NGFC from null to Emergency Services
Changed LppaEcid::licenseStateLppaEcid NGFC from Lppa_E-CID=LTE Positioning Protocol Annex to Emergency Services
Changed LppaEcid::LppaEcidId NGFC from Lppa_E-CID=LTE Positioning Protocol Annex to Emergency Services
Changed LppaEcid::serviceStateLppaEcid NGFC from Lppa_E-CID=LTE Positioning Protocol Annex to Emergency Services
Changed LsmEcs::featureStateLsmEcs NGFC from VoLTE to Emergency Services
Changed LsmEcs::keyIdLsmEcs NGFC from null to Emergency Services
Changed LsmEcs::keyLsmEcs NGFC from null to Emergency Services
Changed LsmEcs::licenseStateLsmEcs NGFC from null to Emergency Services
Changed LsmEcs::LsmEcsId NGFC from null to Emergency Services
Changed LsmEcs::serviceStateLsmEcs NGFC from VoLTE to Emergency Services
Changed OtdoaSupl::featureStateOtdoaSupl NGFC from Software to Emergency Services
Changed OtdoaSupl::licenseStateOtdoaSupl NGFC from Software to Emergency Services
Changed OtdoaSupl::serviceStateOtdoaSupl NGFC from null to Emergency Services
Changed RATFreqPrio::FreqGroupPrioGERAN.csFallbackPrioEC NGFC from null to Emergency Services
Changed RATFreqPrio::FreqPrioUTRAN.csFallbackPrioEC NGFC from null to Emergency Services
Changed UePosCellId::featureStateCellId NGFC from Software to Emergency Services
Changed UePosCellId::keyIdCellId NGFC from Software to Emergency Services
Changed UePosCellId::licenseStateCellId NGFC from Software to Emergency Services
Changed UePosCellId::serviceStateCellId NGFC from Software to Emergency Services
Changed UePosCellId::UePosCellIdId NGFC from Software to Emergency Services
Changed UtranFreqRelation::csFallbackPrioEC(FEMTO) NGFC from null to Emergency Services
Changed UtranFreqRelation::csFallbackPrioEC(UMTS 850) NGFC from null to Emergency Services
Changed UtranFreqRelation::csFallbackPrioEC(UMTS 1900) NGFC from null to Emergency Services

L13B only:

OptionalFeatureLicense=LppaBasedOtdoaSupport::featureState NGFC is set to Emergency Services
OptionalFeatureLicense=LppaBasedOtdoaSupport::licenseState NGFC is set to Emergency Services
OptionalFeatureLicense=LppaBasedOtdoaSupport::serviceState NGFC is set to Emergency Services

Misc clean-up discussed with Ericsson and Nakina

Changed ENodeBFunction::timeAndPhaseSynchCritical to Add Suffix noGPS GS Value false.
Changed ENodeBFunction::timeAndPhaseSynchCritical to Add Suffix gpsSync GS Value true.
Removed SystemConstant::pmEventStreamingNotification(913)
Change L13B QciProfilePredefined=qci1::pdcpSNLength from 7 to default.
Added ReportConfigSearch::timeToTriggerA2Critical Suffix InterLTE GS Value 1280.
Added ReportConfigSearch::timeToTriggerA2Critical Suffix interRAT_10 GS Value 640
Added ReportConfigSearch::timeToTriggerA2Critical Suffix interRAT_5 GS Value 640
Added ReportConfigSearch::timeToTriggerA2Critical Suffix IntraLTE GS Value 640
Added ReportConfigSearch::timeToTriggerA2Critical Suffix multiCarrier GS Value 1280
Corrected EUTranCellFDD::acBarringForCsfb.acBarringForSpecialAC to replace "," with ":" false:false:false:false:false
Corrected EUTranCellFDD::ssacBarringForMMTELVideo.acBarringForSpecialAC to replace "," with ":" false:false:false:false:false
Corrected L13B IpSystem=1,lppm=1:featureStateTwampResponder ATTGS from 0 to 1.
Corrected Synchronization::syncReference ATTGS value from GpsSyncRef to GspSyncRef=1:.....
Removed L13A UeMeasControl::zzzTemporary6
Removed L13B UeMeasControl::zzzTemporary6

As part of FFA activity, following updates are recommended (multicarrier is replace by either OwnFreq or IFHO and two additions) as outcome from 3rd Carrier Project.

Changed EUTranFreqRelation::connectedModeMobilityPrio(From LB to LB, multiCarrier) suffix to 'From LB to LB, OwnFreq'
Changed EUTranFreqRelation::connectedModeMobilityPrio(From LB to MB, multiCarrier) suffix to 'From LB to MB, IFHO'
Changed EUTranFreqRelation::connectedModeMobilityPrio(From MB to LB, multiCarrier) suffix to 'From MB to LB, IFHO'
Changed EUTranFreqRelation::connectedModeMobilityPrio(From MB to MB, multiCarrier) suffix to 'From MB to MB, OwnFreq'
Added EUTranFreqRelation::connectedModeMobilityPrio(From LB to LB, IFHO) with ATTGS value of 1.
Added EUTranFreqRelation::connectedModeMobilityPrio(From MB to MB, IHFO) with ATTGS value of 1.

FGA L13A-E-030 LTE Venue/Event Site Manual Access Class Baring. The main purpose of implementing manual Access Class Barring feature is to alleviate traffic congestion and maximize service to UEs already connected in the cell under high loaded event and venue sites.

Change L13A EUTranCellFDD EUTranCellFDD::acBarringForMoData.acBarringFactor changed from 95 to 50,75 anf Global to Local.
Change L13A EUTranCellFDD EUTranCellFDD::acBarringForMoData.acBarringTime changed from 64 to 16,64 and Global to Local.
Change L13B EUTranCellFDD EUTranCellFDD::acBarringForMoData.acBarringTime changed from 64 to 16,64 and Global to Local.
Change L13A EUTranCellFDD EUTranCellFDD::acBarringForMoDataPresent changed from false to false,true and Global to Local.
Change L13B EUTranCellFDD EUTranCellFDD::acBarringForMoDataPresent changed from false to false,true and Global to Local.
Change L13A EUTranCellFDD EUTranCellFDD::acBarringForMoSignalling.acBarringFactor changed from 95 to 50,75 anf Global to Local.
Change L13B EUTranCellFDD EUTranCellFDD::acBarringForMoSignalling.acBarringFactor changed from 95 to 50,75 anf Global to Local.
Change L13A EUTranCellFDD EUTranCellFDD::acBarringForMoSignalling.acBarringTime changed from 64 to 16,64 and Global to Local.
Change L13B EUTranCellFDD EUTranCellFDD::acBarringForMoSignalling.acBarringTime changed from 64 to 16,64 and Global to Local.
Change L13A EUTranCellFDD EUTranCellFDD::acBarringForMoSignallingPresent changed from false to false,true and Global to Local.
Change L13B EUTranCellFDD EUTranCellFDD::acBarringForMoSignallingPresent changed from false to false,true and Global to Local.
Change L13A EUTranCellFDD EUTranCellFDD::acBarringInfoPresent changed from false to false,true and Global to Local.
Change L13B EUTranCellFDD EUTranCellFDD::acBarringInfoPresent changed from false to false,true and Global to Local.

FGA L13B-E-032 additionalPlmnList Changes.

Changed EUTranCellFDD::additionalPlmnList.mnc ATTGS value from 410 to 1 per FGA L13B-E-032

Changed EUTranCellFDD::additionalPlmnList.mcc ATTGS value from 410 to 1 per FGA L13B-E-032

Changed EUTranCellFDD::additionalPlmnList Parameter from additionalPlmnList to additionalPlmnList.mncLength with ATTGS value from null to 2 and Permission from Not Auditable to Global per FGA L13B-E-032

FGA L13A-E-035 TX2RelocOverall / TS1RelocOverall change from 5 to 10. This change is being implemented to increase the amount of time that may be spent in the X2 or S1 handover execution process and reduce the chance of dropping calls as a result of the timer expiring.

Changed/Added L13A System Constant::TS1RelocOverall from 5 to 10.

Changed/Added L13A System Constant::TX2RelocOverall from 5 to 10.

Changed/Added L13B System Constant::TS1RelocOverall from 5 to 10.

Changed/Added L13B System Constant::TX2RelocOverall from 5 to 10.

FGA L13A-E-033 ulMaxRetxThreshold Change from 16 to 32 and Clean-up L12A-E-005.

Added L13A RadioBearerTable=default,SignalingRadioBearer=1::dlMaxRetxThreshold(non_hicap)

ATTGS value of 32 per L12A FGA05.

Added L13A RadioBearerTable=default,SignalingRadioBearer=1::dlMaxRetxThreshold(hicap) ATTGS value of 8 per L13A FGA23.

Added L13A RadioBearerTable=default,DataRadioBearer=1::dlMaxRetxThreshold(hicap) ATTGS value of 8 per L13A FGA23.

Added L13A RadioBearerTable=default,DataRadioBearer=1::ulMaxRetxThreshold(non_hicap) ATTGS value of 16 per L12A FGA05.

Added L13A RadioBearerTable=default,SignallingRadioBearer=1::ulMaxRetxThreshold(hicap) ATTGS value of 8 per L13A FGA23.

Added L13B RadioBearerTable=default,SignalingRadioBearer=1::dlMaxRetxThreshold(non_hicap) ATTGS value of 32 per L12A FGA05.

Added L13B RadioBearerTable=default,SignalingRadioBearer=1::dlMaxRetxThreshold(hicap) ATTGS value of 8 per L13A FGA23.

Added L13B RadioBearerTable=default,DataRadioBearer=1::dlMaxRetxThreshold(hicap) ATTGS value of 8 per L13A FGA23.

Added L13B RadioBearerTable=default,DataRadioBearer=1::ulMaxRetxThreshold(non_hicap) ATTGS value of 16 per L12A FGA05.

Added L13B RadioBearerTable=default,SignallingRadioBearer=1::ulMaxRetxThreshold(hicap) ATTGS value of 8 per L13A FGA23.

Corrected/Changed L13A ENodeBFunction::zzzTemporary3 Suffix singleCarrier from 0 to null.

Corrected/Changed L13B ENodeBFunction::zzzTemporary3 Suffix singleCarrier from 0 to null.

LTE24.

Corrected all instances of the MOC ReportConfigEutraIFBestCell to ReportConfigEutraIFBestCell. Replaced lower case L in ..IF.. with upper case i.

Removed CapacityOutputPower=80W::licenseCapacityOutputPower Permission value of Not Auditable, Suffix value of 80W

Added CapacityOutputPower=100::licenseCapacityOutputPower ATTGS value of 0, Permission value of Not Auditable, Suffix value of RBS6201, RBS6202

Added CapacityOutputPower=120::licenseCapacityOutputPower ATTGS value of 0, Permission value of Not Auditable, Suffix value of RBS6201, RBS6202

Added CapacityOutputPower=40::licenseCapacityOutputPower ATTGS value of 3, Permission value of Not Auditable, Suffix value of RBS6202

Added CapacityOutputPower=60::licenseCapacityOutputPower ATTGS value of 3, Permission value of Not Auditable, Suffix value of RBS6202

Added CapacityOutputPower=80::licenseCapacityOutputPower ATTGS value of 3, Permission value of Not Auditable, Suffix value of RBS6202

Added CapacityOutputPower=40::licenseCapacityOutputPower ATTGS value of 6, Permission value of Not Auditable, Suffix value of RBS6201, RBS6202

Added CapacityOutputPower=60::licenseCapacityOutputPower ATTGS value of 6, Permission value of Not Auditable, Suffix value of RBS6201, RBS6202

Added CapacityOutputPower=80::licenseCapacityOutputPower ATTGS value of 6, Permission value of Not Auditable, Suffix value of RBS6201, RBS6202

Added CapacityOutputPower=40::licenseCapacityOutputPower ATTGS value of 6, Permission value of Not Auditable, Suffix value of RBS6601(DUL20)

Added CapacityOutputPower=60::licenseCapacityOutputPower ATTGS value of 6, Permission value of Not Auditable, Suffix value of RBS6601(DUL20)

Added CapacityOutputPower=80::licenseCapacityOutputPower ATTGS value of 6, Permission value of Not Auditable, Suffix value of RBS6601(DUL20)

Added CapacityOutputPower=100::licenseCapacityOutputPower ATTGS value of 6, Permission value of Not Auditable, Suffix value of RBS6601(DUL20)

Added CapacityOutputPower=120::licenseCapacityOutputPower ATTGS value of 6, Permission value of Not Auditable, Suffix value of RBS6601(DUL20)

Added CapacityOutputPower=40::licenseCapacityOutputPower ATTGS value of 9, Permission value of Not Auditable, Suffix value of RBS6201

Added CapacityOutputPower=60::licenseCapacityOutputPower ATTGS value of 9, Permission value of Not Auditable, Suffix value of RBS6201

Added CapacityOutputPower=80::licenseCapacityOutputPower ATTGS value of 9, Permission value of Not Auditable, Suffix value of RBS6201

Added CapacityOutputPower=40::licenseCapacityOutputPower ATTGS value of 12, Permission value of Not Auditable, Suffix value of RBS6201

Added CapacityOutputPower=60::licenseCapacityOutputPower ATTGS value of 12, Permission value of Not Auditable, Suffix value of RBS6201

Added CapacityOutputPower=80::licenseCapacityOutputPower ATTGS value of 12, Permission value of Not Auditable, Suffix value of RBS6201

Added CapacityOutputPower=40::licenseCapacityOutputPower ATTGS value of 12, Permission value of Not Auditable, Suffix value of RBS6601(DUS41)

Added CapacityOutputPower=60::licenseCapacityOutputPower ATTGS value of 12, Permission value of Not Auditable, Suffix value of RBS6601(DUS41)

Added CapacityOutputPower=80::licenseCapacityOutputPower ATTGS value of 12, Permission value of Not Auditable, Suffix value of RBS6601(DUS41)

Added CapacityOutputPower=100::licenseCapacityOutputPower ATTGS value of 12, Permission value of Not Auditable, Suffix value of RBS6601(DUS41)

Added CapacityOutputPower=120::licenseCapacityOutputPower ATTGS value of 12, Permission value of Not Auditable, Suffix value of RBS6601(DUS41)

Changed CapacityOutputPower=100::licenseStateOutputPower MOC value from CapacityOutputPower=100 to CapacityOutputPower=100Watt, Suffix value from null to RBS6201, RBS6202

Added CapacityOutputPower=100::licenseStateOutputPower ATTGS value of 1, Permission value of Global, Suffix value of RBS6601

Changed CapacityOutputPower=120::licenseStateOutputPower MOC value from CapacityOutputPower=120 to CapacityOutputPower=120Watt, Suffix value from null to RBS6201, RBS6202

Added CapacityOutputPower=120::licenseStateOutputPower ATTGS value of 1, Permission value of Global, Suffix value of RBS6601

Changed CapacityOutputPower=40::licenseStateOutputPower MOC value from CapacityOutputPower=40 to CapacityOutputPower=40Watt, Suffix value from to RBS6201, RBS6202, RBS6601

Changed CapacityOutputPower=60::licenseStateOutputPower MOC value from CapacityOutputPower=60 to CapacityOutputPower=60Watt, Suffix value from to RBS6201, RBS6202, RBS6601

Changed CapacityOutputPower=80::licenseStateOutputPower MOC value from CapacityOutputPower=80 to CapacityOutputPower=80Watt, Suffix value from to RBS6201, RBS6202, RBS6601

Setting SC913 to 0 (false) as a Work around to avoid event degradation due to drop on number of streamings.

This setting has been added as part of upgrade to L13B IP8 EP14.

Added SystemConstant::pmEventStreamingNotification(913) ATTGS value of 0, Permission value of Not Auditable.

Corrected/Changed L13B SystemConstant::cqiReportBufferThresholdAperiodic1150 to remove ().

Corrected/Changed L13B SystemConstant::nrofMacPaddingsToDetectSid1160 to remove ().

Corrected/Changed L13B SystemConstant::srCqiTargetOffset1144 to remove ().

Clean-up csFallbackPrio and csFallbackPrioEC parameters and suffixes.

FGA L13A-E-034 UtranFreqRelation.threshXLow and measReportConfigParams.b2Threshold2RscpUtraOffset

(QCI1) Parameter Change. FGA34 is being issued for reducing Time Not On LTE (TNOL), keep the users longer on LTE while in idle mode and improving LTE CQI hence it will improve overall customer experience.

Changed L13A UtranFreqRelation::threshXLow from 0 to 14.

Changed L13B UtranFreqRelation::threshXLow from 0 to 14.

Changed L13A QciProfilePredefined=qci1::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 10.

Changed L13B QciProfilePredefined=qci1::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 10.

(Removed UtranFreqRelation::threshXLow muliti carrier and single carrier Suffixes)

FGA L13A-E-037 RoHC Reactivation. This FGA focuses on the reactivation in L13A eNbs of the feature RoHC (Robust Header Compression) and the reactivation of RoHC for the VoLTE QCI (qci=1). In addition, the System Constant QciProfilePredefined=qci1::pdcpSNLength is returned to its software default value of 12 bits (indicated as 'default' in the Gold Standard). These changes are to be applied to L13A eNbs only. This FGA supersedes FGA29 which deactivated RoHC in all L13A eNbs.

Changed L13A ROHC::featureStateROHC from 0 to 1.

Changed L13A QciProfilePredefined=qci1::pdcpSNLength from 7 to 12.

Changed L13A QciProfilePredefined=qci1::rohcEnabled from false to true.

Corrected/Changed L13A ReportConfigEUltraIntraFreqPm::measSelectionEUltraPm from 0 to "PERIODICAL

EVENT_A1

EVENT_A2

EVENT_A3

EVENT_A4

EVENT_A5

" Initial Value 0 Permissions LocalOptional

Corrected/Changed L13B ReportConfigEUltraIntraFreqPm::measSelectionEUltraPm from 0 to "PERIODICAL

EVENT_A1

EVENT_A2

EVENT_A3

EVENT_A4

EVENT_A5

" Initial Value 0 Permissions LocalOptional

Corrected/Changed L13A ReportConfigEUltraIntraFreqPm::reportAmountPm from 0 to 0,1,2,4,8,16,32,64 Initial Value 0 Permissions LocalOptional

Corrected/Changed L13B ReportConfigEUltraIntraFreqPm::reportAmountPm from 0 to 0,1,2,4,8,16,32,64 Initial Value 0 Permissions LocalOptional

Corrected/Changed L13A ReportConfigEUltraIntraFreqPm::ReportConfigEUltraIntraFreqPmId LocalOptional

Corrected/Changed L13B ReportConfigEUltraIntraFreqPm::ReportConfigEUltraIntraFreqPmId LocalOptional

Corrected/Changed L13A ReportConfigEUltraIntraFreqPm::reportIntervalPm from 5 to "MS_120

MS_240

MS_480

MS_640

MS_1024

MS_5120

MS_10240

MIN_1

MIN_6

MIN_12

MIN_30

MIN_60

MS_2048

" Initial Value 5 Permissions LocalOptional

Corrected/Changed L13B ReportConfigEUltraIntraFreqPm::reportIntervalPm from 5 to"MS_120

MS_240

MS_480

MS_640

MS_1024

MS_5120

PMATT 176945 Ericsson 3rd Carrier

Changed EUTranFreqRelation::voicePrio(From LB to LB, multiCarrier) Suffix to (From LB to LB, IFHO) per FGA L13A-E-017b..020b• Changed

EUTranFreqRelation::connectedModeMobilityPrio(From MB to MB, IFHO) ATTGS from 1 to -1 per FGA L13A-E-017b..020b

Added EUTranFreqRelation::voicePrio(From MB to MB, IFHO) with ATTGS value of -1 per FGA L13A-E-017b..020b

Added EUTranFreqRelation::voicePrio(From LB to LB, multiCarrier) Suffix to (From LB to LB, OwnFreq) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::voicePrio(From LB to MB, multiCarrier) Suffix to (From LB to MB, IFHO) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::voicePrio(From MB to LB, multiCarrier) Suffix to (From MB to LB, IFHO) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::voicePrio(From MB to MB, multiCarrier) Suffix to (From MB to MB, OwnFreq) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::threshXLow(From LB to LB, multiCarrier) Suffix to (From LB to LB, ownFreq) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::threshXLow(From LB to MB, multiCarrier) Suffix to (From LB to MB, IFHO) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::threshXLow(From MB to LB, multiCarrier) Suffix to (From MB to LB, IFHO) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::threshXLow(From MB to MB, multiCarrier) Suffix to (From MB to MB, ownFreq) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::threshXHigh(From LB to LB, multiCarrier) Suffix to (From LB to LB, ownFreq) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::threshXHigh(From LB to MB, multiCarrier) Suffix to (From LB to MB, IFHO) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::threshXHigh(From MB to LB, multiCarrier) Suffix to (From MB to LB, IFHO) per FGA L13A-E-017b..020b

Changed EUTranFreqRelation::threshXHigh(From MB to MB, multiCarrier) Suffix to (From MB to MB, ownFreq) per FGA L13A-E-017b..020b

Note: the parameters AdmissionControl::dlTransNwBandwidth, AdmissionControl::ulNonGbrRatio, AdmissionControl::ulTransNwBandwidth and UtranFreqRelation::mobilityAction belong to the VoLTE Node Group Functional Category.

FGA L13A-E-0031 A5Threshold2Rsrp for Multicarrier Parameter Change. This is to improve inter-frequency handover from Mid Band to Low Band, improving IRAT and retainability on Mid Band layer

Added ReportConfigA5::a5Threshold2Rsrp(MB in multiCarrier) with ATTGS value of -112 per FGA L13A-E-031

Added/Changed ReportConfigA5::a5Threshold2Rsrp(multiCarrier) Suffix to (LB in multiCarrier) per FGA L13A-E-031

Note: the parameters AdmissionControl::dlTransNwBandwidth, AdmissionControl::ulNonGbrRatio, AdmissionControl::ulTransNwBandwidth and UtranFreqRelation::mobilityAction belong to the VoLTE Node Group Functional Category.

Corrected/Changed L13B DrxProfile=2::shortDrxCycleTimer from 1 to 0.

Corrected/Added L13B ReportConfigSearch::timeToTriggerA2Search GS Value 640.

LTE26

Corrected/Deleted L13B EUTranCellFDD::mobCtrlAtPoorCovActive()

Corrected/Changed L13B UtranFreqRelation::threshXHighQ from 30 to 25.

LTE27 Clean-up/Corrections

Corrected/Deleted L13A and L13B CapacityChannelBandwidth::licenseStateChannelBandwidth

Corrected/Added L13A and L13B CapacityChannelBandwidth=1p4MHz::licenseStateChannelBandwidth with ATTGS value of 0

Corrected/Added L13A and L13B CapacityChannelBandwidth=3MHz::licenseStateChannelBandwidth with ATTGS value of 0

Corrected/Added L13A and L13B CapacityChannelBandwidth=5MHz::licenseStateChannelBandwidth with ATTGS value of 0

Corrected/Added L13A and L13B CapacityChannelBandwidth=10MHz::licenseStateChannelBandwidth with ATTGS value of 0

Corrected/Added L13A and L13B CapacityChannelBandwidth=15MHz::licenseStateChannelBandwidth with ATTGS value of 0

Corrected/Added L13A and L13B CapacityChannelBandwidth=20MHz::licenseStateChannelBandwidth with ATTGS value of 1

Corrected L13A QciProfilePredefined=qci2::aqmMode ATTGS value from 2 to 0.

Corrected L13A QciProfilePredefined=qci2::counterActiveMode ATTGS value from true to false

Corrected L13A QciProfilePredefined=qci2::dataFwdPerQciEnabled ATTGS value from true to false

Corrected L13A QciProfilePredefined=qci2::dlMinBitRate ATTGS value from 350 to 0

Corrected L13A QciProfilePredefined=qci2::drxPriority ATTGS value from 20 to 0

Corrected L13A QciProfilePredefined=qci2::drxProfileRef ATTGS value from ManagedElement=1,ENodeBFunction=1,DrxProfile=2 to ManagedElement=1,ENodeBFunction=1,DrxProfile=0.

Corrected L13A QciProfilePredefined=qci2::pdb ATTGS value from 130 to 0.

Corrected L13A QciProfilePredefined=qci2::qciSubscriptionQuanta ATTGS value from 370 to 1.

Corrected L13A QciProfilePredefined=qci2::resourceAllocationStrategy ATTGS value from 1 to 0.

Corrected L13A QciProfilePredefined=qci2::rlcMode ATTGS value from 1 to 0.

Corrected L13A QciProfilePredefined=qci2::schedulingAlgorithm ATTGS value from 4 to 0.

Corrected L13A QciProfilePredefined=qci2::srsAllocationStrategy ATTGS value from 1 to 0.

Corrected L13A QciProfilePredefined=qci2::ulMinBitRate ATTGS value from 350 to 0.

Corrected L13A and L13B QciProfilePredefined=qci3::rlcMode ATTGS value from 1 to 0.

Corrected L13A and L13B QciProfilePredefined=qci3::schedulingAlgorithm ATTGS value from 4 to 0.

Corrected L13A and L13B QciProfilePredefined=qci3::resourceAllocationStrategy ATTGS value from 1 to 0.

Corrected L13A and L13B QciProfilePredefined=qci3::srsAllocationStrategy ATTGS value from 1 to 0.

Corrected L13A and L13B QciProfilePredefined=qci4::schedulingAlgorithm ATTGS value from 4 to 0.

Corrected L13A and L13B QciProfilePredefined=qci4::resourceAllocationStrategy ATTGS value from 1 to 0.

FGA L13A-E-038 Static QoS. The Static QoS Solution focuses on the RAN network capabilities and the EPC functions that support the processing of various standard QCI/THP/ARP values across the network, including transport. This overall project begins to differentiate service performance based on the leveraged QCI. This project only addresses non-GBR QCI values 6 through 9.

Change L13A:: QciProfilePredefined=qci6: relativePriority from 1 to 8

Change L13A:: QciProfilePredefined=qci7: relativePriority from 1 to 4

Change L13A:: QciProfilePredefined=qci8: relativePriority from 1 to 2

Change L13B:: QciProfilePredefined=qci6: relativePriority from 1 to 8

Change L13B:: QciProfilePredefined=qci7: relativePriority from 1 to 4

Change L13B:: QciProfilePredefined=qci8: relativePriority from 1 to 2

Updated CAS Tab L13A

Added L13A SectorCarrier:pmActiveUeDISumSectorCarrier with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A SectorCarrier:pmActiveUeUISumSectorCarrier with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A SectorCarrier:pmZtemporary56 with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmTtiBundlingUeSum with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmTtiBundlingUeSamp with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmTtiBundlingUeMax with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmBadCovSearchEvalReport with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmCriticalBorderEvalReport with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmRrcConnReestFailLicMtReest with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmActiveUeDISectorCarrierDistr with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmActiveUeUISectorCarrierDistr with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmRrcConnReestAttHo with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmRrcConnReestSuccHo with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmAdvCellSupDetection with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmAdvCellSupRecoveryCellAtt with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A EUTRANCellFDD:pmAdvCellSupRecoveryCellSucc with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20.

Added L13A PlugInUnit:pmProcessorCoreLoad with 'Active within Scanner' of National_PM_Standard_eNodeB_L13A_GS_13.20

Updated CAS L13B Tab

Corrected L13B SectorCarrier:pmActiveUeDISumSectorCarrier 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B SectorCarrier:pmActiveUeUISumSectorCarrier 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B SectorCarrier:pmZtemporary56 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmTtiBundlingUeSum 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmTtiBundlingUeSamp 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmTtiBundlingUeMax 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmBadCovSearchEvalReport 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmCriticalBorderEvalReport 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmRrcConnReestFailLicMtReest 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmActiveUeDISectorCarrierDistr 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmActiveUeUISectorCarrierDistr 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmRrcConnReestAttHo 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Corrected L13B EUTranCellFDD:pmRrcConnReestSuccHo 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.
Added L13B EUTranCellFDD:pmAdvCellSupDetection with 'Active within Scanner' of National_PM_Standard_eNodeB_L13B_GS_13.20.
Added L13B EUTranCellFDD:pmAdvCellSupRecoveryCellAtt with 'Active within Scanner' of National_PM_Standard_eNodeB_L13B_GS_13.20.
Added L13B EUTranCellFDD:pmAdvCellSupRecoveryCellSucc with 'Active within Scanner' of National_PM_Standard_eNodeB_L13B_GS_13.20.

Corrected L13B PlugInUnit:pmProcessorCoreLoad 'Active within Scanner' from No to National_PM_Standard_eNodeB_L13B_GS_13.20.

Corrected L13A RadioBearerTable=default,DataRadioBearer=1::ulMaxRetxThreshold(hicap) changed from L13A to L13B.

L13B-E-036 PSHO and IRAT offload from LTE to UMTS (IROW) This Field Guide Alert focuses activating PSHO (Packet Switch Handover) and IROW (Inter-RAT Offload to WCDMA). This FGA has both LTE and UMTS parameter changes and should be implemented concurrently. The applicable SW releases for LTE and UMTS are L13B and W13B respectively. PSHO The current LTE IRAT mobility solution for RRC_connected user with non-VoLTE services between LTE and UMTS is to use release redirect (R&R). The R&R (or IRAT mobility) is only triggered when the user in RRC_connected state runs out of the LTE coverage. The PSHO mechanism is another 3GPP standard [TS 23.401] IRAT mobility solution to move users between LTE layer and UMTS layer.

Added L13B EUTRANCellFDD::cellSubscriptionCapacity Suffix singleCarrier 10Mhz 20000 Permissions Global in FGA L13B-E-036

Added L13B EUTRANCellFDD::cellSubscriptionCapacity Suffix singleCarrier 5Mhz 10000 Permission Global in FGA L13B-E-036

Added L13B EUTRANCellRelation::isRemoveAllowed false Initial Value true Permissions Local in FGA L13B-E-036

Added L13B ReportConfigInterRatLb::utranB1ThresholdRscp -90 Permissions Global in FGA L13B-E-036

Added L13B SystemConstant::iratOffloadEnabled1010 Suffix Relation towards co-located UMTS site only 0 Permissions Not Auditable FGA L13B-E-036

Added L13B UtranCellRelation::loadBalancing Suffix Relation towards co-located UMTS site only 2 Permissions Global FGA L13B-E-036

Added L13B UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(1) 1 Permissions Global FGA L13B-E-036

UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(2) 1 Permissions Global FGA L13B-E-036

Added L13B UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(3) 1 Permissions Global FGA L13B-E-036

Added L13B UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(4) 1 Permissions Global FGA L13B-E-036

Added L13B UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(5) 0 Permissions Global FGA L13B-E-036

Added L13B UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(6) 1 Permissions Global FGA L13B-E-036

Added L13B UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(7) 1 Permissions Global FGA L13B-E-036

Added L13B UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(8) 0 Permissions Global FGA L13B-E-036

Added L13B UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling Suffix QCI(9) 1 Permissions Global FGA L13B-E-036

Changed L13B EUTRANCellFDD::lbUtranOffloadThreshold from 100..1600 to 1600 Permissions Local to Global FGA L13B-E-036

Changed L13B OptionalFeatureLicense=InterRatOffloadToUtran::featureState from 0 to 1 FGA L13B-E-036

Changed L13B RadioBearerTable=default,DataRadioBearer=1::ulMaxRetxThreshold with false Initial Value Permissions from Local to Global FGA L13B-E-036

Changed L13B WcdmaHandover::featureStateWcdmaHandover 0 to 1 FGA L13B-E-036

Recommend changing parameter from Global to Not Auditable to allow for dependency in order to perform an audit when this parameter is set to either value.

Corrected/Changed L13A EquipmentSupportFunction::supportSystemControl true from Global to Not Auditable.

Corrected/changed L13B EquipmentSupportFunction::supportSystemControl true from Global to Not Auditable.

Clean up/Add Suffixes to L13B-E-036 PSHO and IRAT offload from LTE to UMTS (IROW)

Changed EUTranCellFDD::cellSubscriptionCapacity to add Suffix singleCarrier 10Mhz=PSHO GS value 20000
Changed EUTranCellFDD::cellSubscriptionCapacity to add Suffix singleCarrier 5Mhz=PSHO GS value 10000
Changed OptionalFeatureLicense=InterRatOffloadToUtran::featureState to add Suffix PSHO GS value 1
Added OptionalFeatureLicense=InterRatOffloadToUtran::featureState to add Suffix Non PSHO GS value 0
Changed WcdmaHandover::featureStateWcdmaHandover to add Suffix PSHO GS value 1
Added WcdmaHandover::featureStateWcdmaHandover to add Suffix Non PSHO GS value 0
Added UtranCellRelation::isRemoveAllowed to add Suffix Non PSHO with GS value true,false
Changed UtranCellRelation::isRemoveAllowed to add Suffix for For all relations towards co-located UMTS Site=PSHO with GS value false
Changed UtranCellRelation::isRemoveAllowed to add Suffix For all other UMTS Relations=PSHO with GS value true
Added EUTranCellFDD::lbUtranOffloadThreshold to add Suffix Non PSHO with GS Value 100
Changed EUTranCellFDD::lbUtranOffloadThreshold to add Suffix PSHO with GS value 100..1600
Changed UtranCellRelation::loadBalancing to add Suffix Relation towards co-located UMTS site only=PSHO with GS value 2
Changed UtranCellRelation::loadBalancing to add Suffix For all other UMTS Relations=PSHO with GS Value 0
Added UtranCellRelation::loadBalancing to add Suffix Non PSHO with GS Value 0
Changed ReportConfigInterRatLb;;utranB1ThresholdRscp to add Suffix PSHO with GS Value -90
Added ReportConfigInterRatLb::utranB1ThresholdRscp to add Suffix Non PSHO with GS Value -24
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(1)=PSHO with GS value 1
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(2)=PSHO with GS value 1
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(3)=PSHO with GS value 1
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(4)=PSHO with GS value 1
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(5)=PSHO with GS value 0
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(6)=PSHO with GS value 1
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(7)=PSHO with GS value 1
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(8)=PSHO with GS value 0
Changed UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(9)=PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(1)=Non PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(2)=Non PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(3)=Non PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(4)=Non PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(5)=Non PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(6)=Non PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(7)=Non PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(8)=Non PSHO with GS value 1
Added UtranFreqRelation::utranFreqToQciProfileRelation.lbQciProfileHandling to add Suffix QCI(9)=Non PSHO with GS value 1

OTDOA E911 Correction

Corrected/Removed L13A EUTranCellFDD:: prsConfigIndex
Corrected/Removed L13B EUTranCellFDD:: prsConfigIndex
Corrected/Removed L13A EUTranCellFDD:: prsConfigIndexMapped
Corrected/Removed L13B EUTranCellFDD:: prsConfigIndexMapped

Corrected/Changed L13A Ipv6::featureState ATTGS from 0 to 0,1 and Permission from Global to Local.
Corrected/Changed L13B Ipv6::featureState ATTGS from 0 to 0,1 and Permission from Global to Local.
Corrected/Changed L13A Ipv6Interface::vLan ATTGS from false to true.
Corrected/Changed L13B Ipv6Interface::vLan ATTGS from false to true.
Corrected/Changed L13A Ipv6Interface::vid ATTGS from 1 to null and Permission from Global to Not Auditable.
Corrected/Changed L13B Ipv6Interface::vid ATTGS from 1 to null and Permission from Global to Not Auditable.

Implementation Teams do not configure this parameter so needs to change to Null and Not Auditable.
Corrected/Changed L13A ExternalNode::informationOnly from false to Null and Permissions from Global to Not Auditable.
Corrected/Changed L13B ExternalNode::informationOnly from false to Null and Permissions from Global to Not Auditable.

Adding L14A CAS TAB.

For the following parameters change profile from 'no' to 'National_PM_Standard_eNb':

SectorCarrier:pmActiveUeDISumSectorCarrier National_PM_Standard_eNb
SectorCarrier:pmActiveUeUISumSectorCarrier National_PM_Standard_eNb
SectorCarrier:pmZtemporary56 National_PM_Standard_eNb
EUTranCellFDD:pmTtiBundlingUeSum National_PM_Standard_eNb
EUTranCellFDD:pmTtiBundlingUeSamp National_PM_Standard_eNb
EUTranCellFDD:pmTtiBundlingUeMax National_PM_Standard_eNb
EUTranCellFDD:pmBadCovSearchEvalReport National_PM_Standard_eNb
EUTranCellFDD:pmCriticalBorderEvalReport National_PM_Standard_eNb
EUTranCellFDD:pmRrcConnReestFailLicMtReest National_PM_Standard_eNb
EUTranCellFDD:pmActiveUeDISectorCarrierDistr National_PM_Standard_eNb
EUTranCellFDD:pmActiveUeUISectorCarrierDistr National_PM_Standard_eNb
EUTranCellFDD:pmRrcConnReestAttHo National_PM_Standard_eNb
EUTranCellFDD:pmRrcConnReestSuccHo National_PM_Standard_eNb
PlugInUnit:pmProcessorCoreLoad National_PM_Standard_eNb

Added below counters in the excel for L14A:

EUTranCellFDD:pmAdvCellSupDetection National_PM_Standard_eNb
EUTranCellFDD:pmAdvCellSupRecoveryCellAtt National_PM_Standard_eNb
EUTranCellFDD:pmAdvCellSupRecoveryCellSucc National_PM_Standard_eNb

Clean-up

Corrected/Changed all GeranFreqGroupRelation:cellReselectionPriority to EUTranFreqRelation::cellReselectionPriority.

Corrected/Changed L13A SectorCarrier::partOfSectorPower Suffix post-production from 100 to 0..100 with Initial Value 7
Corrected/Changed L13B SectorCarrier::partOfSectorPower Suffix post-production from 100 to 0..100 with Initial Value 7
Corrected/Changed L13A SectorCarrier::partOfSectorPower Suffix pre-production from 7,100 to 0..100 with Initial Value 7
Corrected/Changed L13B SectorCarrier::partOfSectorPower Suffix pre-production from 7,100 to 0..100 with Initial Value 7

FGA W12B-E-040 EUTRAN Maximum Cell Range Changes. This FGA modifies the Maximum Cell Range default which involves the maximum distance between the UE and the cell. For qualified cells, FGA40 will allow the flexibility to increase the maximum cellrange to 23km and in some cases, to 35km. This FGA is needed to improve RACH performance and customer experience beyond 18km. With the now available timing advance samples in L13B, markets should be able to take full advantage of these new cellrange guidelines.FGA40 supersedes FGA08.

Changed L13A EUTranCellFDD::cellRange (non_hicap) from 15,18 to 15,18,23,35.

Changed L13B EUTranCellFDD::cellRange (non_hicap) from 15,18 to 15,18,23,35.

Clean-up

Corrected GspSyncRef::gpsCompensationDelay ATTGS Value from 0 to null and Permission from Global to Not Auditable and NGFC from null to Emergency Services.

Corrected RfBranch::dlTrafficDelay ATTGS Value from 0 to null and NGFC from 'eNB Hardware & Antenna parameters' to 'Emergency Services'.

Corrected RfBranch::ulTrafficDelay ATTGS Value from 0 to null and NGFC from 'eNB Hardware & Antenna parameters' to 'Emergency Services'.

FGA L13B-E-041 Inter-Frequency Border (interLTE) and Mixed Bandwidth (mixedBW) Guideline Changes. FGA41 introduces Mobility Control at Poor Coverage (MCPC) feature and it will be used for LTE inter-frequency border (interLTE) and mixed bandwidth (mixedBW) guideline. InterLTE site is an ENodeB located at LTE inter-frequency borders. MixedBW site is a single carrier ENodeB with two or more different bandwidth/frequency.

Changed L13B ReportConfigSearch::a1a2SearchThresholdRsrp (InterLTE) from -107 to -110

Add L13B ReportConfigSearch::a1a2SearchThresholdRsrp (mixedBW)Permissions Global Value -100

Changed L13B ReportConfigSearch::a2CriticalThresholdRsrp from 140 to -118

Add L13B ReportConfigB2Utra::b2Threshold1Rsrp (mixedBW) Permissions Global Value -116

Add L13B MobCtrlAtPoorCov::featureStateMobCtrlAtPoorCov (mixedBW) Permissions Global Value 1

Changed L13B ReportConfigSearch::hysteresisA1A2SearchRsrp from 20 to 30

Changed L13B EUTranFreqRelation::interFreqMeasType (interLTE_intraFreq)from 0 to 0 (EVENT_A5)

Changed L13B EUTranCellFDD::systemInformationBlock3.sNonIntraSearch (interLTE) 10L13B

Changed L13B L13B EUTranCellFDD::systemInformationBlock3.sNonIntraSearch (mixedBW) Value 20

Add L13B EUTranCellFDD::threshServingLow (interLTE) Permissions Global Value 6

Add L13B EUTranCellFDD::threshServingLow (mixedBW) Permissions Global Value 6

Changed L13B ReportConfigSearch::timeToTriggerA2Critical (InterLTE) remains 1280

Add L13B ReportConfigSearch::timeToTriggerA2Critical (mixedBW) Permissions Global Value 1280

Add L13B EUTranFreqRelation::interFreqMeasType (interLTE_intraFreq) Permissions Global Value 1 (EVENT_A3)

Add L13B EUTranFreqRelation::cellReselectionPriority (interLTE) Permissions Global Value 5

Add L13B MobCtrlAtPoorCov::MobCtrlAtPoorCovId (mixedBW) Permissions Global Value true

Add L13B EUTranFreqRelation::interFreqMeasType (mixedBW_intraFreq) Permissions Global Value 0 (EVENT_A5)

Add L13B EUTranFreqRelation::interFreqMeasType (mixedBW_interFreq) Permissions Global Value 1 (EVENT_A3)

Add L13B EUTranFreqRelation::connectedModeMobilityPrio (mixedBW_interFreq) Permissions Global Value 1

Add L13B EUTranFreqRelation::connectedModeMobilityPrio (mixedBW_intraFreq) Permissions Global Value 5

Updated L14A Counter Activation Standard Tab

Activated IpSecTunnel:pmInDiscAReFail in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmInDiscDec in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmInDiscIntCh in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmInDiscNoSa in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmInEspData in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmInPkt in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmOutDiscNoSa in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmOutDiscSeqOw in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmOutEspData in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IpSecTunnel:pmOutPkt in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated EUTranCellFDD:pmZtemporary69 in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated EUTranCellFDD:pmZtemporary70 in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmOutInfoReq in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInInvalidSpi in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmChildSaRekey in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInInfoReq in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmOutInfoRsp in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInInfoRsp in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInInvalid in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmOutAuthRsp in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmOutCrChildReq in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInCrChildReq in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmOutCrChildRsp in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInCrChildRsp in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmOutInitReq in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInInitReq in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmOutInitRsp in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInInitRsp in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmOutAuthReq in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInAuthReq in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Activated IkePeer:pmInAuthRsp in the National_PM_Standard_eNodeB_L14A_GS_14.02 profile

Updated entries in Profile from National_PM_Standard_eNodeB_L14A_GS_14.00 to National_PM_Standard_eNodeB_L14A_GS_14.02

Corrected entries in Profile from National_PM_Standard_eNb to National_PM_Standard_eNodeB_L14A_GS_14.02

Corrected missing EUTranCellFDD:pmAdvCellSupDetection in 14.00 profile.txt import file updated on 8/12.

Corrected missing EUTranCellFDD:pmAdvCellSupRecoveryCellAtt in 14.00 profile.txt import file updated on 8/12.

Corrected missing EUTranCellFDD:pmAdvCellSupRecoveryCellSucc in 14.00 profile.txt import file updated on 8/12.

Added new Tab for Transport Network Design.

Added ENodeBFunction::mfbiSupport ATTGS value of null, Permission value of Not Auditable
Added EUTranCellFDD::additionalFreqBandList ATTGS value of null, Permission value of Not Auditable
Added EUTranCellFDD::additionalSpectrumEmissionValues ATTGS value of null, Permission value of Not Auditable
Added EUTranCellFDD::freqBand ATTGS value of null, Permission value of Not Auditable
Added EUTranCellFDD::spectrumEmissionReqMapping.freqBand ATTGS value of null, Permission value of Not Auditable
Added EUTranCellFDD::spectrumEmissionReqMapping.spectrumEmissionReq ATTGS value of null, Permission value of Not Auditable
Added EUTranFrequency::additionalFreqBandList ATTGS value of null, Permission value of Not Auditable
Added EUTranFrequency::excludeAdditionalFreqBandList ATTGS value of null, Permission value of Not Auditable
Added EUTranFrequency::freqBand ATTGS value of null, Permission value of Not Auditable
Added ExternalENodeBFunction::mfbiSupport ATTGS value of FALSE, Permission value of Global
Added ExternalEUTranCellFDD::additionalFreqBandList ATTGS value of null, Permission value of Not Auditable
Added ExternalEUTranCellFDD::freqBand ATTGS value of null, Permission value of Not Auditable
Added OptionalFeatureLicense=MultiFreqBand::featureState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=MultiFreqBand::licenseState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=MultiFreqBand::serviceState ATTGS value of 1, Permission value of Global
Added System Constant::excludeCaUeInLoadManagement1275 ATTGS value of 1, Suffix value of Only AWS Markets (B4+B17) Combination with CA enabled, Permission value of Global
Added AdmissionControl::admNrRbDifferentiationThr ATTGS value of 900, Permission value of Global
Added AdmissionControl::admNrRrcDifferentiationThr ATTGS value of 900, Permission value of Global
Added AdmissionControl::admResourceMinQciPrio ATTGS value of 5, Permission value of Global
Added AdmissionControl::dlAdmDifferentiationThr ATTGS value of 900, Permission value of Global
Added AdmissionControl::dlAdmOverloadThr ATTGS value of 950, Permission value of Global
Added AdmissionControl::nrOfPaConnReservationsPerCell ATTGS value of 1, Permission value of Global
Added AdmissionControl::nrOfRbReservationsPerPaConn ATTGS value of 4, Permission value of Global
Added AdmissionControl::resourceReservationForDifferentiation ATTGS value of 5, Permission value of Global
Added AdmissionControl::ulAdmDifferentiationThr ATTGS value of 900, Permission value of Global
Added AdmissionControl::ulAdmOverloadThr ATTGS value of 950, Permission value of Global
Changed DifferentiatedAdmissionControl::featureStateDifferentiatedAdmissionControl ATTGS value from 0 to 1
Changed DifferentiatedAdmissionControl::serviceStateDifferentiatedAdmissionControl ATTGS value from 0 to 1
Changed AdmissionControl::zzzTemp20 ATTGS value from 1000 to 500, Permission value from Not Auditable to Global
Changed AdmissionControl::zzzTemp21 ATTGS value from 1000 to 500, Permission value from Not Auditable to Global
Changed AdmissionControl::resourceReservationForPState ATTGS value from 0 to 1, Permission value from Not Auditable to Global
Added EUTranCellFDD::crsGain ATTGS value of 177,300, Initial Value of 300 Permission value of Local
Added EUTranCellFDD::crsGain(Hicap) ATTGS value of 0 Permission value of Global
Changed EUTranCellFDD::zzzTemporary14 ATTGS value from -2000000000 to 1
Added System Constant::semiPersistSchedIntervalUI869 ATTGS value of 10, Permission value of Global
Added System Constant::ulDelayBundlingTime877 ATTGS value of 10, Permission value of Global
Added System Constant::dlDelayBundlingTime746 ATTGS value of 10, Permission value of Global

Added UtranFreqRelation::lbBnrPolicy ATTGS value of 3, Permission value of Global
Added OptionalFeatureLicense=BnrIratOffload::featureState ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=BnrIratOffload::licenseState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=BnrIratOffload::serviceState ATTGS value of 0, Permission value of Global
Added AutoCellCapEstFunction::useEstimatedCellCap ATTGS value of FALSE, Permission value of Global
Added EUTranCellFDD::cellCapMaxCellSubCap ATTGS value of 0..1000000, Permission value of Local
Added EUTranCellFDD::cellCapMinCellSubCap ATTGS value of 0..1000000, Permission value of Local
Added EUTranCellFDD::dynCellSubscrCap ATTGS value of null, Permission value of Not Auditable
Added OptionalFeatureLicense=AutoCellCapEstFunction::featureState ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=AutoCellCapEstFunction::licenseState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=AutoCellCapEstFunction::serviceState ATTGS value of 0, Permission value of Global
Added UtranFreqRelation::lbActivationThreshold ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=IFLBActivationThreshold::featureState ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=IFLBActivationThreshold::licenseState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=IFLBActivationThreshold::serviceState ATTGS value of 0, Permission value of Global
Changed Support12Cells::licenseStateSupport12Cells ATTGS value from 0 to 1,
Added OptionalFeatureLicense=PucchOverdimensioning::featureState ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=PucchOverdimensioning::licenseState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=PucchOverdimensioning::serviceState ATTGS value of 0, Permission value of Global
Changed EUTranCellFDD::pucchOverdimensioning Range value from 0, 13 to 0, 13, 3, 4, 7
Changed EUTranCellFDD::networkSignallingValue Range value from NS_01, NS_03, NS_05, NS_07 to NS_01, NS_03, NS_04 - NS_32
Added EUTranCellFDD::cioLowerLimitAdjBySon ATTGS value of -3, Permission value of Global
Added EUTranCellFDD::cioUpperLimitAdjBySon ATTGS value of 4, Permission value of Global
Added EUTranCellFDD::hoOptAdjThresholdAbs ATTGS value of 5, Permission value of Global
Added EUTranCellFDD::hoOptAdjThresholdPerc ATTGS value of 50, Permission value of Global
Added EUTranCellFDD::hoOptStatNum ATTGS value of 200, Permission value of Global
Added EUTranCellFDD::hoOptStatTime ATTGS value of 24, Permission value of Global
Added OptionalFeatureLicense=AutomatedMobilityOptimization::featureState ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=AutomatedMobilityOptimization::licenseState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=AutomatedMobilityOptimization::serviceState ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=ServiceSpecificLoadMgmt::featureState ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=ServiceSpecificLoadMgmt::licenseState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=ServiceSpecificLoadMgmt::serviceState ATTGS value of 0, Permission value of Global
Added EUTranCellRelation::lbBnrAllowed ATTGS value of TRUE, Permission value of Global
Added UtranFreqRelation::lbBnrPolicy ATTGS value of 1, Permission value of Global
Added LoadBalancingFunction::lbHitRateEUTranAddThreshold ATTGS value of 15, Permission value of Global
Added LoadBalancingFunction::lbHitRateEUTranMeasUeIntensity ATTGS value of 10, Permission value of Global

Added CapacityFeatureLicense::gracePeriodActivationThreshold ATTGS value of 1, Permission value of Not Auditable
Added CapacityFeatureLicense::gracePeriodLength ATTGS value of 14, Permission value of Not Auditable
Added CapacityFeatureLicense::gracePeriodResetThreshold ATTGS value of 10, Permission value of Not Auditable
Added EUTranCellFDD::pdcchLaGinrMargin(HiCap) ATTGS value of 30, Permission value of Global
Added EUTranCellFDD::pdcchLaGinrMargin(Non HiCap) ATTGS value of 100, Permission value of Global
Added EUTranCellFDD::activeServiceAreaId ATTGS value of null, Permission value of Not Auditable
Added EUTranCellFDD::expectedMaxNoOfUsersInCell ATTGS value of -1, Permission value of Not Auditable
Added EUTranCellFDD::initialBufferSizeDefault ATTGS value of 86, Permission value of Global
Added EUTranCellFDD::lbacDecr ATTGS value of 5, Permission value of Global
Added EUTranCellFDD::lbacPeriod ATTGS value of 120, Permission value of Global
Added EUTranCellFDD::lbacThreshRejectRateHigh ATTGS value of 200, Permission value of Global
Added EUTranCellFDD::lbacThreshRejectRateLow ATTGS value of 20, Permission value of Global
Added EUTranCellFDD::lbacThreshTimeHigh ATTGS value of 30, Permission value of Global
Added EUTranCellFDD::lbacThreshTimeLow ATTGS value of 30, Permission value of Global
Added EUTranCellFDD::measuredMaxNoOfUsersInCell ATTGS value of null, Permission value of Not Auditable
Added EUTranCellFDD::serviceAreaId ATTGS value of null, Permission value of Not Auditable
Added ENodeBFunction::upIpAddressRef ATTGS value of null, Permission value of Not Auditable
Added ReportConfigEutraInterFreqMbms::a4ThresholdRsrp ATTGS value of -44, Permission value of Global
Added ReportConfigEutraInterFreqMbms::hysteresisA4 ATTGS value of 10, Permission value of Global
Added RiLink::linkType ATTGS value of null, Permission value of Not Auditable
Added RiLink::operationalState ATTGS value of null, Permission value of Not Auditable
Added RiLink::riPortRef1 ATTGS value of null, Permission value of Not Auditable
Added RiLink::riPortRef2 ATTGS value of null, Permission value of Not Auditable
Added SectorCarrier::rfBranchRxRef ATTGS value of null, Permission value of Not Auditable
Added SectorCarrier::rfBranchTxRef ATTGS value of null, Permission value of Not Auditable
Added UeMeasControl::searchEffortTime ATTGS value of 40, Permission value of Global
Added IpSec::autoUpdateCertEnrollmentServer ATTGS value of null, Permission value of Not Auditable
Added VpnInterface::configurationMode ATTGS value of 0, Permission value of Not Auditable
Added Security::autoUpdateCertEnrollmentServer ATTGS value of null, Permission value of Not Auditable
Added Ip::dnsAutoConfigInterfaceRef ATTGS value of null, Permission value of Not Auditable
Added Ip::usedDnsServerAddresses ATTGS value of null, Permission value of Not Auditable
Added IpHostLink::ipv4Addresses ATTGS value of null, Permission value of Not Auditable
Added IpHostLink::ipv6Addresses ATTGS value of null, Permission value of Not Auditable
Added HptsiSyncRef::hptsiAlarmReport ATTGS value of null, Permission value of Not Auditable
Added GpsOutSyncLink::administrativeState ATTGS value of 0, Permission value of Not Auditable
Added GpsOutSyncLink::gpsCompensationDelay ATTGS value of 0, Permission value of Not Auditable
Added GpsOutSyncLink::gpsOutRefState ATTGS value of 0, Permission value of Not Auditable
Added GpsOutSyncLink::operationalState ATTGS value of null, Permission value of Not Auditable

Added CapacityFeatureLicense=OutputPower40WTo60W::licenseState(RBS6201,RBS6202,RBS6601) ATTGS value of 1, Permission value of Global
Added CapacityFeatureLicense=OutputPower60WTo80W::licensedCapacity.value(RBS6201) ATTGS value of 9, Permission value of Not Auditable
Added CapacityFeatureLicense=OutputPower60WTo80W::licensedCapacity.value(RBS6201) ATTGS value of 12, Permission value of Not Auditable
Added CapacityFeatureLicense=OutputPower60WTo80W::licensedCapacity.value(RBS6201,RBS6202) ATTGS value of 6, Permission value of Not Auditable
Added CapacityFeatureLicense=OutputPower60WTo80W::licensedCapacity.value(RBS6202) ATTGS value of 3, Permission value of Not Auditable
Added CapacityFeatureLicense=OutputPower60WTo80W::licensedCapacity.value(RBS6601(DUL20)) ATTGS value of 6, Permission value of Not Auditable
Added CapacityFeatureLicense=OutputPower60WTo80W::licensedCapacity.value(RBS6601(DUS41)) ATTGS value of 12, Permission value of Not Auditable
Added CapacityFeatureLicense=OutputPower60WTo80W::licenseState(RBS6201,RBS6202,RBS6601) ATTGS value of 1, Permission value of Global
Removed CapacityOutputPower::CapacityOutputPowerId
Removed CapacityOutputPower::capacityUnitOutputPower
Removed CapacityOutputPower::keyIdOutputPower
Removed CapacityOutputPower::licenseStateOutputPower
Removed CapacityOutputPower=100::licenseCapacityOutputPower(RBS6201,RBS6202)
Removed CapacityOutputPower=100::licenseStateOutputPower(RBS6601)
Removed CapacityOutputPower=100::licenseCapacityOutputPower(RBS6601(DUL20))
Removed CapacityOutputPower=100::licenseCapacityOutputPower(RBS6601(DUS41))
Removed CapacityOutputPower=100Watt::licenseStateOutputPower(RBS6201,RBS6202)
Removed CapacityOutputPower=120::licenseCapacityOutputPower(RBS6201,RBS6202)
Removed CapacityOutputPower=120::licenseStateOutputPower(RBS6601)
Removed CapacityOutputPower=120::licenseCapacityOutputPower(RBS6601(DUL20))
Removed CapacityOutputPower=120::licenseCapacityOutputPower(RBS6601(DUS41))
Removed CapacityOutputPower=120Watt::licenseStateOutputPower(RBS6201,RBS6202)
Removed CapacityOutputPower=40::licenseCapacityOutputPower(RBS6201)
Removed CapacityOutputPower=40::licenseCapacityOutputPower(RBS6201)
Removed CapacityOutputPower=40::licenseCapacityOutputPower(RBS6201,RBS6202)
Removed CapacityOutputPower=40::licenseCapacityOutputPower(RBS6202)
Removed CapacityOutputPower=40::licenseCapacityOutputPower(RBS6601(DUL20))
Removed CapacityOutputPower=40::licenseCapacityOutputPower(RBS6601(DUS41))
Removed CapacityOutputPower=40Watt::licenseStateOutputPower(RBS6201,RBS6202,RBS6601)
Removed CapacityOutputPower=60::licenseCapacityOutputPower(RBS6201)
Removed CapacityOutputPower=60::licenseCapacityOutputPower(RBS6201)
Removed CapacityOutputPower=60::licenseCapacityOutputPower(RBS6201,RBS6202)
Removed CapacityOutputPower=60::licenseCapacityOutputPower(RBS6202)
Removed CapacityOutputPower=60::licenseCapacityOutputPower(RBS6601(DUL20))
Removed CapacityOutputPower=60::licenseCapacityOutputPower(RBS6601(DUS41))
Removed CapacityOutputPower=60Watt::licenseStateOutputPower(RBS6201,RBS6202,RBS6601)
Removed CapacityOutputPower=80::licenseCapacityOutputPower(RBS6201)

-Dynamic sCell Selection for CA

Added CarrierAggregationFunction::caPreemptionThreshold ATTGS value of 50, Permission value of Global
Added CarrierAggregationFunction::caUsageLimit ATTGS value of 300, Permission value of Global
Added CarrierAggregationFunction::sCellActDeactDataThres ATTGS value of 100, Permission value of Global
Added CarrierAggregationFunction::sCellActDeactDataThresHyst ATTGS value of 90, Permission value of Global
Added CarrierAggregationFunction::sCellActDeactProhibitTimer ATTGS value of 200, Permission value of Global
Added CarrierAggregationFunction::sCellScheduleSinrThres ATTGS value of 0, Permission value of Global
Added ReportConfigSCellA1A2::a1a2ThresholdRsrp ATTGS value of -126, Permission value of Global
Added ReportConfigSCellA1A2::a1a2ThresholdRsrq ATTGS value of -165, Permission value of Global
Added ReportConfigSCellA1A2::hysteresisA1A2Rsrp ATTGS value of 20, Permission value of Global
Added ReportConfigSCellA1A2::hysteresisA1A2Rsrq ATTGS value of 15, Permission value of Global
Added ReportConfigSCellA1A2::timeToTriggerA1 ATTGS value of 40, Permission value of Global
Added ReportConfigSCellA1A2::timeToTriggerA2 ATTGS value of 40, Permission value of Global
Added ReportConfigSCellA1A2::triggerQuantityA1A2 ATTGS value of 0, Permission value of Global
Added ReportConfigSCellA6::a6offset ATTGS value of 30, Permission value of Global
Added ReportConfigSCellA6::hysteresisA6 ATTGS value of 10, Permission value of Global
Added ReportConfigSCellA6::timeToTriggerA6 ATTGS value of 40, Permission value of Global
Added ReportConfigSCellA6::triggerQuantityA6 ATTGS value of 0, Permission value of Global
Added CarrierAggregationFunction::waitForCaOpportunity ATTGS value of 10000, Permission value of Global
Added OptionalFeatureLicense=DynamicScellSelection::featureState ATTGS value of 0, Permission value of Global
Added OptionalFeatureLicense=DynamicScellSelection::licenseState ATTGS value of 1, Permission value of Global
Added OptionalFeatureLicense=DynamicScellSelection::serviceState ATTGS value of 0, Permission value of Global
Added System Constant::dlOnlyScellPriorityEnabled1318(DynamicScellSelection:featureState=1) ATTGS value of 0, Permission value of Global
Added EUTranCellFDD=5Mhz::noOfPucchSrUsers(5Mhz DynamicScellSelection:featureState=1) ATTGS value of 730, Permission value of Global
Added EUTranCellFDD=10Mhz::noOfPucchSrUsers(10Mhz DynamicScellSelection:featureState=1) ATTGS value of 560, Permission value of Global
Changed EUTranCellFDD=5Mhz when all EUTranCellRelation::sCellCandidate=2::noOfPucchSrUsers Suffix value from 5Mhz when all EUTranCellRelation::sCellCandidate=2 to 5Mhz when all EUTranCellRelation::sCellCandidate=2 & DynamicScellSelection:featureState=0
Changed EUTranCellFDD=5Mhz when any EUTranCellRelation::sCellCandidate=1::noOfPucchSrUsers Suffix value from 5Mhz when any EUTranCellRelation::sCellCandidate=1 to 5Mhz when any EUTranCellRelation::sCellCandidate=1 & DynamicScellSelection:featureState=0
Changed EUTranCellFDD=10Mhz when all EUTranCellRelation::sCellCandidate=2::noOfPucchSrUsers Suffix value from 10Mhz when all EUTranCellRelation::sCellCandidate=2 to 10Mhz when all EUTranCellRelation::sCellCandidate=2 & DynamicScellSelection:featureState=0
Changed EUTranCellFDD=10Mhz when any EUTranCellRelation::sCellCandidate=1::noOfPucchSrUsers Suffix value from 10Mhz when any EUTranCellRelation::sCellCandidate=1 to 10Mhz when any EUTranCellRelation::sCellCandidate=1 & DynamicScellSelection:featureState=0

-Supplementary DL for CA

Added EUTranCellFDD::isDLOnly ATTGS value of FALSE, Permission value of Global
Added EUTranFreqRelation::anrMeasOn ATTGS value of TRUE, Permission value of Global

PMATT 172747 Ericsson L14A Upgrade.

6.-

-Enhanced Pdcch Link Adaptation(AT&T Plans to activate this feature only for HiCap sites), feature must not be activated during deployment since another team/project will do that.

Added EUTranCellFDD::pdcchOuterLoopInitialAdj ATTGS value of -70, Permission value of Global

Added EUTranCellFDD::pdcchOuterLoopInitialAdjPCell ATTGS value of -70, Permission value of Global

Added EUTranCellFDD::pdcchOuterLoopInitialAdjVolte ATTGS value of -70, Permission value of Global

Added EUTranCellFDD::pdcchOuterLoopUpStep ATTGS value of 8, Permission value of Global

Added EUTranCellFDD::pdcchOuterLoopUpStepPCell ATTGS value of 6, Permission value of Global

Added EUTranCellFDD::pdcchOuterLoopUpStepVolte ATTGS value of 6, Permission value of Global

Added EUTranCellFDD::pdcchTargetBler ATTGS value of 24, Permission value of Global

Added EUTranCellFDD::pdcchTargetBlerPCell ATTGS value of 22, Permission value of Global

Added EUTranCellFDD::pdcchTargetBlerVolte ATTGS value of 22, Permission value of Global

7.-

Inter-Frequency Offload (Moved to L14B), still default settings are seen on L14A thus they are included in GS.

Added AnrFunctionEUTran::lbCellOffloadCapacityPolicy ATTGS value of 1000, Permission value of Global

Added EUTranCellFDD::lbEUTranAcceptOffloadThreshold ATTGS value of 50, Permission value of Global

Added EUTranCellFDD::lbEUTranCellOffloadCapacity ATTGS value of 1000, Permission value of Global

Added EUTranCellFDD::lbEUTranTriggerOffloadThreshold ATTGS value of 100, Permission value of Global

Added ExternalEUTranCellFDD::lbEUTranCellOffloadCapacity ATTGS value of 1000, Permission value of Global

Added LoadBalancingFunction::lbCauseCodeS1SourceTriggersOffload ATTGS value of 0, Permission value of Global

Added LoadBalancingFunction::lbCauseCodeS1TargetAcceptsOffload ATTGS value of 0, Permission value of Global

Added LoadBalancingFunction::lbCauseCodeX2SourceTriggersOffload ATTGS value of 0, Permission value of Global

Added LoadBalancingFunction::lbCauseCodeX2TargetAcceptsOffload ATTGS value of 0, Permission value of Global

Added LoadBalancingFunction::lbEUTranOffloadBackoffTime ATTGS value of 60, Permission value of Global

Added OptionalFeatureLicense=InterFrequencyOffload::featureState ATTGS value of 0, Permission value of Global

Added OptionalFeatureLicense=InterFrequencyOffload::licenseState ATTGS value of 1, Permission value of Global

Added OptionalFeatureLicense=InterFrequencyOffload::serviceState ATTGS value of 0, Permission value of Global

Changed QciProfilePredefined=qci2::pdb ATTGS value from 130 to 160

LTE28

Changed SectorCarrier::prsEnabled NGFC from “power and frequency usage of the SectorEquipmentFunction that covers an area.” to ‘Emergency Services’.

Corrected OtdoaSupl::featureStateOtdoaSupl Permission from Local to Global.

Corrected OtdoaSupl::featureStateOtdoaSupl(LppaOTDOAACTIVE) Permission from Local to Global.

LTE29

Changed AdmissionControl::dlNonGbrRatio NGFC from “Admission Control and Capacity management” to ‘VoLTE’.

Changed AdmissionControl::dlTransNwBandwidth NGFC from “Admission Control and Capacity management” to ‘VoLTE’.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Clean-up

Corrected/Changed ReportConfigEutraIntraFreqPm::reportIntervalPm ATTGS value from MS_120 to 5 and Initial Value from 5 to null and Permission from LocalOptional to Global.

Corrected/Changed ExternalUtranCellFDD::rimCapable from GS Value RIM_CAPABLE to 0.

Corrected/Changed ExternalGeranCell::rimCapable from GS Value RIM_CAPABLE to 0.

Corrected/Changed SystemConstants=1::deltaPsdRs2Tx(non_hicap) Initial Value from 3 to 2.

Corrected/Added OptionalFeatureLicense=LppaBasedOtdoaSupport::featureState(LppaOTDOAACTIVE) to add Suffix GS Value 1.

Corrected/Changed IpInterface=2::trafficType set Initial Value from null to 7

Cleaned up "SystemConstants" miss spellings.

FGA-E-022(Rev A) EUTRAN ANR RSRP Threshold and Remove Relation Timers. Current default parameter values are causing an extremely high amount of defined relations per cell sometimes leading to Co-PCI issues and poor handover success rate. Relations limits of 128 are also being reached in some cases. Downstream applications such as Optima are also overwhelmed with updating millions of rows per 15 minute Recording Output Period. The new values will ensure that only necessary relations are added and that cleanup is performed every 5 days. None of the changes require locking or equipment downtime, but should still be done during the maintenance window since the Remove timers will reset and trigger during the same time each day.

Changed L13B AnrFunction::removeNcellTime from 1 to 5.

Changed L13B AnrFunction::removeNenbTime from 1 to 5.

Changed L13B AnrFunction::removeNrelTime from 1 to 5.

Changed L14A AnrFunction::removeNcellTime from 1 to 5.

Changed L14A AnrFunction::removeNenbTime from 1 to 5.

Changed L14A AnrFunction::removeNrelTime from 1 to 5

FGA L13B-E-042 LTE b2Threshold2RscpUtraOffset parameters change for QCI8. measReportConfigParams.b2Threshold2RscpUtraOffset [qciProfilePredefined=qci8, 0..10, dB, Local] is changed from 0dB to 0 to 10dB and the permission of the parameter is set to Local. The parameter indicates the offset for absolute threshold b2Threshold2RscpUtra (UMTS neighbor cell), used for handover from LTE to UMTS. The change needs to be done for QCI8 only.

Changed L13B QciProfilePredefined=qci6::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 0..10, Initial Value null to 10, and Permissions from Global to Local.

Changed L14A QciProfilePredefined=qci6::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 0..10, Initial Value null to 10, and Permissions from Global to Local.

Changed L13B QciProfilePredefined=qci7::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 0..10, Initial Value null to 10, and Permissions from Global to Local.

Changed L14A QciProfilePredefined=qci7::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 0..10, Initial Value null to 10, and Permissions from Global to Local.

Changed L13B QciProfilePredefined=qci8::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 0..10, Initial Value null to 10, and Permissions from Global to Local.

Changed L14A QciProfilePredefined=qci8::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 0..10, Initial Value null to 10, and Permissions from Global to Local.

Changed L13B QciProfilePredefined=qci9::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 0..10, Initial Value null to 10, and Permissions from Global to Local.

Changed L14A QciProfilePredefined=qci9::MeasReportConfigParams.b2Threshold2RscpUtraOffset from 0 to 0..10, Initial Value null to 10, and Permissions from Global to Local.

FGA L13B-E-048 Relative Priority Scheduling feature activation/QCI Subscription Quanta. This FGA introduces further feature activation and parameter changes to support the various services that will be introduced on QCI-6 through QCI-9 bearers via the network based Static Qos project.

Changed L13B QciProfilePredefined=qci6::qciSubscriptionQuanta from 1 to 100.

Changed L14A QciProfilePredefined=qci6::qciSubscriptionQuanta from 1 to 100.

Changed L13B QciProfilePredefined=qci7::qciSubscriptionQuanta from 1 to 100.

Changed L13A QciProfilePredefined=qci7::qciSubscriptionQuanta from 1 to 100.

Changed L13B QciProfilePredefined=qci9::qciSubscriptionQuanta from 1 to 100.

Changed L13A QciProfilePredefined=qci9::qciSubscriptionQuanta from 1 to 100.

Changed L13B Rps::serviceStateRps from 0 to 1.

Changed L13A Rps::featureStateRps from 0 to 1.

Changed L13B Rps::serviceStateRps from 0 to 1.

Changed L13A Rps::serviceStateRps from 0 to 1.

Clean-up.

Removed L14A SystemConstants=1, systConstants::pdcchLaGinrMargin(hicap)

Removed L14A SystemConstants=1, systConstants::pdcchLaGinrMargin(non_hicap)

FGA L13B-E-043 Enable Inter-Frequency ANR for Cell in Multi Carrier Border. The FGA43 provides RAN workaround for the issue on Multi Target RRC Re-establishment (MT RRC) on cell located in Multi Carrier border. CSR or MRD has been opened to request Ericsson source eNB not to release UE context upon context fetch request when cell neighbor is missing. No GS changes are needed for this FGA.

FGA L13B-E-045 ulMaxHARQTx & tReorderingUI Change. Introduces a parameter setting change for the ulMaxHARQTx and tReorderingUI parameters.

Added L13B QciProfilePredefined=default::tReorderingUI Value 60 Permissions Global.

Added L13B QciProfilePredefined=qci8::tReorderingUI Value 60 Permissions Global.

Added L13B SignalingRadioBearer=1::tReorderingUI Value 60 Permissions Global.

Added L13B MACConfiguration=1::ulMaxHARQTx Value 7 Permissions Global.

Added L14A QciProfilePredefined=default::tReorderingUI Value 60 Permissions Global.

Added L14A QciProfilePredefined=qci8::tReorderingUI Value 60 Permissions Global.

Added L14A SignalingRadioBearer=1::tReorderingUI Value 60 Permissions Global.

Added L14A MACConfiguration=1::ulMaxHARQTx Value 7 Permissions Global.

FGA L13B-E-046 dlMaxHARQTx & tReorderingDI change for QCI8. Introduces a parameter setting change for the dlMaxHARQTx and tReorderingDI parameters.

Added L13B MACConfiguration=1::dlMaxHARQTx Value 7 Permissions Global.

Added L13B QciProfilePredefined=default::tReorderingDI value 60 Permissions Global.

Added L13B QciProfilePredefined=qci8::tReorderingDI value 60 Permissions Global.

Added L13B SignalingRadioBearer=1::tReorderingDI Value 60 Permissions Global.

Added L14A MACConfiguration=1::dlMaxHARQTx Value 7 Permissions Global.

Added L14A QciProfilePredefined=default::tReorderingDI value 60 Permissions Global.

Added L14A QciProfilePredefined=qci8::tReorderingDI value 60 Permissions Global.

Added L14A SignalingRadioBearer=1::tReorderingDI Value 60 Permissions Global.

Clean-up.

Corrected/Added L13B Irc::featureStateIrc ATTGS value of 1 Global.

Corrected/Added L14A Irc::featureStateIrc ATTGS value of 1 Global

FGA L13B-E-047 ulNonGbrRatio and dlNonGbrRatio change from 750 to 100. (Approved 10/20/14 pending MOP and RA. Mop and RA received 11/3.)

Changed L13B AdmissionControl::ulNonGbrRatio ATTGS value from 750 to 100 per FGA47.

Changed L13B AdmissionControl::dlNonGbrRatio ATTGS value from 750 to 100 per FGA47.

FGA L13B-E-039 csFallbackPrio and csFallbackPrioEC Changes. This FGA is dealing only with the parameters UtranFreqRelation::csFallbackPrio&csFallbackPrioEC which defines the priority of UTRAN frequencies among all frequencies related to the cell for UEs in connected mode. By setting Utrancellrelation::csFallbackPrio for UMTS 850 and 1900 utranfrequency to different value, we are able to direct the CS fall back traffic to UMTS carriers in different priority. When setting UMTS 1900 equal priority with UMTS 850 carriers, the CS traffic on UMTS can be more evenly distributed between 1900 and 850 carriers.

Changed L14A UtranFreqRelation::csFallbackPrio Suffix UMTS1900 from 2 to 2,3 Permission Global to Local

Changed L14A UtranFreqRelation::csFallbackPrioEC Suffix UMTS1900 from 2 to 2,3 Permission Global to Local

Changed L13B UtranFreqRelation::csFallbackPrio Suffix UMTS1900 from 2 to 2,3 Permission Global to Local

Changed L13B UtranFreqRelation::csFallbackPrioEC Suffix UMTS1900 from 2 to 2,3 Permission Global to Local

Corrected L14A EUTRANCellFDD::zzzTemporary15 Change MOC from ENodeBFunction to EUTRANCellFDD

Small Cell related changes.

Added UTRANFreqRelation::connectedModeMobilityPrio(LTE Metro to UMTS Metro) ATTGS value of 4, Permission of Global.

Added UTRANFreqRelation::csFallbackPrio(LTE Metro to UMTS Metro) ATTGS value of 4, Permission of Global.

Added UTRANFreqRelation::csFallbackPrioEC(LTE Metro to UMTS Metro) ATTGS value of 4, Permission of Global.

Changed UTRANFreqRelation::connectedModeMobilityPrio(UMTS 850) Suffix from 'UMTS 850' to 'UMTS Macro 850'.

Changed UTRANFreqRelation::connectedModeMobilityPrio(UMTS 1900) Suffix from 'UMTS 1900' to 'UMTS Macro 1900'.

Changed UTRANFreqRelation:: csFallbackPrio(UMTS1900) Suffix from 'UMTS1900' to 'UMTS Macro 1900'.

Changed UTRANFreqRelation:: csFallbackPrio(UMTS 850) Suffix from 'UMTS 850' to 'UMTS Macro 850'.

Changed UTRANFreqRelation:: csFallbackPrioEC(UMTS1900) Suffix from 'UMTS1900' to 'UMTS Macro 1900'.

Changed UTRANFreqRelation:: csFallbackPrioEC(UMTS 850) Suffix from 'UMTS 850' to 'UMTS Macro 850'.

Added UTRANFreqRelation::connectedModeMobilityPrio(mRBS to UMTS Metro) ATTGS value of 4, Permission of Global.

Added UTRANFreqRelation::csFallbackPrio(mRBS to UMTS Metro) ATTGS value of 4, Permission of Global.

Added UTRANFreqRelation::csFallbackPrioEC(mRBS to UMTS Metro) ATTGS value of 4, Permission of Global.

Changed UTRANFreqRelation::connectedModeMobilityPrio(UMTS 850) Suffix from 'UMTS 850' to 'UMTS Macro 850'.

Changed UTRANFreqRelation::connectedModeMobilityPrio(UMTS 1900) Suffix from 'UMTS 1900' to 'UMTS Macro 1900'.

Changed UTRANFreqRelation:: csFallbackPrio(UMTS1900) Suffix from 'UMTS1900' to 'UMTS Macro 1900'.

Changed UTRANFreqRelation:: csFallbackPrio(UMTS 850) Suffix from 'UMTS 850' to 'UMTS Macro 850'.

Changed UTRANFreqRelation:: csFallbackPrioEC(UMTS1900) Suffix from 'UMTS1900' to 'UMTS Macro 1900'.

Changed UTRANFreqRelation:: csFallbackPrioEC(UMTS 850) Suffix from 'UMTS 850' to 'UMTS Macro 850'.

PMATT 184971 Ericsson Single Carrier 15/20MHz B2 (Multi-Carrier Feature Testing)

Added EUTRANCellFDD::noOfPucchSrUsers(15Mhz or 20Mhz) ATTGS value of 810, Suffix value of 15Mhz or 20Mhz, Permission value of Global

Added EUTRANCellFDD::noOfPucchCqiUsers(15Mhz or 20Mhz) ATTGS value of 640, Suffix value of 15Mhz or 20Mhz, Permission value of Global

Added OptionalFeatureLicense=CarrierAggregation featureState ATTGS value of 0, Suffix value of 15Mhz or 20Mhz, Permission value of Global

Added EUTRANCellRelation::sCellCandidate(15Mhz or 20Mhz) ATTGS value of 2, Suffix value of 15Mhz or 20Mhz, Permission value of Global

Added EUTRANCellFDD::cellSubscriptionCapacity(20Mhz) ATTGS value of 38000..42000, Initial Value 40000, Suffix value of 20Mhz, Permission value of Local

Added EUTRANCellFDD::cellSubscriptionCapacity(15Mhz) ATTGS value of 28000..32000, Initial Value 30000, Suffix value of 15Mhz, Permission value of Local

Added Paging::maxNoOfPagingRecords(20Mhz) ATTGS value of 16, Suffix value of 20Mhz, Permission value of Global

Added Paging::maxNoOfPagingRecords(15Mhz) ATTGS value of 16, Suffix value of 15Mhz, Permission value of Global

Added UTRANFreqRelation::allowedMeasBandwidth(20Mhz) ATTGS value of 100, Suffix value of 20Mhz, Permission value of Global

Added UTRANFreqRelation::allowedMeasBandwidth(15Mhz) ATTGS value of 75, Suffix value of 15Mhz, Permission value of Global

Added EUTRANCellFDD::noConsecutiveSubframes(20Mhz) ATTGS value of 0, Suffix value of 20Mhz, Permission value of Global

Added EUTRANCellFDD::noConsecutiveSubframes(15Mhz) ATTGS value of 0, Suffix value of 15Mhz, Permission value of Global

Added EUTRANCellFDD::pdccchCfiMode(15Mhz or 20Mhz) ATTGS value of 4, Suffix value of 15Mhz or 20Mhz, Permission value of Global

Added UTRANFreqRelation::threshXHigh (From LB to MB 15Mhz or 20Mhz, IFHO) ATTGS value of 12, Permission value of Global

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

FGA L13B-E-049 LTE DL ICIC. This FGA deals with the activation of the DL ICIC (Inter Cell Interference Coordination) feature. This feature randomize the PRB allocation in order to reduce DL inter cell interference.

- Without DL Iclc, the scheduler assigns the PRB from low to high frequency for each cell.

- With DL ICIC, the starting point for the first PRB is randomly selected by each cell over the whole carrier. This would potentially reduce adjacent cell interference and improve Retainability.

Changed EUTRANCellFDD::dlInterferenceManagementActive from false to true.

Changed EUTRANCellFDD::dlInterferenceManagementDuration from 5000 to 100.

FGA L14A-E-044 Activation of CA on B17>B4,, B5>B4, and B4>B5 Frequency Combinations. FGA-044 activates the following additional Carrier Aggregation (CA) combinations: • B17 (700) Pcell + B4 (AWS) Scell, • B5 (850) Pcell + B4 (AWS) Scell, • B4 (AWS) Pcell + B5 (850) Scell. Previously these CA combinations were not supported by CA capable UEs and therefore not tested in an FFA environment. However, with the launch of iPhone6/6+, which supports these new combinations, FFA testing was completed and it is recommended that these combinations should be activated.

Added L14A EUTRANCellRelation::ScellCandidate (EUTRANCellRelation=700 with Scell AWS co-located cell relation on same DU =Non HiCap Sites) ATTGS value of 1, Permission of Global.

Added L14A EUTRANCellRelation::ScellCandidate (EUTRANCellRelation=850 with Scell AWS co-located cell relation on same DU =Non HiCap Sites) ATTGS value of 1, Permission of Global.

Added L14A EUTRANCellRelation::ScellCandidate (EUTRANCellRelation=AWS with Scell 800 co-located cell relation on same DU =Non HiCap Sites) ATTGS value of 1, Permission of Global.

Added L13B EUTRANCellRelation::ScellCandidate (EUTRANCellRelation=700 with Scell AWS co-located cell relation on same DU =Non HiCap Sites) ATTGS value of 1, Permission of Global.

Added L13B EUTRANCellRelation::ScellCandidate (EUTRANCellRelation=850 with Scell AWS co-located cell relation on same DU =Non HiCap Sites) ATTGS value of 1, Permission of Global.

Added L13B EUTRANCellRelation::ScellCandidate (EUTRANCellRelation=AWS with Scell 800 co-located cell relation on same DU =Non HiCap Sites) ATTGS value of 1, Permission of Global.

Changed L13B EUTranCellFDD::threshServingLow Suffix MB in multiCarrier LB/10 & MB/5 from 6 to 4 Permission Global
 Changed L14A ReportConfigEUTraBadCovPrim::a2ThresholdRsrpPrim Suffix interRAT_10 from -112 to -114 Permission Global
 Changed L14A ReportConfigEUTraBadCovPrim::a2ThresholdRsrpPrim Suffix interRAT_5 from -110 to -112 Permission Global
 Changed L14A ReportConfigEUTraBadCovPrim::a2ThresholdRsrpPrim Suffix intraLTE from -116 to -118 Permission Global
 Changed L13B ReportConfigEUTraBadCovPrim::a2ThresholdRsrpPrim Suffix interRAT_10 from -112 to -114 Permission Global
 Changed L13B ReportConfigEUTraBadCovPrim::a2ThresholdRsrpPrim Suffix interRAT_5 from -110 to -112 Permission Global
 Changed L13B ReportConfigEUTraBadCovPrim::a2ThresholdRsrpPrim Suffix intraLTE from -116 to -118 Permission Global
 Changed L14A ReportConfigA1Prim::a1ThresholdRsrpPrim Suffix interRAT_10 from -103 to -110 Permission Global
 Changed L14A ReportConfigA1Prim::a1ThresholdRsrpPrim Suffix interRAT_5 from -103 to -108 Permission Global
 Changed L14A ReportConfigA1Prim::a1ThresholdRsrpPrim Suffix intraLTE from -103 to -114 Permission Global
 Changed L13B ReportConfigA1Prim::a1ThresholdRsrpPrim Suffix interRAT_10 from -103 to -110 Permission Global
 Changed L13B ReportConfigA1Prim::a1ThresholdRsrpPrim Suffix interRAT_5 from -103 to -108 Permission Global
 Changed L13B ReportConfigA1Prim::a1ThresholdRsrpPrim Suffix intraLTE from -103 to -114 Permission Global
 Changed L14A ReportConfigB2Utra::b2Threshold1Rsrp Suffix mixedBW from -116 to -118 Permission Global
 Changed L14A ReportConfigB2Utra::b2Threshold1Rsrp Suffix interLTE from -116 to -118 Permission Global
 Changed L14A ReportConfigB2Utra::b2Threshold1Rsrp Suffix INTERRAT_10 from -112 to -114 Permission Global
 Changed L14A ReportConfigB2Utra::b2Threshold1Rsrp Suffix interRAT_5 from -110 to -112 Permission Global
 Changed L14A ReportConfigB2Utra::b2Threshold1Rsrp Suffix intraLTE from -116 to -118 Permission Global
 Changed L14A ReportConfigB2Utra::b2Threshold1Rsrp Suffix multiCarrier from -116 to -118 Permission Global
 Changed L13B ReportConfigB2Utra::b2Threshold1Rsrp Suffix mixedBW from -116 to -118 Permission Global
 Changed L13B ReportConfigB2Utra::b2Threshold1Rsrp Suffix interLTE from -116 to -118 Permission Global
 Changed L13B ReportConfigB2Utra::b2Threshold1Rsrp Suffix INTERRAT_10 from -112 to -114 Permission Global
 Changed L13B ReportConfigB2Utra::b2Threshold1Rsrp Suffix interRAT_5 from -110 to -112 Permission Global
 Changed L13B ReportConfigB2Utra::b2Threshold1Rsrp Suffix intraLTE from -116 to -118 Permission Global
 Changed L13B ReportConfigB2Utra::b2Threshold1Rsrp Suffix multiCarrier from -116 to -118 Permission Global
 Changed L14A ReportConfigSearch::a2CriticalThresholdRsrp Suffix from -118 to -120 Permission Global
 Changed L14A ReportConfigSearch::a2CriticalThresholdRsrp Suffix InterLTE from -116 to -120 Permission Global
 Changed L14A ReportConfigSearch::a2CriticalThresholdRsrp Suffix IntraLTE from -118 to -120 Permission Global
 Changed L14A ReportConfigSearch::a2CriticalThresholdRsrp Suffix multiCarrier from -118 to -120 Permission Global
 Changed L13B ReportConfigSearch::a2CriticalThresholdRsrp Suffix InterLTE from -116 to -120 Permission Global
 Changed L14A ReportConfigEUTraBadCovSec::a2ThresholdRsrpSec Suffix interLTE from -116 to -120 Permission Global
 Changed L14A ReportConfigEUTraBadCovSec::a2ThresholdRsrpSec Suffix intraLTE from -116 to -140 Permission Global
 Changed L14A ReportConfigEUTraBadCovSec::a2ThresholdRsrpSec Suffix multiCarrier from -118 to -120 Permission Global
 Changed L13B ReportConfigEUTraBadCovSec::a2ThresholdRsrpSec Suffix interLTE from -116 to -120 Permission Global
 Changed L13B ReportConfigEUTraBadCovSec::a2ThresholdRsrpSec Suffix intraLTE from -116 to -120 Permission Global
 Changed L13B ReportConfigEUTraBadCovSec::a2ThresholdRsrpSec Suffix multiCarrier from -118 to -120 Permission Global

FGA L14A-E-051 QciProfilePredefined-QCI2 MBR Changing from 350 to 400. This changes the Ericsson configurable parameters to improve IR.94 video quality. Testing found that setting DL/UL MinBitRate from 350kbps (as it is currently set in the RAN parameter) to 400 Kbps on QCI2 improves video quality and avoids video pixilation.

Changed L14A QciProfilePredefined=QCI2::dlMinBitRate [QciProfilePredefined, 400, kbps, Global] is changed from 350 to 400
 Changed L14A QciProfilePredefined=QCI2::ulMinBitRate [QciProfilePredefined, 400, kbps, Global] is changed from 350 to 400

Clean-up

Changed L14A AdvCellSup::licenseStateAdvCellSup from 0 to 1.

Changed L13B AdvCellSup::licenseStateAdvCellSup from 0 to 1.

Added L14A UtranCellRelation::lbUeMeasScaling GS Value 0 Permissions Not Auditable.

Added L13B UtranCellRelation::lbUeMeasScaling GS Value 0 Permissions Not Auditable.

Changed L14A EUtranCellRelation::lbUeMeasScaling from Global to Not Auditable.

Changed L13B EUtranCellRelation::lbUeMeasScaling from Global to Not Auditable.

LTE31

Corrected/Added EUtranFreqRelation::interFreqMeasType(intraLTE) ATTGS value of 0.

Corrected/Added EUtranFreqRelation::interFreqMeasType(interRAT_10) ATTGS value of 0.

Corrected/Added EUtranFreqRelation::interFreqMeasType(interRAT_5) ATTGS value of 0.

Corrected/Added EUtranFreqRelation::interFreqMeasType(multiCarrier) ATTGS value of 0.

FGA L13B-E-052 LTE commonSrPeriodicity and noOfPucchSrUsers. The main purpose of increasing of commonSrPeriodicity and noOfPucchSrUsers is to improve Accessibility & Retainability by raising the max RRC connection limit and reduce RRC failures due to overload for venues/events Sites. SR(Scheduling Request) and CQI resources are allowed for UE at the UE setup procedure. The resources are kept as long as the UE is UL synchronized. A UE is allowed to connect to a cell if there are free SR resources (noOfPucchSrUsers). The parameter noOfPucchSrUsers determine the numbers of Resource for SR. This FGA52 should be only applied to eUtrancell hitting the max RRC connections (PMRRCConnMAX): 5 Mhz BW 810, and 10Mhz BW 640. It shall be noted that increasing SR periodicity will lead to higher latency.

Changed EUtranCellFDD::commonSrPeriodicity () Suffix from null to non_hicap.

Added EUtranCellFDD::commonSrPeriodicity (hicap eUtrancell hitting the maximum RRC connections :PMRRCConnMAX 5Mhz BW 810, and 10Mhz BW 640) ATTGS value of 20, Permission of Global.

Added EUtranCellFDD::noOfPucchSrUsers (hicap 10Mhz when all EUtranCellRelation::sCellCandidate=2 & EUtranCellFDD::commonSrPeriodicity=20 & 2RX) ATTGS value of 1280, Permission of Global.

Added EUtranCellFDD::noOfPucchSrUsers (hicap 10Mhz when any EUtranCellRelation::sCellCandidate=1 & EUtranCellFDD::commonSrPeriodicity=20 & 2RX) ATTGS value of 1120, Permission of Global.

Added EUtranCellFDD::noOfPucchSrUsers (hicap 5Mhz when all EUtranCellRelation::sCellCandidate=2 & EUtranCellFDD::commonSrPeriodicity=20 & 2RX) ATTGS value of 1620, Permission of Global.

Added EUtranCellFDD::noOfPucchSrUsers (hicap 5Mhz when any EUtranCellRelation::sCellCandidate=1 & EUtranCellFDD::commonSrPeriodicity=20 & 2RX) ATTGS value of 1460, Permission of Global.

Added SectorEquipmentFunction::configuredOutputPower (RRUS12_Power Split) ATTGS value of 120000, Permission value of Global as per Ericsson Change PA2.

PMATT 143729 SmallCell Ericsson / Outdoor / LTE/ mRBS AWS AP HW

Corrected all instances of IpSecTunnel with IpSecTunnel=1

Corrected all instances of IpAccessHostEt with IpAccessHostEt=1

Corrected all instances of IkePeer with IkePeer=1

Added EUTranCellFDD::cellRange(mRBS) ATTGS value of 15, Permission of Global
Added IkePeer=1::allowedTransforms.diffieHellmanGroup(mRBS) ATTGS value of 1, Permission of Global
Added IkePeer=1::allowedTransforms.diffieHellmanGroup(non_mRBS) ATTGS value of 1, Permission or GlobalOptional
Added IkePeer=1::allowedTransforms.encryptionAlgorithm(mRBS) ATTGS value of 2, Permission of Global
Added IkePeer=1::allowedTransforms.encryptionAlgorithm(non_mRBS) ATTGS value of 2, Permission or GlobalOptional
Added IkePeer=1::allowedTransforms.integrityAlgorithm(mRBS) ATTGS value of 2, Permission of Global
Added IkePeer=1::allowedTransforms.integrityAlgorithm(non_mRBS) ATTGS value of 2, Permission or GlobalOptional
Added IkePeer=1::allowedTransforms.pseudoRandomFunction(mRBS) ATTGS value of 1, Permission of Global
Added IkePeer=1::allowedTransforms.pseudoRandomFunction(non_mRBS) ATTGS value of 1, Permission or GlobalOptional
Added IkePeer=1::authenticationMethod(mRBS) ATTGS value of 1, Permission of Global
Changed IkePeer=1::authenticationMethod() Suffix value from null to non_mRBS Permission from Global to GlobalOptional
Changed IkePeer=1::deadPeerDetectionInterval() Suffix value from null to non_mRBS Permission from Global to GlobalOptional
Added IkePeer=1::deadPeerDetectionInterval(mRBS) ATTGS value of 90, Permission of Global
Added IkePeer=1::ikePeerId(mRBS) ATTGS value of 1, Permission of Global
Changed IkePeer=1::ikePeerId() Suffix value from null to non_mRBS Permission from Global to GlobalOptional
Added IkePeer=1::ikeSaLifeTime(mRBS) ATTGS value of 1440, Permission of Global
Changed IkePeer=1::ikeSaLifeTime() Suffix value from null to non_mRBS Permission from Global to GlobalOptional
Added IkePeer=1::logging(mRBS) ATTGS value of 1, Permission of Global
Changed IkePeer=1::logging() Suffix value from null to non_mRBS Permission from Global to GlobalOptional
Added/Highlighted IkePeer=1::ownIdentity.idFqdn() ATTGS value of null, Permission of Not Auditable
Added/Highlighted IkePeer=1::ownIdentity.ipv4Address() ATTGS value of null, Permission of Not Auditable
Added/Highlighted IkePeer=1::ownIdentity.ownIdType() ATTGS value of 0, Permission of Global
Added/Highlighted IkePeer=1::peerIdentity.idFqdn() ATTGS value of null, Permission of Not Auditable
Added IkePeer=1::peerIdentity.idType(mRBS) ATTGS value of 0,1,2, Permission of Local
Added IkePeer=1::peerIdentity.idType(non_mRBS) ATTGS value of 0, Permission of GlobalOptional
Added/Highlighted IkePeer=1::peerIdentity.ipv4Address() ATTGS value of null, Permission of Not Auditable
Added/Highlighted IkePeer=1::peerIpAddress() ATTGS value of null, Permission of Not Auditable
Added IkePeer=1::securityAssociations.diffieHellmanGroup(mRBS) ATTGS value of 1, Permission of Global
Added IkePeer=1::securityAssociations.diffieHellmanGroup(non_mRBS) ATTGS value of 0, Permission of GlobalOptional
Added IkePeer=1::securityAssociations.encryptionAlgorithm(mRBS) ATTGS value of 2, Permission of Global
Added IkePeer=1::securityAssociations.encryptionAlgorithm(non_mRBS) ATTGS value of 1, Permission of GlobalOptional
Added IkePeer=1::securityAssociations.integrityAlgorithm(mRBS) ATTGS value of 2, Permission of Global
Added IkePeer=1::securityAssociations.integrityAlgorithm(non_mRBS) ATTGS value of 0, Permission of GlobalOptional
Added IkePeer=1::userLabel(mRBS) ATTGS value of Traffic, Permission of Global
Changed IkePeer=1::userLabel() Suffix value from null to non_mRBS

Added IkePeer=2::allowedTransforms.encryptionAlgorithm(non_mRBS) ATTGS value of 2, Permission or GlobalOptional
 Added IkePeer=2::allowedTransforms.integrityAlgorithm(mRBS) ATTGS value of 2, Permission of Global
 Added IkePeer=2::allowedTransforms.integrityAlgorithm(non_mRBS) ATTGS value of 2, Permission or GlobalOptional
 Added IkePeer=2::allowedTransforms.pseudoRandomFunction(mRBS) ATTGS value of 1, Permission of Global
 Added IkePeer=2::allowedTransforms.pseudoRandomFunction(non_mRBS) ATTGS value of 1, Permission or GlobalOptional
 Added IkePeer=2::authenticationMethod(mRBS) ATTGS value of 1, Permission of Global
 Added IkePeer=2::authenticationMethod(non_mRBS) ATTGS value of 1, Permission of GlobalOptional
 Added IkePeer=2::deadPeerDetectionInterval(non_mRBS) ATTGS value of 90, Permission of GlobalOptional
 Added IkePeer=2::deadPeerDetectionInterval(mRBS) ATTGS value of 90, Permission of Global
 Added IkePeer=2::ikePeerId(mRBS) ATTGS value of 2, Permission of Global
 Changed IkePeer=2::ikePeerId() Suffix value from null to non_mRBS
 Added IkePeer=2::ikeSaLifeTime(mRBS) ATTGS value of 1440, Permission of Global
 Added IkePeer=2::ikeSaLifeTime(non_mRBS) ATTGS value of 1440, Permission of GlobalOptional
 Added IkePeer=2::logging(mRBS) ATTGS value of 1, Permission of Global
 Changed IkePeer=2::logging() Suffix value from null to non_mRBS
 Added/Highlighted IkePeer=2::ownIdentity.idFqdn() ATTGS value of null, Permission of Not Auditable
 Added/Highlighted IkePeer=2::ownIdentity.ipv4Address() ATTGS value of null, Permission of Not Auditable
 Added/Highlighted IkePeer=2::ownIdentity.ownIdType() ATTGS value of 0, Permission of Global
 Added/Highlighted IkePeer=2::peerIdentity.idFqdn() ATTGS value of null, Permission of Not Auditable
 Added IkePeer=2::peerIdentity.idType(mRBS) ATTGS value of 0,1,2, Permission of Local
 Added IkePeer=2::peerIdentity.idType(non_mRBS) ATTGS value of 0, Permission of GlobalOptional
 Added/Highlighted IkePeer=2::peerIdentity.ipv4Address() ATTGS value of null, Permission of Not Auditable
 Added/Highlighted IkePeer=2::peerIpAddress() ATTGS value of null, Permission of Not Auditable
 Added IkePeer=2::securityAssociations.diffieHellmanGroup(mRBS) ATTGS value of 1, Permission of Global
 Added IkePeer=2::securityAssociations.diffieHellmanGroup(non_mRBS) ATTGS value of 0, Permission of GlobalOptional
 Added IkePeer=2::securityAssociations.encryptionAlgorithm(mRBS) ATTGS value of 2, Permission of Global
 Added IkePeer=2::securityAssociations.encryptionAlgorithm(non_mRBS) ATTGS value of 1, Permission of GlobalOptional
 Added IkePeer=2::securityAssociations.integrityAlgorithm(mRBS) ATTGS value of 2, Permission of Global
 Added IkePeer=2::securityAssociations.integrityAlgorithm(non_mRBS) ATTGS value of 0, Permission of GlobalOptional
 Added IkePeer=2::userLabel(mRBS) ATTGS value of Traffic, Permission of Global
 Changed IkePeer=2::userLabel() Suffix value from null to non_mRBS
 Added/Highlighted IpAccessHostEt=2::administrativeState() ATTGS value of null, Permission of Not Auditable
 Added/Highlighted IpAccessHostEt=2::availabilityStatus() ATTGS value of null, Permission of Not Auditable
 Added/Highlighted IpAccessHostEt=2::currentPmRegister() ATTGS value of null, Permission of Not Auditable

Added/Highlighted IpAccessHostEt=2::networkPrefixLength() ATTGS value of null, Permission of Not Auditable
Added/Highlighted IpAccessHostEt=2::ntpDscp() ATTGS value of 46, Permission of Global
Added/Highlighted IpAccessHostEt=2::ntpServerMode() ATTGS value of 0, Permission of Global
Added/Highlighted IpAccessHostEt=2::operationalState() ATTGS value of null, Permission of Not Auditable
Added/Highlighted IpAccessHostEt=2::reservedBy() ATTGS value of null, Permission of Not Auditable
Added IpAccessHostEt=2::userLabel(mRBS) ATTGS value of S1-X2-Inner, Permission of Global
Added IpAccessHostEt=2::userLabel(non_mRBS) ATTGS value of null, Permission of Global
Added IpInterface::vLan(mRBS) ATTGS value of false
Changed IpInterface::vLan() Suffix value from null to non_mRBS
Added IpSec::certExpirWarnTime(mRBS) ATTGS value of 90, Permission of Global
Changed IpSec::certExpirWarnTime() Suffix value from null to non_mRBS Permission from Global to GlobalOptional
Added IpSec::featureState(mRBS) ATTGS value of 1
Changed IpSec::featureState() Suffix value from null to non_mRBS
Added IpSecTunnel=1::allowedTransforms.encryptionAlgorithm(mRBS) ATTGS value of 2, Permission of Global
Added IpSecTunnel=1::allowedTransforms.encryptionAlgorithm(non_mRBS) ATTGS value of 0, Permission of GlobalOptional
Added IpSecTunnel=1::allowedTransforms.integrityAlgorithm(mRBS) ATTGS value of 2, Permission of Global
Added IpSecTunnel=1::allowedTransforms.integrityAlgorithm(non_mRBS) ATTGS value of 1, Permission of GlobalOptional
Added IpSecTunnel=1::antiReplayProtection(mRBS) ATTGS value of TRUE, Permission of Global
Changed IpSecTunnel=1::antiReplayProtection() Suffix value from null to non_mRBS Permission from Global to GlobalOptional
Added IpSecTunnel=1::ikePeerRef(mRBS) ATTGS value of ManagedElement=1,IpSystem=1,IpSec=1,IkePeer=1, Permission of Global
Changed IpSecTunnel=1::ikePeerRef() Suffix value from null to non_mRBS
Added IpSecTunnel=1::IpSecTunnelId(mRBS) ATTGS value of 1, Permission of Global
Changed IpSecTunnel=1::IpSecTunnelId() Suffix value from null to non_mRBS
Added IpSecTunnel=1::priority(mRBS) ATTGS value of 1, Permission of Global
Changed IpSecTunnel=1::priority() Suffix value from null to non_mRBS
Added/Highlighted IpSecTunnel=1::tsLocalIpAddressRanges.ipaddress() ATTGS value of null, Permission of Not Auditable
Added/Highlighted IpSecTunnel=1::tsLocalIpAddressRanges.mask() ATTGS value of null, Permission of Not Auditable
Added IpSecTunnel=1::tsProtocols(mRBS) ATTGS value of 0, Permission of Global
Changed IpSecTunnel=1::tsProtocols() Suffix value from null to non_mRBS
Added IpSecTunnel=1::tsRemoteIpAddressRanges.ipaddress(mRBS) ATTGS value of 0.0.0.0, Permission of Global
Added IpSecTunnel=1::tsRemoteIpAddressRanges.ipaddress(non_mRBS) ATTGS value of null, Permission of Not Auditable
Added IpSecTunnel=1::tsRemoteIpAddressRanges.mask(mRBS) ATTGS value of 0, Permission of Global
Added IpSecTunnel=1::tsRemoteIpAddressRanges.mask(non_mRBS) ATTGS value of null, Permission of Not Auditable
Added IpSecTunnel=1::userLabel(mRBS) ATTGS value of S1-X2, Permission of Global
Added IpSecTunnel=1::userLabel(non_mRBS) ATTGS value of null, Permission of Not Auditable

Added IpSecTunnel=2::allowedTransforms.encryptionAlgorithm(mRBS) ATTGS value of 2, Permission of Global
 Added IpSecTunnel=2::allowedTransforms.encryptionAlgorithm(non_mRBS) ATTGS value of 0, Permission of GlobalOptional
 Added IpSecTunnel=2::allowedTransforms.integrityAlgorithm(mRBS) ATTGS value of 2, Permission of Global
 Added IpSecTunnel=2::allowedTransforms.integrityAlgorithm(non_mRBS) ATTGS value of 1, Permission of GlobalOptional
 Added IpSecTunnel=2::antiReplayProtection(mRBS) ATTGS value of TRUE, Permission of Global
 Added IpSecTunnel=2::antiReplayProtection(non_mRBS) ATTGS value of TRUE, Permission of GlobalOptional
 Added IpSecTunnel=2::ikePeerRef(mRBS) ATTGS value of ManagedElement=1,IpSystem=1,IpSec=1,IkePeer=2, Permission of Global
 Changed IpSecTunnel=2::ikePeerRef() Suffix value from null to non_mRBS
 Added IpSecTunnel=2::IpSecTunnelId(mRBS) ATTGS value of 2, Permission of Global
 Changed IpSecTunnel=2::IpSecTunnelId() Suffix value from null to non_mRBS
 Added IpSecTunnel=2::priority(mRBS) ATTGS value of 1, Permission of Global
 Changed IpSecTunnel=2::priority() Suffix value from null to non_mRBS
 Added/Highlighted IpSecTunnel=2::tsLocalIpAddressRanges.ipaddress() ATTGS value of null, Permission of Not Auditable
 Added/Highlighted IpSecTunnel=2::tsLocalIpAddressRanges.mask() ATTGS value of null, Permission of Not Auditable
 Added IpSecTunnel=2::tsProtocols(mRBS) ATTGS value of 0, Permission of Global
 Changed IpSecTunnel=2::tsProtocols() Suffix value from null to non_mRBS
 Added IpSecTunnel=2::tsRemoteIpAddressRanges.ipaddress(mRBS) ATTGS value of 0.0.0.0, Permission of Global
 Added IpSecTunnel=2::tsRemoteIpAddressRanges.ipaddress(non_mRBS) ATTGS value of null, Permission of Not Auditable
 Added IpSecTunnel=2::tsRemoteIpAddressRanges.mask(mRBS) ATTGS value of 0, Permission of Global
 Added IpSecTunnel=2::tsRemoteIpAddressRanges.mask(non_mRBS) ATTGS value of null, Permission of Not Auditable
 Added IpSecTunnel=2::userLabel(mRBS) ATTGS value of OAM, Permission of Global
 Added IpSecTunnel=2::userLabel(non_mRBS) ATTGS value of null, Permission of Not Auditable
 Added IpSecTunnel=2::vpnInterfaceRef(mRBS) ATTGS value of ManagedElement=1,IpSystem=1,VpnInterface=1, Permission of Global
 Changed IpSecTunnel=2::vpnInterfaceRef() Suffix value from null to non_mRBS
 Added IpSystem=1,Ippm=1,TwampResponder=1::ipAccessHostEtRef(mRBS) ATTGS value of ManagedElement=1,IpSystem=1,IpAccessHostEt=2, Permission of Global
 Added IpSystem=1,Ippm=1,TwampResponder=1::ipAccessHostEtRef(non_mRBS) ATTGS value of null, Permission of Not Auditable
 Added IpSystem=1,Ippm=1,TwampResponder=2::ipAccessHostEtRef(mRBS) ATTGS value of ManagedElement=1,IpSystem=1,IpAccessHostEt=2, Permission of Global
 Added IpSystem=1,Ippm=1,TwampResponder=2::ipAccessHostEtRef(non_mRBS) ATTGS value of null, Permission of Not Auditable
 Added IpSystem=1,Ippm=1,TwampResponder=3::ipAccessHostEtRef(mRBS) ATTGS value of ManagedElement=1,IpSystem=1,IpAccessHostEt=2, Permission of Global
 Added IpSystem=1,Ippm=1,TwampResponder=3::ipAccessHostEtRef(non_mRBS) ATTGS value of null, Permission of Not Auditable
 Added IpSystem=1,Ippm=1,TwampResponder=4::ipAccessHostEtRef(mRBS) ATTGS value of ManagedElement=1,IpSystem=1,IpAccessHostEt=2, Permission of Global
 Added IpSystem=1,Ippm=1,TwampResponder=4::ipAccessHostEtRef(non_mRBS) ATTGS value of null, Permission of Not Auditable
 Added MaximumCellRange::featureStateMaximumCellRange(mRBS) ATTGS value of 0, Permission of Global
 Highlighted QciProfilePredefined=default::dscp as important to mRBS
 Highlighted QciProfilePredefined=qci1::dscp as important to mRBS

PMATT 143729 SmallCell Ericsson / Outdoor / LTE/ mRBS AWS AP HW cont'd

Highlighted QciProfilePredefined=qci2::dscp as important to mRBS
Highlighted QciProfilePredefined=qci3::dscp as important to mRBS
Highlighted QciProfilePredefined=qci4::dscp as important to mRBS
Highlighted QciProfilePredefined=qci5::dscp as important to mRBS
Highlighted QciProfilePredefined=qci6::dscp as important to mRBS
Highlighted QciProfilePredefined=qci7::dscp as important to mRBS
Added QciProfilePredefined=qci8::dscp(mRBS) ATTGS value of 0, Permission of Global
Changed QciProfilePredefined=qci8::dscp() Suffix value from null to non_mRBS
Highlighted QciProfilePredefined=qci9::dscp as important to mRBS
Added QuadAntUIPerfPkg::featureStateQuadAntUIPerfPkg(mRBS) ATTGS value of 0, Permission of Global
Added RetCascading::featureStateRetCascading(mRBS) ATTGS value of 0, Permission of Global
Changed RetCascading::featureStateRetCascading() Suffix value from null to non_mRBS
Added RetConfigurationMgt::featureStateRetConfigurationMgt(mRBS) ATTGS value of 0, Permission of Global
Changed RetConfigurationMgt::featureStateRetConfigurationMgt() Suffix value from null to non_mRBS
Added RetSupport::featureStateRetSupport(mRBS) ATTGS value of 0, Permission of Global
Changed RetSupport::featureStateRetSupport() Suffix value from null to non_mRBS
Added SectorCarrier::noOfTxAntennas(mRBS) ATTGS value of 2, Permission of Global
Changed SectorCarrier::noOfTxAntennas() Suffix value from null to non_mRBS
Added SectorCarrier::noOfRxAntennas(mRBS) ATTGS value of 2, Permission of Global
Added SectorEquipmentFunction::configuredOutputPower(mRBS) ATTGS value of 10000, Permission of Global
Highlighted Support12Cells::featureStateSupport12Cells as important to mRBS
Added Support6Cells::featureStateSupport6Cells(mRBS) ATTGS value of 0, Permission of Global
Changed Support6Cells::featureStateSupport6Cells() Suffix value from null to non_mRBS
Added TmaSupport::featureStateTmaSupport(mRBS) ATTGS value of 0, Permission of Global
Changed TmaSupport::featureStateTmaSupport() Suffix value from null to non_mRBS
Added VpnInterface::networkPrefixLength(mRBS) ATTGS value of 1..31, Permission of Local
Changed VpnInterface::networkPrefixLength() Suffix value from null to non_mRBS
Highlighted VpnInterface::subnet as important to mRBS
Added VpnInterface::userLabel(mRBS) ATTGS value of S1-X2-OaM, Permission of Global
Changed VpnInterface::userLabel() Suffix value from null to non_mRBS

LTE32

Corrected RedirectWithNacc::featureStateRedirectWithNacc ATTGS value from 0,1 to 1, Initial value from 0 to null and Permission from Local to Global per RIM/eCSFB deployment completion.
Corrected ReportConfigEUltraBadCovPrim::timeToTriggerA2Prim Initial Value from 1280 to null.
Corrected UtranFreqRelation::mobilityActionCsfB ATTGS value from 0,1 to 1, Initial value from 0 to null and Permission from Local to Global per RIM/eCSFB deployment completion.

LTE33

Corrected/Removed ReportConfigA5::a5Threshold2Rsrp(multiCarrier).
Added L13B ReportConfigSearch::a1a2SearchThresholdRsrp(intraLTE) Value -116
Deprecated L14A ReportConfigSearch::a1a2SearchThresholdRsrp -134
Changed L14A ReportConfigSearch::a1a2SearchThresholdRsrp(intraLTE) from -110 to -116
Added L14A ReportConfigSearch::a1a2SearchThresholdRsrp(interRAT_10) Value -112
Added L14A ReportConfigSearch::a1a2SearchThresholdRsrp(interRAT_5) Value -110
Deprecated L13B ReportConfigSearch::a1a2SearchThresholdRsrp -134
Changed L13B ReportConfigSearch::a1a2SearchThresholdRsrp(intraLTE) from -110 to -116
Added L13B ReportConfigSearch::a1a2SearchThresholdRsrp(interRAT_10) Value -112
Added L13B ReportConfigSearch::a1a2SearchThresholdRsrp(interRAT_5) Value -110
Changed L14A ReportConfigSearch::a2CriticalThresholdRsrp from -120 to -122
Deprecated L14A ReportConfigSearch::a2CriticalThresholdRsrp(InterLTE) -120
Deprecated L14A ReportConfigSearch::a2CriticalThresholdRsrp(IntraLTE) -120
Deprecated L14A ReportConfigSearch::a2CriticalThresholdRsrp(multiCarrier) -120
Changed L13B ReportConfigSearch::a2CriticalThresholdRsrp from -118 to -122
Deprecated L13B ReportConfigSearch::a2CriticalThresholdRsrp(InterLTE) -120
Deprecated L13B ReportConfigSearch::a2CriticalThresholdRsrp(IntraLTE) -118
Deprecated L13B ReportConfigSearch::a2CriticalThresholdRsrp(multiCarrier) -118
Deprecated L14A ReportConfigSearch::timeToTriggerA2Critical(interRAT_10) 640
Deprecated L14A ReportConfigSearch::timeToTriggerA2Critical(interRAT_5) 640
Deprecated L14A ReportConfigSearch::timeToTriggerA2Critical(IntraLTE) 640
Deprecated L14A ReportConfigSearch::timeToTriggerA2Critical(multiCarrier) 1280
Deprecated L14A ReportConfigSearch::timeToTriggerA2Critical(InterLTE) 1280
Deprecated L14A ReportConfigSearch::timeToTriggerA2Critical(mixedBW) 1280
Added L14A ReportConfigSearch::timeToTriggerA2Critical Value 1280
Deprecated L13B ReportConfigSearch::timeToTriggerA2Critical(interRAT_10) 640
Deprecated L13B ReportConfigSearch::timeToTriggerA2Critical(interRAT_5) 640
Deprecated L13B ReportConfigSearch::timeToTriggerA2Critical(IntraLTE) 640
Deprecated L13B ReportConfigSearch::timeToTriggerA2Critical(multiCarrier) 1280
Deprecated L13B ReportConfigSearch::timeToTriggerA2Critical(InterLTE) 1280
Deprecated L13B ReportConfigSearch::timeToTriggerA2Critical(mixedBW) 1280
Added L13B ReportConfigSearch::timeToTriggerA2Critical Value 1280
Deprecated L14A ReportConfigB2Utra::timeToTriggerB2(multiCarrier) 1280
Deprecated L13B ReportConfigB2Utra::timeToTriggerB2(multiCarrier) 1280
Deprecated L14A ReportConfigB2Utra::timeToTriggerB2(singleCarrier) 640
Deprecated L13B ReportConfigB2Utra::timeToTriggerB2(singleCarrier) 640
Added L14A ReportConfigB2Utra::timeToTriggerB2 Value 1280
Added L13B ReportConfigB2Utra::timeToTriggerB2 Value 1280

Activated IpFlowMonitor:pmIpFlowMaxOutBitrate in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated IpFlowMonitor:pmIpFlowMinOutBitrate in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmUIGrantsTransNoAck in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmUIGrantsTransVolteNoAck in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmUIGrantsTransPCellNoAck in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmRaContResAccDistr in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmRaAccHarqFailWithinContRes in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmRaAccHarqFailAfterContRes in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmRaContResRejDistr in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmRaRejHarqFailWithinContRes in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmRaRejHarqFailAfterContRes in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellRelation:pmHoExeAttLteInterFCaRedirect in the National_PM_Standard_eNodeB_L14B_14.08 profile

-Legacy Counters to be included in "National_PM_Standard_eNodeB_L14B_GS_14.08" from none profile assignment (Legacy L14A)

Activated EUTranCellFDD:pmCompUIDeltaSinrPuschDistr in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmErabRelAbnormalEnbActCdtAutoPnr in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmErabRelAbnormalEnbCdtAutoPnr in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmUeCtxtRelAbnormalEnbActCdtAutoPnr in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated EUTranCellFDD:pmUeCtxtRelAbnormalEnbCdtAutoPnr in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated SectorCarrier:pmBranchDeltaSinrDistr0 in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated SectorCarrier:pmBranchDeltaSinrDistr1 in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated SectorCarrier:pmBranchDeltaSinrDistr2 in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated SectorCarrier:pmBranchDeltaSinrDistr3 in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated SectorCarrier:pmBranchDeltaSinrDistr4 in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated SectorCarrier:pmBranchDeltaSinrDistr5 in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated SectorCarrier:pmBranchDeltaSinrDistr6 in the National_PM_Standard_eNodeB_L14B_14.08 profile
Activated SectorCarrier:pmBranchUsersLevSum in the National_PM_Standard_eNodeB_L14B_14.08 profile

-Legacy Counters to be excluded from "National_PM_Standard_eNodeB_L14B_GS_14.08" profile

Removed EUTranCellFDD:pmPdcplLatPktTransDINoDrxSync
Removed EUTranCellFDD:pmPdcplLatTimeDINoDrxSync
Removed EUTranCellFDD:pmZtemporary17Qci
Removed EUTranCellFDD:pmZtemporary64
Removed EUTranCellFDD:pmZtemporary66
Removed EUTranCellFDD:pmZtemporary69
Removed EUTranCellFDD:pmPdcchCceRequestedDistr

Removed Counter Activation STD L13A Tab.

FGA L14A-E-053 Hicap Settings. This FGA53 is a Hi Cap setting recommendation update for Ericsson L13B/L14A. FGA53 supersedes LTE FGA23.

Added EnhancedPdcchLa::featureState(hicap) with value of 1(Activated) Permission of Global per FGA53

Changed EnhancedPdcchLa::featureState() suffix from null to non_hicap per FGA53

Added dlMaxHARQTx(hicap) with value of 4 permission of Global per FGA53

Changed dlMaxHARQTx() suffix from null to non_hicap per FGA53

Added RadioBearerTable=default,SRB1::tReorderingDI(hicap) with value of 35 permission of Global per FGA53

Changed RadioBearerTable=default,SRB1::tReorderingDI() suffix from null to non_hicap per FGA53

Added QciProfilePredefined=default::tReorderingDI(hicap) with value of 35 permission of Global per FGA53

Changed QciProfilePredefined=default::tReorderingDI() suffix from null to non_hicap per FGA53

Added QciProfilePredefined=qci8::tReorderingDI(hicap) with value of 35 permission of Global per FGA53

Changed QciProfilePredefined=qci8::tReorderingDI() suffix from null to non_hicap per FGA53

Added ulMaxHARQTx(hicap) with value of 4 permission of Global per FGA53

Changed ulMaxHARQTx() suffix from null to non_hicap per FGA53

Added RadioBearerTable=default,SRB1::tReorderingUI(hicap) with value of 35 permission of Global per FGA53

Changed RadioBearerTable=default,SRB1::tReorderingUI() suffix from null to non_hicap per FGA53

Added QciProfilePredefined=default::tReorderingUI(hicap) with value of 35 permission of Global per FGA53

Changed QciProfilePredefined=default::tReorderingUI() suffix from null to non_hicap per FGA53

Added QciProfilePredefined=qci8::tReorderingUI(hicap) with value of 35 permission of Global per FGA53

Changed QciProfilePredefined=qci8::tReorderingUI() suffix from null to non_hicap per FGA53

Remove SystemConstants=1,systConstants::pdcchLaGinrMargin(hicap) per FGA53

Changed SystemConstants=1,systConstants::pdcchLaGinrMargin(non_hicap) suffix from non_hicap to null per FGA53

Added OptionalFeatureLicense= CarrierAggregation::featureState (HiCap AND where the peak of RRC Connection Max <66% of noOfPucchSrUsers at any given ROP) ATTGS value of 1, Permission of Global

Added EUTRANCellRelation::sCellCandidate (700 with Scell AWS co-located cell relation on same DU=HiCap Sites AND where the peak of RRC Connection Max <66% of noOfPucchSrUsers at any given ROP) ATTGS value of 1, Permission of Global

Added EUTRANCellRelation::sCellCandidate (700 with Scell PCS co-located cell relation on same DU=HiCap Sites AND where the peak of RRC Connection Max <66% of noOfPucchSrUsers at any given ROP) ATTGS value of 1, Permission of Global

Added EUTRANCellRelation::sCellCandidate (850 with Scell AWS co-located cell relation on same DU=HiCap Sites AND where the peak of RRC Connection Max <66% of noOfPucchSrUsers at any given ROP) ATTGS value of 1, Permission of Global

Added EUTRANCellRelation::sCellCandidate (AWS with Scell 850 co-located cell relation on same DU=HiCap Sites AND where the peak of RRC Connection Max <66% of noOfPucchSrUsers at any given ROP) ATTGS value of 1, Permission of Global

Added EUTRANCellRelation::sCellCandidate (AWS/PCS with Scell on 700 co-located cell relation on same DU=HiCap Sites AND where the peak of RRC Connection Max <66% of noOfPucchSrUsers at any given ROP) ATTGS value of 1, Permission of Global

[illegible]

featureStateDI64Qam
featureStateDualAntDIPerfPkg
featureStateGsmSessionContinuity
featureStateIntraLTEHandover
featureStateMultiErabsPerUser

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

featureStatePmInitiatedUeMeasurements
featureStateUl16Qam
featureStateVswrSupervision
featureStateWcdmaSessionContinuity

qRxLevMin
qRxLevMin

4/28/2011

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Pradeep Kunjunny/Hongyan Lei/Mike Noah JudyMiller

Pradeep Kunjunny/Hongyan Lei/Mike Noah	JudyMiller
Srinivas Krishnamurthy	JudyMiller
Mike Noah	Mike Noah

Dipankar Ray
Chris Wyatt

Judy Miller
Judy Miller

Judy Miller

Pradeep Kunjunny/Dipankar Ray

Judy Miller
Judy Miller

Hongyan Lei

Judy Miller

Audit Tool

Judy Miller

Dipankar Ray/Hongyan Lei

Judy Miller

Pradeep Kunjunny/Hongyan Lei

Hongyan Lei

John Smither for Judy Miller

Hongyan Lei

John Smither for Judy Miller

Mike Noah

Judy Miller

Judy Miller
Mike Noah

Judy Miller
Judy Miller

Mike Noah

Judy Miller

Vladimir Gusavac

John Smither for Judy Miller

Vladimir Gusavac

Judy Miller

Mike Noah

Judy Miller

Vladimir Gusavac

Judy Miller

Vladimir Gusavac

Judy Miller

Aida La Point/Mike Noah

Judy Miller

Vladimir Gusavac

Judy Miller

Judy Miller

Judy Miller

Wen Yang

Judy Miller

Vladimir Gusavac

Judy Miller

Wen Yang

Judy Miller

Aida La Point

Judy Miller

Joe Dear

Judy Miller

Mike Noah

Judy Miller

Wen Yang

Judy Miller

Chris Wyatt
Mike Noah

Judy Miller
Judy Miller

Aida LaPoint

Judy Miller

Vladimir Gusavac

Judy Miller

Wen Yang

Judy Miller

Wen Yang

Judy Miller

Vladimir Gusavac
Aida La Point
Wen Yang

Judy Miller
Judy Miller
Judy Miller

Wen Yang

JudyMiller

Aida La Point

Judy Miller

Wen Yang

Judy Miller

Wen Yang

Judy Miller

Mike Noah

Judy Miller

Aida LaPoint

Judy Miller

Aida LaPoint

Judy Miller

Bruce Portzer

Judy Miller

Aida LaPoint/Mike Noah
Chris Wyatt/Mike Noah

Judy Miller
Judy Miller

Wen Yang

Judy Miller

Mike Noah
Wen Yang

Judy Miller
Judy Miller

Jason Hsiao

Judy Miller

Mike Noah

Judy Miller

Vignesh Vasanthakumar

Judy Miller

Mike Noah
Mike Noah

Judy Miller
Judy Miller

Wen Yang

Judy Miller

Wen Yang

Judy Miller

Wen Yang
Jose Hernandez

Judy Miller
Judy Miller

Mike Noah

Judy Miller

Mike Noah/Wen Yang

Judy Miller

Mike Noah
Vignesh Vasanthakumar
Mike Noah
Mike Noah
Erik Holmberg

Judy Miller
Judy Miller
Judy Miller
Judy Miller
Judy Miller

Arshad Zarak/Mike Noah

Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Erik Holmberg

Judy Miller

Tjoen Kusardi

Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Jing Xu

Judy Miller

Erik Holmberg

Judy Miller

Mike Noah

Judy Miller

Jose Hernandez

Judy Miller

Mehdi Razvi

Judy Miller/ Nitin Dogra

Jose Hernandez
Jose Hernandez

Judy Miller
Judy Miller

Jose Hernandez

Judy Miller

Troy Ballard

Judy Miller

Vignesh Vasanthakumar

Judy Miller

Jose Hernandez/Wen Yang

Judy Miller

Jose Hernandez

Vignesh Vasanthakumar
Vignesh Vasanthakumar

Vignesh Vasanthakumar

Marcus Wright

Chris Wyatt
Judy Miller

Mike Noah
Mike Noah

Judy Miller
Judy Miller

Judy Miller

Judy Miller

Judy Miller
Judy Miller

Judy Miller
Judy Miller

Wen Yang
Judy Miller
Judy Miller

Judy Miller
Judy Miller
Judy Miller

Nakina

Judy Miller

Nakina
Nakina
Nakina

Judy Miller
Judy Miller
Judy Miller

Nakina
Nakina
Nakina

Judy Miller
Judy Miller
Judy Miller

Mochamad Mirza

Judy Miller

Troy Ballard

Judy Miller

Mike Noah

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Chris Wyatt

Mike Noah
Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Vignesh Vasanthakumar/Chris Wyatt

Judy Miller

Mike Noah

Judy Miller

Jimmy Wang

Anthony Sam

Judy Miller

Vignesh Vasanthakumar

Mike Noah

Judy Miller

Daniel Kwakye

Judy Miller

Mike Noah
Vignesh Vasanthakumar

Judy Miller
Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Mike Noah
Jose Hernandez

Judy Miller
Judy Miller

Tiger Team

Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Greg Gonzales/Mike Noah

Judy Miller

	Judy Miller
Vignesh Vasanthakumar	
Martha Desmond	Judy Miller
Jose Hernandez	Judy Miller
Mike Noah/Nabeel Mir	Judy Miller

Mike Noah

Judy Miller

Jose Hernandez, Vignesh Vasanthakumar Judy Miller, Mike Noah

Jimmy Wang

Judy Miller

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Mike Noah

Judy Miller

Daniel Ulanday

Judy Miller

Lee Elchak/Mike Noah

Judy Miller

Jose Hernandez

Judy Miller

Mike Noah

Judy Miller

Jing Xu

Judy Miller

Mochamad Mirza

Judy Miller

Mike Noah

Judy Miller

Jose Hernandez
Vignesh Vasanthakumar

Mike Noah
Vignesh Vasanthakumar

Judy Miller
Judy Miller

Judy Miller
Judy Miller

Mike Noah

Judy Miller

Brian McCarthy/Myranda Johnson

Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Daniel Kwakye

Jose Hernandez

Judy Miller

Lien Dao/Jing Xu

Judy Miller

Tim Erlandson/Mike Noah

Judy Miller

Jose Hernandez

Judy Miller

Jing Xu/Mike Noah

Judy Miller

Jason Hsiao/Jose Hernandez

Judy Miller

Jose Hernandez/Vignesh Vasanthakumar

Judy Miller

Rick Neuman

Judy Miller

Mike Noah

Judy Miller

Mochamad Mirza/Aziz Ay

Judy Miller

Gagan Jeji/Jose Hernandez/Vignesh
VasanthakumarVignesh

Gagan Jeji/Jose Hernandez/Vignesh Vasanthakumar

Gagan Jeji/Jose Hernandez/Vignesh Vasanthakumar

Gagan Jeji/Jose Hernandez/Vignesh Vasanthakumar

Jeji/Jose Hernandez/Vignesh Vasanthakumar

Gagan Jeji/Jose Hernandez/Vignesh Vasanthakumar

Gagan Jeji/Jose Hernandez/Vignesh Vasanthakumar

Mike Noah

Mike Noah

Mike Noah/Ericsson
Judy Miller

Troy Ballard

Judy Miller

Jing Xu

Judy Miller

Brian McCarthy/Rizwan Muzaffar

Judy Miller

Vignesh Vashanthakumar

Judy Miller

Mochamad Mirza

Judy Miller

Troy Ballard

Judy Miller

Troy Ballard

Judy Miller

Vladimir Gusavac/Mike Noah

Judy Miller

Lee Elchak

Judy Miller

Jing Xu

Judy Miller

Jose Hernandez

Judy Miller

Mike Noah

JudyMiller

Joe Dear

Judy Miller

Bobie Solis/Mike Noah

Judy Miller

Daniel Kwakye

Judy Miller

Mochamad Mirza

Judy Miller

Vignesh Vashanthakumar/Jose Hernandez Judy Miller

Mike Noah

Jose Hernandez

Judy Miller

Mike Noah/Ahmad Mansour

Mike Noah

Judy Miller

Mike Noah

Judy Miller

Mochamad Mirza

Judy Miller

Jose Hernandez/Mike Noah
Mike Noah

Judy Miller
Judy Miller

Jimmy Wang

Judy Miller

Contacts - RAN - Ericsson LTE eNodeB

Organization	Voting Member	Name	Phone
A&P Labs	Pradeep Kunjunny	Wen Yang	(425) 702-3024
A&P Labs	Pradeep Kunjunny	Erik Holmberg	(425) 580-5711
Labs	David Orloff	Ahmad Mansour	(425) 580-8614
NP&E Global Network Planning	N/A	N/A	N/A
NP&E RAN Engineering	Tim Hiemenz	Rich Caine	(925) 468-8346
NP&E RAN Engineering	Tim Hiemenz	Michael Noah	(425) 580-6716
NP&E RAN Engineering	Tim Hiemenz	Vladimir Gusavac	(404) 499-5516
NP&E RAN Engineering	Kurt Huber	Zhonghua Qin	(469) 571-4055
NP&E Global Network Planning	David Carroll	Kaushik Gohel	(214) 782-6256
NP&E Global Network Planning	David Carroll	Heather McAleer	(410) 782-7271
GNO MNRC	Jorge Vidal	Michael Blackshaw	(425) 702-3915
GNO MNRC	Jorge Vidal	Lance Hastings	(951) 774-3187
GNO Provisioning	Richard Fakes	Chris Wyatt	(972) 706-5981
GNO Provisioning	Richard Fakes	Brian Rivers	(404) 661-8624
GNO Provisioning	Richard Fakes	Rudy Pineda	(972) 340-4394
GNO Provisioning	Richard Fakes	Ernest McKnight	(678) 642-3498

GNO Provisioning	Richard Fakes	Diana Fahim	(404) 497-2367
GNO Provisioning	Richard Fakes	Greg Gonzalez	(972) 706-5993
GNO Provisioning	Richard Fakes	Scott Mitchell	(972) 658-4903
NP&E Layer 4+	N/A	N/A	N/A
AT&T LABS E911	Kelly Springer	Marc Sather	(425) 580-6720
AT&T LABS E911	Kelly Springer	Elaine Sze	(425) 580-6778
ATS	Mike Stephens	Ben Perry	(404) 847-3594
ATS	Mike Stephens	Ray Webber	(678) 654-5954
ATS	Mike Stephens	Noman Ghazali	(562) 468-6116
ATS	Mike Stephens	Imtiaz Malik	(972) 277-5844
ATS	Mike Stephens	Stuart Robertson	(404) 630-8718
ASG	Niraj Shah	Lamberto Pisani	(713) 265-4714
Metrics		N/A	
Ericsson		Jason Hsiao	(469) 266-9747
Ericsson		Jose Hernandez	(469) 266-8943
Ericsson		Vignesh Vasanthakumar	(972) 765-7063
GSAT		Sherri Moquin	(732) 420-1091

Supporting Documents

Document Link	Title
http://manchild.wireless.attws.com/cgi-bin/alex	Ericsson Customer F

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution


https://businesssolutions.web.att.com/sites/RANPerformance/RANPerformanceStandards/Er	Ericsson LTE Pe

Links	
Links	Description



E-mail	Title / Team				
wy3206@att.com	Principal - Product Development Engineer (Document Owner MACRO)				
eh2942@att.com	Lead Member Technical Staff				
am711x@att.com	Principal - Product Development Engineer (Document Owner mRBS)				
N/A	N/A.				
rc1316@att.com	Area Manager RAN Engineerineering				
mn9741@att.com	Sr RAN Engineer				
vg0136@att.com	Sr RAN Engineer				
zq4810@att.com	Sr RAN Engineer				
kg3243@att.com	Director				
hm5610@att.com	Sr Network Planning Engineer				
mb6765@att.com	Area Manager, GNO MNRC				
lh5407@att.com	Area Manager, GNO MNRC				
cw7534@att.com	Area Manager - Network Engineering				
br2753@att.com	GNO Provisioning				
rp3971@att.com	Area Manager - Network Engineering				
em963x@att.com	Project Manager, GNO Provisioning				

[illegible]



AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

AT&T LTE Transport Network Design Stand

Mobility Gold Standard Document

Supporting Documents

Document Link	Title
https://operations.web.att.com/sites/NPEL4-GNP/M	L13 TND Standard V2.6_07132013

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution




ard for Ericsson Markets

Description

LTE Transport
Network
Design (TND)

Node Description

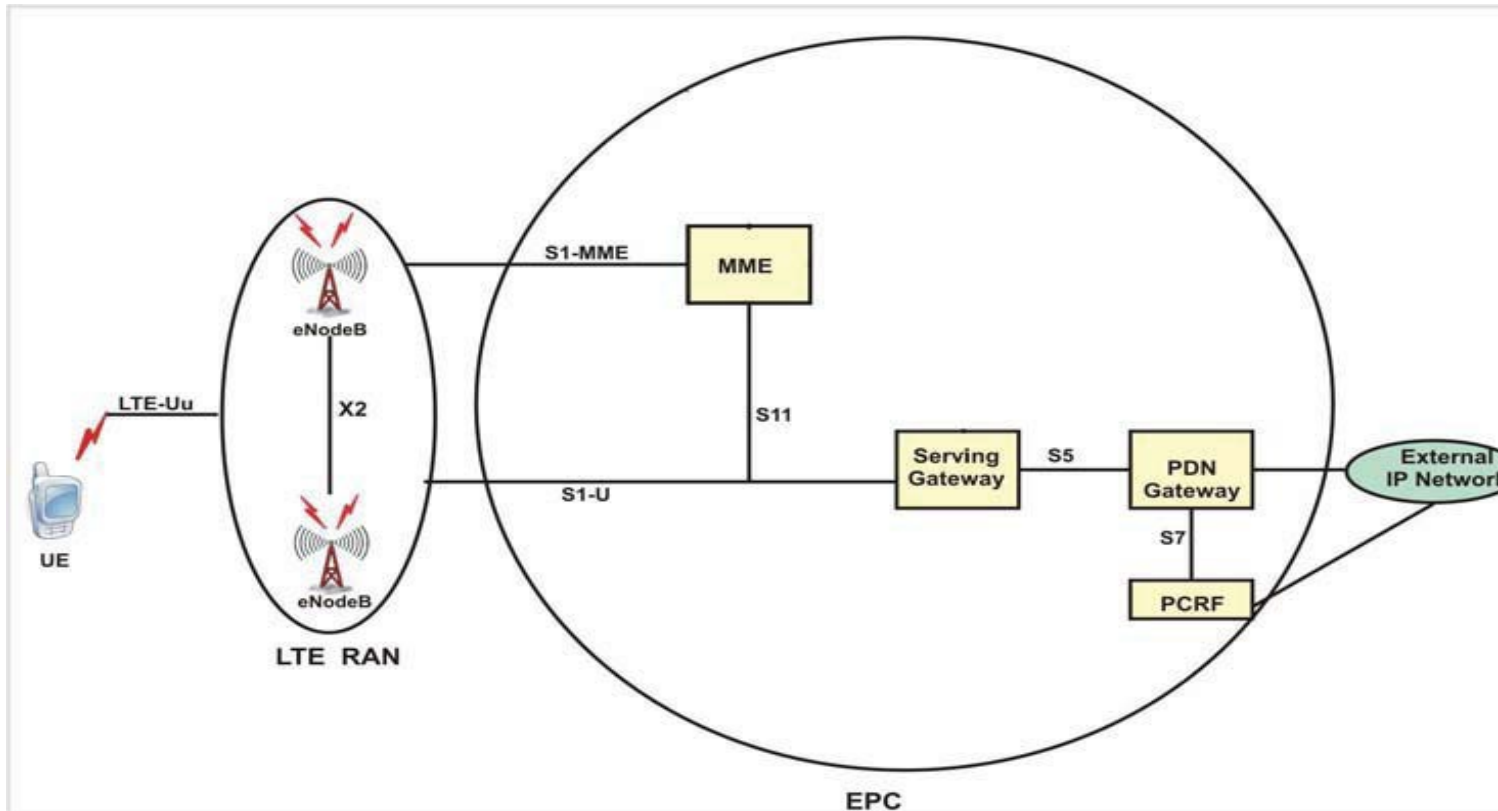

The eNodeB is the component that provides the physical radio link between the UE and the network.

eNodeB

The eNodeB contains the Transceiver and the Baseband Processor. It communicates with the UE and the MME.

The eNodeB provides:


- Radio resource management
- Connection Mobility Control
- and downlink (scheduling)
- S1-MME Interface to MME
- S1-U Interface to Serving Gateway
- IP header compression and decompression
- Routing of user plane data

- Scheduling and transmi
- Scheduling and transmi
- Operations, Administratio
- Bearer level rate enforc
- Handover support

Link to more informati
<https://businesssolutions.ault.aspx>

Vendors:
Ericsson

on : LTE ENodeB

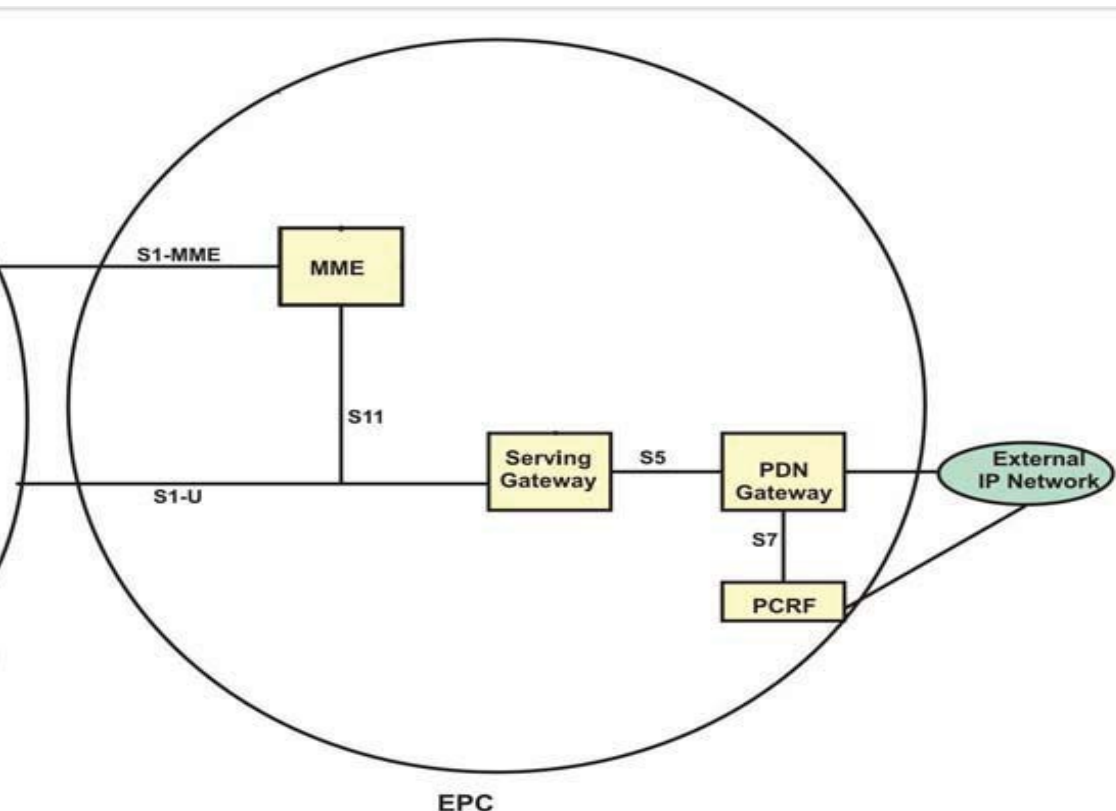

ment within the LTE RAN network. LTE RAN provides the
in the User Equipment (UE) and the evolved packet core

ismit Receive Duplex Units (TRDUs) or (RRH) and
Es. The eNodeB supports Multiple Input Multiple Output (MIMO).

ment: Radio Bearer Control, Radio Admission Control,
ol, and Dynamic allocation of resources to UEs in uplink
)
bility Management Entity (MME)
g Gateway (S-GW)
and encryption of user data stream
ata toward S-GW

ssion of paging messages (originated from MME)
ssion of broadcast information (originated from MME or
n, and Maintenance (OAM)
ement and bearer level admission control

on:

web.att.com/sites/RANPerformance/RANPerformanceStandards/Ericsson_LTE/def

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Originating Lab Results Document(s)

Originating FFA Results

Lab / FFA Change History

Date	Description
3/17/2011	Lab and FFA are part of PMATT Project 47064. FFA is still in progress.
6/9/2011	Lab and FFA are part of PMATT Project 47064. This is Phase 1 for the Launch of the first three Markets.
6/23/2011	Lab and FFA are part of PMATT Project 47064. This is Phase 1 Drop 2.5 for the Launch of the first three Markets.
7/21/2011	Lab and FFA are part of PMATT Project 47064. This is Phase 1 for the Launch of the first three Markets.
8/4/2011	Lab and FFA are part of PMATT Project 47064. This is Phase 1 for the Launch of the first three Markets.
9/1/2011	Lab and FFA are part of PMATT Project 47064.
9/6/2011	Lab and FFA are part of PMATT Project 47064.
9/29/2011	Lab and FFA are part of PMATT Project 47064.
10/13/2011	Lab and FFA are part of PMATT Project 47064.
10/27/2011	Lab and FFA are part of PMATT Project 47064. completed 10/21
12/15/2011	Clean-up from Audit Mismatches.No Lab or FFA required.
1/19/2012	Corrected values for serviceStateEcsCsfb and numberOfAssociations. No Lab or FFA required.
2/2/2012	LTE L11B FGA01 - Automated Neighbor Relations (ANR) adjustment - Testing conducted in LA Market
2/15/2012	Ericsson LTE Counter Activation Standard version 11.50 Tab. No Lab or FFA required.
4/12/2012	FGA L11B 002 RACH Preamble Change study was done in the Dallas Market. No further Lab or FFA required.
4/12/2012	FGA L11B 003 Reselection Points and IRAT Threshold Change study done in Chicago, Boston and Houston. No further Lab or FFA required.
6/7/2012	PMATT 106000 Ericsson LTE L12a Project completed LAB and FFA.
6/21/2012	LTE L11B FGA04 – eUTRAN PresenceAntennaPort1 Change. Field studies were done in San Francisco, Atlanta and Los Angeles Markets.

9/4/2012	LTE L12A FGA05 - Max RLC Retransmission Change. Field studies were conducted in the San Francisco and the Los Angeles markets.
9/4/2012	LTE L12A FGA06 - CDRX Parameter Changes. Studies were done in Dallas and Las Angeles Markets.
9/13/2012	PMATT 118863 Ericsson Software Rllse L12B. LAB and FFA done as part of PMATT project.
10/29/2012	PMATT 118863 Ericsson Software Rllse L12B FFA changes. LAB and FFA done as part of PMATT project.
12/13/2012	FGA L12A-E-007 EUTRAN Event A2 Time to Trigger Changes Field Trials were done in Los Angles, Chicago, Atlanta and Boston.
1/7/2013	PMATT 129145 AIR. The RAN features and functionality supported by the AIR are identical to those of RBS6601, which is currently in operation in the AT&T LTE network, and has recently been through FFA.
1/7/2013	PMATT 118084 CMAS Changes. Lab and FFA done as parrr of PMATT Project.
2/1/2013	PMATT #118863. Lab and FFA done as part of PMATT Project. Markets include LA and Chicago.
3/1/2013	FGA L12B 008 EUTRAN Maximum Cell Range Change.The study has been conducted in San Francisco, Los Angeles, Puerto Rico and Dallas markets.
3/1/2013	FGA L12B-009 LTE Inter-Frequency Border Guideline. Field trials done in Sacramento and Chicago Markets.
3/7/2013	L12B IP10 final maintenance release. FFA is ongoing in Tulsa, Oklahoma.
3/7/2013	eCSFB Project. FFA ongoing in Dallas, Texas
3/21/2013	FGA L12B-E-010 The study has been conducted in Oklahoma, Los Angeles, South Florida, Louisiana, Chicago and other markets.
4/29/2013	All Changes/Corrections are part of are part of FFA Clean-up.
5/6/2013	TWAMP solution is implemented in Willows lab, WA in the CAZ zone in WTC1. We worked with Ericsson, Wen Yang, and Gavin Cleary along with many others such as Asad Ansari in Willows lab have a permanent test program in Willows and will be certifying every upcoming software releases of the E/// eNBs. When ALU eNBs start supporting the TWAMP protocol, we will utilize the same feature and resources in those markets as well].
6/4/2013	FGA L12B-E-011. Trials were done in SF and SAC Markets on all eNodeBs on April 30 and have remained. The test was also done in the SD Market on over 100 eNodeBs on April 16th.
6/12/2013	L13A RAN Software Release
6/18/2013	LTE FGA L12B - E-012 cellIndividualOffsetEutran change was tested in San Francisco.
6/18/2013	LTE FGA L12B-E-013 ANR isHoAllowed and isRemoveAllowed were tested in the San Francisco and Los Angeles markets.
7/15/2013	L12B FGA-14 LTE DAS Site/ Cell Naming field change. No Lab or FFA required.
8/23/2013	FGA L13A-E-015 EUTRAN RS Power Boost Change. Field Trials done in Dallas and San Francisco.
8/29/2013	PMATT 150958 VoLTE Changes. FFA is in Chicago Market.
9/23/2013	Corrections Only. No LAB or FFA Required.
10/18/2013	FGA L13A 021 EUTRAN EventA2 Time to Trigger Change. The Field Study was conducted in the Dallas Markets.
12/5/2013	FGA L13A-E-022 EUTRAN ANR RSRP Threshold and Remove Relation Timers. Field trials were done in Northern California and Southern Florida.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s)within the AT&T companies and not for general distribution

12/5/2013	FGA17 LTE 2C Layer Management For 10 MHz Low Band and 5 MHz Mid Band and Mike Noah Consolidation Project
1/22/2014	FGA 13A-E-027 QCIPredefined/Clean-up and Corrections. No LAB or FFA required since corrections only.
1/31/2014	FGA L13A-E-023 LTE Hicap Settings. Field Studies were done in Oklahoma, Los Angeles, South Florida, Louisiana, Chicago Markets.
1/31/2014	FGA L13A-E-024 lte DI-FSS Feature Off. Field Studies done in San Antonio, South Florida, Arkansas, Austin, Lafayette.
1/31/2014	GA L13A-E-025 LTE Reduce UL SE/TTI. Field Studies were done in San Antonio, South Florida, Arkansas, Austin, Lafayette Markets..
1/31/2014	FGA L13A-E-026 LTE Mobility. Field Studies were done San Diego, Ft Myers and Tampa and Birmingham Markets.
1/31/2014	PMATT 157212 Ericsson RRUS12. FFA done in Waco Texas.
2/10/2014	FGA L13A-E-028 LTE ENodeB GpsSyncRef. The Field Study was done in Illinois
3/7/2014	FGA L13A-E-029 RoHC Deactivation
3/7/2014	FGA L13A-E-REM01 Remediation of the VoLTE Node Group Functional Category
5/8/2014	L13B Software Release. FFA done in Chicago.
5/16/2014	FGA L13A-E-030 LTE Venue/Event Site Manual Access Class Baring. Field studies were done in Florida.
5/16/2014	FGA L13B-E-032 additionalPlmnList Changes. These settings are active in 50% of the network so no studies done.
5/16/2014	FGA L13A-E-035 TX2RelocOverall / TS1RelocOverall Change. The studies were conducted in the San Francisco, Georgia, and Los Angeles markets.
6/12/2014	FGA L13A-E-034 UtranFreqRelation.threshXLow and measReportConfigParams.b2Threshold2RscpUtraOffs. The studies were conducted in Baton Rouge, Charlotte and South Georgia markets
6/12/2014	FGA L13A-E-037 RoHC Reactivation.
6/24/2014	PMATT 176945 Ericsson 3rd Carrier. LAB and FFA done as part of PMATT project.
6/24/2014	FGA L13A-E-0031 A5Threshold2Rsrp for Multicarrier Parameter Change. Field Trials were done in So. Florida and LA Markets.
6/26/2014	FGA L13A-E-038 Static QoS. Field Trials done in Dallas.
7/10/2014	L13B-E-036 PSHO and IRAT offload from LTE to UMTS (IROW). Field studies were done in Indianapolis Lafayette Market.
8/25/2014	FGA W12B-E-040 EUTRAN Maximum Cell Range Changes. Studies conducted in San Francisco, with additional involvement of Chicago, Central ILL, Indianapolis and Wisconsin.
8/29/2014	FGA L13B-E-041 Inter-Frequency Border (interLTE) and Mixed Bandwidth (mixedBW) Guideline Changes. The study was done in the North Georgia Market.
10/9/2014	PMATT 172747 Ericsson L14A Upgrade. FFA Markets were Chicago and Indiana.
10/20/2014	FGA-E-022(Rev A) EUTRAN ANR RSRP Threshold and Remove Relation Timers
10/20/2014	FGA L13B-E-042 LTE b2Threshold2RscpUtraOffset parameters change for QCI8. Field Studies were in SF, SAC, LA and Arkansas Markets.
10/20/2014	FGA L13B-E-048 Relative Priority Scheduling feature activation/QCI Subscription Quanta

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

10/20/2014	FGA L13B-E-045 ulMaxHARQTx & tReorderingUI Change. The studies were conducted in the Los Angeles, San Francisco, and Upstate New York markets.
10/20/2014	FGA L13B-E-046 dlMaxHARQTx & tReorderingDI change for QCI8. The studies were conducted in the Los Angeles, San Francisco, Sacramento, and Upstate New York markets.
10/20/2014	FGA L13B-E-047 ulNonGbrRatio and dlNonGbrRatio Change. The studies were conducted on a limited number of eNodeBs in the Chicago VoLTE market and in the Georgia Non-VoLTE Market on L13B eNodeBs.
11/11/2014	FGA L13B-E-039 csFallbackPrio and csFallbackPrioEC Changes. The trials were done in San Francisco and Sacramento Markets.
11/20/2014	PMATT 184971 Ericsson Single Carrier 15/20MHz B2 (Multi-Carrier Feature Testing). The B2 Carrier expansion from 10M to 15M/20M was done in Carson City, NV.
11/20/2014	FGA L13B-E-049 LTE DL ICIC.Field Trials wer done in Atlanta, Dallas, Wisconsin and Chicago Markets.
12/8/2014	FGA L14A-E-044 Activation of CA on B17>B4,, B5>B4, and B4>B5 Frequency Combinations. Studies done in Chicago and So. Florida.
12/8/2014	FGA L13B-E-050 LTE Reselection points and IRAT Thresholds Changes. Studies done in Massachusetts, El Paso, Puerto Rico, Oklahoma City, Lafayette, San Francisco and Chicago markets.
12/8/2014	FGA L14A-E-051 QciProfilePredefined-QCI2 MBR Changing from 350 to 400. Studies were done in Chicago.
1/15/2015	FGA L13B-E-052 LTE commonSrPeriodicity and noOfPucchSrUsers. The study was conducted in Los Angeles, Arkansas and other markets.
1/29/2015	PMATT 143729 SmallCell Ericsson / Outdoor / LTE/ mRBS AWS AP HW. FFA was done in Atlanta.
2/5/2015	FGA L13B/L14A-E-056 MCPC For Single Carrier and A2 Critical Change. The trials were done in Arkansas, Los Angles, San Francisco and Sacramento.
2/9/2015	FGA L14A-E-053 LTE Hicap Settings.The study was conducted in Oklahoma, Los Angeles, South Florida, Louisiana, Chicago and other markets.

designated
eral distribution



Updated By

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

John Smither for Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Judy Miller

Audit

Tool used for audit	Manual Auditing - As Needed MBBT
Owner	Dick Khan (925) 824-5388 Raja Gunasekaran (925) 824-7179
Org. of owner	MBBT - A&P
Frequency of MBBT Audit	Daily

KPIs

KPI Tools	KPI Links
LTE KPIs	http://ns.cingular.net/sites/EngOpsSup/E

Remediation History

Project title	Remediation Owner
PMATT 47064	Ron Maltoni
All FFA Changes will be tracked as part of the Project Remediation.	
serviceStateEcsCsfb and numberof Associations.	Chris Wyatt
LTE L11B FGA01 - Automated Neighbor Relations (ANR) adjustment	Chris Wyatt
Ericsson LTE Counter Activation Standard version 11.50	N/A
FGA L11B -002 RACH Preamble Change	Chris Wyatt
FGA L11B -003 Reselection Points and IRAT Threshold Changes	Chris Wyatt
PMATT 106000 Ericsson LTE L12a project.	Todd Chastain
LTE L11B FGA04 – eUTRAN PresenceAntennaPort1 Change	Chris Wyatt

LTE L11B FGA05 - Max RLC Retransmission Change	Ericsson
LTE L11B FGA06 - CDRX Parameter Change	Ericsson
PMATT 118863 L12B Software Release	NPMO
PMATT 118863 L12B Software Release	NPMO
FGA L12A-E-007 EUTRAN Event A2 Time to Trigger Changes	Chris Wyatt
PMATT 129145 The Antenna Integrated Radio (AIR)	NPMO
PMATT 118084 CMAS Parameter Changes	NPMO
PMATT #118863 L12B changes	Todd Chastain
FGA L12B-008 EUTRAN maximum cell range change	Chris Wyatt
FGA L12B-009 LTE Inter-Frequency Border Guideline	Ericsson/Vladimir Gusavac
L12B IP10 final maintenance release	NPMO
eCSFB Project.	NPMO
FGA L12B-E-010 LTE High Capacity	Ericsson/Vladimir Gusavac
FFA Clean-up	N/A
FGA L12B-E-011 LTE UL Power Control Parameters Change	Chris Wyatt
L13A RAN Software Release.	NPMO
LTE FGA L12B - E-012 cellIndividualOffsetEUTRAN	Chris Wyatt
LTE FGA L12B-E-013 ANR isHoAllowed and isRemoveAllowed	Chris Wyatt
L12B FGA-14 LTE DAS Site/ Cell Naming field change	Chris Wyatt
FGA L13A-E-015 EUTRAN RS Power Boost Change	Ericsson
PMATT 150958 VoLTE	Todd Chastain
FGA L13A 021 EUTRAN EventA2 Time to Trigger Change.	Chris Wyatt

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

FGA L13A-E-022 EUTRAN ANR RSRP Threshold and Remove Relation Timers	Chris Wyatt
FGA17 LTE 2C Layer Management For 10 MHz Low Band and 5 MHz Mid Band and Mike Noah Consolidation Project	Chris Wyatt
FGA 13A-E-027 QCIPProfilePredefined	Chris Wyatt
FGA L13A-E-023 LTE Hicap Settings.	Mkts/Chris Wyatt
FGA L13A-E-024 lte DI-FSS Feature Off	Chris Wyatt
GA L13A-E-025 LTE Reduce UL SE/TTI	Ericsson
FGA L13A-E-026 LTE Mobility	Chris Wyatt
PMATT 157212 Ericsson RRUS12	Barbara Henry
FGA L13A-E-028 LTE ENodeB GpsSyncRef	Chris Wyatt
FGA L13A-E-029 RoHC Deactivation	Chris Wyatt
FGA L13A-E-REM01 Remediation of the VoLTE Node Group Functional Category	Chris Wyatt
L13B Software Release	Todd Chastain
FGA L13A-E-030 LTE Venue/Event Site Manual Access Class Baring.	Market
FGA L13B-E-032 additionalPlmnList Changes.	Chris Wyatt
FGA L13A-E-035 TX2RelocOverall / TS1RelocOverall Change	Ericsson
FGA L13A-E-034 UtranFreqRelation.threshXLow and measReportConfigParams.b2Threshold2RscpUtraOffs	Chris Wyatt

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

FGA L13A-E-037 RoHC Reactivation. Chris Wyatt

PMATT 176945 Ericsson 3rd Carrier Todd Chastain
FGA L13A-E-0031 A5Threshold2Rsrp for Chris Wyatt
Multicarrier Parameter Change.

FGA L13A-E-038 Static QoS Chris Wyatt

L13B-E-036 PSHO and IRAT offload from LTE to Chris Wyatt
UMTS (IROW)

FGA W12B-E-040 EUTRAN Maximum Cell Chris Wyatt
Range Changes.

FGA L13B-E-041 Inter-Frequency Border Chris Wyatt
(interLTE) and Mixed Bandwidth (mixedBW)
Guideline Changes.

PMATT 172747 Ericsson L14A Upgrade Todd Chastain

FGA-E-022(Rev A) EUTRAN ANR RSRP Threshold and Remove Relation Timers	Chris Wyatt
FGA L13B-E-042 LTE b2Threshold2RscpUtraOffset parameters change for QCI8	Chris Wyatt
FGA L13B-E-048 Relative Priority Scheduling feature activation/QCI Subscription Quanta	Chris Wyatt
FGA L13B-E-045 ulMaxHARQTx & tReorderingUI Change	Chris Wyatt
FGA L13B-E-046 dlMaxHARQTx & tReorderingDI change for QCI8	Chris Wyatt
FGA L13B-E-047 ulNonGbrRatio and dlNonGbrRatio Change.	Chris Wyatt
FGA L13B-E-039 csFallbackPrio and csFallbackPrioEC Changes	Chris Wyatt
PMATT 184971 Ericsson Single Carrier 15/20MHz B2 (Multi-Carrier Feature Testing)	Steven Like/Ericsson
FGA L13B-E-049 LTE DL ICIC.	Chris Wyatt
FGA L14A-E-044 Activation of CA on B1>B4,, B5>B4, and B4>B5 Frequency Combinations.	Chris Wyatt
FGA L13B-E-050 LTE Reselection points and IRAT Thresholds Changes	Chris Wyatt
FGA L14A-E-051 QciProfilePredefined-QCI2 MBR Changing from 350 to 400	Chris Wyatt

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

FGA L13B-E-052 LTE commonSrPeriodicity and
noOfPucchSrUsers Chris Wyatt

PMATT 143729 SmallCell Ericsson / Outdoor /
LTE/ mRBS AWS AP HW Jonathan Beade

FGA L13B/L14A-E-056 MCPC For Single Carrier
and A2 Critical Change Chris Wyatt

FGA L14A-E-053 LTE Hicap Settings Chris Wyatt

above-designated
for general distribution



rk1348@att.comrg6282@att.com

http://lte.labs.att.com/audit_reports.html

KPI Descriptions

Standard LTE KPIs

Org. of Remediation Owner	Rem. Start	Rem. Complete
NP&E NPMO	6/15/2011	11/18/2011
GNO Provisioning	TBD	TBD
GNO Provisioning	TBD	TBD
N/A	N/A	N/A
GNO Provisioning		
GNO Provisioning		
NPMO		
GNO Provisioning		

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Vendor		
Vendor		
GNO Provisioning		
GNO Provisioning		
Vendor		
GNO Provisioning		
National PMO		
GNO Provisioning		
GNO Provisioning		
GNO Provisioning		
Vendor		
NPMO		
GNO Provisioning		

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GNO Provisioning		
GNO Provisioning		
GNO Provisioning		

Mkts

GNO Provisioning

Vendor

GNO Provisioning

NPMO

GNO Provisioning

GNO Provisioning

GNO Provisioning

NPMO

GNO Provisioning

Vendor

GNO Provisioning

GNO Provisioning

NPMO

GNO Provisioning

GNO Provisioning

GNO Provisioning

GNO Provisioning

GNO Provisioning

NPMO

GNO Provisioning

GNO Provisioning

GNO Provisioning

GNO Provisioning

GNO Provisioning

GNO Provisioning

GNO Provisioning

NPMO

GNO Provisioning

GNO Provisioning

GNO Provisioning

GNO Provisioning

GNO Provisioning

NPMO

GNO Provisioning

GNO Provisioning

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Remediation Progress
Remediation will be done as part of NGFC remediation.

Carrier restricted. Vendor Contacts
are David Burkholder
[david.burkholder@ericsson.com]
David Cuccia
[david.cuccia@ericsson.com]

Carrier restricted. Vendor Contacts
are David Burkholder
[david.burkholder@ericsson.com]
David Cuccia
[david.cuccia@ericsson.com]

Markets will be responsible for having
MNT do remediation.

Remediation to be done by Vendor

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for
general distribution

Markets should adjust the ANR RSRP value from the default -116dbm only in extreme cases where either the relation counts are unable to be decreased enough or a unique coverage issue where relations can be added below -116dbm. These should be extremely rare.

Mkts need to provide a list of venue/event sites to MNT.

Ericsson will implement with MNT Team.

Market Engineers will determine if changes need to be applied.

MNT can determine schedule. 50% of Network already set correctly.

Ericsson will provide schedule for MNT so they can create tickets.

The following VoLTE markets have priority and should be updated first.

- GEORGIA
- NORTH TEXAS
- MICHIGAN/INDIANA
- NORTH CAROLINA/SOUTH CAROLINA
- NEW ENGLAND
- SAN FRANCISCO/SACRAMENTO
- TENNESSEE/KENTUCKY
- VA/WVA
- LOS ANGELES
- NORTH FLORIDA
- OHIO/WESTERN PENNSYLVANIA
- SOUTH TEXAS
- UPSTATE NEW YORK
- ALABAMA/MISSISSIPPI/LOUISIANA
- ARKANSAS/OKLAHOMA
- ALABAMA/MISSISSIPPI/LOUISIANA
- SAN DIEGO/LAS VEGAS/HAWAII
- PUERTO RICO
- SEATTLE/OREGON/NO. ID

Changes made to this parameter take effect immediately. Please ensure that L13A-E-27 is loaded before this FGA is implemented.

LTE and UMTS changes need to be implemented concurrently. SON must be turned off.

Markets will need to create IWOS tickets with appropriate information for implementation.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Markets should adjust the ANR RSRP value from the default -116dbm only in extreme cases where either the relation counts are unable to be decreased enough or a unique coverage issue where relations can be added below -116dbm. These should be extremely rare. For any questions regarding the changes please contact Troy Ballard (tb1729@att.

The parameters ulMaxHARQTx and tReorderingUI are hidden parameters. Changes to these parameters will require an eNodeB restart. No action is needed by the markets.

The parameters dlMaxHARQTx and tReorderingDI are hidden parameters. Changes to these parameters will require an eNodeB restart verified in Northern California and Upstate New York trials. The Ericsson CPI needs to be modified to correctly state this in future documentation releases. No action is needed by the markets.

The existing MOP was generated by Ericsson. Markets will request quotation from Ericsson for the bandwidth expansion. However, we have engaged ATS and MPC and they have agreed to update existing AT&T MPC "Ericsson LTE Carrier Expansion MOP" for B2 and B4 (first) 10M to 15M/20M Carrier expansion.

This involves changes to both LTE and UMTS.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

This FGA52 should be only applied to eUtrancell hitting the max RRC connections (PMRRCConnMAX): 5 Mhz BW 810, and 10Mhz BW 640. It shall be noted that increasing SR periodicity will lead to higher latency.

MNT will combine FGA56 and FGA50 for Audit and Remediation.

CA can be activated on HiCap sites if the RRC Conn Max is equal to or less than 66% of NoOfPucchSrUsers for any given ROP. Activating CA at the recommended RRC Conn Max level will not cause any degradation to Accessibility or Retainability or any other KPIs. **Otherwise CA is not recommended on HiCap sites.** If any site exceeds the recommend RRC Conn Max and it is already has the CA activated, it is recommended to reverse the CA feature. For Any Hi Cap CA activation questions, please contact Daniel Kwakye at dk7028@att.com.

Gold Standard Voting History - Ericsson LTE

Date	Vote topic
3/31/2011	Initial Version of Document
6/9/2011	Phase 1 Launch. Final GSGB Aproval.

6/23/2011	Changes for Phase I Launch Drop 2.5,
7/21/2011	Clean-up
9/1/2011	FFA Clean-up and E911 parameter change

10/13/2011	11.57 FFA Changes
10/27/2011	11.58 FFA Changes
12/15/2011	Audit Tool Clean-up

2/2/2012	LTE L11B FGA02 - RACH Preamble Change and L11B -003 Reselection Points and IRAT Threshold Changes
7/Jun/12	PMATT 106000 Ericsson LTE L12A Release
21/Jun/12	LTE L11B FGA04 - eUTRAN PresenceAntennaPort1 Change

29/Oct/12	PMATT Project 118863 L12B Software Release FFA Changes, CAS Tab Update and other misc clean-up changes
13/Dec/12	PMATT Project 129145 AIR FGA L12A-E-007 EUTRAN Event A2 Time to Trigger Changes Updated STD L12B Counter Profile Tab License Upates per CNS Audit
7/Jan/13	PMATT Project 129145 AIR PMATT Project 118084 CMAS

1/Mar/13	FGA L12B 008 EUTRAN Maximum Cell Range Change. FGA L12B-009 LTE Inter-Frequency Border Guideline
7/Mar/13	L12B IP10 SW Rollout eCSFB Project

29/Mar/13	FGA L12B-E-010 introduces LTE High Capacity parameter settings
29/Apr/13	Misc Changes
9/May/13	PMATT 031365 IPv6 Transport Change, TWAMP and Misc Cleanup

4/Jun/13	FGA L12B-E-11 LTE UL Power Control Parameters Change
12/Jun/13	L13A RAN Software Release

18/Jun/13	FGA L12B-E-012 cellIndividualOffsetEUtran change FGA L12B-E-013 ANR isHoAllowed and isRemovedAllowed SettingsChanges
23/Jul/13	L12B FGA-14 LTE DAS Site/ Cell Naming field change

23/Aug/13	L12B FGA-015 EUTRAN RS Power Boost Change & Clean-up
29/Aug/13	PMATT 150958 VoLTE Changes and Clean-up

18/Oct/13 FGA L13A 021 EUTRAN EventA2 Time to Trigger Change.



5/Dec/13 FGA17 LTE 2C Layer Management For 10 MHz Low Band and 5 MHz Mid Band
and Mike Noah Consolidation Project



22/Jan/14 FGA 13A-E-027 QCIPProfilePredefined & Misc Corrections



31/Jan/14 FGA L13A-E-023 LTE Hicap Settings.
FGA L13A-E-024 lte DI-FSS Feature Off
GA L13A-E-025 LTE Reduce UL SE/TTI
FGA L13A-E-026 LTE Mobility
PMATT 157212 Ericsson RRUS12



31/Jan/14 FGA L13A-E-028 LTE ENodeB GpsSyncRef

7/Mar/14 FGA L13A-E-029 RoHC Deactivation
FGA L13A-E-REM01 Remediation of the VoLTE Node
Group Functional Category
Document Corrections and Clean-up

24/Mar/14 Clean-up and Corrections

8/May/14 W13B Software Release



16/May/14 FGA L13A-E-030 LTE Venue/Event Site Manual Access Class Baring.
FGA L13B-E-032 additionalPlmnList Changes.
FGA L13A-E-035 TX2RelocOverall / TS1RelocOverall Change



27/May/14 FGA L13A-E-033 and Misc Cleanup



12/May/14

FGA L13A-E-034 UtranFreqRelation.threshXLow and
measReportConfigParams.b2Threshold2RscpUtraOffs

FGA L13A-E-037 RoHC Reactivation

24/Jun/14

PMATT 176945 Ericsson 3rd Carrier

FGA L13A-E-0031 A5Threshold2Rsrp for Multicarrier Parameter Change.

26/Jun/14 FGA L13A-E-038 Static QoS



10/Jul/14 L13B-E-036 PSHO and IRAT offload from LTE to UMTS (IROW)



30/Jul/14 Clean-up/Add Suffixes to L13B-E-036 PSHO and IRAT offload from LTE to UMTS (IROW)



1/Aug/14 Various corrections/changes/OTDOA E911 Correction



25/Aug/14 FGA W12B-E-040 EUTRAN Maximum Cell Range Changes.



29/Aug/14 FGA L13B-E-041 Inter-Frequency Border (interLTE) and Mixed Bandwidth
(mixedBW) Guideline Changes



9/Oct/14 PMATT 172747 Ericsson L14A Upgrade.



20/Oct/14 FGA-E-022(Rev A) EUTRAN ANR RSRP Threshold and Remove Relation Timers
FGA L13B-E-042 LTE b2Threshold2RscpUtraOffset parameters change for QCI8
FGA L13B-E-048 Relative Priority Scheduling feature activation/QCI Subscription
Quanta
FGA L13B-E-043 Enable Inter-Frequency ANR for Cell in Multi Carrier Border.
FGA L13B-E-045 ulMaxHARQTx & tReorderingUI Change
FGA L13B-E-046 dlMaxHARQTx & tReorderingDI change for QCI8



3/Nov/14 FGA L13B-E-047 ulNonGbrRatio and dlNonGbrRatio Change
(approved on 10/20 but MOP and RA not completed)



11/Nov/14 FGA L13B-E-039 csFallbackPrio and csFallbackPrioEC Changes.



20/Nov/14

PMATT 184971 Ericsson Single Carrier 15/20MHz B2 (Multi-Carrier Feature Testing)
FGA L13B-E-049 LTE DL ICIC



8/Dec/14

Activation of CA on B17>B4,, B5>B4, and B4>B5 Frequency Combinations
FGA L13B-E-050 LTE Reselection points and IRAT Thresholds Changes
FGA L14A-E-051 QciProfilePredefined-QCI2 MBR Changing from 350 to 400



15/Jan/15

FGA L13B-E-052 LTE commonSrPeriodicity and noOfPucchSrUsers

29/Jan/15 PMATT 143729 SmallCell Ericsson / Outdoor / LTE/ mRBS AWS AP HW
LTE32 Corrections
LTE33 Corrections

5/Feb/15 FGA L13B/L14A-E-056 MCPC For Single Carrier and A2 Critical Change

9/Feb/15 RAN Ericsson LTE eNodeB FGA L14A/L13B-E-053 LTE Hi-Cap Settings

or any above-designated
and not for general distribution

Stakeholder	Person(s) Voting	Approve?
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Hongyan Lei for David Orloff	Yes
NP&E Layer 4+	Dan McCartney for Rob Young	Yes
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	Yes
NP&E Global Network Planning	Mike Scott	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	Marc Sather for Kelly Springer	Yes
A&P	Pradeep Kunjunny for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Steve King for Muhammad Gill	Yes
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E Global Network Planning	Mohammad Azeem for Mike Scott	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes

GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Pradeep Kunjunny for David Orloff	Yes
NP&E Layer 4+	Rob Young	Follow-up
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	Yes
NP&E RAN Engineering	Steve King for Muhammad Gill	Yes
NP&E Global Network Planning	Mike Scott	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Hongyan Lei for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E Global Network Planning	Abdul Abbuthalha for Mike Scott	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	Elaine Sze for Kelly Springer	Yes
A&P	Hongyan Lei for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Steve King for Muhammad Gill	Yes
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E Global Network Planning	N/A	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Hongyan Lei for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E Global Network Planning	N/A	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Hongyan Lei for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	Steve King for Muhammad Gill	Yes
NP&E Global Network Planning	Sam Pearson for Mike Scott Kaushik Gohel for David Carroll	Yes Yes Conditioned upon synchronization with ALU
GNO Core OPS	N/A	
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Hongyan Lei for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Sam Pearson for Mike Scott Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Hongyan Lei for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Sam Pearson for Mike Scott Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	
AT&T Labs	N/A	
A&P	Hongyan Lei for David Orloff	
NP&E Layer 4+	N/A	
NP&E Layer 0 - 3	N/A	
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E RAN Engineering	N/A	
NP&E Global Network Planning	Sam Pearson for Mike Scott Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	
GNO MNRC	Fadi Yashruti for Jorge Vidal	
GNO ATS	Ray Webber for Mike Stephens	
GNO Provisioning	Richard Fakes	
GS Document Owner	Pradeep Kunjunny	
AT&T Labs	N/A	
A&P	Hongyan Lei for David Orloff	
NP&E Layer 4+	N/A	
NP&E Layer 0 - 3	N/A	
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	
NP&E RAN Engineering	N/A	
NP&E Global Network Planning	Sam Pearson for Mike Scott Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	
GNO MNRC	Fadi Yashruti for Jorge Vidal	
GNO ATS	Ray Webber for Mike Stephens	
GNO Provisioning	Richard Fakes	
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Hongyan Lei for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Pradeep Kunjunny for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Jorge Vidal	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/a
NP&E RAN Engineering	Chris Hristov for Tim Hiemenz	yES

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
GS Document Owner	Pradeep Kunjunny	
AT&T Labs	N/A	
A&P	Wen Yang for Pradeep Kunjunny	
NP&E Layer 4+	N/A	
NP&E Layer 0 - 3	N/A	
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	
NP&E RAN Engineering	N/A	
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	
GNO MNRC	Fadi Yashruti for Matt Sanders	
GNO ATS	Imtiaz Malik for Mike Stephens	
GNO Provisioning	Chris Wyatt for Richard Fakes	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Vladimir Gusavac for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Vladimir Gusavac for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
GS Document Owner	Joe Dear for Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Joe Dear for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Jay Nelson for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
GS Document Owner	Joe Dear for Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Joe Dear for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Jay Nelson for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	Chris Chen	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	Chris Chen	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	Chris Chen	
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	
Metrics (NP&E Layer 4+)	Chris Chen	Yes
NASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	
Metrics (NP&E Layer 4+)	Chris Chen	Yes
NASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Noman Ghazali for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Noman Ghazali for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Gagan Jeji for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Brian Rivers for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Shandy Alverson for Richard Fakes	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	
AT&T Labs	N/A	
A&P	Wen Yang for Pradeep Kunjunny	
NP&E Layer 4+	N/A	
NP&E Layer 0 - 3	N/A	
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	
NP&E RAN Engineering	N/A	
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	
GNO MNRC	Fadi Yashruti for Matt Sanders	
GNO ATS	Ben Perry for Mike Stephens	
GNO Provisioning	Shandy Alverson for Richard Fakes	
Metrics (NP&E Layer 4+)	N/A	
NASG	Mehdi Razvi for Niraj Shah	
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	
GNO ATS	Ray Webber for Mike Stephens	
GNO Provisioning	Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	
NASG	Mehdi Razvi for Niraj Shah	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
NASG	Mehdi Razvi for Niraj Shah	Yes

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Anthony Sam for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Anthony Sam for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Fadi Yashruti for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	
AT&T Labs	N/A	
A&P	WenYang for Pradeep Kunjunny	
NP&E Layer 4+	N/A	
NP&E Layer 0 - 3	N/A	
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	
NP&E RAN Engineering	N/A	
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	
GNO MNRC	Fadi Yashruti for Matt Sanders	
GNO ATS	Imtiaz Malik for Mike Stephens	
GNO Provisioning	Chris Wyatt for Richard Fakes	
Metrics (NP&E Layer 4+)	N/A	
ASG	Mehdi Razvi for Niraj Shah	
No Approval Required.		
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Anthony Sam for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

ASG	Mehdi Razvi for Niraj Shah	
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	No Response
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Noman Ghazali for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Anthony Sam for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Anthony Sam for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	No Response
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes

GS Document Owner	Yi Zhang for Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Anthony Sam for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Dan Mahaik for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes

No Approvals required.

GS Document Owner	Wen Yang	Yes
AT&T Labs	Marc Sather for Kelly Springer	Yes
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Jing Xu for Tim Hiemenz	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	No Response
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders Lien Dao for Tom Stidham	Yes Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	No Response
GNO Core OPS	N/A	N/A
GNO MNRC	Michael Blackshaw for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Mehdi Razvi for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	
NP&E Layer 0 - 3	N/A	
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GNO MNRC	Chris Funkhouser for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	
ASG	Mehdi Razvi for Niraj Shah	Yes

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Gagan Jeji for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Michael Blackshaw for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	Yes

GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

ASG	Lamberto Pisani for Niraj Shah	Yes
GS Document Owner	Wen Yang	Yes
AT&T Labs	N/A	N/A
A&P	Wen Yang for Pradeep Kunjunny	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	N/A	N/A
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	Yes
GS Document Owner MACRO	Wen Yang	
GS Document Owner mRBS	Ahmad Mansour	Yes
A&P	Wen Yang for Pradeep Kunjunny	
Labs	Ahmad Mansour for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	Zhonghua Qin for Kurt Huber	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Stu Robertson for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	
GS Document Owner MACRO	Wen Yang	Yes
GS Document Owner mRBS	Ahmad Mansour	Yes
A&P	Wen Yang for Pradeep Kunjunny	Yes
Labs	Ahmad Mansour for David Orloff	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	Zhonghua Qin for Kurt Huber	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Ben Perry for Mike Stephens	
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	

GS Document Owner MACRO	Wen Yang	Yes
GS Document Owner mRBS	Ahmad Mansour	Yes
A&P	Wen Yang for Pradeep Kunjunny	Yes
Labs	Ahmad Mansour for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	Zhonghua Qin for Kurt Huber	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	Yes

GS Document Owner MACRO	Wen Yang	Pending Review
GS Document Owner mRBS	Ahmad Mansour	Yes
A&P	Wen Yang for Pradeep Kunjunny	Pending Review
Labs	Ahmad Mansour for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	Zhonghua Qin for Kurt Huber	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	No Response

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	Yes
GS Document Owner MACRO	Wen Yang	Yes
GS Document Owner mRBS	Ahmad Mansour	Yes
A&P	Wen Yang for Pradeep Kunjunny	Yes
Labs	Ahmad Mansour for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Mike Noah for Tim Hiemenz	Yes
NP&E RAN Engineering	Zhonghua Qin for Kurt Huber	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	No Response
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Ray Webber for Mike Stephens	Yes
GNO Provisioning	Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	Yes
GS Document Owner MACRO	Wen Yang	Yes
GS Document Owner mRBS	Ahmad Mansour	Yes
A&P	Wen Yang for Pradeep Kunjunny	Yes
Labs	Ahmad Mansour for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	Zhonghua Qin for Kurt Huber	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	Yes
GNO Core OPS	N/A	N/A

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	Yes
GS Document Owner MACRO	Wen Yang	Yes
GS Document Owner mRBS	Ahmad Mansour	Yes
A&P	Wen Yang for Pradeep Kunjunny	Yes
Labs	Ahmad Mansour for David Orloff	Yes
NP&E Layer 4+	N/A	N/A
NP&E Layer 0 - 3	N/A	N/A
NP&E RAN Engineering	Rich Caine for Tim Hiemenz	Yes
NP&E RAN Engineering	Zhonghua Qin for Kurt Huber	Yes
NP&E Global Network Planning	Kaushik Gohel for David Carroll	No response
GNO Core OPS	N/A	N/A
GNO MNRC	Lance Hastings for Matt Sanders	Yes
GNO ATS	Imtiaz Malik for Mike Stephens	Yes
GNO Provisioning	Chris Wyatt for Richard Fakes	Yes
Metrics (NP&E Layer 4+)	N/A	N/A
ASG	Lamberto Pisani for Niraj Shah	Yes

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

[illegible]

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

[illegible]

























Post Governance Board Communications Plan: LTE

Purpose: The Communication Plan serves as notification to affected groups that 3G RAN configurations have been changed. Remediation may be required. Listed below are Key Contacts, Guidelines, Email Distribution Lists, and Meeting Information for GSGB standards.

Alert Notifications

Description: Listed below is information describing how to sign up and receive alert notifications from the GSGB.

[Visit Web Site Location and use the Job Aid instructions to sign up for alert notices:https://operations.wireless.att.com/operations/Alerts/Alerts.aspx](https://operations.wireless.att.com/operations/Alerts/Alerts.aspx)

Affected Groups

Description: Listed below are the groups affected by the 3G RAN configuration standards.

NP&E RAN (3G RAN), MPC (GPC) Core, MPC (RFPC) RAN, A&P Labs

Key Communication Contacts

Description: This chart contains key individuals that need to be contacted and/or notified of configuration changes.

Name	ATTUID	Role
Michael Noah	MN9741	Ericsson
Chris Hristov	HH6807	RAN Board
Judy Miller	JM4459	GSGB
Rick Flournoy	RF9921	Manager
Christopher R. Wyatt	CW7534	Manager
Raj Gunasekaran	RG6282	MBBT
Prasanna Thulasiram	PT4568	ALU Project
Jaco du Plooy	pt4568	Ericsson
Salokya Tummala	Email	ALU Vendor
Manoj Mahapatra	Email	ALU Vendor
Sundararajan Venugopalan	Email	ALU Vendor
Victor Wilkins	Email	ALU Vendor
Dipankar Ray	Email	Ericsson

Configuration Change Guidelines

Description: The Configuration Change Request Guidelines provide the rules and names of individuals that request updates to the approved GSGB standards. In order to make future changes to the approved standards, a request must be submitted to the GSGB for final review and approval.

How to Submit a Change Request?

Create and Submit an IWOS ticket for your change request to GPC or RFPC.

Alert - **National Gold Standard Teams** are **approved** to make configurations change: (Stakeholder)

IWOS Contracts

- Global Parameter Configurations (**GPC**) - **Rick Flournoy (RF9921@att.com)**
GPC handles GS remediation from the RNC to the Core (MSC)
IWOS Group: NSNA Global Parameter Provisioning
- Radio Frequency Parameter Configuration (RFPC) - **Christopher R. Wyatt (cw7534)**
RFPC handles GS remediation from RNC (BSS) to Node B (including cell/sector)
IWOS Group: NSNA RF Parameter Configuration

Configurations changes are made based on the Gold Standard Audit results

Email & Meeting Information

Description: RAN Stakeholders will send a Broadcast Email Notification to their affective parties and hold remediation of the configurations.

Email Distribution List - contains the URL Address for the National Email Directory distribution lists. They automatically be notified of the RAN 3G forum meetings.

Meeting Type - contains the pre-defined forum meeting information to discuss the RAN 3G configuration Standards is warranted to the broader RAN team the GSGT PM and/or the Remediation Owner could be

Special Note: *Individuals already subscribed to the National Distribution lists for the UTRAN vendor, will*

Type	Title	Frequency	Start Time (CST)
Meeting	Ericsson Best Practices	Monday	12:00 PM
Meeting	Ericsson Forum	Bi-Weekly Friday	1:00 PM
Email Dist List	AT&T/Ericsson National UTRAN Forum	n/a	n/a
Meeting	ALU Best Practices	Monday	2:00 PM
Meeting	ALU Forum	Bi-Weekly Monday	10:00 AM
Email Dist List	AT&T/ALU National UTRAN Forum	n/a	n/a

Please contact Revenda Bannerman (rb8624@att.com) with any proc



1 approved by the Gold Standard Governance Board (GSGB) and
ormation needed to request Configuration Changes to the approved

e GSGB Project Managers for mobility network elements.

web.att.com/sites/GoldStandard/Data%20Sharing/GS_Alerts.aspx



n change requests to the approved RAN 3G GSGB Standards.

Role
on UTRAN Primary RAN Stakeholder
est Practices/Optimization Stakeholder
PM
er of Network (Core)
er of Network (RAN & RF)
Tool - AT&T Labs
imary RAN Stakeholder (Posts GS Document to ALU
on Vendor
endor
endor
endor
endor
on Vendor

authorized by the RAN/MPC National Gold Standard Teams to
standards, you must submit a change request, which will be re-

s to the nodes unless, deemed necessary by the HQ RAN team

@att.com)

d discussion meetings on the acceptance and possible

his is a self subscribed email distribution list. All subscribers will

ns. In the event that further explanation of the approved Gold
e invited to participate in the following RAN meetings.

ll automatically get notified about the Bi-weekly meetings.

Host and Contact Information
Michael Noah (mn9741) / Vladimir Gusavac (vg0136)
Michael Noah (mn9741) / Vladimir Gusavac (vg0136)
Michael Noah (mn9741) / Vladimir Gusavac (vg0136) URL: ' ns_umts-ericsson-rf-engineering@nas01.sc.attws.com '
Manish Vaishnav (mv8600) / Prasanna Thulasiram (pt4568)
Manish Vaishnav (mv8600) / Prasanna Thulasiram (pt4568)
Manish Vaishnav (mv8600) / Prasanna Thulasiram (pt4568) URL: ' ns_umts-lucent-rf-engineering@nas01.sc.attws.com '

edure and/or contact updates.

Parameter Definitions - Ericsson

Term
HW/SW load
MOC
Resolution
Node Group
Node Group Functional Category
Suffix 1
Node Group Functional Category
Call Establishment
Handover and Cell Reselection
Radio Connection supervision
Power Control
Admission Control and Capacity management
Load Management
Scheduling
eNB Hardware & Antenna parameters
SON Parameters
QoS
IP Transport
Positioning/911
Software

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

son LTE

Definition

First release of Gold Standard for LTE is for L11A release and new parameters in future releases will be indicated here.

Managed Object Class

Node impacted by the parameter change. Vendor Agnostic.

Node where the parameter resides, to be accessed to change its configuration. Vendor Agnostic.

Main UTRAN functional categories. Each functional category is governed by a subset of parameters. Vendor Agnostic.

Suffix used to specialize a parameter to a particular node configuration or profile

Short Description

Access parameters, Idle mode parameters...

Handover, Intra, Inter-RAT Mobility, Measurement configuration, ..

Radio link control parameters..

DL transmit power and UL power control parameters..

Capacity licensing, eNB capacity, load management

Load Management parameters (for a call in progress) and others

Schedulers, Link adaptation, HARQ parameters..

eNB hardware & MIMO parameters...

Automatic Neighbor tuning parameters...

QoS class parameters

IP Transport parameters

Investigate the timelines on Positioning related parameters for LTE and 911 call

Program, load module, configuration and any other software related parameters .

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution



Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Ericsson LTE L13B and L14A eNodeB Master Parameter List

Legend

Group

five

Syst

Loca

Imp

NOT

audi

ReCe

Nam

HW/SW load	MOC	NAKINA MOC	Parameter
L14A	EUtranFreqRelation=interLTE	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=interLTE	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=LB to LB, multiCarrier LB/10 MB/10	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=LB to LB, multiCarrier LB/10 MB/10	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=LB to LB, multiCarrier LB/10 MB/5	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=LB to LB, multiCarrier LB/10 MB/5	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=LB to LB, multiCarrier LB/5 MB/10	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=LB to LB, multiCarrier LB/5 MB/10	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=LB to LB, multiCarrier LB/5 MB/5	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=LB to LB, multiCarrier LB/5 MB/5	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=LB to MB, multiCarrier LB/10 MB/10	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=LB to MB, multiCarrier LB/10 MB/10	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=LB to MB, multiCarrier LB/10 MB/5	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=LB to MB, multiCarrier LB/10 MB/5	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=LB to MB, multiCarrier LB/5 MB/10	EUtranFreqRelation	cellReselectionPriority

L13B	EUtranFreqRelation=LB to MB, multiCarrier LB/5 MB/10	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=LB to MB, multiCarrier LB/5 MB/5	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=LB to MB, multiCarrier LB/5 MB/5	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=MB to LB, multiCarrier LB/10 MB/10	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=MB to LB, multiCarrier LB/10 MB/10	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=MB to LB, multiCarrier LB/10 MB/5	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=MB to LB, multiCarrier LB/10 MB/5	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=MB to LB, multiCarrier LB/5 MB/10	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=MB to LB, multiCarrier LB/5 MB/10	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=MB to LB, multiCarrier LB/5 MB/5	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=MB to LB, multiCarrier LB/5 MB/5	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=MB to MB, multiCarrier LB/10 MB/10	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=MB to MB, multiCarrier LB/10 MB/10	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=MB to MB, multiCarrier LB/10 MB/5	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=MB to MB, multiCarrier LB/10 MB/5	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=MB to MB, multiCarrier LB/5 MB/10	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=MB to MB, multiCarrier LB/5 MB/10	EUtranFreqRelation	cellReselectionPriority
L14A	EUtranFreqRelation=MB to MB, multiCarrier LB/5 MB/5	EUtranFreqRelation	cellReselectionPriority
L13B	EUtranFreqRelation=MB to MB, multiCarrier LB/5 MB/5	EUtranFreqRelation	cellReselectionPriority

All nodes have the same
 setting
 em Constant:
 l: Set to local requirements
 ortant to mRBS
 Auditable: Parameter is not
 table
 ent update: Highlight Parameter
 ie Only

AT&T Proprietary (Restricted)
 Only for use by authorized individuals or any above-designated
 team(s) within the AT&T companies and not for general distribution

Suffix 1	AT&T Gold Standard	Initial Value (Only to be used by Ericsson when building a new site)	Vendor Recommended	Range
interLTE	5			
interLTE	5			
LB to LB, multiCarrier LB/10 MB/10	4			
LB to LB, multiCarrier LB/10 MB/10	4			
LB to LB, multiCarrier LB/10 MB/5	5			
LB to LB, multiCarrier LB/10 MB/5	5			
LB to LB, multiCarrier LB/5 MB/10	4			
LB to LB, multiCarrier LB/5 MB/10	4			
LB to LB, multiCarrier LB/5 MB/5	4			
LB to LB, multiCarrier LB/5 MB/5	4			
LB to MB, multiCarrier LB/10 MB/10	5			
LB to MB, multiCarrier LB/10 MB/10	5			
LB to MB, multiCarrier LB/10 MB/5	5			
LB to MB, multiCarrier LB/10 MB/5	5			
LB to MB, multiCarrier LB/5 MB/10	5			

LB to MB, multiCarrier LB/5 MB/10	5
LB to MB, multiCarrier LB/5 MB/5	5
LB to MB, multiCarrier LB/5 MB/5	5
MB to LB, multiCarrier LB/10 MB/10	4
MB to LB, multiCarrier LB/10 MB/10	4
MB to LB, multiCarrier LB/10 MB/5	5
MB to LB, multiCarrier LB/10 MB/5	5
MB to LB, multiCarrier LB/5 MB/10	4
MB to LB, multiCarrier LB/5 MB/10	4
MB to LB, multiCarrier LB/5 MB/5	4
MB to LB, multiCarrier LB/5 MB/5	4
MB to MB, multiCarrier LB/10 MB/10	5
MB to MB, multiCarrier LB/10 MB/10	5
MB to MB, multiCarrier LB/10 MB/5	5
MB to MB, multiCarrier LB/10 MB/5	5
MB to MB, multiCarrier LB/5 MB/10	5
MB to MB, multiCarrier LB/5 MB/10	5
MB to MB, multiCarrier LB/5 MB/5	5
MB to MB, multiCarrier LB/5 MB/5	5

Unit	Permission	Resolution	Node Group	Node Group Functional Category	Reference
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	FGA L13B-E-041
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	FGA L13B-E-041
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	
	Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection	

Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection
Global	eNB	Radio (OSS) Operator Read/Write	Handover and Cell Reselection

E911 Testing Type	GS Version	GS Type		
-------------------	------------	---------	--	--

14.00
13.25
14.00
13.24
14.00
13.24
14.00
13.24
14.00
13.24
14.00
13.24
14.00
13.24
14.00

13.24
14.00
13.24
14.00
13.24
14.00
13.24
14.00
13.24
14.00
13.24
14.00
13.24
14.00
13.24
14.00
13.24

**Ericsson LTE L14B eNodeB Counter Activation
Standard**

Resolution	MO:Counter
eNb	AdmissionControl:pmAdmNrRrcUnknownArpRatio
eNb	BbProcessingResource:pmLicDlCapActual
eNb	BbProcessingResource:pmLicDlCapDistr
eNb	BbProcessingResource:pmLicDlPrbCapActual
eNb	BbProcessingResource:pmLicDlPrbCapDistr
eNb	BbProcessingResource:pmLicUlCapActual
eNb	BbProcessingResource:pmLicUlCapDistr
eNb	BbProcessingResource:pmLicUlPrbCapActual
eNb	BbProcessingResource:pmLicUlPrbCapDistr
eNb	BbProcessingResource:pmPdcPktDiscDlEth
eNb	BbProcessingResource:pmPdcPktDiscDlEthBurst
eNb	BbProcessingResource:pmPdcPktDiscDlEthFormat
eNb	BbProcessingResource:pmPdcPktDiscDlEthX2Fwd
eNb	BbProcessingResource:pmPdcPktDiscDlNoMbmsCtxt
eNb	BbProcessingResource:pmPdcPktDiscDlNoUeCtxt
eNb	BbProcessingResource:pmPdcPktDiscUlEthPacing
eNb	BbProcessingResource:pmRohcCidSamp
eNb	BbProcessingResource:pmRohcCidSum
eNb	BbProcessingResource:pmZtemporary47
eNb	BbProcessingResource:pmZtemporary48
eNb	BbProcessingResource:pmZtemporary49
eNb	BbProcessingResource:pmZtemporary50
eNb	BbProcessingResource:pmZtemporary51
eNb	BbProcessingResource:pmZtemporary52
eNb	BbProcessingResource:pmZtemporary53
eNb	BbProcessingResource:pmZtemporary54
eNb	CapacityConnectedUsers:pmLicConnectedUsersActual
eNb	CapacityConnectedUsers:pmLicConnectedUsersDistr
eNb	CapacityConnectedUsers:pmLicConnectedUsersLevSa
eNb	CapacityConnectedUsers:pmLicConnectedUsersLevSu
eNb	CapacityConnectedUsers:pmLicConnectedUsersLicense
eNb	CapacityConnectedUsers:pmLicConnectedUsersMax
eNb	CapacityConnectedUsers:pmLicConnectedUsersTimeCc
eNb	CapacityConnectedUsers:pmZtemporary38
eNb	CapacityConnectedUsers:pmZtemporary39
eNb	Cdma20001xRttCellRelation:pmHoPrepAtt1xRttSrvcc
eNb	Cdma20001xRttCellRelation:pmHoPrepAttCsfb

eNb	Cdma20001xRttCellRelation:pmHoPrepAttCsfbEm
eNb	Cdma20001xRttCellRelation:pmHoPrepSucc1xRttSrvcc
eNb	Cdma20001xRttCellRelation:pmHoPrepSuccCsfb
eNb	Cdma20001xRttCellRelation:pmHoPrepSuccCsfbEm
eNb	DefaultRouter:pmNoOfFailedPingsDefaultRouter
eNb	DIBasebandCapacity:pmLicDIBCapLicense
eNb	DIBasebandCapacity:pmZtemporary40
eNb	DIPrbCapacity:pmLicDIPrbCapLicense
eNb	DIPrbCapacity:pmZtemporary42
eNb	DnsClient:pmDnsResCounterNotExistResponses
eNb	DnsClient:pmDnsResCounterStandardQueries
eNb	DnsClient:pmDnsResOptCounterNoResponses
eNb	DscpGroup:pmIfStatsDscplnOctets
eNb	DscpGroup:pmIfStatsDscplnPmts
eNb	DscpGroup:pmIfStatsDscpOutOctets
eNb	DscpGroup:pmIfStatsDscpOutPmts
eNb	ENodeBFunction:pmLic5MHzSectorCarrierActual
eNb	ENodeBFunction:pmMoFootprintMax
eNb	ENodeBFunction:pmPagS1DiscDistr
eNb	ENodeBFunction:pmPagS1Discarded
eNb	ENodeBFunction:pmPagS1RecDistr
eNb	ENodeBFunction:pmPagS1Received
eNb	ENodeBFunction:pmZtemporary34
eNb	ENodeBFunction:pmZtemporary35
eNb	EUtranCellFDD:pmAccessClassBarringCsfbDistr
eNb	EUtranCellFDD:pmAccessClassBarringEm
eNb	EUtranCellFDD:pmAccessClassBarringModDistr
eNb	EUtranCellFDD:pmAccessClassBarringMosDistr
eNb	EUtranCellFDD:pmActiveDrbDISum
eNb	EUtranCellFDD:pmActiveDrbDISumQci
eNb	EUtranCellFDD:pmActiveDrbUISum
eNb	EUtranCellFDD:pmActiveUeDIMax
eNb	EUtranCellFDD:pmActiveUeDISectorCarrierDistr
eNb	EUtranCellFDD:pmActiveUeDISum
eNb	EUtranCellFDD:pmActiveUeDISumQci
eNb	EUtranCellFDD:pmActiveUeDrbSamp
eNb	EUtranCellFDD:pmActiveUeUIMax
eNb	EUtranCellFDD:pmActiveUeUISectorCarrierDistr
eNb	EUtranCellFDD:pmActiveUeUISum
eNb	EUtranCellFDD:pmActiveUeUISumLcg
eNb	EUtranCellFDD:pmAdjustAccessDynLoadCtrl
eNb	EUtranCellFDD:pmAdjustAccessMpLoadCtrl
eNb	EUtranCellFDD:pmAnrNeighbreIAdd
eNb	EUtranCellFDD:pmAnrNeighbreIRem
eNb	EUtranCellFDD:pmBadCovEvalReport

eNb	EUtranCellFDD:pmBadCovSearchEvalReport
eNb	EUtranCellFDD:pmBestCellEvalReport
eNb	EUtranCellFDD:pmCaActivatedDISum
eNb	EUtranCellFDD:pmCaAssignedCsSetsDistr
eNb	EUtranCellFDD:pmCaCapableDISamp
eNb	EUtranCellFDD:pmCaCapableDISum
eNb	EUtranCellFDD:pmCaConfiguredDISamp
eNb	EUtranCellFDD:pmCaConfiguredDISum
eNb	EUtranCellFDD:pmCaConfiguredMeasAtt
eNb	EUtranCellFDD:pmCaConfiguredMeasSucc
eNb	EUtranCellFDD:pmCaConfiguredNoMeasAtt
eNb	EUtranCellFDD:pmCaConfiguredNoMeasSucc
eNb	EUtranCellFDD:pmCaConfiguredSamp
eNb	EUtranCellFDD:pmCaDeconfigured
eNb	EUtranCellFDD:pmCaDeconfiguredLostCoverage
eNb	EUtranCellFDD:pmCaDeconfiguredSCellChange
eNb	EUtranCellFDD:pmCaDeconfiguredSamp
eNb	EUtranCellFDD:pmCaScheduledDISum
eNb	EUtranCellFDD:pmCellAdmControlPdcchRej
eNb	EUtranCellFDD:pmCellAdmControlPdcchRejMeas
eNb	EUtranCellFDD:pmCellDownLockAuto
eNb	EUtranCellFDD:pmCellDownLockMan
eNb	EUtranCellFDD:pmCellDownUnlockMan
eNb	EUtranCellFDD:pmCellDowntimeAuto
eNb	EUtranCellFDD:pmCellDowntimeMan
eNb	EUtranCellFDD:pmCellHoExeAttLteInterF
eNb	EUtranCellFDD:pmCellHoExeAttLteInterFMbms
eNb	EUtranCellFDD:pmCellHoExeAttLteIntraF
eNb	EUtranCellFDD:pmCellHoExeAttLteIntraFTuneOut
eNb	EUtranCellFDD:pmCellHoExeSuccLteInterF
eNb	EUtranCellFDD:pmCellHoExeSuccLteInterFMbms
eNb	EUtranCellFDD:pmCellHoExeSuccLteIntraF
eNb	EUtranCellFDD:pmCellHoExeSuccLteIntraFTuneOut
eNb	EUtranCellFDD:pmCellHoPrepAttLteInterF
eNb	EUtranCellFDD:pmCellHoPrepAttLteInterFMbms
eNb	EUtranCellFDD:pmCellHoPrepAttLteIntraF
eNb	EUtranCellFDD:pmCellHoPrepSuccLteInterF
eNb	EUtranCellFDD:pmCellHoPrepSuccLteInterFMbms
eNb	EUtranCellFDD:pmCellHoPrepSuccLteIntraF
eNb	EUtranCellFDD:pmCompUIDeltaSinrPuschDistr
eNb	EUtranCellFDD:pmContDI
eNb	EUtranCellFDD:pmContDICapLic
eNb	EUtranCellFDD:pmContDIHw
eNb	EUtranCellFDD:pmContDIPdcch
eNb	EUtranCellFDD:pmContUI

eNb	EUtranCellFDD:pmContUICapLic
eNb	EUtranCellFDD:pmContUIHw
eNb	EUtranCellFDD:pmContUIPdcch
eNb	EUtranCellFDD:pmCriticalBorderEvalReport
eNb	EUtranCellFDD:pmDIAssigsTrans
eNb	EUtranCellFDD:pmDIAssigsTransPCell
eNb	EUtranCellFDD:pmDIAssigsTransSCell
eNb	EUtranCellFDD:pmDIAssigsTransVolte
eNb	EUtranCellFDD:pmDIAssigsWithDetectedHarqAck
eNb	EUtranCellFDD:pmDIAssigsWithDetectedHarqAckPCell
eNb	EUtranCellFDD:pmDIAssigsWithDetectedHarqAckSCell
eNb	EUtranCellFDD:pmDIAssigsWithDetectedHarqAckVolte
eNb	EUtranCellFDD:pmDIAssigsWithUnknownReception
eNb	EUtranCellFDD:pmDIAssigsWithUnknownReceptionPCel
eNb	EUtranCellFDD:pmDIAssigsWithUnknownReceptionSCel
eNb	EUtranCellFDD:pmDIAssigsWithUnknownReceptionVolte
eNb	EUtranCellFDD:pmDrbThpTimeDIQci
eNb	EUtranCellFDD:pmDrxSleepTime
eNb	EUtranCellFDD:pmDrxTotalTime
eNb	EUtranCellFDD:pmErabEstabAttAdded
eNb	EUtranCellFDD:pmErabEstabAttAddedArp
eNb	EUtranCellFDD:pmErabEstabAttAddedHoOngoing
eNb	EUtranCellFDD:pmErabEstabAttAddedHoOngoingArp
eNb	EUtranCellFDD:pmErabEstabAttAddedHoOngoingQci
eNb	EUtranCellFDD:pmErabEstabAttAddedPa
eNb	EUtranCellFDD:pmErabEstabAttAddedQci
eNb	EUtranCellFDD:pmErabEstabAttInit
eNb	EUtranCellFDD:pmErabEstabAttInitArp
eNb	EUtranCellFDD:pmErabEstabAttInitPa
eNb	EUtranCellFDD:pmErabEstabAttInitQci
eNb	EUtranCellFDD:pmErabEstabFailAddedLic
eNb	EUtranCellFDD:pmErabEstabFailGbrDIEnb
eNb	EUtranCellFDD:pmErabEstabFailGbrUIEnb
eNb	EUtranCellFDD:pmErabEstabFailInitLic
eNb	EUtranCellFDD:pmErabEstabSuccAdded
eNb	EUtranCellFDD:pmErabEstabSuccAddedArp
eNb	EUtranCellFDD:pmErabEstabSuccAddedPa
eNb	EUtranCellFDD:pmErabEstabSuccAddedQci
eNb	EUtranCellFDD:pmErabEstabSuccInit
eNb	EUtranCellFDD:pmErabEstabSuccInitArp
eNb	EUtranCellFDD:pmErabEstabSuccInitPa
eNb	EUtranCellFDD:pmErabEstabSuccInitQci
eNb	EUtranCellFDD:pmErabLevRopStartQci
eNb	EUtranCellFDD:pmErabLevSamp
eNb	EUtranCellFDD:pmErabLevSum

eNb	EUtranCellFDD:pmErabMax
eNb	EUtranCellFDD:pmErabModAttQci
eNb	EUtranCellFDD:pmErabModFailLic
eNb	EUtranCellFDD:pmErabModSuccQci
eNb	EUtranCellFDD:pmErabQciLevSum
eNb	EUtranCellFDD:pmErabQciMax
eNb	EUtranCellFDD:pmErabRelAbnormalEnb
eNb	EUtranCellFDD:pmErabRelAbnormalEnbAct
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActArp
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActCdt
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActCdtAuto
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActCdtAutoPnr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActHo
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActHpr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActPe
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActQci
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActTnFail
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActUeLost
eNb	EUtranCellFDD:pmErabRelAbnormalEnbArp
eNb	EUtranCellFDD:pmErabRelAbnormalEnbCdt
eNb	EUtranCellFDD:pmErabRelAbnormalEnbCdtAuto
eNb	EUtranCellFDD:pmErabRelAbnormalEnbCdtAutoPnr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbHo
eNb	EUtranCellFDD:pmErabRelAbnormalEnbHpr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbLic
eNb	EUtranCellFDD:pmErabRelAbnormalEnbPe
eNb	EUtranCellFDD:pmErabRelAbnormalEnbQci
eNb	EUtranCellFDD:pmErabRelAbnormalEnbTnFail
eNb	EUtranCellFDD:pmErabRelAbnormalEnbUeLost
eNb	EUtranCellFDD:pmErabRelAbnormalMme
eNb	EUtranCellFDD:pmErabRelAbnormalMmeAct
eNb	EUtranCellFDD:pmErabRelAbnormalMmeActArp
eNb	EUtranCellFDD:pmErabRelAbnormalMmeActQci
eNb	EUtranCellFDD:pmErabRelAbnormalMmeQci
eNb	EUtranCellFDD:pmErabRelMme
eNb	EUtranCellFDD:pmErabRelMmeAct
eNb	EUtranCellFDD:pmErabRelMmeActEutra
eNb	EUtranCellFDD:pmErabRelMmeActHo
eNb	EUtranCellFDD:pmErabRelMmeActQci
eNb	EUtranCellFDD:pmErabRelMmeActUnspecified
eNb	EUtranCellFDD:pmErabRelMmeActUserInactivity
eNb	EUtranCellFDD:pmErabRelMmeArp
eNb	EUtranCellFDD:pmErabRelMmeHo
eNb	EUtranCellFDD:pmErabRelMmeQci
eNb	EUtranCellFDD:pmErabRelNormalEnb

eNb	EUtranCellFDD:pmErabRelNormalEnbAct
eNb	EUtranCellFDD:pmErabRelNormalEnbActArp
eNb	EUtranCellFDD:pmErabRelNormalEnbActQci
eNb	EUtranCellFDD:pmErabRelNormalEnbArp
eNb	EUtranCellFDD:pmErabRelNormalEnbQci
eNb	EUtranCellFDD:pmErabRelNormalEnbUserInactivity
eNb	EUtranCellFDD:pmErabRelNormalEnbUserInactivityQci
eNb	EUtranCellFDD:pmHoExeOutAttQci
eNb	EUtranCellFDD:pmHoExeOutSuccQci
eNb	EUtranCellFDD:pmHoPrepRejInBearerAdmissionRej
eNb	EUtranCellFDD:pmHoPrepRejInDIOnlyCell
eNb	EUtranCellFDD:pmHoPrepRejInHighLoad
eNb	EUtranCellFDD:pmHoPrepRejInLicConnUsers
eNb	EUtranCellFDD:pmHoPrepRejInLicMob
eNb	EUtranCellFDD:pmHoPrepRejInLicMultiErab
eNb	EUtranCellFDD:pmHoPrepRejInLicRlcUm
eNb	EUtranCellFDD:pmHoPrepRejInMISigQCong
eNb	EUtranCellFDD:pmHoPrepRejInOffloadAdmission
eNb	EUtranCellFDD:pmHoPrepRejInOverload
eNb	EUtranCellFDD:pmHoPrepRejInSI
eNb	EUtranCellFDD:pmLbSubRatioSamp
eNb	EUtranCellFDD:pmLbSubRatioSum
eNb	EUtranCellFDD:pmLcgThpTimeUILcg
eNb	EUtranCellFDD:pmLcgThpVolUILcg
eNb	EUtranCellFDD:pmMacDelayTimeDI
eNb	EUtranCellFDD:pmMacHarqDIAck16qam
eNb	EUtranCellFDD:pmMacHarqDIAck64qam
eNb	EUtranCellFDD:pmMacHarqDIAckQpsk
eNb	EUtranCellFDD:pmMacHarqDIDtx16qam
eNb	EUtranCellFDD:pmMacHarqDIDtx64qam
eNb	EUtranCellFDD:pmMacHarqDIDtxQpsk
eNb	EUtranCellFDD:pmMacHarqDINack16qam
eNb	EUtranCellFDD:pmMacHarqDINack64qam
eNb	EUtranCellFDD:pmMacHarqDINackQpsk
eNb	EUtranCellFDD:pmMacHarqFail
eNb	EUtranCellFDD:pmMacHarqUIDtx16qam
eNb	EUtranCellFDD:pmMacHarqUIDtxQpsk
eNb	EUtranCellFDD:pmMacHarqUIFail16qam
eNb	EUtranCellFDD:pmMacHarqUIFailQpsk
eNb	EUtranCellFDD:pmMacHarqUISucc16qam
eNb	EUtranCellFDD:pmMacHarqUISuccQpsk
eNb	EUtranCellFDD:pmMeasGapFailLicInterFOtdoa
eNb	EUtranCellFDD:pmMeasMissingNeighRel
eNb	EUtranCellFDD:pmMimoSleepOppTime
eNb	EUtranCellFDD:pmMimoSleepTime

eNb	EUtranCellFDD:pmOocNewDataUlGrants
eNb	EUtranCellFDD:pmOocStateEntries
eNb	EUtranCellFDD:pmOocStateExits
eNb	EUtranCellFDD:pmOocStateExitsUeRel
eNb	EUtranCellFDD:pmPagDiscarded
eNb	EUtranCellFDD:pmPagReceived
eNb	EUtranCellFDD:pmPdcchCceActivity
eNb	EUtranCellFDD:pmPdcchCceAggregationDistr
eNb	EUtranCellFDD:pmPdcchCceUsedDIQci
eNb	EUtranCellFDD:pmPdcchCceUsedUIQci
eNb	EUtranCellFDD:pmPdcchCceUtil
eNb	EUtranCellFDD:pmPdcchCfiUtil
eNb	EUtranCellFDD:pmPdcchMaxCceAvail
eNb	EUtranCellFDD:pmPdcchResyncAtt
eNb	EUtranCellFDD:pmPdcchResyncSucc
eNb	EUtranCellFDD:pmPdcchSym0PwrUtil
eNb	EUtranCellFDD:pmPdcchSym1PwrUtil
eNb	EUtranCellFDD:pmPdcchSym2PwrUtil
eNb	EUtranCellFDD:pmPdcchSym3PwrUtil
eNb	EUtranCellFDD:pmPdcchTxAggressive
eNb	EUtranCellFDD:pmPdcchTxConservative
eNb	EUtranCellFDD:pmPdcPBitrateDIDrbMax
eNb	EUtranCellFDD:pmPdcPBitrateDIDrbMin
eNb	EUtranCellFDD:pmPdcPBitrateUIDrbMax
eNb	EUtranCellFDD:pmPdcPBitrateUIDrbMin
eNb	EUtranCellFDD:pmPdcPLatPktTransDI
eNb	EUtranCellFDD:pmPdcPLatPktTransDIDrxNoSync
eNb	EUtranCellFDD:pmPdcPLatPktTransDIDrxSync
eNb	EUtranCellFDD:pmPdcPLatPktTransDINoDrxSync
eNb	EUtranCellFDD:pmPdcPLatPktTransDIQci
eNb	EUtranCellFDD:pmPdcPLatTimeDI
eNb	EUtranCellFDD:pmPdcPLatTimeDIDrxNoSync
eNb	EUtranCellFDD:pmPdcPLatTimeDIDrxSync
eNb	EUtranCellFDD:pmPdcPLatTimeDINoDrxSync
eNb	EUtranCellFDD:pmPdcPLatTimeDIQci
eNb	EUtranCellFDD:pmPdcPpktDiscDIAqm
eNb	EUtranCellFDD:pmPdcPpktDiscDIAqmQci
eNb	EUtranCellFDD:pmPdcPpktDiscDIHo
eNb	EUtranCellFDD:pmPdcPpktDiscDIHoQci
eNb	EUtranCellFDD:pmPdcPpktDiscDIPelr
eNb	EUtranCellFDD:pmPdcPpktDiscDIPelrQci
eNb	EUtranCellFDD:pmPdcPpktDiscDIPelrUu
eNb	EUtranCellFDD:pmPdcPpktDiscDIPelrUuQci
eNb	EUtranCellFDD:pmPdcPpktFwdDI
eNb	EUtranCellFDD:pmPdcPpktLostUI

eNb	EUtranCellFDD:pmPdcPktLostUILimitations
eNb	EUtranCellFDD:pmPdcPktLostUIMissingPdusQci
eNb	EUtranCellFDD:pmPdcPktLostUIQci
eNb	EUtranCellFDD:pmPdcPktLostUIRohcFailQci
eNb	EUtranCellFDD:pmPdcPktPdbUIOkVoip
eNb	EUtranCellFDD:pmPdcPktReceivedDI
eNb	EUtranCellFDD:pmPdcPktReceivedDIQci
eNb	EUtranCellFDD:pmPdcPktReceivedUI
eNb	EUtranCellFDD:pmPdcPktReceivedUIQci
eNb	EUtranCellFDD:pmPdcPktTransDI
eNb	EUtranCellFDD:pmPdcPktTransDIQci
eNb	EUtranCellFDD:pmPdcPVolDICmpHdrQci
eNb	EUtranCellFDD:pmPdcPVolDIDrb
eNb	EUtranCellFDD:pmPdcPVolDIDrbLastTTI
eNb	EUtranCellFDD:pmPdcPVolDIDrbLastTTIQci
eNb	EUtranCellFDD:pmPdcPVolDIDrbQci
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn0
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn1
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn2
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn3
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn4
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn5
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn6
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransQci
eNb	EUtranCellFDD:pmPdcPVolDIHdrQci
eNb	EUtranCellFDD:pmPdcPVolDISrb
eNb	EUtranCellFDD:pmPdcPVolDISrbTrans
eNb	EUtranCellFDD:pmPdcPVolUICmpHdrQci
eNb	EUtranCellFDD:pmPdcPVolUIDrb
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn0
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn1
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn2
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn3
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn4
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn5
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn6
eNb	EUtranCellFDD:pmPdcPVolUIDrbQci
eNb	EUtranCellFDD:pmPdcPVolUIHdrQci
eNb	EUtranCellFDD:pmPdcPVolUISrb
eNb	EUtranCellFDD:pmPrbAvailDI
eNb	EUtranCellFDD:pmPrbAvailDIMbms
eNb	EUtranCellFDD:pmPrbAvailUI
eNb	EUtranCellFDD:pmPrbUsedDIAilgHighPrio
eNb	EUtranCellFDD:pmPrbUsedDIAilgTot
eNb	EUtranCellFDD:pmPrbUsedDIBcch

eNb	EUtranCellFDD:pmPrbUsedDIDtch
eNb	EUtranCellFDD:pmPrbUsedDIDtchFirstTransQci
eNb	EUtranCellFDD:pmPrbUsedDIFirstTrans
eNb	EUtranCellFDD:pmPrbUsedDIPcch
eNb	EUtranCellFDD:pmPrbUsedDIReTrans
eNb	EUtranCellFDD:pmPrbUsedDISrbFirstTrans
eNb	EUtranCellFDD:pmPrbUsedUIAilgTot
eNb	EUtranCellFDD:pmPrbUsedUIDtch
eNb	EUtranCellFDD:pmPrbUsedUIDtchQci
eNb	EUtranCellFDD:pmPrbUsedUISrb
eNb	EUtranCellFDD:pmPrbUtilDI
eNb	EUtranCellFDD:pmPrbUtilUI
eNb	EUtranCellFDD:pmPucchFailSr
eNb	EUtranCellFDD:pmPucchSr
eNb	EUtranCellFDD:pmPucchSrCqiResAllocAtt
eNb	EUtranCellFDD:pmPucchSrCqiResCongCqi
eNb	EUtranCellFDD:pmPucchSrCqiResCongSr
eNb	EUtranCellFDD:pmPucchSrMax
eNb	EUtranCellFDD:pmRaAccHarqFailAfterContRes
eNb	EUtranCellFDD:pmRaAccHarqFailWithinContRes
eNb	EUtranCellFDD:pmRaAllocCfra
eNb	EUtranCellFDD:pmRaAttCbra
eNb	EUtranCellFDD:pmRaAttCfra
eNb	EUtranCellFDD:pmRaBackoffDistr
eNb	EUtranCellFDD:pmRaContResAccDistr
eNb	EUtranCellFDD:pmRaContResRejDistr
eNb	EUtranCellFDD:pmRaFailCbraMsg1DiscOoc
eNb	EUtranCellFDD:pmRaFailCbraMsg1DiscSched
eNb	EUtranCellFDD:pmRaFailCbraMsg2Disc
eNb	EUtranCellFDD:pmRaFailCfraMsg1DiscOoc
eNb	EUtranCellFDD:pmRaFailCfraMsg1DiscSched
eNb	EUtranCellFDD:pmRaFailCfraMsg2Disc
eNb	EUtranCellFDD:pmRaRejHarqFailAfterContRes
eNb	EUtranCellFDD:pmRaRejHarqFailWithinContRes
eNb	EUtranCellFDD:pmRaSuccCbra
eNb	EUtranCellFDD:pmRaSuccCfra
eNb	EUtranCellFDD:pmRaSuccSrInSync
eNb	EUtranCellFDD:pmRaSuccSrOutOfSync
eNb	EUtranCellFDD:pmRaSuccTa
eNb	EUtranCellFDD:pmRaUnassignedCfraFalse
eNb	EUtranCellFDD:pmRaUnassignedCfraSum
eNb	EUtranCellFDD:pmRachNumContentionReport
eNb	EUtranCellFDD:pmRachPreambleDist
eNb	EUtranCellFDD:pmRadioRecInterferencePwr
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb1

[illegible]

[illegible]

eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb91
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb92
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb93
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb94
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb95
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb96
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb97
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb98
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb99
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPucch
eNb	EUtranCellFDD:pmRadioTbsPwrRestricted
eNb	EUtranCellFDD:pmRadioTbsPwrUnrestricted
eNb	EUtranCellFDD:pmRadioThpResDI
eNb	EUtranCellFDD:pmRadioThpResUI
eNb	EUtranCellFDD:pmRadioThpVolDI
eNb	EUtranCellFDD:pmRadioThpVolDISCell
eNb	EUtranCellFDD:pmRadioThpVolUI
eNb	EUtranCellFDD:pmRadioTxRankDistr
eNb	EUtranCellFDD:pmRadioUeOutLoopAdjDistr
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband0Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband10Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband11Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband12Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband1Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband2Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband3Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband4Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband5Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband6Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband7Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband8Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband9Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2SubbandSamp
eNb	EUtranCellFDD:pmRadioUeRepCqiDistr
eNb	EUtranCellFDD:pmRadioUeRepCqiDistr2
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband0Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband10Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband11Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband12Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband1Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband2Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband3Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband4Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband5Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband6Sum

eNb	EUtranCellFDD:pmRadioUeRepCqiSubband7Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband8Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband9Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubbandSamp
eNb	EUtranCellFDD:pmRadioUeRepRankDistr
eNb	EUtranCellFDD:pmRateShapeTimeUl
eNb	EUtranCellFDD:pmRlcArqDIAck
eNb	EUtranCellFDD:pmRlcArqDINack
eNb	EUtranCellFDD:pmRlcArqRetxDI
eNb	EUtranCellFDD:pmRlcArqUIAck
eNb	EUtranCellFDD:pmRlcArqUINack
eNb	EUtranCellFDD:pmRlcDelayPktTransDI
eNb	EUtranCellFDD:pmRlcDelayPktTransDIQci
eNb	EUtranCellFDD:pmRlcDelayTimeDI
eNb	EUtranCellFDD:pmRlcDelayTimeDIQci
eNb	EUtranCellFDD:pmRlcPollRetxDI
eNb	EUtranCellFDD:pmRlcPollRetxUl
eNb	EUtranCellFDD:pmRohcEstabFailCid
eNb	EUtranCellFDD:pmRohcEstabFailLic
eNb	EUtranCellFDD:pmRohcEstabFailUeCap
eNb	EUtranCellFDD:pmRrcConnEstabAtt
eNb	EUtranCellFDD:pmRrcConnEstabAttDta
eNb	EUtranCellFDD:pmRrcConnEstabAttEm
eNb	EUtranCellFDD:pmRrcConnEstabAttHpa
eNb	EUtranCellFDD:pmRrcConnEstabAttMod
eNb	EUtranCellFDD:pmRrcConnEstabAttMos
eNb	EUtranCellFDD:pmRrcConnEstabAttMta
eNb	EUtranCellFDD:pmRrcConnEstabAttReatt
eNb	EUtranCellFDD:pmRrcConnEstabAttReattDta
eNb	EUtranCellFDD:pmRrcConnEstabAttReattEm
eNb	EUtranCellFDD:pmRrcConnEstabAttReattHpa
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMod
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMos
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMta
eNb	EUtranCellFDD:pmRrcConnEstabFailBearerAdmissionRe
eNb	EUtranCellFDD:pmRrcConnEstabFailHighLoad
eNb	EUtranCellFDD:pmRrcConnEstabFailLic
eNb	EUtranCellFDD:pmRrcConnEstabFailLicActiveUsers
eNb	EUtranCellFDD:pmRrcConnEstabFailMISigQCong
eNb	EUtranCellFDD:pmRrcConnEstabFailMmeOvlMod
eNb	EUtranCellFDD:pmRrcConnEstabFailMmeOvlMos
eNb	EUtranCellFDD:pmRrcConnEstabFailOverload
eNb	EUtranCellFDD:pmRrcConnEstabSucc
eNb	EUtranCellFDD:pmRrcConnEstabSuccDta
eNb	EUtranCellFDD:pmRrcConnEstabSuccEm

eNb	EUtranCellFDD:pmRrcConnEstabSuccGummeiNative
eNb	EUtranCellFDD:pmRrcConnEstabSuccHpa
eNb	EUtranCellFDD:pmRrcConnEstabSuccMod
eNb	EUtranCellFDD:pmRrcConnEstabSuccMos
eNb	EUtranCellFDD:pmRrcConnEstabSuccMta
eNb	EUtranCellFDD:pmRrcConnLevSamp
eNb	EUtranCellFDD:pmRrcConnLevSum
eNb	EUtranCellFDD:pmRrcConnLevSumUIOutOfSync
eNb	EUtranCellFDD:pmRrcConnMax
eNb	EUtranCellFDD:pmRrcConnReconfAttNoMob
eNb	EUtranCellFDD:pmRrcConnReconfSuccNoMob
eNb	EUtranCellFDD:pmRrcConnReestAtt
eNb	EUtranCellFDD:pmRrcConnReestAttHo
eNb	EUtranCellFDD:pmRrcConnReestAttQci
eNb	EUtranCellFDD:pmRrcConnReestFailLicMtReest
eNb	EUtranCellFDD:pmRrcConnReestFailMISigQCong
eNb	EUtranCellFDD:pmRrcConnReestSucc
eNb	EUtranCellFDD:pmRrcConnReestSuccHo
eNb	EUtranCellFDD:pmRrcConnReestSuccQci
eNb	EUtranCellFDD:pmRrcConnTuneOutLevSamp
eNb	EUtranCellFDD:pmRrcConnTuneOutLevSum
eNb	EUtranCellFDD:pmS1SigConnEstabAtt
eNb	EUtranCellFDD:pmS1SigConnEstabAttDta
eNb	EUtranCellFDD:pmS1SigConnEstabAttEm
eNb	EUtranCellFDD:pmS1SigConnEstabAttHpa
eNb	EUtranCellFDD:pmS1SigConnEstabAttMod
eNb	EUtranCellFDD:pmS1SigConnEstabAttMos
eNb	EUtranCellFDD:pmS1SigConnEstabAttMta
eNb	EUtranCellFDD:pmS1SigConnEstabFailMmeOvlMos
eNb	EUtranCellFDD:pmS1SigConnEstabSucc
eNb	EUtranCellFDD:pmS1SigConnEstabSuccDta
eNb	EUtranCellFDD:pmS1SigConnEstabSuccEm
eNb	EUtranCellFDD:pmS1SigConnEstabSuccHpa
eNb	EUtranCellFDD:pmS1SigConnEstabSuccMod
eNb	EUtranCellFDD:pmS1SigConnEstabSuccMos
eNb	EUtranCellFDD:pmS1SigConnEstabSuccMta
eNb	EUtranCellFDD:pmSchedActivityCellDI
eNb	EUtranCellFDD:pmSchedActivityCellUI
eNb	EUtranCellFDD:pmSchedActivityUeDI
eNb	EUtranCellFDD:pmSchedActivityUeUI
eNb	EUtranCellFDD:pmSchedActivityUITTI
eNb	EUtranCellFDD:pmServiceTimeDrb
eNb	EUtranCellFDD:pmServiceTimeDrbQci
eNb	EUtranCellFDD:pmServiceTimeUe
eNb	EUtranCellFDD:pmSessionTimeDrb

eNb	EUtranCellFDD:pmSessionTimeDrbQci
eNb	EUtranCellFDD:pmSessionTimeUe
eNb	EUtranCellFDD:pmSinrPucchDistr
eNb	EUtranCellFDD:pmSinrPuschDistr
eNb	EUtranCellFDD:pmSrGrantLatDistr
eNb	EUtranCellFDD:pmTtiBundlingDisable
eNb	EUtranCellFDD:pmTtiBundlingEnable
eNb	EUtranCellFDD:pmTtiBundlingFailTO
eNb	EUtranCellFDD:pmTtiBundlingUeMax
eNb	EUtranCellFDD:pmTtiBundlingUeSamp
eNb	EUtranCellFDD:pmTtiBundlingUeSum
eNb	EUtranCellFDD:pmUeCategoryDistr
eNb	EUtranCellFDD:pmUeCtxtEstabAtt
eNb	EUtranCellFDD:pmUeCtxtEstabSucc
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnb
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbAct
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActCdt
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActCdtAuto
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActCdtAutoPr
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActHo
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActPe
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActTnFail
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActUeLost
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbCdt
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbCdtAuto
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbCdtAutoPnr
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbHo
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbLic
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbPe
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbTuneOut
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbUeLost
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalMme
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalMmeAct
eNb	EUtranCellFDD:pmUeCtxtRelCsfbCdma1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbCdma1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbGsm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbGsmEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbHoPrepFail1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbHoPrepFail1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbLimitedDualRadioUeC
eNb	EUtranCellFDD:pmUeCtxtRelCsfbMeasTO1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbMeasTO1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbTdScdma
eNb	EUtranCellFDD:pmUeCtxtRelCsfbTdScdmaEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbWcdma

eNb	EUtranCellFDD:pmUeCtxtRelCsfbWcdmaEm
eNb	EUtranCellFDD:pmUeCtxtRelMme
eNb	EUtranCellFDD:pmUeCtxtRelMmeAct
eNb	EUtranCellFDD:pmUeCtxtRelMmeActHo
eNb	EUtranCellFDD:pmUeCtxtRelMmeHo
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnb
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnbAct
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnbTuneOut
eNb	EUtranCellFDD:pmUeCtxtRelSCCdma
eNb	EUtranCellFDD:pmUeCtxtRelSCEUtra
eNb	EUtranCellFDD:pmUeCtxtRelSCGsm
eNb	EUtranCellFDD:pmUeCtxtRelSCTdScdma
eNb	EUtranCellFDD:pmUeCtxtRelSCWcdma
eNb	EUtranCellFDD:pmUeCtxtRelSrvccA2Critical1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelSrvccMeasTO1xRtt
eNb	EUtranCellFDD:pmUeCtxtTa
eNb	EUtranCellFDD:pmUeThpDIDistr
eNb	EUtranCellFDD:pmUeThpTimeDI
eNb	EUtranCellFDD:pmUeThpTimeUI
eNb	EUtranCellFDD:pmUeThpUIDistr
eNb	EUtranCellFDD:pmUeThpVolUI
eNb	EUtranCellFDD:pmUIGrantsTrans
eNb	EUtranCellFDD:pmUIGrantsTransNoAck
eNb	EUtranCellFDD:pmUIGrantsTransPCell
eNb	EUtranCellFDD:pmUIGrantsTransPCellNoAck
eNb	EUtranCellFDD:pmUIGrantsTransVolte
eNb	EUtranCellFDD:pmUIGrantsTransVolteNoAck
eNb	EUtranCellFDD:pmUIGrantsWithDetectedPusch
eNb	EUtranCellFDD:pmUIGrantsWithDetectedPuschPCell
eNb	EUtranCellFDD:pmUIGrantsWithDetectedPuschVolte
eNb	EUtranCellFDD:pmUIPathlossDistr
eNb	EUtranCellFDD:pmVoipQualityRbUILowSampl
eNb	EUtranCellFDD:pmVoipQualityRbUINok
eNb	EUtranCellFDD:pmVoipQualityRbUIOk
eNb	EUtranCellFDD:pmVoipQualityUeUILowSampl
eNb	EUtranCellFDD:pmVoipQualityUeUINok
eNb	EUtranCellFDD:pmVoipQualityUeUIOk
eNb	EUtranCellFDD:pmZtemporary1
eNb	EUtranCellFDD:pmZtemporary10
eNb	EUtranCellFDD:pmZtemporary11
eNb	EUtranCellFDD:pmZtemporary12
eNb	EUtranCellFDD:pmZtemporary13
eNb	EUtranCellFDD:pmZtemporary14
eNb	EUtranCellFDD:pmZtemporary15
eNb	EUtranCellFDD:pmZtemporary16Qci

eNb	EUtranCellFDD:pmZtemporary17Qci
eNb	EUtranCellFDD:pmZtemporary18Qci
eNb	EUtranCellFDD:pmZtemporary19
eNb	EUtranCellFDD:pmZtemporary2
eNb	EUtranCellFDD:pmZtemporary20
eNb	EUtranCellFDD:pmZtemporary21
eNb	EUtranCellFDD:pmZtemporary22
eNb	EUtranCellFDD:pmZtemporary23
eNb	EUtranCellFDD:pmZtemporary24
eNb	EUtranCellFDD:pmZtemporary25
eNb	EUtranCellFDD:pmZtemporary26
eNb	EUtranCellFDD:pmZtemporary27
eNb	EUtranCellFDD:pmZtemporary28
eNb	EUtranCellFDD:pmZtemporary29
eNb	EUtranCellFDD:pmZtemporary3
eNb	EUtranCellFDD:pmZtemporary30
eNb	EUtranCellFDD:pmZtemporary31
eNb	EUtranCellFDD:pmZtemporary32
eNb	EUtranCellFDD:pmZtemporary33
eNb	EUtranCellFDD:pmZtemporary4
eNb	EUtranCellFDD:pmZtemporary5
eNb	EUtranCellFDD:pmZtemporary57
eNb	EUtranCellFDD:pmZtemporary58
eNb	EUtranCellFDD:pmZtemporary59
eNb	EUtranCellFDD:pmZtemporary6
eNb	EUtranCellFDD:pmZtemporary60
eNb	EUtranCellFDD:pmZtemporary61
eNb	EUtranCellFDD:pmZtemporary62
eNb	EUtranCellFDD:pmZtemporary63
eNb	EUtranCellFDD:pmZtemporary64
eNb	EUtranCellFDD:pmZtemporary65
eNb	EUtranCellFDD:pmZtemporary66
eNb	EUtranCellFDD:pmZtemporary67
eNb	EUtranCellFDD:pmZtemporary68
eNb	EUtranCellFDD:pmZtemporary69
eNb	EUtranCellFDD:pmZtemporary7
eNb	EUtranCellFDD:pmZtemporary70
eNb	EUtranCellFDD:pmZtemporary71
eNb	EUtranCellFDD:pmZtemporary8
eNb	EUtranCellFDD:pmZtemporary80
eNb	EUtranCellFDD:pmZtemporary81
eNb	EUtranCellFDD:pmZtemporary82
eNb	EUtranCellFDD:pmZtemporary83
eNb	EUtranCellFDD:pmZtemporary9
eNb	EUtranCellRelation:pmCaRedirectQualifiedUe

eNb	EUtranCellRelation:pmHoExeAttLteInterF
eNb	EUtranCellRelation:pmHoExeAttLteInterFLb
eNb	EUtranCellRelation:pmHoExeAttLteInterFMbms
eNb	EUtranCellRelation:pmHoExeAttLteIntraF
eNb	EUtranCellRelation:pmHoExeAttLteIntraFTuneOut
eNb	EUtranCellRelation:pmHoExeAttLteSpifho
eNb	EUtranCellRelation:pmHoExeAttNonMob
eNb	EUtranCellRelation:pmHoExeSuccLteInterF
eNb	EUtranCellRelation:pmHoExeSuccLteInterFLb
eNb	EUtranCellRelation:pmHoExeSuccLteInterFMbms
eNb	EUtranCellRelation:pmHoExeSuccLteIntraF
eNb	EUtranCellRelation:pmHoExeSuccLteIntraFTuneOut
eNb	EUtranCellRelation:pmHoExeSuccLteSpifho
eNb	EUtranCellRelation:pmHoExeSuccNonMob
eNb	EUtranCellRelation:pmHoExecAttLteInterFCaRedirect
eNb	EUtranCellRelation:pmHoExecSuccLteInterFCaRedirect
eNb	EUtranCellRelation:pmHoOscInterF
eNb	EUtranCellRelation:pmHoOscIntraF
eNb	EUtranCellRelation:pmHoPrepAttLteInterF
eNb	EUtranCellRelation:pmHoPrepAttLteInterFCaRedirect
eNb	EUtranCellRelation:pmHoPrepAttLteInterFLb
eNb	EUtranCellRelation:pmHoPrepAttLteInterFMbms
eNb	EUtranCellRelation:pmHoPrepAttLteIntraF
eNb	EUtranCellRelation:pmHoPrepAttLteSpifho
eNb	EUtranCellRelation:pmHoPrepAttNonMob
eNb	EUtranCellRelation:pmHoPrepSuccLteInterF
eNb	EUtranCellRelation:pmHoPrepSuccLteInterFCaRedirect
eNb	EUtranCellRelation:pmHoPrepSuccLteInterFLb
eNb	EUtranCellRelation:pmHoPrepSuccLteInterFMbms
eNb	EUtranCellRelation:pmHoPrepSuccLteIntraF
eNb	EUtranCellRelation:pmHoPrepSuccLteSpifho
eNb	EUtranCellRelation:pmHoPrepSuccNonMob
eNb	EUtranCellRelation:pmHoTooEarlyHoInterF
eNb	EUtranCellRelation:pmHoTooEarlyHoIntraF
eNb	EUtranCellRelation:pmHoTooLateHoInterF
eNb	EUtranCellRelation:pmHoTooLateHoIntraF
eNb	EUtranCellRelation:pmHoWrongCellInterF
eNb	EUtranCellRelation:pmHoWrongCellIntraF
eNb	EUtranCellRelation:pmHoWrongCellReestInterF
eNb	EUtranCellRelation:pmHoWrongCellReestIntraF
eNb	EUtranCellRelation:pmLbQualifiedUe
eNb	EUtranCellRelation:pmSpifhoReportedUe
eNb	EUtranCellRelation:pmZtemporary36
eNb	EUtranCellRelation:pmZtemporary72
eNb	EUtranCellRelation:pmZtemporary73

eNb	EUtranCellRelation:pmZtemporary74
eNb	EUtranCellRelation:pmZtemporary75
eNb	EUtranCellRelation:pmZtemporary76
eNb	EUtranCellRelation:pmZtemporary77
eNb	EUtranCellRelation:pmZtemporary78
eNb	EUtranCellRelation:pmZtemporary79
eNb	EUtranCellTDD:pmAccessClassBarringCsfbDistr
eNb	EUtranCellTDD:pmAccessClassBarringEm
eNb	EUtranCellTDD:pmAccessClassBarringModDistr
eNb	EUtranCellTDD:pmAccessClassBarringMosDistr
eNb	EUtranCellTDD:pmActiveDrbDISum
eNb	EUtranCellTDD:pmActiveDrbDISumQci
eNb	EUtranCellTDD:pmActiveDrbUISum
eNb	EUtranCellTDD:pmActiveUeDIMax
eNb	EUtranCellTDD:pmActiveUeDISectorCarrierDistr
eNb	EUtranCellTDD:pmActiveUeDISum
eNb	EUtranCellTDD:pmActiveUeDISumQci
eNb	EUtranCellTDD:pmActiveUeDrbSamp
eNb	EUtranCellTDD:pmActiveUeUIMax
eNb	EUtranCellTDD:pmActiveUeUISectorCarrierDistr
eNb	EUtranCellTDD:pmActiveUeUISum
eNb	EUtranCellTDD:pmActiveUeUISumLcg
eNb	EUtranCellTDD:pmAdjustAccessDynLoadCtrl
eNb	EUtranCellTDD:pmAdjustAccessMpLoadCtrl
eNb	EUtranCellTDD:pmAnrNeighbreIAdd
eNb	EUtranCellTDD:pmAnrNeighbreIRem
eNb	EUtranCellTDD:pmBadCovEvalReport
eNb	EUtranCellTDD:pmBadCovSearchEvalReport
eNb	EUtranCellTDD:pmBestCellEvalReport
eNb	EUtranCellTDD:pmCaActivatedDISum
eNb	EUtranCellTDD:pmCaAssignedCsSetsDistr
eNb	EUtranCellTDD:pmCaCapableDISamp
eNb	EUtranCellTDD:pmCaCapableDISum
eNb	EUtranCellTDD:pmCaConfiguredDISamp
eNb	EUtranCellTDD:pmCaConfiguredDISum
eNb	EUtranCellTDD:pmCaConfiguredMeasAtt
eNb	EUtranCellTDD:pmCaConfiguredMeasSucc
eNb	EUtranCellTDD:pmCaConfiguredNoMeasAtt
eNb	EUtranCellTDD:pmCaConfiguredNoMeasSucc
eNb	EUtranCellTDD:pmCaConfiguredSamp
eNb	EUtranCellTDD:pmCaDeconfigured
eNb	EUtranCellTDD:pmCaDeconfiguredLostCoverage
eNb	EUtranCellTDD:pmCaDeconfiguredSCellChange
eNb	EUtranCellTDD:pmCaDeconfiguredSamp
eNb	EUtranCellTDD:pmCaScheduledDISum

eNb	EUtranCellTDD:pmCellAdmControlPdcchRej
eNb	EUtranCellTDD:pmCellAdmControlPdcchRejMeas
eNb	EUtranCellTDD:pmCellDownLockAuto
eNb	EUtranCellTDD:pmCellDownLockMan
eNb	EUtranCellTDD:pmCellDownUnlockMan
eNb	EUtranCellTDD:pmCellDowntimeAuto
eNb	EUtranCellTDD:pmCellDowntimeMan
eNb	EUtranCellTDD:pmCellHoExeAttLteInterF
eNb	EUtranCellTDD:pmCellHoExeAttLteInterFMbms
eNb	EUtranCellTDD:pmCellHoExeAttLteIntraF
eNb	EUtranCellTDD:pmCellHoExeAttLteIntraFTuneOut
eNb	EUtranCellTDD:pmCellHoExeSuccLteInterF
eNb	EUtranCellTDD:pmCellHoExeSuccLteInterFMbms
eNb	EUtranCellTDD:pmCellHoExeSuccLteIntraF
eNb	EUtranCellTDD:pmCellHoExeSuccLteIntraFTuneOut
eNb	EUtranCellTDD:pmCellHoPrepAttLteInterF
eNb	EUtranCellTDD:pmCellHoPrepAttLteInterFMbms
eNb	EUtranCellTDD:pmCellHoPrepAttLteIntraF
eNb	EUtranCellTDD:pmCellHoPrepSuccLteInterF
eNb	EUtranCellTDD:pmCellHoPrepSuccLteInterFMbms
eNb	EUtranCellTDD:pmCellHoPrepSuccLteIntraF
eNb	EUtranCellTDD:pmCompUIDeltaSinrPuschDistr
eNb	EUtranCellTDD:pmContDI
eNb	EUtranCellTDD:pmContDICapLic
eNb	EUtranCellTDD:pmContDIHw
eNb	EUtranCellTDD:pmContDIPdcch
eNb	EUtranCellTDD:pmContUI
eNb	EUtranCellTDD:pmContUICapLic
eNb	EUtranCellTDD:pmContUIHw
eNb	EUtranCellTDD:pmContUIPdcch
eNb	EUtranCellTDD:pmCriticalBorderEvalReport
eNb	EUtranCellTDD:pmDIAssigsTrans
eNb	EUtranCellTDD:pmDIAssigsWithDetectedHarqAck
eNb	EUtranCellTDD:pmDIAssigsWithUnknownReception
eNb	EUtranCellTDD:pmDrbThpTimeDIQci
eNb	EUtranCellTDD:pmDrxSleepTime
eNb	EUtranCellTDD:pmDrxTotalTime
eNb	EUtranCellTDD:pmErabEstabAttAdded
eNb	EUtranCellTDD:pmErabEstabAttAddedArp
eNb	EUtranCellTDD:pmErabEstabAttAddedHoOngoing
eNb	EUtranCellTDD:pmErabEstabAttAddedHoOngoingArp
eNb	EUtranCellTDD:pmErabEstabAttAddedHoOngoingQci
eNb	EUtranCellTDD:pmErabEstabAttAddedPa
eNb	EUtranCellTDD:pmErabEstabAttAddedQci
eNb	EUtranCellTDD:pmErabEstabAttInit

eNb	EUtranCellTDD:pmErabEstabAttInitArp
eNb	EUtranCellTDD:pmErabEstabAttInitPa
eNb	EUtranCellTDD:pmErabEstabAttInitQci
eNb	EUtranCellTDD:pmErabEstabFailAddedLic
eNb	EUtranCellTDD:pmErabEstabFailGbrDIEnb
eNb	EUtranCellTDD:pmErabEstabFailGbrUIEnb
eNb	EUtranCellTDD:pmErabEstabFailInitLic
eNb	EUtranCellTDD:pmErabEstabSuccAdded
eNb	EUtranCellTDD:pmErabEstabSuccAddedArp
eNb	EUtranCellTDD:pmErabEstabSuccAddedPa
eNb	EUtranCellTDD:pmErabEstabSuccAddedQci
eNb	EUtranCellTDD:pmErabEstabSuccInit
eNb	EUtranCellTDD:pmErabEstabSuccInitArp
eNb	EUtranCellTDD:pmErabEstabSuccInitPa
eNb	EUtranCellTDD:pmErabEstabSuccInitQci
eNb	EUtranCellTDD:pmErabLevRopStartQci
eNb	EUtranCellTDD:pmErabLevSamp
eNb	EUtranCellTDD:pmErabLevSum
eNb	EUtranCellTDD:pmErabMax
eNb	EUtranCellTDD:pmErabModAttQci
eNb	EUtranCellTDD:pmErabModFailLic
eNb	EUtranCellTDD:pmErabModSuccQci
eNb	EUtranCellTDD:pmErabQciLevSum
eNb	EUtranCellTDD:pmErabQciMax
eNb	EUtranCellTDD:pmErabRelAbnormalEnb
eNb	EUtranCellTDD:pmErabRelAbnormalEnbAct
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActArp
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActCdt
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActCdtAuto
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActCdtAutoPnr
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActHo
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActHpr
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActPe
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActQci
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActTnFail
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActUeLost
eNb	EUtranCellTDD:pmErabRelAbnormalEnbArp
eNb	EUtranCellTDD:pmErabRelAbnormalEnbCdt
eNb	EUtranCellTDD:pmErabRelAbnormalEnbCdtAuto
eNb	EUtranCellTDD:pmErabRelAbnormalEnbCdtAutoPnr
eNb	EUtranCellTDD:pmErabRelAbnormalEnbHo
eNb	EUtranCellTDD:pmErabRelAbnormalEnbHpr
eNb	EUtranCellTDD:pmErabRelAbnormalEnbLic
eNb	EUtranCellTDD:pmErabRelAbnormalEnbPe
eNb	EUtranCellTDD:pmErabRelAbnormalEnbQci

eNb	EUtranCellTDD:pmErabRelAbnormalEnbTnFail
eNb	EUtranCellTDD:pmErabRelAbnormalEnbUeLost
eNb	EUtranCellTDD:pmErabRelAbnormalMme
eNb	EUtranCellTDD:pmErabRelAbnormalMmeAct
eNb	EUtranCellTDD:pmErabRelAbnormalMmeActArp
eNb	EUtranCellTDD:pmErabRelAbnormalMmeActQci
eNb	EUtranCellTDD:pmErabRelAbnormalMmeQci
eNb	EUtranCellTDD:pmErabRelMme
eNb	EUtranCellTDD:pmErabRelMmeAct
eNb	EUtranCellTDD:pmErabRelMmeActEutra
eNb	EUtranCellTDD:pmErabRelMmeActHo
eNb	EUtranCellTDD:pmErabRelMmeActQci
eNb	EUtranCellTDD:pmErabRelMmeActUnspecified
eNb	EUtranCellTDD:pmErabRelMmeActUserInactivity
eNb	EUtranCellTDD:pmErabRelMmeArp
eNb	EUtranCellTDD:pmErabRelMmeHo
eNb	EUtranCellTDD:pmErabRelMmeQci
eNb	EUtranCellTDD:pmErabRelNormalEnb
eNb	EUtranCellTDD:pmErabRelNormalEnbAct
eNb	EUtranCellTDD:pmErabRelNormalEnbActArp
eNb	EUtranCellTDD:pmErabRelNormalEnbActQci
eNb	EUtranCellTDD:pmErabRelNormalEnbArp
eNb	EUtranCellTDD:pmErabRelNormalEnbQci
eNb	EUtranCellTDD:pmErabRelNormalEnbUserInactivity
eNb	EUtranCellTDD:pmErabRelNormalEnbUserInactivityQci
eNb	EUtranCellTDD:pmHoExeOutAttQci
eNb	EUtranCellTDD:pmHoExeOutSuccQci
eNb	EUtranCellTDD:pmHoPrepRejInBearerAdmissionRej
eNb	EUtranCellTDD:pmHoPrepRejInHighLoad
eNb	EUtranCellTDD:pmHoPrepRejInLicConnUsers
eNb	EUtranCellTDD:pmHoPrepRejInLicMob
eNb	EUtranCellTDD:pmHoPrepRejInLicMultiErab
eNb	EUtranCellTDD:pmHoPrepRejInLicRlcUm
eNb	EUtranCellTDD:pmHoPrepRejInMISigQCong
eNb	EUtranCellTDD:pmHoPrepRejInOffloadAdmission
eNb	EUtranCellTDD:pmHoPrepRejInOverload
eNb	EUtranCellTDD:pmHoPrepRejInSI
eNb	EUtranCellTDD:pmLbSubRatioSamp
eNb	EUtranCellTDD:pmLbSubRatioSum
eNb	EUtranCellTDD:pmLcgThpTimeUULcg
eNb	EUtranCellTDD:pmLcgThpVolUULcg
eNb	EUtranCellTDD:pmMacDelayTimeDI
eNb	EUtranCellTDD:pmMacHarqDIAck16qam
eNb	EUtranCellTDD:pmMacHarqDIAck64qam
eNb	EUtranCellTDD:pmMacHarqDIAckQpsk

eNb	EUtranCellTDD:pmMacHarqDIDtx16qam
eNb	EUtranCellTDD:pmMacHarqDIDtx64qam
eNb	EUtranCellTDD:pmMacHarqDIDtxQpsk
eNb	EUtranCellTDD:pmMacHarqDINack16qam
eNb	EUtranCellTDD:pmMacHarqDINack64qam
eNb	EUtranCellTDD:pmMacHarqDINackQpsk
eNb	EUtranCellTDD:pmMacHarqFail
eNb	EUtranCellTDD:pmMacHarqUIDtx16qam
eNb	EUtranCellTDD:pmMacHarqUIDtxQpsk
eNb	EUtranCellTDD:pmMacHarqUIFail16qam
eNb	EUtranCellTDD:pmMacHarqUIFailQpsk
eNb	EUtranCellTDD:pmMacHarqUISucc16qam
eNb	EUtranCellTDD:pmMacHarqUISuccQpsk
eNb	EUtranCellTDD:pmMeasGapFailLicInterFOtdoa
eNb	EUtranCellTDD:pmMeasMissingNeighRel
eNb	EUtranCellTDD:pmMimoSleepOppTime
eNb	EUtranCellTDD:pmMimoSleepTime
eNb	EUtranCellTDD:pmOocNewDataUIGrants
eNb	EUtranCellTDD:pmOocStateEntries
eNb	EUtranCellTDD:pmOocStateExits
eNb	EUtranCellTDD:pmOocStateExitsUeRel
eNb	EUtranCellTDD:pmPagDiscarded
eNb	EUtranCellTDD:pmPagReceived
eNb	EUtranCellTDD:pmPdcchCceActivity
eNb	EUtranCellTDD:pmPdcchCceAggregationDistr
eNb	EUtranCellTDD:pmPdcchCceUsedDIQci
eNb	EUtranCellTDD:pmPdcchCceUsedUIQci
eNb	EUtranCellTDD:pmPdcchCceUtil
eNb	EUtranCellTDD:pmPdcchCfiUtil
eNb	EUtranCellTDD:pmPdcchMaxCceAvail
eNb	EUtranCellTDD:pmPdcchResyncAtt
eNb	EUtranCellTDD:pmPdcchResyncSucc
eNb	EUtranCellTDD:pmPdcchSym0PwrUtil
eNb	EUtranCellTDD:pmPdcchSym1PwrUtil
eNb	EUtranCellTDD:pmPdcchSym2PwrUtil
eNb	EUtranCellTDD:pmPdcchSym3PwrUtil
eNb	EUtranCellTDD:pmPdcchTxAggressive
eNb	EUtranCellTDD:pmPdcchTxConservative
eNb	EUtranCellTDD:pmPdcPBitrateDIDrbMax
eNb	EUtranCellTDD:pmPdcPBitrateUIDrbMin
eNb	EUtranCellTDD:pmPdcPBitrateUIDrbMax
eNb	EUtranCellTDD:pmPdcPBitrateUIDrbMin
eNb	EUtranCellTDD:pmPdcPLatPktTransDI
eNb	EUtranCellTDD:pmPdcPLatPktTransDIDrxNoSync
eNb	EUtranCellTDD:pmPdcPLatPktTransDIDrxSync

eNb	EUtranCellTDD:pmPdcplLatPktTransDI NoDrxSync
eNb	EUtranCellTDD:pmPdcplLatPktTransDIQci
eNb	EUtranCellTDD:pmPdcplLatTimeDI
eNb	EUtranCellTDD:pmPdcplLatTimeDI DrxNoSync
eNb	EUtranCellTDD:pmPdcplLatTimeDI DrxSync
eNb	EUtranCellTDD:pmPdcplLatTimeDI NoDrxSync
eNb	EUtranCellTDD:pmPdcplLatTimeDIQci
eNb	EUtranCellTDD:pmPdcplPktDiscDI Aqm
eNb	EUtranCellTDD:pmPdcplPktDiscDI AqmQci
eNb	EUtranCellTDD:pmPdcplPktDiscDI Ho
eNb	EUtranCellTDD:pmPdcplPktDiscDI HoQci
eNb	EUtranCellTDD:pmPdcplPktDiscDI Pelr
eNb	EUtranCellTDD:pmPdcplPktDiscDI PelrQci
eNb	EUtranCellTDD:pmPdcplPktDiscDI PelrUu
eNb	EUtranCellTDD:pmPdcplPktDiscDI PelrUuQci
eNb	EUtranCellTDD:pmPdcplPktFwdDI
eNb	EUtranCellTDD:pmPdcplPktLostUI
eNb	EUtranCellTDD:pmPdcplPktLostUI Limitations
eNb	EUtranCellTDD:pmPdcplPktLostUI MissingPdusQci
eNb	EUtranCellTDD:pmPdcplPktLostUIQci
eNb	EUtranCellTDD:pmPdcplPktLostUI RohcFailQci
eNb	EUtranCellTDD:pmPdcplPktPdbUI OkVoip
eNb	EUtranCellTDD:pmPdcplPktReceivedDI
eNb	EUtranCellTDD:pmPdcplPktReceivedDIQci
eNb	EUtranCellTDD:pmPdcplPktReceivedUI
eNb	EUtranCellTDD:pmPdcplPktReceivedUIQci
eNb	EUtranCellTDD:pmPdcplPktTransDI
eNb	EUtranCellTDD:pmPdcplPktTransDIQci
eNb	EUtranCellTDD:pmPdcplVolDI CmpHdrQci
eNb	EUtranCellTDD:pmPdcplVolDI Drb
eNb	EUtranCellTDD:pmPdcplVolDI DrbLastTTI
eNb	EUtranCellTDD:pmPdcplVolDI DrbLastTTIQci
eNb	EUtranCellTDD:pmPdcplVolDI DrbQci
eNb	EUtranCellTDD:pmPdcplVolDI DrbTransPlmn0
eNb	EUtranCellTDD:pmPdcplVolDI DrbTransPlmn1
eNb	EUtranCellTDD:pmPdcplVolDI DrbTransPlmn2
eNb	EUtranCellTDD:pmPdcplVolDI DrbTransPlmn3
eNb	EUtranCellTDD:pmPdcplVolDI DrbTransPlmn4
eNb	EUtranCellTDD:pmPdcplVolDI DrbTransPlmn5
eNb	EUtranCellTDD:pmPdcplVolDI DrbTransPlmn6
eNb	EUtranCellTDD:pmPdcplVolDI DrbTransQci
eNb	EUtranCellTDD:pmPdcplVolDI HdrQci
eNb	EUtranCellTDD:pmPdcplVolDI Srb
eNb	EUtranCellTDD:pmPdcplVolDI SrbTrans
eNb	EUtranCellTDD:pmPdcplVolUI CmpHdrQci

eNb	EUtranCellTDD:pmPdcplVolUIDrb
eNb	EUtranCellTDD:pmPdcplVolUIDrbPlmn0
eNb	EUtranCellTDD:pmPdcplVolUIDrbPlmn1
eNb	EUtranCellTDD:pmPdcplVolUIDrbPlmn2
eNb	EUtranCellTDD:pmPdcplVolUIDrbPlmn3
eNb	EUtranCellTDD:pmPdcplVolUIDrbPlmn4
eNb	EUtranCellTDD:pmPdcplVolUIDrbPlmn5
eNb	EUtranCellTDD:pmPdcplVolUIDrbPlmn6
eNb	EUtranCellTDD:pmPdcplVolUIDrbQci
eNb	EUtranCellTDD:pmPdcplVolUIHdrQci
eNb	EUtranCellTDD:pmPdcplVolUISrb
eNb	EUtranCellTDD:pmPrbAvailDI
eNb	EUtranCellTDD:pmPrbAvailDIMbms
eNb	EUtranCellTDD:pmPrbAvailUI
eNb	EUtranCellTDD:pmPrbUsedDIAilgHighPrio
eNb	EUtranCellTDD:pmPrbUsedDIAilgTot
eNb	EUtranCellTDD:pmPrbUsedDIBcch
eNb	EUtranCellTDD:pmPrbUsedDIDtch
eNb	EUtranCellTDD:pmPrbUsedDIDtchFirstTransQci
eNb	EUtranCellTDD:pmPrbUsedDIFirstTrans
eNb	EUtranCellTDD:pmPrbUsedDIPcch
eNb	EUtranCellTDD:pmPrbUsedDIReTrans
eNb	EUtranCellTDD:pmPrbUsedDISrbFirstTrans
eNb	EUtranCellTDD:pmPrbUsedUIAilgTot
eNb	EUtranCellTDD:pmPrbUsedUIDtch
eNb	EUtranCellTDD:pmPrbUsedUIDtchQci
eNb	EUtranCellTDD:pmPrbUsedUISrb
eNb	EUtranCellTDD:pmPrbUtilDI
eNb	EUtranCellTDD:pmPrbUtilUI
eNb	EUtranCellTDD:pmPucchFailSr
eNb	EUtranCellTDD:pmPucchSr
eNb	EUtranCellTDD:pmPucchSrCqiResAllocAtt
eNb	EUtranCellTDD:pmPucchSrCqiResCongCqi
eNb	EUtranCellTDD:pmPucchSrCqiResCongSr
eNb	EUtranCellTDD:pmPucchSrMax
eNb	EUtranCellTDD:pmRaAccHarqFailAfterContRes
eNb	EUtranCellTDD:pmRaAccHarqFailWithinContRes
eNb	EUtranCellTDD:pmRaAllocCfra
eNb	EUtranCellTDD:pmRaAttCbra
eNb	EUtranCellTDD:pmRaAttCfra
eNb	EUtranCellTDD:pmRaBackoffDistr
eNb	EUtranCellTDD:pmRaContResAccDistr
eNb	EUtranCellTDD:pmRaContResRejDistr
eNb	EUtranCellTDD:pmRaFailCbraMsg1DiscOoc
eNb	EUtranCellTDD:pmRaFailCbraMsg1DiscSched

eNb	EUtranCellTDD:pmRaFailCbraMsg2Disc
eNb	EUtranCellTDD:pmRaFailCfraMsg1DiscOoc
eNb	EUtranCellTDD:pmRaFailCfraMsg1DiscSched
eNb	EUtranCellTDD:pmRaFailCfraMsg2Disc
eNb	EUtranCellTDD:pmRaRejHarqFailAfterContRes
eNb	EUtranCellTDD:pmRaRejHarqFailWithinContRes
eNb	EUtranCellTDD:pmRaSuccCbra
eNb	EUtranCellTDD:pmRaSuccCfra
eNb	EUtranCellTDD:pmRaSuccSrInSync
eNb	EUtranCellTDD:pmRaSuccSrOutOfSync
eNb	EUtranCellTDD:pmRaSuccTa
eNb	EUtranCellTDD:pmRaUnassignedCfraFalse
eNb	EUtranCellTDD:pmRaUnassignedCfraSum
eNb	EUtranCellTDD:pmRachNumContentionReport
eNb	EUtranCellTDD:pmRachPreambleDist
eNb	EUtranCellTDD:pmRadioCalibAttFail
eNb	EUtranCellTDD:pmRadioRecInterferencePwr
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb1
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb10
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb100
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb11
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb12
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb13
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb14
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb15
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb16
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb17
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb18
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb19
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb2
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb20
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb21
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb22
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb23
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb24
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb25
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb26
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb27
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb28
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb29
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb3
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb30
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb31
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb32
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb33

[illegible]

eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb75
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb76
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb77
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb78
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb79
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb8
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb80
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb81
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb82
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb83
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb84
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb85
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb86
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb87
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb88
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb89
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb9
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb90
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb91
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb92
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb93
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb94
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb95
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb96
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb97
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb98
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb99
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPucch
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf1
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf2
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf3
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf6
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf7
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf8
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSfSamp
eNb	EUtranCellTDD:pmRadioTbsPwrRestricted
eNb	EUtranCellTDD:pmRadioTbsPwrUnrestricted
eNb	EUtranCellTDD:pmRadioThpResDI
eNb	EUtranCellTDD:pmRadioThpResUI
eNb	EUtranCellTDD:pmRadioThpVolDI
eNb	EUtranCellTDD:pmRadioThpVolDISCell
eNb	EUtranCellTDD:pmRadioThpVolUI
eNb	EUtranCellTDD:pmRadioTxRankDistr
eNb	EUtranCellTDD:pmRadioUeOutLoopAdjDistr
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband0Sum

eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband10Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband11Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband12Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband1Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband2Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband3Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband4Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband5Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband6Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband7Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband8Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband9Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2SubbandSamp
eNb	EUtranCellTDD:pmRadioUeRepCqiDistr
eNb	EUtranCellTDD:pmRadioUeRepCqiDistr2
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband0Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband10Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband11Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband12Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband1Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband2Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband3Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband4Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband5Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband6Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband7Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband8Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband9Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubbandSamp
eNb	EUtranCellTDD:pmRadioUeRepRankDistr
eNb	EUtranCellTDD:pmRateShapeTimeUl
eNb	EUtranCellTDD:pmRlcArqDIAck
eNb	EUtranCellTDD:pmRlcArqDINack
eNb	EUtranCellTDD:pmRlcArqRetxDI
eNb	EUtranCellTDD:pmRlcArqUIAck
eNb	EUtranCellTDD:pmRlcArqUINack
eNb	EUtranCellTDD:pmRlcDelayPktTransDI
eNb	EUtranCellTDD:pmRlcDelayPktTransDIQci
eNb	EUtranCellTDD:pmRlcDelayTimeDI
eNb	EUtranCellTDD:pmRlcDelayTimeDIQci
eNb	EUtranCellTDD:pmRlcPollRetxDI
eNb	EUtranCellTDD:pmRlcPollRetxUl
eNb	EUtranCellTDD:pmRohcEstabFailCid
eNb	EUtranCellTDD:pmRohcEstabFailLic
eNb	EUtranCellTDD:pmRohcEstabFailUeCap

eNb	EUtranCellTDD:pmRrcConnEstabAtt
eNb	EUtranCellTDD:pmRrcConnEstabAttDta
eNb	EUtranCellTDD:pmRrcConnEstabAttEm
eNb	EUtranCellTDD:pmRrcConnEstabAttHpa
eNb	EUtranCellTDD:pmRrcConnEstabAttMod
eNb	EUtranCellTDD:pmRrcConnEstabAttMos
eNb	EUtranCellTDD:pmRrcConnEstabAttMta
eNb	EUtranCellTDD:pmRrcConnEstabAttReatt
eNb	EUtranCellTDD:pmRrcConnEstabAttReattDta
eNb	EUtranCellTDD:pmRrcConnEstabAttReattEm
eNb	EUtranCellTDD:pmRrcConnEstabAttReattHpa
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMod
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMos
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMta
eNb	EUtranCellTDD:pmRrcConnEstabFailBearerAdmissionRe
eNb	EUtranCellTDD:pmRrcConnEstabFailHighLoad
eNb	EUtranCellTDD:pmRrcConnEstabFailLic
eNb	EUtranCellTDD:pmRrcConnEstabFailLicActiveUsers
eNb	EUtranCellTDD:pmRrcConnEstabFailMISigQCong
eNb	EUtranCellTDD:pmRrcConnEstabFailMmeOvlMod
eNb	EUtranCellTDD:pmRrcConnEstabFailMmeOvlMos
eNb	EUtranCellTDD:pmRrcConnEstabFailOverload
eNb	EUtranCellTDD:pmRrcConnEstabSucc
eNb	EUtranCellTDD:pmRrcConnEstabSuccDta
eNb	EUtranCellTDD:pmRrcConnEstabSuccEm
eNb	EUtranCellTDD:pmRrcConnEstabSuccGummeiNative
eNb	EUtranCellTDD:pmRrcConnEstabSuccHpa
eNb	EUtranCellTDD:pmRrcConnEstabSuccMod
eNb	EUtranCellTDD:pmRrcConnEstabSuccMos
eNb	EUtranCellTDD:pmRrcConnEstabSuccMta
eNb	EUtranCellTDD:pmRrcConnLevSamp
eNb	EUtranCellTDD:pmRrcConnLevSum
eNb	EUtranCellTDD:pmRrcConnLevSumUIOutOfSync
eNb	EUtranCellTDD:pmRrcConnMax
eNb	EUtranCellTDD:pmRrcConnReconfAttNoMob
eNb	EUtranCellTDD:pmRrcConnReconfSuccNoMob
eNb	EUtranCellTDD:pmRrcConnReestAtt
eNb	EUtranCellTDD:pmRrcConnReestAttHo
eNb	EUtranCellTDD:pmRrcConnReestAttQci
eNb	EUtranCellTDD:pmRrcConnReestFailLicMtReest
eNb	EUtranCellTDD:pmRrcConnReestFailMISigQCong
eNb	EUtranCellTDD:pmRrcConnReestSucc
eNb	EUtranCellTDD:pmRrcConnReestSuccHo
eNb	EUtranCellTDD:pmRrcConnReestSuccQci
eNb	EUtranCellTDD:pmRrcConnTuneOutLevSamp

eNb	EUtranCellTDD:pmRrcConnTuneOutLevSum
eNb	EUtranCellTDD:pmS1SigConnEstabAtt
eNb	EUtranCellTDD:pmS1SigConnEstabAttDta
eNb	EUtranCellTDD:pmS1SigConnEstabAttEm
eNb	EUtranCellTDD:pmS1SigConnEstabAttHpa
eNb	EUtranCellTDD:pmS1SigConnEstabAttMod
eNb	EUtranCellTDD:pmS1SigConnEstabAttMos
eNb	EUtranCellTDD:pmS1SigConnEstabAttMta
eNb	EUtranCellTDD:pmS1SigConnEstabFailMmeOvlMos
eNb	EUtranCellTDD:pmS1SigConnEstabSucc
eNb	EUtranCellTDD:pmS1SigConnEstabSuccDta
eNb	EUtranCellTDD:pmS1SigConnEstabSuccEm
eNb	EUtranCellTDD:pmS1SigConnEstabSuccHpa
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMod
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMos
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMta
eNb	EUtranCellTDD:pmSchedActivityCellDI
eNb	EUtranCellTDD:pmSchedActivityCellUI
eNb	EUtranCellTDD:pmSchedActivityUeDI
eNb	EUtranCellTDD:pmSchedActivityUeUI
eNb	EUtranCellTDD:pmSchedActivityUITTI
eNb	EUtranCellTDD:pmServiceTimeDrb
eNb	EUtranCellTDD:pmServiceTimeDrbQci
eNb	EUtranCellTDD:pmServiceTimeUe
eNb	EUtranCellTDD:pmSessionTimeDrb
eNb	EUtranCellTDD:pmSessionTimeDrbQci
eNb	EUtranCellTDD:pmSessionTimeUe
eNb	EUtranCellTDD:pmSinrPucchDistr
eNb	EUtranCellTDD:pmSinrPuschDistr
eNb	EUtranCellTDD:pmSrGrantLatDistr
eNb	EUtranCellTDD:pmTtiBundlingDisable
eNb	EUtranCellTDD:pmTtiBundlingEnable
eNb	EUtranCellTDD:pmTtiBundlingFailTO
eNb	EUtranCellTDD:pmUeCategoryDistr
eNb	EUtranCellTDD:pmUeCtxtEstabAtt
eNb	EUtranCellTDD:pmUeCtxtEstabSucc
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnb
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbAct
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActCdt
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActCdtAuto
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActCdtAutoPr
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActHo
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActPe
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActTnFail
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActUeLost

eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbCdt
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbCdtAuto
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbCdtAutoPnr
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbHo
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbLic
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbPe
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbTuneOut
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbUeLost
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalMme
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalMmeAct
eNb	EUtranCellTDD:pmUeCtxtRelCsfbCdma1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbCdma1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbGsm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbGsmEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbHoPrepFail1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbHoPrepFail1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbLimitedDualRadioUeC
eNb	EUtranCellTDD:pmUeCtxtRelCsfbMeasTO1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbMeasTO1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbTdScdma
eNb	EUtranCellTDD:pmUeCtxtRelCsfbTdScdmaEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbWcdma
eNb	EUtranCellTDD:pmUeCtxtRelCsfbWcdmaEm
eNb	EUtranCellTDD:pmUeCtxtRelMme
eNb	EUtranCellTDD:pmUeCtxtRelMmeAct
eNb	EUtranCellTDD:pmUeCtxtRelMmeActHo
eNb	EUtranCellTDD:pmUeCtxtRelMmeHo
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnb
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnbAct
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnbTuneOut
eNb	EUtranCellTDD:pmUeCtxtRelSCCdma
eNb	EUtranCellTDD:pmUeCtxtRelSCEUtra
eNb	EUtranCellTDD:pmUeCtxtRelSCGsm
eNb	EUtranCellTDD:pmUeCtxtRelSCTdScdma
eNb	EUtranCellTDD:pmUeCtxtRelSCWcdma
eNb	EUtranCellTDD:pmUeCtxtRelSrvccA2Critical1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelSrvccMeasTO1xRtt
eNb	EUtranCellTDD:pmUeCtxtTa
eNb	EUtranCellTDD:pmUeThpDIDistr
eNb	EUtranCellTDD:pmUeThpTimeDI
eNb	EUtranCellTDD:pmUeThpTimeUI
eNb	EUtranCellTDD:pmUeThpUIDistr
eNb	EUtranCellTDD:pmUeThpVolUI
eNb	EUtranCellTDD:pmUIGrantsTrans
eNb	EUtranCellTDD:pmUIGrantsTransNoAck

eNb	EUtranCellTDD:pmUIGrantsTransPCellNoAck
eNb	EUtranCellTDD:pmUIGrantsTransVolteNoAck
eNb	EUtranCellTDD:pmUIGrantsWithDetectedPusch
eNb	EUtranCellTDD:pmUIPathlossDistr
eNb	EUtranCellTDD:pmVoipQualityRbUILowSampl
eNb	EUtranCellTDD:pmVoipQualityRbUINok
eNb	EUtranCellTDD:pmVoipQualityRbUIOk
eNb	EUtranCellTDD:pmVoipQualityUeUILowSampl
eNb	EUtranCellTDD:pmVoipQualityUeUINok
eNb	EUtranCellTDD:pmVoipQualityUeUIOk
eNb	EUtranCellTDD:pmZtemporary1
eNb	EUtranCellTDD:pmZtemporary10
eNb	EUtranCellTDD:pmZtemporary11
eNb	EUtranCellTDD:pmZtemporary12
eNb	EUtranCellTDD:pmZtemporary13
eNb	EUtranCellTDD:pmZtemporary14
eNb	EUtranCellTDD:pmZtemporary15
eNb	EUtranCellTDD:pmZtemporary16Qci
eNb	EUtranCellTDD:pmZtemporary17Qci
eNb	EUtranCellTDD:pmZtemporary18Qci
eNb	EUtranCellTDD:pmZtemporary19
eNb	EUtranCellTDD:pmZtemporary2
eNb	EUtranCellTDD:pmZtemporary20
eNb	EUtranCellTDD:pmZtemporary21
eNb	EUtranCellTDD:pmZtemporary22
eNb	EUtranCellTDD:pmZtemporary23
eNb	EUtranCellTDD:pmZtemporary24
eNb	EUtranCellTDD:pmZtemporary25
eNb	EUtranCellTDD:pmZtemporary26
eNb	EUtranCellTDD:pmZtemporary27
eNb	EUtranCellTDD:pmZtemporary28
eNb	EUtranCellTDD:pmZtemporary29
eNb	EUtranCellTDD:pmZtemporary3
eNb	EUtranCellTDD:pmZtemporary30
eNb	EUtranCellTDD:pmZtemporary31
eNb	EUtranCellTDD:pmZtemporary32
eNb	EUtranCellTDD:pmZtemporary33
eNb	EUtranCellTDD:pmZtemporary4
eNb	EUtranCellTDD:pmZtemporary5
eNb	EUtranCellTDD:pmZtemporary57
eNb	EUtranCellTDD:pmZtemporary58
eNb	EUtranCellTDD:pmZtemporary59
eNb	EUtranCellTDD:pmZtemporary6
eNb	EUtranCellTDD:pmZtemporary60
eNb	EUtranCellTDD:pmZtemporary61

eNb	EUtranCellTDD:pmZtemporary62
eNb	EUtranCellTDD:pmZtemporary63
eNb	EUtranCellTDD:pmZtemporary64
eNb	EUtranCellTDD:pmZtemporary65
eNb	EUtranCellTDD:pmZtemporary66
eNb	EUtranCellTDD:pmZtemporary67
eNb	EUtranCellTDD:pmZtemporary68
eNb	EUtranCellTDD:pmZtemporary69
eNb	EUtranCellTDD:pmZtemporary7
eNb	EUtranCellTDD:pmZtemporary70
eNb	EUtranCellTDD:pmZtemporary71
eNb	EUtranCellTDD:pmZtemporary8
eNb	EUtranCellTDD:pmZtemporary80
eNb	EUtranCellTDD:pmZtemporary81
eNb	EUtranCellTDD:pmZtemporary82
eNb	EUtranCellTDD:pmZtemporary83
eNb	EUtranCellTDD:pmZtemporary9
eNb	EUtranFreqRelation:pmCaRedirectMeasuredUe
eNb	EUtranFreqRelation:pmLbMeasuredUe
eNb	EUtranFreqRelation:pmMbmsInterestIndication
eNb	EUtranFreqRelation:pmSpifhoMeasuredUe
eNb	EthernetLink:pmNoOfIfInDiscards
eNb	EthernetLink:pmNoOfIfInErrors
eNb	EthernetLink:pmNoOfIfInNUcastPkts
eNb	EthernetLink:pmNoOfIfInUcastPkts
eNb	EthernetLink:pmNoOfIfOutDiscards
eNb	EthernetLink:pmNoOfIfOutNUcastPkts
eNb	EthernetLink:pmNoOfIfOutUcastPkts
eNb	FastEthernet:pmIfInBroadcastPkts
eNb	FastEthernet:pmIfInDiscards
eNb	FastEthernet:pmIfInErrors
eNb	FastEthernet:pmIfInMulticastPkts
eNb	FastEthernet:pmIfInOctetsHi
eNb	FastEthernet:pmIfInOctetsLo
eNb	FastEthernet:pmIfInUcastPkts
eNb	FastEthernet:pmIfInUnknownProtos
eNb	FastEthernet:pmIfOutBroadcastPkts
eNb	FastEthernet:pmIfOutDiscards
eNb	FastEthernet:pmIfOutErrors
eNb	FastEthernet:pmIfOutMulticastPkts
eNb	FastEthernet:pmIfOutOctetsHi
eNb	FastEthernet:pmIfOutOctetsLo
eNb	FastEthernet:pmIfOutUcastPkts
eNb	GeranCellRelation:pmHoExeAtt
eNb	GeranCellRelation:pmHoExeSucc

eNb	GeranCellRelation:pmHoPrepAtt
eNb	GeranCellRelation:pmHoPrepSucc
eNb	GigaBitEthernet:pmDot1qTpVlanPortInDiscardsLink1
eNb	GigaBitEthernet:pmDot1qTpVlanPortInDiscardsLink2
eNb	GigaBitEthernet:pmIfInBroadcastPktsLink1
eNb	GigaBitEthernet:pmIfInBroadcastPktsLink2
eNb	GigaBitEthernet:pmIfInDiscardsLink1
eNb	GigaBitEthernet:pmIfInDiscardsLink2
eNb	GigaBitEthernet:pmIfInErrorsLink1
eNb	GigaBitEthernet:pmIfInErrorsLink2
eNb	GigaBitEthernet:pmIfInMulticastPktsLink1
eNb	GigaBitEthernet:pmIfInMulticastPktsLink2
eNb	GigaBitEthernet:pmIfInOctetsLink1Hi
eNb	GigaBitEthernet:pmIfInOctetsLink1Lo
eNb	GigaBitEthernet:pmIfInOctetsLink2Hi
eNb	GigaBitEthernet:pmIfInOctetsLink2Lo
eNb	GigaBitEthernet:pmIfInUcastPktsLink1
eNb	GigaBitEthernet:pmIfInUcastPktsLink2
eNb	GigaBitEthernet:pmIfInUnknownProtosLink1
eNb	GigaBitEthernet:pmIfInUnknownProtosLink2
eNb	GigaBitEthernet:pmIfOutBroadcastPktsLink1
eNb	GigaBitEthernet:pmIfOutBroadcastPktsLink2
eNb	GigaBitEthernet:pmIfOutDiscardsLink1
eNb	GigaBitEthernet:pmIfOutDiscardsLink2
eNb	GigaBitEthernet:pmIfOutErrorsLink1
eNb	GigaBitEthernet:pmIfOutErrorsLink2
eNb	GigaBitEthernet:pmIfOutMulticastPktsLink1
eNb	GigaBitEthernet:pmIfOutMulticastPktsLink2
eNb	GigaBitEthernet:pmIfOutOctetsLink1Hi
eNb	GigaBitEthernet:pmIfOutOctetsLink1Lo
eNb	GigaBitEthernet:pmIfOutOctetsLink2Hi
eNb	GigaBitEthernet:pmIfOutOctetsLink2Lo
eNb	GigaBitEthernet:pmIfOutUcastPktsLink1
eNb	GigaBitEthernet:pmIfOutUcastPktsLink2
eNb	Icmp:pmIcmpStatsInErrors
eNb	Icmp:pmIcmpStatsInMsgs
eNb	Icmp:pmIcmpStatsInPktsDestUnreach
eNb	Icmp:pmIcmpStatsInPktsEchoRep
eNb	Icmp:pmIcmpStatsInPktsEchos
eNb	Icmp:pmIcmpStatsInPktsNeighAdv
eNb	Icmp:pmIcmpStatsInPktsNeighSol
eNb	Icmp:pmIcmpStatsInPktsParmProb
eNb	Icmp:pmIcmpStatsInPktsRedir
eNb	Icmp:pmIcmpStatsInPktsRoutAdv
eNb	Icmp:pmIcmpStatsInPktsRoutSol

eNb	Icmp:pmlcmpStatsInPktsTimeExcds
eNb	Icmp:pmlcmpStatsInPktsTooBig
eNb	Icmp:pmlcmpStatsOutErrors
eNb	Icmp:pmlcmpStatsOutMsgs
eNb	Icmp:pmlcmpStatsOutPktsDestUnreach
eNb	Icmp:pmlcmpStatsOutPktsEchoRep
eNb	Icmp:pmlcmpStatsOutPktsEchos
eNb	Icmp:pmlcmpStatsOutPktsNeighAdv
eNb	Icmp:pmlcmpStatsOutPktsNeighSol
eNb	Icmp:pmlcmpStatsOutPktsParmProb
eNb	Icmp:pmlcmpStatsOutPktsRedir
eNb	Icmp:pmlcmpStatsOutPktsRoutAdv
eNb	Icmp:pmlcmpStatsOutPktsRoutSol
eNb	Icmp:pmlcmpStatsOutPktsTimeExcds
eNb	Icmp:pmlcmpStatsOutPktsTooBig
eNb	IkePeer:pmChildSaRekey
eNb	IkePeer:pmInAuthReq
eNb	IkePeer:pmInAuthRsp
eNb	IkePeer:pmInCrChildReq
eNb	IkePeer:pmInCrChildRsp
eNb	IkePeer:pmInInfoReq
eNb	IkePeer:pmInInfoRsp
eNb	IkePeer:pmInInitReq
eNb	IkePeer:pmInInitRsp
eNb	IkePeer:pmInInvalid
eNb	IkePeer:pmInInvalidSpi
eNb	IkePeer:pmOutAuthReq
eNb	IkePeer:pmOutAuthRsp
eNb	IkePeer:pmOutCrChildReq
eNb	IkePeer:pmOutCrChildRsp
eNb	IkePeer:pmOutInfoReq
eNb	IkePeer:pmOutInfoRsp
eNb	IkePeer:pmOutInitReq
eNb	IkePeer:pmOutInitRsp
eNb	InternalEthernetPort:pmDot1qTpVlanPortInDiscardsLink
eNb	InternalEthernetPort:pmIfInBroadcastPkts
eNb	InternalEthernetPort:pmIfInDiscards
eNb	InternalEthernetPort:pmIfInErrors
eNb	InternalEthernetPort:pmIfInMulticastPkts
eNb	InternalEthernetPort:pmIfInOctetsHi
eNb	InternalEthernetPort:pmIfInOctetsLo
eNb	InternalEthernetPort:pmIfInUcastPkts
eNb	InternalEthernetPort:pmIfInUnknownProtos
eNb	InternalEthernetPort:pmIfOutBroadcastPkts
eNb	InternalEthernetPort:pmIfOutDiscards

eNb	InternalEthernetPort:pmIfOutErrors
eNb	InternalEthernetPort:pmIfOutMulticastPkts
eNb	InternalEthernetPort:pmIfOutOctetsHi
eNb	InternalEthernetPort:pmIfOutOctetsLo
eNb	InternalEthernetPort:pmIfOutUcastPkts
eNb	Ip:pmNoOfHdrErrors
eNb	Ip:pmNoOfIpAddrErrors
eNb	Ip:pmNoOfIpForwDatagrams
eNb	Ip:pmNoOfIpInDiscards
eNb	Ip:pmNoOfIpInReceives
eNb	Ip:pmNoOfIpOutDiscards
eNb	Ip:pmNoOfIpReasmOKs
eNb	Ip:pmNoOfIpReasmReqds
eNb	IpAccessHostEt:pmIcmpInDestUnreachs
eNb	IpAccessHostEt:pmIcmpInEchoReps
eNb	IpAccessHostEt:pmIcmpInEchos
eNb	IpAccessHostEt:pmIcmpInErrors
eNb	IpAccessHostEt:pmIcmpInMsgs
eNb	IpAccessHostEt:pmIcmpInParamProbs
eNb	IpAccessHostEt:pmIcmpInRedirects
eNb	IpAccessHostEt:pmIcmpInSrcQuenchs
eNb	IpAccessHostEt:pmIcmpInTimeExcds
eNb	IpAccessHostEt:pmIcmpOutDestUnreachs
eNb	IpAccessHostEt:pmIcmpOutEchoReps
eNb	IpAccessHostEt:pmIcmpOutEchos
eNb	IpAccessHostEt:pmIcmpOutErrors
eNb	IpAccessHostEt:pmIcmpOutMsgs
eNb	IpAccessHostEt:pmIcmpOutParamProbs
eNb	IpAccessHostEt:pmInAppLayerError
eNb	IpAccessHostEt:pmIpFragCreates
eNb	IpAccessHostEt:pmIpFragFails
eNb	IpAccessHostEt:pmIpFragOKs
eNb	IpAccessHostEt:pmIpInAddrErrors
eNb	IpAccessHostEt:pmIpInDelivers
eNb	IpAccessHostEt:pmIpInDiscards
eNb	IpAccessHostEt:pmIpInHdrErrors
eNb	IpAccessHostEt:pmIpInReceives
eNb	IpAccessHostEt:pmIpInUnknownProtos
eNb	IpAccessHostEt:pmIpOutDiscards
eNb	IpAccessHostEt:pmIpOutRequests
eNb	IpAccessHostEt:pmIpPortUnreachable
eNb	IpAccessHostEt:pmIpReasmFails
eNb	IpAccessHostEt:pmIpReasmOKs
eNb	IpAccessHostEt:pmIpReasmReqds
eNb	IpAccessHostEt:pmMeanAtmConnSetupIntensity

eNb	IpAccessHostEt:pmPeakAtmConnSetupIntensity
eNb	IpAccessHostEt:pmStdDevAtmSetupIntensity
eNb	IpAccessHostEt:pmUdpInDatagrams
eNb	IpAccessHostEt:pmUdpInErrors
eNb	IpAccessHostEt:pmUdpOutDatagrams
eNb	IpAccessHostGpb:pmIcmpInDestUnreachs
eNb	IpAccessHostGpb:pmIcmpInEchoReps
eNb	IpAccessHostGpb:pmIcmpInEchos
eNb	IpAccessHostGpb:pmIcmpInErrors
eNb	IpAccessHostGpb:pmIcmpInMsgs
eNb	IpAccessHostGpb:pmIcmpInParamProbs
eNb	IpAccessHostGpb:pmIcmpInRedirects
eNb	IpAccessHostGpb:pmIcmpInSrcQuenchs
eNb	IpAccessHostGpb:pmIcmpInTimeExcds
eNb	IpAccessHostGpb:pmIcmpOutDestUnreachs
eNb	IpAccessHostGpb:pmIcmpOutEchoReps
eNb	IpAccessHostGpb:pmIcmpOutEchos
eNb	IpAccessHostGpb:pmIcmpOutErrors
eNb	IpAccessHostGpb:pmIcmpOutMsgs
eNb	IpAccessHostGpb:pmIcmpOutParmProbs
eNb	IpAccessHostGpb:pmIpFragCreates
eNb	IpAccessHostGpb:pmIpFragFails
eNb	IpAccessHostGpb:pmIpFragOKs
eNb	IpAccessHostGpb:pmIpInAddrErrors
eNb	IpAccessHostGpb:pmIpInDelivers
eNb	IpAccessHostGpb:pmIpInDiscards
eNb	IpAccessHostGpb:pmIpInHdrErrors
eNb	IpAccessHostGpb:pmIpInReceives
eNb	IpAccessHostGpb:pmIpInUnknownProtos
eNb	IpAccessHostGpb:pmIpOutDiscards
eNb	IpAccessHostGpb:pmIpOutRequests
eNb	IpAccessHostGpb:pmIpReasmFails
eNb	IpAccessHostGpb:pmIpReasmOKs
eNb	IpAccessHostGpb:pmIpReasmReqds
eNb	IpAccessHostGpb:pmUdpInDatagrams
eNb	IpAccessHostGpb:pmUdpInErrors
eNb	IpAccessHostGpb:pmUdpNoPorts
eNb	IpAccessHostGpb:pmUdpOutDatagrams
eNb	IpAccessHostSpb:pmIcmpInDestUnreachs
eNb	IpAccessHostSpb:pmIcmpInEchoReps
eNb	IpAccessHostSpb:pmIcmpInEchos
eNb	IpAccessHostSpb:pmIcmpInErrors
eNb	IpAccessHostSpb:pmIcmpInMsgs
eNb	IpAccessHostSpb:pmIcmpInParamProbs
eNb	IpAccessHostSpb:pmIcmpInRedirects

eNb	IpAccessHostSpb:pmlcmpInSrcQuenchs
eNb	IpAccessHostSpb:pmlcmpInTimeExcds
eNb	IpAccessHostSpb:pmlcmpOutDestUnreachs
eNb	IpAccessHostSpb:pmlcmpOutEchoReps
eNb	IpAccessHostSpb:pmlcmpOutEchos
eNb	IpAccessHostSpb:pmlcmpOutErrors
eNb	IpAccessHostSpb:pmlcmpOutMsgs
eNb	IpAccessHostSpb:pmlcmpOutParmProbs
eNb	IpAccessHostSpb:pmlpFragCreates
eNb	IpAccessHostSpb:pmlpFragFails
eNb	IpAccessHostSpb:pmlpFragOKs
eNb	IpAccessHostSpb:pmlpInAddrErrors
eNb	IpAccessHostSpb:pmlpInDelivers
eNb	IpAccessHostSpb:pmlpInDiscards
eNb	IpAccessHostSpb:pmlpInHdrErrors
eNb	IpAccessHostSpb:pmlpInReceives
eNb	IpAccessHostSpb:pmlpInUnknownProtos
eNb	IpAccessHostSpb:pmlpOutDiscards
eNb	IpAccessHostSpb:pmlpOutRequests
eNb	IpAccessHostSpb:pmlpReasmFails
eNb	IpAccessHostSpb:pmlpReasmOKs
eNb	IpAccessHostSpb:pmlpReasmReqds
eNb	IpAccessHostSpb:pmUdpInDatagrams
eNb	IpAccessHostSpb:pmUdpInErrors
eNb	IpAccessHostSpb:pmUdpNoPorts
eNb	IpAccessHostSpb:pmUdpOutDatagrams
eNb	IpFlowMonitor:pmlpFlowInOctets
eNb	IpFlowMonitor:pmlpFlowInPkts
eNb	IpFlowMonitor:pmlpFlowMaxInBitrate
eNb	IpFlowMonitor:pmlpFlowMaxOutBitrate
eNb	IpFlowMonitor:pmlpFlowMinInBitrate
eNb	IpFlowMonitor:pmlpFlowMinOutBitrate
eNb	IpFlowMonitor:pmlpFlowOutOctets
eNb	IpFlowMonitor:pmlpFlowOutPkts
eNb	IpHostLink:pmNoOfIfInDiscards
eNb	IpHostLink:pmNoOfIfInErrors
eNb	IpHostLink:pmNoOfIfInNUcastPkts
eNb	IpHostLink:pmNoOfIfInUcastPkts
eNb	IpHostLink:pmNoOfIfOutDiscards
eNb	IpHostLink:pmNoOfIfOutNUcastPkts
eNb	IpHostLink:pmNoOfIfOutUcastPkts
eNb	IpInterface:pmDot1qTpVlanPortInFrames
eNb	IpInterface:pmDot1qTpVlanPortOutFrames
eNb	IpInterface:pmIfStatsHCInMcastOctets
eNb	IpInterface:pmIfStatsHCInMcastPkts

eNb	IpInterface:pmIfStatsHCIpOutMcastOctets
eNb	IpInterface:pmIfStatsHCIpOutMcastPkts
eNb	IpInterface:pmIfStatsIpAddrErrors
eNb	IpInterface:pmIfStatsIpInDiscards
eNb	IpInterface:pmIfStatsIpInHdrErrors
eNb	IpInterface:pmIfStatsIpInReceives
eNb	IpInterface:pmIfStatsIpOutDiscards
eNb	IpInterface:pmIfStatsIpOutRequests
eNb	IpInterface:pmIfStatsIpUnknownProtos
eNb	IpInterface:pmInDiscPolicy
eNb	IpInterface:pmInEsp
eNb	IpInterface:pmInPassedPolicy
eNb	IpInterface:pmIpIfStatsHCInOctets
eNb	IpInterface:pmIpIfStatsHCInReceives
eNb	IpInterface:pmIpIfStatsHCOctets
eNb	IpInterface:pmIpIfStatsHCOutTransmits
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter0
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter1
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter2
eNb	IpMux:pmIpMuxNotApplied
eNb	IpSecTunnel:pmInDiscARefail
eNb	IpSecTunnel:pmInDiscDec
eNb	IpSecTunnel:pmInDiscIntCh
eNb	IpSecTunnel:pmInDiscNoSa
eNb	IpSecTunnel:pmInEspData
eNb	IpSecTunnel:pmInPkt
eNb	IpSecTunnel:pmOutDiscNoSa
eNb	IpSecTunnel:pmOutDiscSeqOw
eNb	IpSecTunnel:pmOutEspData
eNb	IpSecTunnel:pmOutPkt
eNb	Ipv6Interface:pmIfStatsHCIPInMcastOctets
eNb	Ipv6Interface:pmIfStatsHCIPInMcastPkts
eNb	Ipv6Interface:pmIfStatsHCIPOutMcastOctets
eNb	Ipv6Interface:pmIfStatsHCIPOutMcastPkts
eNb	Ipv6Interface:pmIpIfStatsHCInOctets
eNb	Ipv6Interface:pmIpIfStatsHCInReceives
eNb	Ipv6Interface:pmIpIfStatsHCOctets
eNb	Ipv6Interface:pmIpIfStatsHCOutTransmits
eNb	Ipv6Interface:pmIpIfStatsInAddrErrors
eNb	Ipv6Interface:pmIpIfStatsInDiscards
eNb	Ipv6Interface:pmIpIfStatsInHdrErrors
eNb	Ipv6Interface:pmIpIfStatsInUnknownProtos
eNb	Ipv6Interface:pmIpIfStatsOutDiscards
eNb	Ipv6Interface:pmIpIfStatsOutFragCreates
eNb	Ipv6Interface:pmIpIfStatsReasmFails

eNb	Ipv6Interface:pmIplfStatsReasmReqds
eNb	Ipv6Interface:pmUdplfStatsInError
eNb	MbmsService:pmMbmsPktDiscSynchPayloadMuted
eNb	MbmsService:pmMbmsPktDiscSynchPayloadTooMuch
eNb	MbmsService:pmMbmsPktDiscSynchPayloadTooOld
eNb	MbmsService:pmMbmsPktLostSynchPayload
eNb	MbmsService:pmMbmsPktRecSynchCtrl
eNb	MbmsService:pmMbmsPktRecSynchPayload
eNb	MbmsService:pmMbmsSessionEnd
eNb	MbmsService:pmMbmsSessionEstabAtt
eNb	MbmsService:pmMbmsSessionEstabFailUpdate
eNb	MbmsService:pmMbmsSessionEstabSucc
eNb	MbmsService:pmMbmsSessionStopAuditTimer
eNb	MbmsService:pmMbmsSessionStopMme
eNb	MbmsService:pmMbmsVolReceived
eNb	MbmsService:pmMbmsVolTrans
eNb	MbmsService:pmZtemporary55
eNb	MceFunction:pmMbmsSessionEstabFailNotSupp
eNb	MceFunction:pmMbmsSessionStopMmeNoSession
eNb	MediumAccessUnit:pmNoOfDot3StatsFCSErrors
eNb	MediumAccessUnit:pmNoOfDot3StatsLateCollisions
eNb	PlugInUnit:pmProcessorCoreLoad
eNb	PlugInUnit:pmProcessorLoad
eNb	PlugInUnit:pmSwitchIngressDiscards
eNb	PlugInUnit:pmSwitchIngressLoad
eNb	PmUeMeasControl:pmUeMeasRsrpDeltaIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrpServIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrqDeltaIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrqServIntraFreq1
eNb	PmUeMeasControl:pmZtemporary44
eNb	ProcessorLoad:pmProcessorLoadDistr
eNb	ProcessorLoad:pmZtemporary46
eNb	Sctp:pmSctpAborted
eNb	Sctp:pmSctpActiveEstab
eNb	Sctp:pmSctpCurrEstab
eNb	Sctp:pmSctpInErrors
eNb	Sctp:pmSctpInNoPorts
eNb	Sctp:pmSctpPassiveEstab
eNb	Sctp:pmSctpShutdowns
eNb	Sctp:pmSctpStatAssocOutOfBlue
eNb	Sctp:pmSctpStatChecksumErrorCounter
eNb	Sctp:pmSctpStatCommResume
eNb	Sctp:pmSctpStatCommStop
eNb	Sctp:pmSctpStatFragmentedUserMsg
eNb	Sctp:pmSctpStatOutOfOrderRecChunks

eNb	Sctp:pmSctpStatOutOfOrderSendChunks
eNb	Sctp:pmSctpStatReassembledUserMsg
eNb	Sctp:pmSctpStatRecChunks
eNb	Sctp:pmSctpStatRecChunksDropped
eNb	Sctp:pmSctpStatReceivedControlChunks
eNb	Sctp:pmSctpStatReceivedPackages
eNb	Sctp:pmSctpStatRetransChunks
eNb	Sctp:pmSctpStatSentChunks
eNb	Sctp:pmSctpStatSentChunksDropped
eNb	Sctp:pmSctpStatSentControlChunks
eNb	Sctp:pmSctpStatSentPackages
eNb	SctpAssociation:pmAbortedS
eNb	SctpAssociation:pmCongestions
eNb	SctpAssociation:pmInControlChunkAbnormal
eNb	SctpAssociation:pmInControlChunkDiscards
eNb	SctpAssociation:pmInControlChunks
eNb	SctpAssociation:pmInDataChunkAbnormal
eNb	SctpAssociation:pmInDataChunkDiscards
eNb	SctpAssociation:pmInDataChunks
eNb	SctpAssociation:pmInOctets
eNb	SctpAssociation:pmInPacks
eNb	SctpAssociation:pmOutControlChunks
eNb	SctpAssociation:pmOutDataChunkDiscards
eNb	SctpAssociation:pmOutDataChunks
eNb	SctpAssociation:pmOutOctets
eNb	SctpAssociation:pmOutPacks
eNb	SctpAssociation:pmOutUserMsgDiscards
eNb	SctpAssociation:pmPeerZeroWindows
eNb	SctpAssociation:pmRtxChunks
eNb	SctpAssociation:pmShutdowns
eNb	SctpAssociation:pmTimeCongested
eNb	SctpAssociation:pmTimePeerZeroWindow
eNb	SctpAssociation:pmTimeUnavail
eNb	SctpAssociation:pmUnavailRetrans
eNb	SectorCarrier:pmActiveUeDISumSectorCarrier
eNb	SectorCarrier:pmActiveUeUISumSectorCarrier
eNb	SectorCarrier:pmBranchDeltaSinrDistr0
eNb	SectorCarrier:pmBranchDeltaSinrDistr1
eNb	SectorCarrier:pmBranchDeltaSinrDistr2
eNb	SectorCarrier:pmBranchDeltaSinrDistr3
eNb	SectorCarrier:pmBranchDeltaSinrDistr4
eNb	SectorCarrier:pmBranchDeltaSinrDistr5
eNb	SectorCarrier:pmBranchDeltaSinrDistr6
eNb	SectorCarrier:pmBranchUsersLevSum
eNb	SectorCarrier:pmCompUIToADiffDistr

eNb	SectorCarrier:pmMicroTxSleepTime
eNb	SectorCarrier:pmZtemporary56
eNb	SecurityHandling:pmRrcSecFailIntegrity
eNb	SecurityHandling:pmRrcSecFailUnexpectedMsg
eNb	SecurityHandling:pmZtemporary45
eNb	Synchronization:pmHDelayVarBest10Pct
eNb	Synchronization:pmHDelayVarBest1Pct
eNb	Synchronization:pmHDelayVarBest50Pct
eNb	Synchronization:pmMaxDelayVariation
eNb	TrafficManagementQueue:pmQueueDroppedOctets
eNb	TrafficManagementQueue:pmQueueDroppedPackets
eNb	TrafficManagementQueue:pmQueueOutOctets
eNb	TrafficManagementQueue:pmQueueOutPackets
eNb	TwampResponder:pmTestInDiscards
eNb	TwampResponder:pmTestInErrors
eNb	TwampResponder:pmTestInReceives
eNb	TwampResponder:pmTestOutTransmits
eNb	TwampResponder:pmTestSessions
eNb	UIBasebandCapacity:pmLicUICapLicense
eNb	UIBasebandCapacity:pmZtemporary41
eNb	UIPrbCapacity:pmLicUIPrbCapLicense
eNb	UIPrbCapacity:pmZtemporary43
eNb	UtranCellRelation:pmHoExeAtt
eNb	UtranCellRelation:pmHoExeAttCsfb
eNb	UtranCellRelation:pmHoExeAttCsfbEm
eNb	UtranCellRelation:pmHoExeAttLb
eNb	UtranCellRelation:pmHoExeSucc
eNb	UtranCellRelation:pmHoExeSuccCsfb
eNb	UtranCellRelation:pmHoExeSuccCsfbEm
eNb	UtranCellRelation:pmHoExeSuccLb
eNb	UtranCellRelation:pmHoPrepAtt
eNb	UtranCellRelation:pmHoPrepAttCsfb
eNb	UtranCellRelation:pmHoPrepAttCsfbEm
eNb	UtranCellRelation:pmHoPrepAttLb
eNb	UtranCellRelation:pmHoPrepAttSrvcc
eNb	UtranCellRelation:pmHoPrepAttSrvccLb
eNb	UtranCellRelation:pmHoPrepSucc
eNb	UtranCellRelation:pmHoPrepSuccCsfb
eNb	UtranCellRelation:pmHoPrepSuccCsfbEm
eNb	UtranCellRelation:pmHoPrepSuccLb
eNb	UtranCellRelation:pmHoPrepSuccSrvcc
eNb	UtranCellRelation:pmHoPrepSuccSrvccLb
eNb	UtranCellRelation:pmLbQualifiedUe
eNb	UtranCellRelation:pmZtemporary37
eNb	UtranFreqRelation:pmLbMeasuredUe

eNb

VpnInterface:pmOutDroppedPacketsPolicyControl



National_PM_Standard_eNodeB_L14B_GS_14.08.txt

Profile

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

No

National_PM_Standard_eNodeB_L14B_GS_14.0

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

No

No

No

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

No

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
No
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
No
System ERBS PRIMARY
System ERBS PRIMARY
No
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.08
No
No
No
No
No

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

[illegible]

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
No
National_PM_Standard_eNodeB_L14B_GS_14.C
No
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
No
National_PM_Standard_eNodeB_L14B_GS_14.C
No
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
No
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
No
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
No
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
No
National_PM_Standard_eNodeB_L14B_GS_14.C
No
No
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.C
No
No
No
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.C
No
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
No
No
No
No
No
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C

No

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB 114B GS 14 C

National PM Standard eNodeB 114B GS 14 C

National_PM_Standard_eNodeB_E14B_CS_14.0
National_PM_Standard_eNodeB_I14B_CS_14.0National_TM_Standard_eNodeB_E14B_GS_14.0
National_TM_Standard_eNodeB_E14B_GS_14.0

National_FM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB 114B GS 14C

National PM Standard eNodeB I14B GS 14 C

National PM Standard eNodeB U14B GS 14 C

National_FM_Standard_eNodeB_E14B_GS_14.0
National_FM_Standard_eNodeB_I14B_GS_14.0National_FM_Standard_eNodeB_L14B_GS_14.0
National_FM_Standard_eNodeB_L14B_GS_14.0

National_FM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

No

No

No

No

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

No

No

No

No

No

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

No

No

No

No

No

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

No

No

No

No

No

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

No

National PM Standard eNodeB L14B GS 14.0

National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National PM Standard eNodeB L14B GS 14.C

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.08

No

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
National_PM_Standard_eNodeB_L14B_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY

— — — — —

No

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

No

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

No

No

No

No

No

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

No

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.08

System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
No
System ERBS PRIMARY
No
National_PM_Standard_eNodeB_L14B_GS_14.08
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
No
System ERBS PRIMARY
No
National_PM_Standard_eNodeB_L14B_GS_14.08
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.0
No
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.08
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.0
No
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.08
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.0
National_PM_Standard_eNodeB_L14B_GS_14.08
National_PM_Standard_eNodeB_L14B_GS_14.0
No
No

[illegible]

No
No
No
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
System ERBS PRIMARY
No
System ERBS PRIMARY
No
System ERBS PRIMARY
No
System ERBS PRIMARY
No
System ERBS PRIMARY
System ERBS PRIMARY
No
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
No
System ERBS PRIMARY

System ERBS PRIMARY

No

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

No

No

System ERBS PRIMARY

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

No

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No
No
No
System ERBS PRIMARY
No
No
No
No
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
No
No
No
No
No
No
System ERBS PRIMARY
System ERBS PRIMARY
No
No
No
No
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
No
No
No
No

System ERBS PRIMARY
No
No

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

[illegible]

[illegible]

[illegible]

[illegible]

System ERBS PRIMARY

System ERBS PRIMARY

No

No

No

No

No

System ERBS PRIMARY

System ERBS PRIMARY

No

No

No

No

No

No

No

System ERBS PRIMARY

System ERBS PRIMARY

No

System ERBS PRIMARY

System ERBS PRIMARY

No

System ERBS PRIMARY

System ERBS PRIMARY

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY

No

No

No

No

No

No

No

No

System ERBS PRIMARY

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No

[illegible]

No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.0

No

National_PM_Standard_eNodeB_L14B_GS_14.08

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

National_PM_Standard_eNodeB_L14B_GS_14.0

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

[illegible]

National_PM_Standard_eNodeB_L14B_GS_14.C

No

No

No

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National_PM_Standard_eNodeB_L14B_GS_14.C

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.C

No

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.C

No

No

No

No

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.C

National PM Standard eNodeB L14B GS 14.0

National PM Standard eNodeB L14B GS 14.0

[illegible]

[illegible]

[illegible]

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Reason

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18
18
18

18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18

18

18

)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8

)8
)8

)8
)8

)8
)8

)8
)8

)8
)8
)8
)8
)8

18
18
18
18

18

18
18
18

18
18
18
18
18
18
18
18
18
18

18
18
18
18
18
18
18
18
18

18
18
18
18

18
18
18
18
18
18
18
18
18

18
18

18
18
18
18
18
18
18
18

18
18
18
18
18

18
18

18
18
18
18
18
18
18
18
18
18

18
18
18
18
18
18

18

18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18

18

18

18

18
18
18
18
18

18

18
18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18
18
18
18
18
18
18
18
18
18
18
18
18

18
18
18

18

18

18

18
18

18
18

18

18

18

18

18

[illegible]

18
18
18
18
18
18
18
18

18
18
18
18
18
18

18
18
18

18
18
18
18
18

18
18
18
18
18
18
18

18

18

18

)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8

)8
)8
)8
)8

)8
)8
)8
)8

)8
)8
)8

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

18

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18

18

18

18

18

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

)8

[illegible]

[illegible]

[illegible]

)8
)8
)8
)8
)8

)8
)8
)8
)8
)8
)8
)8
)8
)8

18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18
18

18
18
18
18
18
18
18
18
18
18
18

18
18
18
18
18
18
18
18
18
18
18

)8
)8

18
18
18
18

[illegible]

[illegible]

)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8
)8

)8

)8
)8

)8
)8

)8
)8

)8
)8
)8
)8

)8
)8
)8
)8
)8
)8

**Ericsson LTE L14A eNodeB Counter Activation
Standard**

Resolution	MO:Counter
eNb	AdmissionControl:pmAdmNrRrcUnknownArpRatio
eNb	BbProcessingResource:pmLicDlCapActual
eNb	BbProcessingResource:pmLicDlCapDistr
eNb	BbProcessingResource:pmLicDlPrbCapActual
eNb	BbProcessingResource:pmLicDlPrbCapDistr
eNb	BbProcessingResource:pmLicUlCapActual
eNb	BbProcessingResource:pmLicUlCapDistr
eNb	BbProcessingResource:pmLicUlPrbCapActual
eNb	BbProcessingResource:pmLicUlPrbCapDistr
eNb	BbProcessingResource:pmPdcPktDiscDlEth
eNb	BbProcessingResource:pmPdcPktDiscDlEthBurst
eNb	BbProcessingResource:pmPdcPktDiscDlEthFormat
eNb	BbProcessingResource:pmPdcPktDiscDlEthX2Fwd
eNb	BbProcessingResource:pmPdcPktDiscDlNoMbmsCtxt
eNb	BbProcessingResource:pmPdcPktDiscDlNoUeCtxt
eNb	BbProcessingResource:pmPdcPktDiscUlEthPacing
eNb	BbProcessingResource:pmRohcCidSamp
eNb	BbProcessingResource:pmRohcCidSum
eNb	BbProcessingResource:pmZtemporary47
eNb	BbProcessingResource:pmZtemporary48
eNb	BbProcessingResource:pmZtemporary49
eNb	BbProcessingResource:pmZtemporary50
eNb	BbProcessingResource:pmZtemporary51
eNb	BbProcessingResource:pmZtemporary52
eNb	BbProcessingResource:pmZtemporary53
eNb	BbProcessingResource:pmZtemporary54
eNb	CapacityConnectedUsers:pmLicConnectedUsersActual
eNb	CapacityConnectedUsers:pmLicConnectedUsersDistr
eNb	CapacityConnectedUsers:pmLicConnectedUsersLevSa
eNb	CapacityConnectedUsers:pmLicConnectedUsersLevSu
eNb	CapacityConnectedUsers:pmLicConnectedUsersLicense
eNb	CapacityConnectedUsers:pmLicConnectedUsersMax
eNb	CapacityConnectedUsers:pmLicConnectedUsersTimeCc
eNb	CapacityConnectedUsers:pmZtemporary38
eNb	CapacityConnectedUsers:pmZtemporary39
eNb	Cdma20001xRttCellRelation:pmHoPrepAttCsfb
eNb	Cdma20001xRttCellRelation:pmHoPrepAttCsfbEm

eNb	Cdma20001xRttCellRelation:pmHoPrepSuccCsfb
eNb	Cdma20001xRttCellRelation:pmHoPrepSuccCsfbEm
eNb	DefaultRouter:pmNoOfFailedPingsDefaultRouter
eNb	DlBasebandCapacity:pmLicDlCapLicense
eNb	DlBasebandCapacity:pmZtemporary40
eNb	DlPrbCapacity:pmLicDlPrbCapLicense
eNb	DlPrbCapacity:pmZtemporary42
eNb	DscpGroup:pmIfStatsDscplnOctets
eNb	DscpGroup:pmIfStatsDscplnPackets
eNb	DscpGroup:pmIfStatsDscpOutOctets
eNb	DscpGroup:pmIfStatsDscpOutPackets
eNb	ENodeBFunction:pmMoFootprintMax
eNb	ENodeBFunction:pmPagS1Discarded
eNb	ENodeBFunction:pmPagS1Received
eNb	ENodeBFunction:pmZtemporary34
eNb	ENodeBFunction:pmZtemporary35
eNb	EthernetLink:pmNoOfIfInDiscards
eNb	EthernetLink:pmNoOfIfInErrors
eNb	EthernetLink:pmNoOfIfInNUcastPackets
eNb	EthernetLink:pmNoOfIfInUcastPackets
eNb	EthernetLink:pmNoOfIfOutDiscards
eNb	EthernetLink:pmNoOfIfOutNUcastPackets
eNb	EthernetLink:pmNoOfIfOutUcastPackets
eNb	EUtranCellFDD:pmActiveDrbDlSum
eNb	EUtranCellFDD:pmActiveDrbDlSumQci
eNb	EUtranCellFDD:pmActiveDrbUlSum
eNb	EUtranCellFDD:pmActiveUeDlMax
eNb	EUtranCellFDD:pmActiveUeDlSectorCarrierDistr
eNb	EUtranCellFDD:pmActiveUeDlSum
eNb	EUtranCellFDD:pmActiveUeDlSumQci
eNb	EUtranCellFDD:pmActiveUeDrbSamp
eNb	EUtranCellFDD:pmActiveUeUlMax
eNb	EUtranCellFDD:pmActiveUeUlSectorCarrierDistr
eNb	EUtranCellFDD:pmActiveUeUlSum
eNb	EUtranCellFDD:pmActiveUeUlSumLcg
eNb	EUtranCellFDD:pmAdvCellSupDetection
eNb	EUtranCellFDD:pmAdvCellSupRecoveryCellAtt
eNb	EUtranCellFDD:pmAdvCellSupRecoveryCellSucc
eNb	EUtranCellFDD:pmAnrNeighbreAdd
eNb	EUtranCellFDD:pmAnrNeighbreRem
eNb	EUtranCellFDD:pmBadCovEvalReport
eNb	EUtranCellFDD:pmBadCovSearchEvalReport
eNb	EUtranCellFDD:pmBestCellEvalReport
eNb	EUtranCellFDD:pmCaActivatedDlSum
eNb	EUtranCellFDD:pmCaCapableDlSamp

eNb	EUtranCellFDD:pmCaCapableDISum
eNb	EUtranCellFDD:pmCaConfiguredDISamp
eNb	EUtranCellFDD:pmCaConfiguredDISum
eNb	EUtranCellFDD:pmCaConfiguredMeasAtt
eNb	EUtranCellFDD:pmCaConfiguredMeasSucc
eNb	EUtranCellFDD:pmCaConfiguredNoMeasAtt
eNb	EUtranCellFDD:pmCaConfiguredNoMeasSucc
eNb	EUtranCellFDD:pmCaConfiguredSamp
eNb	EUtranCellFDD:pmCaDeconfigured
eNb	EUtranCellFDD:pmCaDeconfiguredLostCoverage
eNb	EUtranCellFDD:pmCaDeconfiguredSamp
eNb	EUtranCellFDD:pmCaDeconfiguredSCellChange
eNb	EUtranCellFDD:pmCaScheduledDISum
eNb	EUtranCellFDD:pmCellAdmControlPdcchRej
eNb	EUtranCellFDD:pmCellAdmControlPdcchRejMeas
eNb	EUtranCellFDD:pmCellDownLockAuto
eNb	EUtranCellFDD:pmCellDownLockMan
eNb	EUtranCellFDD:pmCellDowntimeAuto
eNb	EUtranCellFDD:pmCellDowntimeMan
eNb	EUtranCellFDD:pmCellDownUnlockMan
eNb	EUtranCellFDD:pmCellHoExeAttLteInterF
eNb	EUtranCellFDD:pmCellHoExeAttLteInterFMbms
eNb	EUtranCellFDD:pmCellHoExeAttLteIntraF
eNb	EUtranCellFDD:pmCellHoExeAttLteIntraFTuneOut
eNb	EUtranCellFDD:pmCellHoExeSuccLteInterF
eNb	EUtranCellFDD:pmCellHoExeSuccLteInterFMbms
eNb	EUtranCellFDD:pmCellHoExeSuccLteIntraF
eNb	EUtranCellFDD:pmCellHoExeSuccLteIntraFTuneOut
eNb	EUtranCellFDD:pmCellHoPrepAttLteInterF
eNb	EUtranCellFDD:pmCellHoPrepAttLteInterFMbms
eNb	EUtranCellFDD:pmCellHoPrepAttLteIntraF
eNb	EUtranCellFDD:pmCellHoPrepSuccLteInterF
eNb	EUtranCellFDD:pmCellHoPrepSuccLteInterFMbms
eNb	EUtranCellFDD:pmCellHoPrepSuccLteIntraF
eNb	EUtranCellFDD:pmCompUIDeltaSinrPuschDistr
eNb	EUtranCellFDD:pmContDI
eNb	EUtranCellFDD:pmContDICapLic
eNb	EUtranCellFDD:pmContDIHw
eNb	EUtranCellFDD:pmContDIPdcch
eNb	EUtranCellFDD:pmContUI
eNb	EUtranCellFDD:pmContUICapLic
eNb	EUtranCellFDD:pmContUIHw
eNb	EUtranCellFDD:pmContUIPdcch
eNb	EUtranCellFDD:pmCriticalBorderEvalReport
eNb	EUtranCellFDD:pmDIAssigsTrans

eNb	EUtranCellFDD:pmDlAssigsTransPCell
eNb	EUtranCellFDD:pmDlAssigsTransSCell
eNb	EUtranCellFDD:pmDlAssigsTransVolte
eNb	EUtranCellFDD:pmDlAssigsWithDetectedHarqAck
eNb	EUtranCellFDD:pmDlAssigsWithDetectedHarqAckPCell
eNb	EUtranCellFDD:pmDlAssigsWithDetectedHarqAckSCell
eNb	EUtranCellFDD:pmDlAssigsWithDetectedHarqAckVolte
eNb	EUtranCellFDD:pmDlAssigsWithUnknownReception
eNb	EUtranCellFDD:pmDlAssigsWithUnknownReceptionPCel
eNb	EUtranCellFDD:pmDlAssigsWithUnknownReceptionSCel
eNb	EUtranCellFDD:pmDlAssigsWithUnknownReceptionVolte
eNb	EUtranCellFDD:pmDrbThpTimeDlQci
eNb	EUtranCellFDD:pmDrxSleepTime
eNb	EUtranCellFDD:pmDrxTotalTime
eNb	EUtranCellFDD:pmErabEstabAttAdded
eNb	EUtranCellFDD:pmErabEstabAttAddedArp
eNb	EUtranCellFDD:pmErabEstabAttAddedPa
eNb	EUtranCellFDD:pmErabEstabAttAddedQci
eNb	EUtranCellFDD:pmErabEstabAttInit
eNb	EUtranCellFDD:pmErabEstabAttInitArp
eNb	EUtranCellFDD:pmErabEstabAttInitPa
eNb	EUtranCellFDD:pmErabEstabAttInitQci
eNb	EUtranCellFDD:pmErabEstabFailAddedLic
eNb	EUtranCellFDD:pmErabEstabFailGbrDlEnb
eNb	EUtranCellFDD:pmErabEstabFailGbrUlEnb
eNb	EUtranCellFDD:pmErabEstabFailInitLic
eNb	EUtranCellFDD:pmErabEstabSuccAdded
eNb	EUtranCellFDD:pmErabEstabSuccAddedArp
eNb	EUtranCellFDD:pmErabEstabSuccAddedPa
eNb	EUtranCellFDD:pmErabEstabSuccAddedQci
eNb	EUtranCellFDD:pmErabEstabSuccInit
eNb	EUtranCellFDD:pmErabEstabSuccInitArp
eNb	EUtranCellFDD:pmErabEstabSuccInitPa
eNb	EUtranCellFDD:pmErabEstabSuccInitQci
eNb	EUtranCellFDD:pmErabLevRopStartQci
eNb	EUtranCellFDD:pmErabLevSamp
eNb	EUtranCellFDD:pmErabLevSum
eNb	EUtranCellFDD:pmErabMax
eNb	EUtranCellFDD:pmErabModAttQci
eNb	EUtranCellFDD:pmErabModFailLic
eNb	EUtranCellFDD:pmErabModSuccQci
eNb	EUtranCellFDD:pmErabQciLevSum
eNb	EUtranCellFDD:pmErabQciMax
eNb	EUtranCellFDD:pmErabRelAbnormalEnb
eNb	EUtranCellFDD:pmErabRelAbnormalEnbAct

eNb	EUtranCellFDD:pmErabRelAbnormalEnbActArp
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActCdt
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActCdtAuto
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActCdtAutoPnr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActHo
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActHpr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActPe
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActQci
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActTnFail
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActUeLost
eNb	EUtranCellFDD:pmErabRelAbnormalEnbArp
eNb	EUtranCellFDD:pmErabRelAbnormalEnbCdt
eNb	EUtranCellFDD:pmErabRelAbnormalEnbCdtAuto
eNb	EUtranCellFDD:pmErabRelAbnormalEnbCdtAutoPnr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbHo
eNb	EUtranCellFDD:pmErabRelAbnormalEnbHpr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbLic
eNb	EUtranCellFDD:pmErabRelAbnormalEnbPe
eNb	EUtranCellFDD:pmErabRelAbnormalEnbQci
eNb	EUtranCellFDD:pmErabRelAbnormalEnbTnFail
eNb	EUtranCellFDD:pmErabRelAbnormalEnbUeLost
eNb	EUtranCellFDD:pmErabRelAbnormalMme
eNb	EUtranCellFDD:pmErabRelAbnormalMmeAct
eNb	EUtranCellFDD:pmErabRelAbnormalMmeActArp
eNb	EUtranCellFDD:pmErabRelAbnormalMmeActQci
eNb	EUtranCellFDD:pmErabRelAbnormalMmeQci
eNb	EUtranCellFDD:pmErabRelMme
eNb	EUtranCellFDD:pmErabRelMmeAct
eNb	EUtranCellFDD:pmErabRelMmeActEutra
eNb	EUtranCellFDD:pmErabRelMmeActHo
eNb	EUtranCellFDD:pmErabRelMmeActQci
eNb	EUtranCellFDD:pmErabRelMmeActUnspecified
eNb	EUtranCellFDD:pmErabRelMmeActUserInactivity
eNb	EUtranCellFDD:pmErabRelMmeArp
eNb	EUtranCellFDD:pmErabRelMmeHo
eNb	EUtranCellFDD:pmErabRelMmeQci
eNb	EUtranCellFDD:pmErabRelNormalEnb
eNb	EUtranCellFDD:pmErabRelNormalEnbAct
eNb	EUtranCellFDD:pmErabRelNormalEnbActArp
eNb	EUtranCellFDD:pmErabRelNormalEnbActQci
eNb	EUtranCellFDD:pmErabRelNormalEnbArp
eNb	EUtranCellFDD:pmErabRelNormalEnbQci
eNb	EUtranCellFDD:pmErabRelNormalEnbUserInactivity
eNb	EUtranCellFDD:pmErabRelNormalEnbUserInactivityQci
eNb	EUtranCellFDD:pmHoExeOutAttQci

eNb	EUtranCellFDD:pmHoExeOutSuccQci
eNb	EUtranCellFDD:pmHoPrepRejInBearerAdmissionRej
eNb	EUtranCellFDD:pmHoPrepRejInDIOnlyCell
eNb	EUtranCellFDD:pmHoPrepRejInHighLoad
eNb	EUtranCellFDD:pmHoPrepRejInLicConnUsers
eNb	EUtranCellFDD:pmHoPrepRejInLicMob
eNb	EUtranCellFDD:pmHoPrepRejInLicMultiErab
eNb	EUtranCellFDD:pmHoPrepRejInLicRlcUm
eNb	EUtranCellFDD:pmHoPrepRejInMISigQCong
eNb	EUtranCellFDD:pmHoPrepRejInOffloadAdmission
eNb	EUtranCellFDD:pmHoPrepRejInOverload
eNb	EUtranCellFDD:pmHoPrepRejInSI
eNb	EUtranCellFDD:pmLbSubRatioSamp
eNb	EUtranCellFDD:pmLbSubRatioSum
eNb	EUtranCellFDD:pmLcgThpTimeUILcg
eNb	EUtranCellFDD:pmLcgThpVolUILcg
eNb	EUtranCellFDD:pmMacDelayTimeDI
eNb	EUtranCellFDD:pmMacHarqDIAck16qam
eNb	EUtranCellFDD:pmMacHarqDIAck64qam
eNb	EUtranCellFDD:pmMacHarqDIAckQpsk
eNb	EUtranCellFDD:pmMacHarqDIDtx16qam
eNb	EUtranCellFDD:pmMacHarqDIDtx64qam
eNb	EUtranCellFDD:pmMacHarqDIDtxQpsk
eNb	EUtranCellFDD:pmMacHarqDINack16qam
eNb	EUtranCellFDD:pmMacHarqDINack64qam
eNb	EUtranCellFDD:pmMacHarqDINackQpsk
eNb	EUtranCellFDD:pmMacHarqUIDtx16qam
eNb	EUtranCellFDD:pmMacHarqUIDtxQpsk
eNb	EUtranCellFDD:pmMacHarqUIFail16qam
eNb	EUtranCellFDD:pmMacHarqUIFailQpsk
eNb	EUtranCellFDD:pmMacHarqUISucc16qam
eNb	EUtranCellFDD:pmMacHarqUISuccQpsk
eNb	EUtranCellFDD:pmMeasMissingNeighRel
eNb	EUtranCellFDD:pmOocNewDataUIGrants
eNb	EUtranCellFDD:pmOocStateEntries
eNb	EUtranCellFDD:pmOocStateExits
eNb	EUtranCellFDD:pmOocStateExitsUeRel
eNb	EUtranCellFDD:pmPagDiscarded
eNb	EUtranCellFDD:pmPagReceived
eNb	EUtranCellFDD:pmPdcchCceActivity
eNb	EUtranCellFDD:pmPdcchCceAggregationDistr
eNb	EUtranCellFDD:pmPdcchCceRequestedDistr
eNb	EUtranCellFDD:pmPdcchCceUsedDIQci
eNb	EUtranCellFDD:pmPdcchCceUsedUIQci
eNb	EUtranCellFDD:pmPdcchCceUtil

eNb	EUtranCellFDD:pmPdcchCfiUtil
eNb	EUtranCellFDD:pmPdcchMaxCceAvail
eNb	EUtranCellFDD:pmPdcchResyncAtt
eNb	EUtranCellFDD:pmPdcchResyncSucc
eNb	EUtranCellFDD:pmPdcchSym0PwrUtil
eNb	EUtranCellFDD:pmPdcchSym1PwrUtil
eNb	EUtranCellFDD:pmPdcchSym2PwrUtil
eNb	EUtranCellFDD:pmPdcchSym3PwrUtil
eNb	EUtranCellFDD:pmPdcchTxAggressive
eNb	EUtranCellFDD:pmPdcchTxConservative
eNb	EUtranCellFDD:pmPdcPbRateDlDrbMax
eNb	EUtranCellFDD:pmPdcPbRateDlDrbMin
eNb	EUtranCellFDD:pmPdcPbRateUlDrbMax
eNb	EUtranCellFDD:pmPdcPbRateUlDrbMin
eNb	EUtranCellFDD:pmPdcPbLatPktTransDl
eNb	EUtranCellFDD:pmPdcPbLatPktTransDlDrxNoSync
eNb	EUtranCellFDD:pmPdcPbLatPktTransDlDrxSync
eNb	EUtranCellFDD:pmPdcPbLatPktTransDlNoDrxSync
eNb	EUtranCellFDD:pmPdcPbLatPktTransDlQci
eNb	EUtranCellFDD:pmPdcPbLatTimeDl
eNb	EUtranCellFDD:pmPdcPbLatTimeDlDrxNoSync
eNb	EUtranCellFDD:pmPdcPbLatTimeDlDrxSync
eNb	EUtranCellFDD:pmPdcPbLatTimeDlNoDrxSync
eNb	EUtranCellFDD:pmPdcPbLatTimeDlQci
eNb	EUtranCellFDD:pmPdcPbPktDiscDlAqm
eNb	EUtranCellFDD:pmPdcPbPktDiscDlAqmQci
eNb	EUtranCellFDD:pmPdcPbPktDiscDlHo
eNb	EUtranCellFDD:pmPdcPbPktDiscDlHoQci
eNb	EUtranCellFDD:pmPdcPbPktDiscDlPelr
eNb	EUtranCellFDD:pmPdcPbPktDiscDlPelrQci
eNb	EUtranCellFDD:pmPdcPbPktDiscDlPelrUu
eNb	EUtranCellFDD:pmPdcPbPktDiscDlPelrUuQci
eNb	EUtranCellFDD:pmPdcPbPktFwdDl
eNb	EUtranCellFDD:pmPdcPbPktLostUl
eNb	EUtranCellFDD:pmPdcPbPktLostUlQci
eNb	EUtranCellFDD:pmPdcPbPktPdbUlOkVoip
eNb	EUtranCellFDD:pmPdcPbPktReceivedDl
eNb	EUtranCellFDD:pmPdcPbPktReceivedDlQci
eNb	EUtranCellFDD:pmPdcPbPktReceivedUl
eNb	EUtranCellFDD:pmPdcPbPktReceivedUlQci
eNb	EUtranCellFDD:pmPdcPbPktTransDl
eNb	EUtranCellFDD:pmPdcPbPktTransDlQci
eNb	EUtranCellFDD:pmPdcPbVolDlCmpHdrQci
eNb	EUtranCellFDD:pmPdcPbVolDlDrb
eNb	EUtranCellFDD:pmPdcPbVolDlDrbLastTTI

eNb	EUtranCellFDD:pmPdcPVolDIDrbLastTTIQci
eNb	EUtranCellFDD:pmPdcPVolDIDrbQci
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn0
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn1
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn2
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn3
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn4
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn5
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransPlmn6
eNb	EUtranCellFDD:pmPdcPVolDIDrbTransQci
eNb	EUtranCellFDD:pmPdcPVolDIHdrQci
eNb	EUtranCellFDD:pmPdcPVolDISrb
eNb	EUtranCellFDD:pmPdcPVolDISrbTrans
eNb	EUtranCellFDD:pmPdcPVolUICmpHdrQci
eNb	EUtranCellFDD:pmPdcPVolUIDrb
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn0
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn1
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn2
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn3
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn4
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn5
eNb	EUtranCellFDD:pmPdcPVolUIDrbPlmn6
eNb	EUtranCellFDD:pmPdcPVolUIDrbQci
eNb	EUtranCellFDD:pmPdcPVolUIHdrQci
eNb	EUtranCellFDD:pmPdcPVolUISrb
eNb	EUtranCellFDD:pmPrbAvailDI
eNb	EUtranCellFDD:pmPrbAvailDIMbms
eNb	EUtranCellFDD:pmPrbAvailUI
eNb	EUtranCellFDD:pmPrbUsedDIAilgHighPrio
eNb	EUtranCellFDD:pmPrbUsedDIAilgTot
eNb	EUtranCellFDD:pmPrbUsedDIBcch
eNb	EUtranCellFDD:pmPrbUsedDIDtch
eNb	EUtranCellFDD:pmPrbUsedDIDtchFirstTransQci
eNb	EUtranCellFDD:pmPrbUsedDIFirstTrans
eNb	EUtranCellFDD:pmPrbUsedDIMbms
eNb	EUtranCellFDD:pmPrbUsedDIPcch
eNb	EUtranCellFDD:pmPrbUsedDIReTrans
eNb	EUtranCellFDD:pmPrbUsedDISrbFirstTrans
eNb	EUtranCellFDD:pmPrbUsedUIAilgTot
eNb	EUtranCellFDD:pmPrbUsedUIDtch
eNb	EUtranCellFDD:pmPrbUsedUIDtchQci
eNb	EUtranCellFDD:pmPrbUsedUISrb
eNb	EUtranCellFDD:pmPrbUtilDI
eNb	EUtranCellFDD:pmPrbUtilUI
eNb	EUtranCellFDD:pmPucchFailSr

eNb	EUtranCellFDD:pmPucchSr
eNb	EUtranCellFDD:pmPucchSrCqiResAllocAtt
eNb	EUtranCellFDD:pmPucchSrCqiResCongCqi
eNb	EUtranCellFDD:pmPucchSrCqiResCongSr
eNb	EUtranCellFDD:pmPucchSrMax
eNb	EUtranCellFDD:pmRaAllocCfra
eNb	EUtranCellFDD:pmRaAttCbra
eNb	EUtranCellFDD:pmRaAttCfra
eNb	EUtranCellFDD:pmRachNumContentionReport
eNb	EUtranCellFDD:pmRachPreambleDist
eNb	EUtranCellFDD:pmRadioRecInterferencePwr
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb1
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb10
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb100
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb11
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb12
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb13
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb14
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb15
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb16
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb17
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb18
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb19
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb2
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb20
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb21
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb22
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb23
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb24
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb25
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb26
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb27
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb28
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb29
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb3
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb30
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb31
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb32
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb33
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb34
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb35
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb36
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb37
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb38
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb39

[illegible]

eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb80
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb81
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb82
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb83
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb84
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb85
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb86
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb87
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb88
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb89
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb9
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb90
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb91
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb92
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb93
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb94
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb95
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb96
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb97
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb98
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb99
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPucch
eNb	EUtranCellFDD:pmRadioTbsPwrRestricted
eNb	EUtranCellFDD:pmRadioTbsPwrUnrestricted
eNb	EUtranCellFDD:pmRadioThpResDI
eNb	EUtranCellFDD:pmRadioThpResUI
eNb	EUtranCellFDD:pmRadioThpVolDI
eNb	EUtranCellFDD:pmRadioThpVolDISCell
eNb	EUtranCellFDD:pmRadioThpVolUI
eNb	EUtranCellFDD:pmRadioTxRankDistr
eNb	EUtranCellFDD:pmRadioUeOutLoopAdjDistr
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband0Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband10Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband11Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband12Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband1Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband2Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband3Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband4Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband5Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband6Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband7Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband8Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband9Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2SubbandSamp

eNb	EUtranCellFDD:pmRadioUeRepCqiDistr
eNb	EUtranCellFDD:pmRadioUeRepCqiDistr2
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband0Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband10Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband11Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband12Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband1Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband2Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband3Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband4Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband5Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband6Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband7Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband8Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband9Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubbandSamp
eNb	EUtranCellFDD:pmRadioUeRepRankDistr
eNb	EUtranCellFDD:pmRaFailCbraMsg2Disc
eNb	EUtranCellFDD:pmRaFailCfraMsg2Disc
eNb	EUtranCellFDD:pmRaSuccCbra
eNb	EUtranCellFDD:pmRaSuccCfra
eNb	EUtranCellFDD:pmRaSuccSrInSync
eNb	EUtranCellFDD:pmRaSuccSrOutOfSync
eNb	EUtranCellFDD:pmRaSuccTa
eNb	EUtranCellFDD:pmRateShapeTimeUl
eNb	EUtranCellFDD:pmRaUnassignedCfraFalse
eNb	EUtranCellFDD:pmRaUnassignedCfraSum
eNb	EUtranCellFDD:pmRlcArqDIAck
eNb	EUtranCellFDD:pmRlcArqDINack
eNb	EUtranCellFDD:pmRlcArqUIAck
eNb	EUtranCellFDD:pmRlcArqUINack
eNb	EUtranCellFDD:pmRlcDelayPktTransDI
eNb	EUtranCellFDD:pmRlcDelayPktTransDIQci
eNb	EUtranCellFDD:pmRlcDelayTimeDI
eNb	EUtranCellFDD:pmRlcDelayTimeDIQci
eNb	EUtranCellFDD:pmRohcEstabFailCid
eNb	EUtranCellFDD:pmRohcEstabFailLic
eNb	EUtranCellFDD:pmRohcEstabFailUeCap
eNb	EUtranCellFDD:pmRrcConnEstabAtt
eNb	EUtranCellFDD:pmRrcConnEstabAttDta
eNb	EUtranCellFDD:pmRrcConnEstabAttEm
eNb	EUtranCellFDD:pmRrcConnEstabAttHpa
eNb	EUtranCellFDD:pmRrcConnEstabAttMod
eNb	EUtranCellFDD:pmRrcConnEstabAttMos
eNb	EUtranCellFDD:pmRrcConnEstabAttMta

eNb	EUtranCellFDD:pmRrcConnEstabAttReatt
eNb	EUtranCellFDD:pmRrcConnEstabAttReattDta
eNb	EUtranCellFDD:pmRrcConnEstabAttReattEm
eNb	EUtranCellFDD:pmRrcConnEstabAttReattHpa
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMod
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMos
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMta
eNb	EUtranCellFDD:pmRrcConnEstabFailBearerAdmissionRe
eNb	EUtranCellFDD:pmRrcConnEstabFailHighLoad
eNb	EUtranCellFDD:pmRrcConnEstabFailLic
eNb	EUtranCellFDD:pmRrcConnEstabFailMISigQCong
eNb	EUtranCellFDD:pmRrcConnEstabFailOverload
eNb	EUtranCellFDD:pmRrcConnEstabSucc
eNb	EUtranCellFDD:pmRrcConnEstabSuccDta
eNb	EUtranCellFDD:pmRrcConnEstabSuccEm
eNb	EUtranCellFDD:pmRrcConnEstabSuccGummeiNative
eNb	EUtranCellFDD:pmRrcConnEstabSuccHpa
eNb	EUtranCellFDD:pmRrcConnEstabSuccMod
eNb	EUtranCellFDD:pmRrcConnEstabSuccMos
eNb	EUtranCellFDD:pmRrcConnEstabSuccMta
eNb	EUtranCellFDD:pmRrcConnLevSamp
eNb	EUtranCellFDD:pmRrcConnLevSum
eNb	EUtranCellFDD:pmRrcConnLevSumUIOutOfSync
eNb	EUtranCellFDD:pmRrcConnMax
eNb	EUtranCellFDD:pmRrcConnReconfAttNoMob
eNb	EUtranCellFDD:pmRrcConnReconfSuccNoMob
eNb	EUtranCellFDD:pmRrcConnReestAtt
eNb	EUtranCellFDD:pmRrcConnReestAttHo
eNb	EUtranCellFDD:pmRrcConnReestFailLicMtReest
eNb	EUtranCellFDD:pmRrcConnReestFailMISigQCong
eNb	EUtranCellFDD:pmRrcConnReestSucc
eNb	EUtranCellFDD:pmRrcConnReestSuccHo
eNb	EUtranCellFDD:pmRrcConnTuneOutLevSamp
eNb	EUtranCellFDD:pmRrcConnTuneOutLevSum
eNb	EUtranCellFDD:pmS1SigConnEstabAtt
eNb	EUtranCellFDD:pmS1SigConnEstabAttDta
eNb	EUtranCellFDD:pmS1SigConnEstabAttEm
eNb	EUtranCellFDD:pmS1SigConnEstabAttHpa
eNb	EUtranCellFDD:pmS1SigConnEstabAttMod
eNb	EUtranCellFDD:pmS1SigConnEstabAttMos
eNb	EUtranCellFDD:pmS1SigConnEstabAttMta
eNb	EUtranCellFDD:pmS1SigConnEstabSucc
eNb	EUtranCellFDD:pmS1SigConnEstabSuccDta
eNb	EUtranCellFDD:pmS1SigConnEstabSuccEm
eNb	EUtranCellFDD:pmS1SigConnEstabSuccHpa

eNb	EUtranCellFDD:pmS1SigConnEstabSuccMod
eNb	EUtranCellFDD:pmS1SigConnEstabSuccMos
eNb	EUtranCellFDD:pmS1SigConnEstabSuccMta
eNb	EUtranCellFDD:pmSchedActivityCellDI
eNb	EUtranCellFDD:pmSchedActivityCellUI
eNb	EUtranCellFDD:pmSchedActivityUeDI
eNb	EUtranCellFDD:pmSchedActivityUeUI
eNb	EUtranCellFDD:pmSchedRestrictUeCatDI
eNb	EUtranCellFDD:pmSchedRestrictUeCatUI
eNb	EUtranCellFDD:pmServiceTimeDrb
eNb	EUtranCellFDD:pmServiceTimeDrbQci
eNb	EUtranCellFDD:pmServiceTimeUe
eNb	EUtranCellFDD:pmSessionTimeDrb
eNb	EUtranCellFDD:pmSessionTimeDrbQci
eNb	EUtranCellFDD:pmSessionTimeUe
eNb	EUtranCellFDD:pmSinrPucchDistr
eNb	EUtranCellFDD:pmSinrPuschDistr
eNb	EUtranCellFDD:pmTtiBundlingUeMax
eNb	EUtranCellFDD:pmTtiBundlingUeSamp
eNb	EUtranCellFDD:pmTtiBundlingUeSum
eNb	EUtranCellFDD:pmUeCategoryDistr
eNb	EUtranCellFDD:pmUeCtxtEstabAtt
eNb	EUtranCellFDD:pmUeCtxtEstabSucc
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnb
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbAct
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActCdt
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActCdtAuto
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActCdtAutoPr
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActHo
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActPe
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActTnFail
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActUeLost
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbCdt
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbCdtAuto
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbCdtAutoPnr
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbHo
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbLic
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbPe
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbTuneOut
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbUeLost
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalMme
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalMmeAct
eNb	EUtranCellFDD:pmUeCtxtRelCsfbCdma1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbCdma1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbGsm

eNb	EUtranCellFDD:pmUeCtxtRelCsfbGsmEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbHoPrepFail1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbHoPrepFail1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbLimitedDualRadioUeC
eNb	EUtranCellFDD:pmUeCtxtRelCsfbMeasTO1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbMeasTO1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbTdScdma
eNb	EUtranCellFDD:pmUeCtxtRelCsfbTdScdmaEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbWcdma
eNb	EUtranCellFDD:pmUeCtxtRelCsfbWcdmaEm
eNb	EUtranCellFDD:pmUeCtxtRelMme
eNb	EUtranCellFDD:pmUeCtxtRelMmeAct
eNb	EUtranCellFDD:pmUeCtxtRelMmeActHo
eNb	EUtranCellFDD:pmUeCtxtRelMmeHo
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnb
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnbAct
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnbTuneOut
eNb	EUtranCellFDD:pmUeCtxtRelSCCdma
eNb	EUtranCellFDD:pmUeCtxtRelSCEUtra
eNb	EUtranCellFDD:pmUeCtxtRelSCGsm
eNb	EUtranCellFDD:pmUeCtxtRelSCTdScdma
eNb	EUtranCellFDD:pmUeCtxtRelSCWcdma
eNb	EUtranCellFDD:pmUeCtxtTa
eNb	EUtranCellFDD:pmUeThpDIDistr
eNb	EUtranCellFDD:pmUeThpTimeDI
eNb	EUtranCellFDD:pmUeThpTimeUI
eNb	EUtranCellFDD:pmUeThpUIDistr
eNb	EUtranCellFDD:pmUeThpVolUI
eNb	EUtranCellFDD:pmUIGrantsTrans
eNb	EUtranCellFDD:pmUIGrantsTransPCell
eNb	EUtranCellFDD:pmUIGrantsTransVolte
eNb	EUtranCellFDD:pmUIGrantsWithDetectedPusch
eNb	EUtranCellFDD:pmUIGrantsWithDetectedPuschPCell
eNb	EUtranCellFDD:pmUIGrantsWithDetectedPuschVolte
eNb	EUtranCellFDD:pmUIPathlossDistr
eNb	EUtranCellFDD:pmVoipQualityRbUILowSampl
eNb	EUtranCellFDD:pmVoipQualityRbUINok
eNb	EUtranCellFDD:pmVoipQualityRbUIOk
eNb	EUtranCellFDD:pmVoipQualityUeUILowSampl
eNb	EUtranCellFDD:pmVoipQualityUeUINok
eNb	EUtranCellFDD:pmVoipQualityUeUIOk
eNb	EUtranCellFDD:pmZtemporary1
eNb	EUtranCellFDD:pmZtemporary10
eNb	EUtranCellFDD:pmZtemporary11
eNb	EUtranCellFDD:pmZtemporary12

eNb	EUtranCellFDD:pmZtemporary13
eNb	EUtranCellFDD:pmZtemporary14
eNb	EUtranCellFDD:pmZtemporary15
eNb	EUtranCellFDD:pmZtemporary16Qci
eNb	EUtranCellFDD:pmZtemporary17Qci
eNb	EUtranCellFDD:pmZtemporary18Qci
eNb	EUtranCellFDD:pmZtemporary19
eNb	EUtranCellFDD:pmZtemporary2
eNb	EUtranCellFDD:pmZtemporary20
eNb	EUtranCellFDD:pmZtemporary21
eNb	EUtranCellFDD:pmZtemporary22
eNb	EUtranCellFDD:pmZtemporary23
eNb	EUtranCellFDD:pmZtemporary24
eNb	EUtranCellFDD:pmZtemporary25
eNb	EUtranCellFDD:pmZtemporary26
eNb	EUtranCellFDD:pmZtemporary27
eNb	EUtranCellFDD:pmZtemporary28
eNb	EUtranCellFDD:pmZtemporary29
eNb	EUtranCellFDD:pmZtemporary3
eNb	EUtranCellFDD:pmZtemporary30
eNb	EUtranCellFDD:pmZtemporary31
eNb	EUtranCellFDD:pmZtemporary32
eNb	EUtranCellFDD:pmZtemporary33
eNb	EUtranCellFDD:pmZtemporary4
eNb	EUtranCellFDD:pmZtemporary5
eNb	EUtranCellFDD:pmZtemporary57
eNb	EUtranCellFDD:pmZtemporary58
eNb	EUtranCellFDD:pmZtemporary59
eNb	EUtranCellFDD:pmZtemporary6
eNb	EUtranCellFDD:pmZtemporary60
eNb	EUtranCellFDD:pmZtemporary61
eNb	EUtranCellFDD:pmZtemporary62
eNb	EUtranCellFDD:pmZtemporary63
eNb	EUtranCellFDD:pmZtemporary64
eNb	EUtranCellFDD:pmZtemporary65
eNb	EUtranCellFDD:pmZtemporary66
eNb	EUtranCellFDD:pmZtemporary67
eNb	EUtranCellFDD:pmZtemporary68
eNb	EUtranCellFDD:pmZtemporary69
eNb	EUtranCellFDD:pmZtemporary7
eNb	EUtranCellFDD:pmZtemporary70
eNb	EUtranCellFDD:pmZtemporary71
eNb	EUtranCellFDD:pmZtemporary8
eNb	EUtranCellFDD:pmZtemporary9
eNb	EUtranCellRelation:pmHoExeAttLtelInterF

eNb	EUtranCellRelation:pmHoExeAttLteInterFLb
eNb	EUtranCellRelation:pmHoExeAttLteInterFMbms
eNb	EUtranCellRelation:pmHoExeAttLteIntraF
eNb	EUtranCellRelation:pmHoExeAttLteIntraFTuneOut
eNb	EUtranCellRelation:pmHoExeSuccLteInterF
eNb	EUtranCellRelation:pmHoExeSuccLteInterFLb
eNb	EUtranCellRelation:pmHoExeSuccLteInterFMbms
eNb	EUtranCellRelation:pmHoExeSuccLteIntraF
eNb	EUtranCellRelation:pmHoExeSuccLteIntraFTuneOut
eNb	EUtranCellRelation:pmHoOscInterF
eNb	EUtranCellRelation:pmHoOscIntraF
eNb	EUtranCellRelation:pmHoPrepAttLteInterF
eNb	EUtranCellRelation:pmHoPrepAttLteInterFLb
eNb	EUtranCellRelation:pmHoPrepAttLteInterFMbms
eNb	EUtranCellRelation:pmHoPrepAttLteIntraF
eNb	EUtranCellRelation:pmHoPrepSuccLteInterF
eNb	EUtranCellRelation:pmHoPrepSuccLteInterFLb
eNb	EUtranCellRelation:pmHoPrepSuccLteInterFMbms
eNb	EUtranCellRelation:pmHoPrepSuccLteIntraF
eNb	EUtranCellRelation:pmHoTooEarlyHoInterF
eNb	EUtranCellRelation:pmHoTooEarlyHoIntraF
eNb	EUtranCellRelation:pmHoTooLateHoInterF
eNb	EUtranCellRelation:pmHoTooLateHoIntraF
eNb	EUtranCellRelation:pmHoWrongCellInterF
eNb	EUtranCellRelation:pmHoWrongCellIntraF
eNb	EUtranCellRelation:pmHoWrongCellReestInterF
eNb	EUtranCellRelation:pmHoWrongCellReestIntraF
eNb	EUtranCellRelation:pmLbQualifiedUe
eNb	EUtranCellRelation:pmZtemporary36
eNb	EUtranCellRelation:pmZtemporary72
eNb	EUtranCellRelation:pmZtemporary73
eNb	EUtranCellRelation:pmZtemporary74
eNb	EUtranCellRelation:pmZtemporary75
eNb	EUtranCellRelation:pmZtemporary76
eNb	EUtranCellRelation:pmZtemporary77
eNb	EUtranCellRelation:pmZtemporary78
eNb	EUtranCellRelation:pmZtemporary79
eNb	EUtranCellTDD:pmActiveDrbDISum
eNb	EUtranCellTDD:pmActiveDrbDISumQci
eNb	EUtranCellTDD:pmActiveDrbUISum
eNb	EUtranCellTDD:pmActiveUeDIMax
eNb	EUtranCellTDD:pmActiveUeDISectorCarrierDistr
eNb	EUtranCellTDD:pmActiveUeDISum
eNb	EUtranCellTDD:pmActiveUeDISumQci
eNb	EUtranCellTDD:pmActiveUeDrbSamp

eNb	EUtranCellTDD:pmActiveUeUIMax
eNb	EUtranCellTDD:pmActiveUeUISectorCarrierDistr
eNb	EUtranCellTDD:pmActiveUeUISum
eNb	EUtranCellTDD:pmActiveUeUISumLcg
eNb	EUtranCellTDD:pmAnrNeighbreIAdd
eNb	EUtranCellTDD:pmAnrNeighbreIRem
eNb	EUtranCellTDD:pmBadCovEvalReport
eNb	EUtranCellTDD:pmBadCovSearchEvalReport
eNb	EUtranCellTDD:pmBestCellEvalReport
eNb	EUtranCellTDD:pmCaConfiguredMeasAtt
eNb	EUtranCellTDD:pmCaConfiguredMeasSucc
eNb	EUtranCellTDD:pmCaConfiguredNoMeasAtt
eNb	EUtranCellTDD:pmCaConfiguredNoMeasSucc
eNb	EUtranCellTDD:pmCaConfiguredSamp
eNb	EUtranCellTDD:pmCaDeconfigured
eNb	EUtranCellTDD:pmCaDeconfiguredLostCoverage
eNb	EUtranCellTDD:pmCaDeconfiguredSamp
eNb	EUtranCellTDD:pmCaDeconfiguredSCellChange
eNb	EUtranCellTDD:pmCellAdmControlPdcchRej
eNb	EUtranCellTDD:pmCellAdmControlPdcchRejMeas
eNb	EUtranCellTDD:pmCellDownLockAuto
eNb	EUtranCellTDD:pmCellDownLockMan
eNb	EUtranCellTDD:pmCellDowntimeAuto
eNb	EUtranCellTDD:pmCellDowntimeMan
eNb	EUtranCellTDD:pmCellDownUnlockMan
eNb	EUtranCellTDD:pmCellHoExeAttLteInterF
eNb	EUtranCellTDD:pmCellHoExeAttLteInterFMBms
eNb	EUtranCellTDD:pmCellHoExeAttLteIntraF
eNb	EUtranCellTDD:pmCellHoExeAttLteIntraFTuneOut
eNb	EUtranCellTDD:pmCellHoExeSuccLteInterF
eNb	EUtranCellTDD:pmCellHoExeSuccLteInterFMBms
eNb	EUtranCellTDD:pmCellHoExeSuccLteIntraF
eNb	EUtranCellTDD:pmCellHoExeSuccLteIntraFTuneOut
eNb	EUtranCellTDD:pmCellHoPrepAttLteInterF
eNb	EUtranCellTDD:pmCellHoPrepAttLteInterFMBms
eNb	EUtranCellTDD:pmCellHoPrepAttLteIntraF
eNb	EUtranCellTDD:pmCellHoPrepSuccLteInterF
eNb	EUtranCellTDD:pmCellHoPrepSuccLteInterFMBms
eNb	EUtranCellTDD:pmCellHoPrepSuccLteIntraF
eNb	EUtranCellTDD:pmCompUIDeltaSinrPuschDistr
eNb	EUtranCellTDD:pmContDI
eNb	EUtranCellTDD:pmContDICapLic
eNb	EUtranCellTDD:pmContDIHw
eNb	EUtranCellTDD:pmContDIPdcch
eNb	EUtranCellTDD:pmContUI

eNb	EUtranCellTDD:pmContUICapLic
eNb	EUtranCellTDD:pmContUIHw
eNb	EUtranCellTDD:pmContUIPdcch
eNb	EUtranCellTDD:pmCriticalBorderEvalReport
eNb	EUtranCellTDD:pmDIAssigsTrans
eNb	EUtranCellTDD:pmDIAssigsWithDetectedHarqAck
eNb	EUtranCellTDD:pmDIAssigsWithUnknownReception
eNb	EUtranCellTDD:pmDrbThpTimeDIQci
eNb	EUtranCellTDD:pmDrxSleepTime
eNb	EUtranCellTDD:pmDrxTotalTime
eNb	EUtranCellTDD:pmErabEstabAttAdded
eNb	EUtranCellTDD:pmErabEstabAttAddedArp
eNb	EUtranCellTDD:pmErabEstabAttAddedPa
eNb	EUtranCellTDD:pmErabEstabAttAddedQci
eNb	EUtranCellTDD:pmErabEstabAttInit
eNb	EUtranCellTDD:pmErabEstabAttInitArp
eNb	EUtranCellTDD:pmErabEstabAttInitPa
eNb	EUtranCellTDD:pmErabEstabAttInitQci
eNb	EUtranCellTDD:pmErabEstabFailAddedLic
eNb	EUtranCellTDD:pmErabEstabFailGbrDIEnb
eNb	EUtranCellTDD:pmErabEstabFailGbrUIEnb
eNb	EUtranCellTDD:pmErabEstabFailInitLic
eNb	EUtranCellTDD:pmErabEstabSuccAdded
eNb	EUtranCellTDD:pmErabEstabSuccAddedArp
eNb	EUtranCellTDD:pmErabEstabSuccAddedPa
eNb	EUtranCellTDD:pmErabEstabSuccAddedQci
eNb	EUtranCellTDD:pmErabEstabSuccInit
eNb	EUtranCellTDD:pmErabEstabSuccInitArp
eNb	EUtranCellTDD:pmErabEstabSuccInitPa
eNb	EUtranCellTDD:pmErabEstabSuccInitQci
eNb	EUtranCellTDD:pmErabLevRopStartQci
eNb	EUtranCellTDD:pmErabLevSamp
eNb	EUtranCellTDD:pmErabLevSum
eNb	EUtranCellTDD:pmErabMax
eNb	EUtranCellTDD:pmErabModAttQci
eNb	EUtranCellTDD:pmErabModFailLic
eNb	EUtranCellTDD:pmErabModSuccQci
eNb	EUtranCellTDD:pmErabQciLevSum
eNb	EUtranCellTDD:pmErabQciMax
eNb	EUtranCellTDD:pmErabRelAbnormalEnb
eNb	EUtranCellTDD:pmErabRelAbnormalEnbAct
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActArp
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActCdt
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActCdtAuto
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActCdtAutoPnr

eNb	EUtranCellTDD:pmErabRelAbnormalEnbActHo
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActHpr
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActPe
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActQci
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActTnFail
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActUeLost
eNb	EUtranCellTDD:pmErabRelAbnormalEnbArp
eNb	EUtranCellTDD:pmErabRelAbnormalEnbCdt
eNb	EUtranCellTDD:pmErabRelAbnormalEnbCdtAuto
eNb	EUtranCellTDD:pmErabRelAbnormalEnbCdtAutoPnr
eNb	EUtranCellTDD:pmErabRelAbnormalEnbHo
eNb	EUtranCellTDD:pmErabRelAbnormalEnbHpr
eNb	EUtranCellTDD:pmErabRelAbnormalEnbLic
eNb	EUtranCellTDD:pmErabRelAbnormalEnbPe
eNb	EUtranCellTDD:pmErabRelAbnormalEnbQci
eNb	EUtranCellTDD:pmErabRelAbnormalEnbTnFail
eNb	EUtranCellTDD:pmErabRelAbnormalEnbUeLost
eNb	EUtranCellTDD:pmErabRelAbnormalMme
eNb	EUtranCellTDD:pmErabRelAbnormalMmeAct
eNb	EUtranCellTDD:pmErabRelAbnormalMmeActArp
eNb	EUtranCellTDD:pmErabRelAbnormalMmeActQci
eNb	EUtranCellTDD:pmErabRelAbnormalMmeQci
eNb	EUtranCellTDD:pmErabRelMme
eNb	EUtranCellTDD:pmErabRelMmeAct
eNb	EUtranCellTDD:pmErabRelMmeActEutra
eNb	EUtranCellTDD:pmErabRelMmeActHo
eNb	EUtranCellTDD:pmErabRelMmeActQci
eNb	EUtranCellTDD:pmErabRelMmeActUnspecified
eNb	EUtranCellTDD:pmErabRelMmeActUserInactivity
eNb	EUtranCellTDD:pmErabRelMmeArp
eNb	EUtranCellTDD:pmErabRelMmeHo
eNb	EUtranCellTDD:pmErabRelMmeQci
eNb	EUtranCellTDD:pmErabRelNormalEnb
eNb	EUtranCellTDD:pmErabRelNormalEnbAct
eNb	EUtranCellTDD:pmErabRelNormalEnbActArp
eNb	EUtranCellTDD:pmErabRelNormalEnbActQci
eNb	EUtranCellTDD:pmErabRelNormalEnbArp
eNb	EUtranCellTDD:pmErabRelNormalEnbQci
eNb	EUtranCellTDD:pmErabRelNormalEnbUserInactivity
eNb	EUtranCellTDD:pmErabRelNormalEnbUserInactivityQci
eNb	EUtranCellTDD:pmHoExeOutAttQci
eNb	EUtranCellTDD:pmHoExeOutSuccQci
eNb	EUtranCellTDD:pmHoPrepRejInBearerAdmissionRej
eNb	EUtranCellTDD:pmHoPrepRejInHighLoad
eNb	EUtranCellTDD:pmHoPrepRejInLicConnUsers

eNb	EUtranCellTDD:pmHoPrepRejInLicMob
eNb	EUtranCellTDD:pmHoPrepRejInLicMultiErab
eNb	EUtranCellTDD:pmHoPrepRejInLicRlcUm
eNb	EUtranCellTDD:pmHoPrepRejInMISigQCong
eNb	EUtranCellTDD:pmHoPrepRejInOffloadAdmission
eNb	EUtranCellTDD:pmHoPrepRejInOverload
eNb	EUtranCellTDD:pmHoPrepRejInSI
eNb	EUtranCellTDD:pmLbSubRatioSamp
eNb	EUtranCellTDD:pmLbSubRatioSum
eNb	EUtranCellTDD:pmLcgThpTimeUILcg
eNb	EUtranCellTDD:pmLcgThpVolUILcg
eNb	EUtranCellTDD:pmMacDelayTimeDI
eNb	EUtranCellTDD:pmMacHarqDIAck16qam
eNb	EUtranCellTDD:pmMacHarqDIAck64qam
eNb	EUtranCellTDD:pmMacHarqDIAckQpsk
eNb	EUtranCellTDD:pmMacHarqDIDtx16qam
eNb	EUtranCellTDD:pmMacHarqDIDtx64qam
eNb	EUtranCellTDD:pmMacHarqDIDtxQpsk
eNb	EUtranCellTDD:pmMacHarqDINack16qam
eNb	EUtranCellTDD:pmMacHarqDINack64qam
eNb	EUtranCellTDD:pmMacHarqDINackQpsk
eNb	EUtranCellTDD:pmMacHarqUIDtx16qam
eNb	EUtranCellTDD:pmMacHarqUIDtxQpsk
eNb	EUtranCellTDD:pmMacHarqUIFail16qam
eNb	EUtranCellTDD:pmMacHarqUIFailQpsk
eNb	EUtranCellTDD:pmMacHarqUISucc16qam
eNb	EUtranCellTDD:pmMacHarqUISuccQpsk
eNb	EUtranCellTDD:pmMeasMissingNeighRel
eNb	EUtranCellTDD:pmOocNewDataUIGrants
eNb	EUtranCellTDD:pmOocStateEntries
eNb	EUtranCellTDD:pmOocStateExits
eNb	EUtranCellTDD:pmOocStateExitsUeRel
eNb	EUtranCellTDD:pmPagDiscarded
eNb	EUtranCellTDD:pmPagReceived
eNb	EUtranCellTDD:pmPdcchCceActivity
eNb	EUtranCellTDD:pmPdcchCceAggregationDistr
eNb	EUtranCellTDD:pmPdcchCceRequestedDistr
eNb	EUtranCellTDD:pmPdcchCceUsedDIQci
eNb	EUtranCellTDD:pmPdcchCceUsedUIQci
eNb	EUtranCellTDD:pmPdcchCceUtil
eNb	EUtranCellTDD:pmPdcchCfiUtil
eNb	EUtranCellTDD:pmPdcchMaxCceAvail
eNb	EUtranCellTDD:pmPdcchResyncAtt
eNb	EUtranCellTDD:pmPdcchResyncSucc
eNb	EUtranCellTDD:pmPdcchSym0PwrUtil

eNb	EUtranCellTDD:pmPdcchSym1PwrUtil
eNb	EUtranCellTDD:pmPdcchSym2PwrUtil
eNb	EUtranCellTDD:pmPdcchSym3PwrUtil
eNb	EUtranCellTDD:pmPdcchTxAggressive
eNb	EUtranCellTDD:pmPdcchTxConservative
eNb	EUtranCellTDD:pmPdcPBitrateDIDrbMax
eNb	EUtranCellTDD:pmPdcPBitrateDIDrbMin
eNb	EUtranCellTDD:pmPdcPBitrateUIDrbMax
eNb	EUtranCellTDD:pmPdcPBitrateUIDrbMin
eNb	EUtranCellTDD:pmPdcPLatPktTransDI
eNb	EUtranCellTDD:pmPdcPLatPktTransDIDrxNoSync
eNb	EUtranCellTDD:pmPdcPLatPktTransDIDrxSync
eNb	EUtranCellTDD:pmPdcPLatPktTransDINoDrxSync
eNb	EUtranCellTDD:pmPdcPLatPktTransDIQci
eNb	EUtranCellTDD:pmPdcPLatTimeDI
eNb	EUtranCellTDD:pmPdcPLatTimeDIDrxNoSync
eNb	EUtranCellTDD:pmPdcPLatTimeDIDrxSync
eNb	EUtranCellTDD:pmPdcPLatTimeDINoDrxSync
eNb	EUtranCellTDD:pmPdcPLatTimeDIQci
eNb	EUtranCellTDD:pmPdcPPktDiscDIAqm
eNb	EUtranCellTDD:pmPdcPPktDiscDIAqmQci
eNb	EUtranCellTDD:pmPdcPPktDiscDIHo
eNb	EUtranCellTDD:pmPdcPPktDiscDIHoQci
eNb	EUtranCellTDD:pmPdcPPktDiscDIPelr
eNb	EUtranCellTDD:pmPdcPPktDiscDIPelrQci
eNb	EUtranCellTDD:pmPdcPPktDiscDIPelrUu
eNb	EUtranCellTDD:pmPdcPPktDiscDIPelrUuQci
eNb	EUtranCellTDD:pmPdcPPktFwdDI
eNb	EUtranCellTDD:pmPdcPPktLostUI
eNb	EUtranCellTDD:pmPdcPPktLostUIQci
eNb	EUtranCellTDD:pmPdcPPktPdbUIOkVoip
eNb	EUtranCellTDD:pmPdcPPktReceivedDI
eNb	EUtranCellTDD:pmPdcPPktReceivedDIQci
eNb	EUtranCellTDD:pmPdcPPktReceivedUI
eNb	EUtranCellTDD:pmPdcPPktReceivedUIQci
eNb	EUtranCellTDD:pmPdcPPktTransDI
eNb	EUtranCellTDD:pmPdcPPktTransDIQci
eNb	EUtranCellTDD:pmPdcPVoldICmpHdrQci
eNb	EUtranCellTDD:pmPdcPVoldIDrb
eNb	EUtranCellTDD:pmPdcPVoldIDrbLastTTI
eNb	EUtranCellTDD:pmPdcPVoldIDrbLastTTIQci
eNb	EUtranCellTDD:pmPdcPVoldIDrbQci
eNb	EUtranCellTDD:pmPdcPVoldIDrbTransPlmn0
eNb	EUtranCellTDD:pmPdcPVoldIDrbTransPlmn1
eNb	EUtranCellTDD:pmPdcPVoldIDrbTransPlmn2

eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn3
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn4
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn5
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn6
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransQci
eNb	EUtranCellTDD:pmPdcPVolDIHdrQci
eNb	EUtranCellTDD:pmPdcPVolDISrb
eNb	EUtranCellTDD:pmPdcPVolDISrbTrans
eNb	EUtranCellTDD:pmPdcPVolUICmpHdrQci
eNb	EUtranCellTDD:pmPdcPVolUIDrb
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn0
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn1
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn2
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn3
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn4
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn5
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn6
eNb	EUtranCellTDD:pmPdcPVolUIDrbQci
eNb	EUtranCellTDD:pmPdcPVolUIHdrQci
eNb	EUtranCellTDD:pmPdcPVolUISrb
eNb	EUtranCellTDD:pmPrbAvailDI
eNb	EUtranCellTDD:pmPrbAvailDIMbms
eNb	EUtranCellTDD:pmPrbAvailUI
eNb	EUtranCellTDD:pmPrbUsedDIAilgHighPrio
eNb	EUtranCellTDD:pmPrbUsedDIAilgTot
eNb	EUtranCellTDD:pmPrbUsedDIBcch
eNb	EUtranCellTDD:pmPrbUsedDIDtch
eNb	EUtranCellTDD:pmPrbUsedDIDtchFirstTransQci
eNb	EUtranCellTDD:pmPrbUsedDIFirstTrans
eNb	EUtranCellTDD:pmPrbUsedDIMbms
eNb	EUtranCellTDD:pmPrbUsedDIPcch
eNb	EUtranCellTDD:pmPrbUsedDIReTrans
eNb	EUtranCellTDD:pmPrbUsedDISrbFirstTrans
eNb	EUtranCellTDD:pmPrbUsedUIAilgTot
eNb	EUtranCellTDD:pmPrbUsedUIDtch
eNb	EUtranCellTDD:pmPrbUsedUIDtchQci
eNb	EUtranCellTDD:pmPrbUsedUISrb
eNb	EUtranCellTDD:pmPrbUtilDI
eNb	EUtranCellTDD:pmPrbUtilUI
eNb	EUtranCellTDD:pmPucchFailSr
eNb	EUtranCellTDD:pmPucchSr
eNb	EUtranCellTDD:pmPucchSrCqiResAllocAtt
eNb	EUtranCellTDD:pmPucchSrCqiResCongCqi
eNb	EUtranCellTDD:pmPucchSrCqiResCongSr
eNb	EUtranCellTDD:pmPucchSrMax

eNb	EUtranCellTDD:pmRaAllocCfra
eNb	EUtranCellTDD:pmRaAttCbra
eNb	EUtranCellTDD:pmRaAttCfra
eNb	EUtranCellTDD:pmRachNumContentionReport
eNb	EUtranCellTDD:pmRachPreambleDist
eNb	EUtranCellTDD:pmRadioCalibAttFail
eNb	EUtranCellTDD:pmRadioRecInterferencePwr
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb1
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb10
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb100
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb11
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb12
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb13
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb14
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb15
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb16
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb17
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb18
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb19
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb2
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb20
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb21
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb22
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb23
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb24
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb25
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb26
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb27
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb28
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb29
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb3
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb30
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb31
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb32
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb33
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb34
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb35
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb36
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb37
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb38
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb39
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb4
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb40
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb41
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb42

[illegible]

eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb84
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb85
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb86
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb87
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb88
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb89
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb9
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb90
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb91
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb92
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb93
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb94
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb95
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb96
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb97
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb98
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb99
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPucch
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf1
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf2
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf3
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf6
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf7
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf8
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSfSamp
eNb	EUtranCellTDD:pmRadioTbsPwrRestricted
eNb	EUtranCellTDD:pmRadioTbsPwrUnrestricted
eNb	EUtranCellTDD:pmRadioThpResDI
eNb	EUtranCellTDD:pmRadioThpResUI
eNb	EUtranCellTDD:pmRadioThpVolDI
eNb	EUtranCellTDD:pmRadioThpVolUI
eNb	EUtranCellTDD:pmRadioTxRankDistr
eNb	EUtranCellTDD:pmRadioUeOutLoopAdjDistr
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband0Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband10Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband11Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband12Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband1Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband2Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband3Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband4Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband5Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband6Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband7Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband8Sum

eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband9Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2SubbandSamp
eNb	EUtranCellTDD:pmRadioUeRepCqiDistr
eNb	EUtranCellTDD:pmRadioUeRepCqiDistr2
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband0Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband10Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband11Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband12Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband1Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband2Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband3Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband4Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband5Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband6Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband7Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband8Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband9Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubbandSamp
eNb	EUtranCellTDD:pmRadioUeRepRankDistr
eNb	EUtranCellTDD:pmRaFailCbraMsg2Disc
eNb	EUtranCellTDD:pmRaFailCfraMsg2Disc
eNb	EUtranCellTDD:pmRaSuccCbra
eNb	EUtranCellTDD:pmRaSuccCfra
eNb	EUtranCellTDD:pmRaSuccSrInSync
eNb	EUtranCellTDD:pmRaSuccSrOutOfSync
eNb	EUtranCellTDD:pmRaSuccTa
eNb	EUtranCellTDD:pmRateShapeTimeUl
eNb	EUtranCellTDD:pmRaUnassignedCfraFalse
eNb	EUtranCellTDD:pmRaUnassignedCfraSum
eNb	EUtranCellTDD:pmRlcArqDIAck
eNb	EUtranCellTDD:pmRlcArqDINack
eNb	EUtranCellTDD:pmRlcArqUIAck
eNb	EUtranCellTDD:pmRlcArqUINack
eNb	EUtranCellTDD:pmRlcDelayPktTransDI
eNb	EUtranCellTDD:pmRlcDelayPktTransDIQci
eNb	EUtranCellTDD:pmRlcDelayTimeDI
eNb	EUtranCellTDD:pmRlcDelayTimeDIQci
eNb	EUtranCellTDD:pmRohcEstabFailCid
eNb	EUtranCellTDD:pmRohcEstabFailLic
eNb	EUtranCellTDD:pmRohcEstabFailUeCap
eNb	EUtranCellTDD:pmRrcConnEstabAtt
eNb	EUtranCellTDD:pmRrcConnEstabAttDta
eNb	EUtranCellTDD:pmRrcConnEstabAttEm
eNb	EUtranCellTDD:pmRrcConnEstabAttHpa
eNb	EUtranCellTDD:pmRrcConnEstabAttMod

eNb	EUtranCellTDD:pmRrcConnEstabAttMos
eNb	EUtranCellTDD:pmRrcConnEstabAttMta
eNb	EUtranCellTDD:pmRrcConnEstabAttReatt
eNb	EUtranCellTDD:pmRrcConnEstabAttReattDta
eNb	EUtranCellTDD:pmRrcConnEstabAttReattEm
eNb	EUtranCellTDD:pmRrcConnEstabAttReattHpa
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMod
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMos
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMta
eNb	EUtranCellTDD:pmRrcConnEstabFailBearerAdmissionRe
eNb	EUtranCellTDD:pmRrcConnEstabFailHighLoad
eNb	EUtranCellTDD:pmRrcConnEstabFailLic
eNb	EUtranCellTDD:pmRrcConnEstabFailMISigQCong
eNb	EUtranCellTDD:pmRrcConnEstabFailOverload
eNb	EUtranCellTDD:pmRrcConnEstabSucc
eNb	EUtranCellTDD:pmRrcConnEstabSuccDta
eNb	EUtranCellTDD:pmRrcConnEstabSuccEm
eNb	EUtranCellTDD:pmRrcConnEstabSuccGummeiNative
eNb	EUtranCellTDD:pmRrcConnEstabSuccHpa
eNb	EUtranCellTDD:pmRrcConnEstabSuccMod
eNb	EUtranCellTDD:pmRrcConnEstabSuccMos
eNb	EUtranCellTDD:pmRrcConnEstabSuccMta
eNb	EUtranCellTDD:pmRrcConnLevSamp
eNb	EUtranCellTDD:pmRrcConnLevSum
eNb	EUtranCellTDD:pmRrcConnLevSumUIOutOfSync
eNb	EUtranCellTDD:pmRrcConnMax
eNb	EUtranCellTDD:pmRrcConnReconfAttNoMob
eNb	EUtranCellTDD:pmRrcConnReconfSuccNoMob
eNb	EUtranCellTDD:pmRrcConnReestAtt
eNb	EUtranCellTDD:pmRrcConnReestAttHo
eNb	EUtranCellTDD:pmRrcConnReestFailLicMtReest
eNb	EUtranCellTDD:pmRrcConnReestFailMISigQCong
eNb	EUtranCellTDD:pmRrcConnReestSucc
eNb	EUtranCellTDD:pmRrcConnReestSuccHo
eNb	EUtranCellTDD:pmRrcConnTuneOutLevSamp
eNb	EUtranCellTDD:pmRrcConnTuneOutLevSum
eNb	EUtranCellTDD:pmS1SigConnEstabAtt
eNb	EUtranCellTDD:pmS1SigConnEstabAttDta
eNb	EUtranCellTDD:pmS1SigConnEstabAttEm
eNb	EUtranCellTDD:pmS1SigConnEstabAttHpa
eNb	EUtranCellTDD:pmS1SigConnEstabAttMod
eNb	EUtranCellTDD:pmS1SigConnEstabAttMos
eNb	EUtranCellTDD:pmS1SigConnEstabAttMta
eNb	EUtranCellTDD:pmS1SigConnEstabSucc
eNb	EUtranCellTDD:pmS1SigConnEstabSuccDta

eNb	EUtranCellTDD:pmS1SigConnEstabSuccEm
eNb	EUtranCellTDD:pmS1SigConnEstabSuccHpa
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMod
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMos
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMta
eNb	EUtranCellTDD:pmSchedActivityCellDI
eNb	EUtranCellTDD:pmSchedActivityCellUI
eNb	EUtranCellTDD:pmSchedActivityUeDI
eNb	EUtranCellTDD:pmSchedActivityUeUI
eNb	EUtranCellTDD:pmSchedRestrictUeCatDI
eNb	EUtranCellTDD:pmSchedRestrictUeCatUI
eNb	EUtranCellTDD:pmServiceTimeDrb
eNb	EUtranCellTDD:pmServiceTimeDrbQci
eNb	EUtranCellTDD:pmServiceTimeUe
eNb	EUtranCellTDD:pmSessionTimeDrb
eNb	EUtranCellTDD:pmSessionTimeDrbQci
eNb	EUtranCellTDD:pmSessionTimeUe
eNb	EUtranCellTDD:pmSinrPucchDistr
eNb	EUtranCellTDD:pmSinrPuschDistr
eNb	EUtranCellTDD:pmUeCategoryDistr
eNb	EUtranCellTDD:pmUeCtxtEstabAtt
eNb	EUtranCellTDD:pmUeCtxtEstabSucc
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnb
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbAct
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActCdt
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActCdtAuto
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActCdtAutoPr
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActHo
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActPe
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActTnFail
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActUeLost
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbCdt
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbCdtAuto
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbCdtAutoPnr
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbHo
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbLic
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbPe
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbTuneOut
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbUeLost
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalMme
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalMmeAct
eNb	EUtranCellTDD:pmUeCtxtRelCsfbCdma1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbCdma1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbGsm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbGsmEm

eNb	EUtranCellTDD:pmUeCtxtRelCsfbHoPrepFail1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbHoPrepFail1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbLimitedDualRadioUeC
eNb	EUtranCellTDD:pmUeCtxtRelCsfbMeasTO1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbMeasTO1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbTdScdma
eNb	EUtranCellTDD:pmUeCtxtRelCsfbTdScdmaEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbWcdma
eNb	EUtranCellTDD:pmUeCtxtRelCsfbWcdmaEm
eNb	EUtranCellTDD:pmUeCtxtRelMme
eNb	EUtranCellTDD:pmUeCtxtRelMmeAct
eNb	EUtranCellTDD:pmUeCtxtRelMmeActHo
eNb	EUtranCellTDD:pmUeCtxtRelMmeHo
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnb
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnbAct
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnbTuneOut
eNb	EUtranCellTDD:pmUeCtxtRelSCCdma
eNb	EUtranCellTDD:pmUeCtxtRelSCEUtra
eNb	EUtranCellTDD:pmUeCtxtRelSCGsm
eNb	EUtranCellTDD:pmUeCtxtRelSCTdScdma
eNb	EUtranCellTDD:pmUeCtxtRelSCWcdma
eNb	EUtranCellTDD:pmUeCtxtTa
eNb	EUtranCellTDD:pmUeThpDIDistr
eNb	EUtranCellTDD:pmUeThpTimeDI
eNb	EUtranCellTDD:pmUeThpTimeUI
eNb	EUtranCellTDD:pmUeThpUIDistr
eNb	EUtranCellTDD:pmUeThpVolUI
eNb	EUtranCellTDD:pmUIGrantsTrans
eNb	EUtranCellTDD:pmUIGrantsWithDetectedPusch
eNb	EUtranCellTDD:pmUIPathlossDistr
eNb	EUtranCellTDD:pmVoipQualityRbUILowSampl
eNb	EUtranCellTDD:pmVoipQualityRbUINok
eNb	EUtranCellTDD:pmVoipQualityRbUIOk
eNb	EUtranCellTDD:pmVoipQualityUeUILowSampl
eNb	EUtranCellTDD:pmVoipQualityUeUINok
eNb	EUtranCellTDD:pmVoipQualityUeUIOk
eNb	EUtranCellTDD:pmZtemporary1
eNb	EUtranCellTDD:pmZtemporary10
eNb	EUtranCellTDD:pmZtemporary11
eNb	EUtranCellTDD:pmZtemporary12
eNb	EUtranCellTDD:pmZtemporary13
eNb	EUtranCellTDD:pmZtemporary14
eNb	EUtranCellTDD:pmZtemporary15
eNb	EUtranCellTDD:pmZtemporary16Qci
eNb	EUtranCellTDD:pmZtemporary17Qci

eNb	EUtranCellTDD:pmZtemporary18Qci
eNb	EUtranCellTDD:pmZtemporary19
eNb	EUtranCellTDD:pmZtemporary2
eNb	EUtranCellTDD:pmZtemporary20
eNb	EUtranCellTDD:pmZtemporary21
eNb	EUtranCellTDD:pmZtemporary22
eNb	EUtranCellTDD:pmZtemporary23
eNb	EUtranCellTDD:pmZtemporary24
eNb	EUtranCellTDD:pmZtemporary25
eNb	EUtranCellTDD:pmZtemporary26
eNb	EUtranCellTDD:pmZtemporary27
eNb	EUtranCellTDD:pmZtemporary28
eNb	EUtranCellTDD:pmZtemporary29
eNb	EUtranCellTDD:pmZtemporary3
eNb	EUtranCellTDD:pmZtemporary30
eNb	EUtranCellTDD:pmZtemporary31
eNb	EUtranCellTDD:pmZtemporary32
eNb	EUtranCellTDD:pmZtemporary33
eNb	EUtranCellTDD:pmZtemporary4
eNb	EUtranCellTDD:pmZtemporary5
eNb	EUtranCellTDD:pmZtemporary57
eNb	EUtranCellTDD:pmZtemporary58
eNb	EUtranCellTDD:pmZtemporary59
eNb	EUtranCellTDD:pmZtemporary6
eNb	EUtranCellTDD:pmZtemporary60
eNb	EUtranCellTDD:pmZtemporary61
eNb	EUtranCellTDD:pmZtemporary62
eNb	EUtranCellTDD:pmZtemporary63
eNb	EUtranCellTDD:pmZtemporary64
eNb	EUtranCellTDD:pmZtemporary65
eNb	EUtranCellTDD:pmZtemporary66
eNb	EUtranCellTDD:pmZtemporary67
eNb	EUtranCellTDD:pmZtemporary68
eNb	EUtranCellTDD:pmZtemporary69
eNb	EUtranCellTDD:pmZtemporary7
eNb	EUtranCellTDD:pmZtemporary70
eNb	EUtranCellTDD:pmZtemporary71
eNb	EUtranCellTDD:pmZtemporary8
eNb	EUtranCellTDD:pmZtemporary9
eNb	EUtranFreqRelation:pmLbMeasuredUe
eNb	EUtranFreqRelation:pmMbmsInterestIndication
eNb	FastEthernet:pmIfInBroadcastPkts
eNb	FastEthernet:pmIfInDiscards
eNb	FastEthernet:pmIfInErrors
eNb	FastEthernet:pmIfInMulticastPkts

eNb	FastEthernet:pmIfInOctetsHi
eNb	FastEthernet:pmIfInOctetsLo
eNb	FastEthernet:pmIfInUcastPkts
eNb	FastEthernet:pmIfInUnknownProtos
eNb	FastEthernet:pmIfOutBroadcastPkts
eNb	FastEthernet:pmIfOutDiscards
eNb	FastEthernet:pmIfOutErrors
eNb	FastEthernet:pmIfOutMulticastPkts
eNb	FastEthernet:pmIfOutOctetsHi
eNb	FastEthernet:pmIfOutOctetsLo
eNb	FastEthernet:pmIfOutUcastPkts
eNb	GeranCellRelation:pmHoExeAtt
eNb	GeranCellRelation:pmHoExeSucc
eNb	GeranCellRelation:pmHoPrepAtt
eNb	GeranCellRelation:pmHoPrepSucc
eNb	GigaBitEthernet:pmDot1qTpVlanPortInDiscardsLink1
eNb	GigaBitEthernet:pmDot1qTpVlanPortInDiscardsLink2
eNb	GigaBitEthernet:pmIfInBroadcastPktsLink1
eNb	GigaBitEthernet:pmIfInBroadcastPktsLink2
eNb	GigaBitEthernet:pmIfInDiscardsLink1
eNb	GigaBitEthernet:pmIfInDiscardsLink2
eNb	GigaBitEthernet:pmIfInErrorsLink1
eNb	GigaBitEthernet:pmIfInErrorsLink2
eNb	GigaBitEthernet:pmIfInMulticastPktsLink1
eNb	GigaBitEthernet:pmIfInMulticastPktsLink2
eNb	GigaBitEthernet:pmIfInOctetsLink1Hi
eNb	GigaBitEthernet:pmIfInOctetsLink1Lo
eNb	GigaBitEthernet:pmIfInOctetsLink2Hi
eNb	GigaBitEthernet:pmIfInOctetsLink2Lo
eNb	GigaBitEthernet:pmIfInUcastPktsLink1
eNb	GigaBitEthernet:pmIfInUcastPktsLink2
eNb	GigaBitEthernet:pmIfInUnknownProtosLink1
eNb	GigaBitEthernet:pmIfInUnknownProtosLink2
eNb	GigaBitEthernet:pmIfOutBroadcastPktsLink1
eNb	GigaBitEthernet:pmIfOutBroadcastPktsLink2
eNb	GigaBitEthernet:pmIfOutDiscardsLink1
eNb	GigaBitEthernet:pmIfOutDiscardsLink2
eNb	GigaBitEthernet:pmIfOutErrorsLink1
eNb	GigaBitEthernet:pmIfOutErrorsLink2
eNb	GigaBitEthernet:pmIfOutMulticastPktsLink1
eNb	GigaBitEthernet:pmIfOutMulticastPktsLink2
eNb	GigaBitEthernet:pmIfOutOctetsLink1Hi
eNb	GigaBitEthernet:pmIfOutOctetsLink1Lo
eNb	GigaBitEthernet:pmIfOutOctetsLink2Hi
eNb	GigaBitEthernet:pmIfOutOctetsLink2Lo

eNb	GigaBitEthernet:pmIfOutUcastPktsLink1
eNb	GigaBitEthernet:pmIfOutUcastPktsLink2
eNb	Icmp:pmIcmpStatsInErrors
eNb	Icmp:pmIcmpStatsInMsgs
eNb	Icmp:pmIcmpStatsInPktsDestUnreach
eNb	Icmp:pmIcmpStatsInPktsEchoRep
eNb	Icmp:pmIcmpStatsInPktsEchos
eNb	Icmp:pmIcmpStatsInPktsNeighAdv
eNb	Icmp:pmIcmpStatsInPktsNeighSol
eNb	Icmp:pmIcmpStatsInPktsParmProb
eNb	Icmp:pmIcmpStatsInPktsRedir
eNb	Icmp:pmIcmpStatsInPktsRoutAdv
eNb	Icmp:pmIcmpStatsInPktsRoutSol
eNb	Icmp:pmIcmpStatsInPktsTimeExcds
eNb	Icmp:pmIcmpStatsInPktsTooBig
eNb	Icmp:pmIcmpStatsOutErrors
eNb	Icmp:pmIcmpStatsOutMsgs
eNb	Icmp:pmIcmpStatsOutPktsDestUnreach
eNb	Icmp:pmIcmpStatsOutPktsEchoRep
eNb	Icmp:pmIcmpStatsOutPktsEchos
eNb	Icmp:pmIcmpStatsOutPktsNeighAdv
eNb	Icmp:pmIcmpStatsOutPktsNeighSol
eNb	Icmp:pmIcmpStatsOutPktsParmProb
eNb	Icmp:pmIcmpStatsOutPktsRedir
eNb	Icmp:pmIcmpStatsOutPktsRoutAdv
eNb	Icmp:pmIcmpStatsOutPktsRoutSol
eNb	Icmp:pmIcmpStatsOutPktsTimeExcds
eNb	Icmp:pmIcmpStatsOutPktsTooBig
eNb	IkePeer:pmChildSaRekey
eNb	IkePeer:pmInAuthReq
eNb	IkePeer:pmInAuthRsp
eNb	IkePeer:pmInCrChildReq
eNb	IkePeer:pmInCrChildRsp
eNb	IkePeer:pmInInfoReq
eNb	IkePeer:pmInInfoRsp
eNb	IkePeer:pmInInitReq
eNb	IkePeer:pmInInitRsp
eNb	IkePeer:pmInInvalid
eNb	IkePeer:pmInInvalidSpi
eNb	IkePeer:pmOutAuthReq
eNb	IkePeer:pmOutAuthRsp
eNb	IkePeer:pmOutCrChildReq
eNb	IkePeer:pmOutCrChildRsp
eNb	IkePeer:pmOutInfoReq
eNb	IkePeer:pmOutInfoRsp

eNb	IkePeer:pmOutInitReq
eNb	IkePeer:pmOutInitRsp
eNb	InternalEthernetPort:pmDot1qTpVlanPortInDiscardsLink
eNb	InternalEthernetPort:pmIfInBroadcastPkts
eNb	InternalEthernetPort:pmIfInDiscards
eNb	InternalEthernetPort:pmIfInErrors
eNb	InternalEthernetPort:pmIfInMulticastPkts
eNb	InternalEthernetPort:pmIfInOctetsHi
eNb	InternalEthernetPort:pmIfInOctetsLo
eNb	InternalEthernetPort:pmIfInUcastPkts
eNb	InternalEthernetPort:pmIfInUnknownProtos
eNb	InternalEthernetPort:pmIfOutBroadcastPkts
eNb	InternalEthernetPort:pmIfOutDiscards
eNb	InternalEthernetPort:pmIfOutErrors
eNb	InternalEthernetPort:pmIfOutMulticastPkts
eNb	InternalEthernetPort:pmIfOutOctetsHi
eNb	InternalEthernetPort:pmIfOutOctetsLo
eNb	InternalEthernetPort:pmIfOutUcastPkts
eNb	Ip:pmNoOfHdrErrors
eNb	Ip:pmNoOfIpAddrErrors
eNb	Ip:pmNoOfIpForwDatagrams
eNb	Ip:pmNoOfIpInDiscards
eNb	Ip:pmNoOfIpInReceives
eNb	Ip:pmNoOfIpOutDiscards
eNb	Ip:pmNoOfIpReasmOKs
eNb	Ip:pmNoOfIpReasmReqds
eNb	IpAccessHostEt:pmlcmpInDestUnreachs
eNb	IpAccessHostEt:pmlcmpInEchoReps
eNb	IpAccessHostEt:pmlcmpInEchos
eNb	IpAccessHostEt:pmlcmpInErrors
eNb	IpAccessHostEt:pmlcmpInMsgs
eNb	IpAccessHostEt:pmlcmpInParamProbs
eNb	IpAccessHostEt:pmlcmpInRedirects
eNb	IpAccessHostEt:pmlcmpInSrcQuenchs
eNb	IpAccessHostEt:pmlcmpInTimeExcds
eNb	IpAccessHostEt:pmlcmpOutDestUnreachs
eNb	IpAccessHostEt:pmlcmpOutEchoReps
eNb	IpAccessHostEt:pmlcmpOutEchos
eNb	IpAccessHostEt:pmlcmpOutErrors
eNb	IpAccessHostEt:pmlcmpOutMsgs
eNb	IpAccessHostEt:pmlcmpOutParamProbs
eNb	IpAccessHostEt:pmInAppLayerError
eNb	IpAccessHostEt:pmIpFragCreates
eNb	IpAccessHostEt:pmIpFragFails
eNb	IpAccessHostEt:pmIpFragOks

eNb	IpAccessHostEt:pmIpInAddrErrors
eNb	IpAccessHostEt:pmIpInDelivers
eNb	IpAccessHostEt:pmIpInDiscards
eNb	IpAccessHostEt:pmIpInHdrErrors
eNb	IpAccessHostEt:pmIpInReceives
eNb	IpAccessHostEt:pmIpInUnknownProtos
eNb	IpAccessHostEt:pmIpOutDiscards
eNb	IpAccessHostEt:pmIpOutRequests
eNb	IpAccessHostEt:pmIpPortUnreachable
eNb	IpAccessHostEt:pmIpReasmFails
eNb	IpAccessHostEt:pmIpReasmOks
eNb	IpAccessHostEt:pmIpReasmReqds
eNb	IpAccessHostEt:pmMeanAtmConnSetupIntensity
eNb	IpAccessHostEt:pmPeakAtmConnSetupIntensity
eNb	IpAccessHostEt:pmStdDevAtmSetupIntensity
eNb	IpAccessHostEt:pmUdpInDatagrams
eNb	IpAccessHostEt:pmUdpInErrors
eNb	IpAccessHostEt:pmUdpOutDatagrams
eNb	IpAccessHostGpb:pmIcmpInDestUnreachs
eNb	IpAccessHostGpb:pmIcmpInEchoReps
eNb	IpAccessHostGpb:pmIcmpInEchos
eNb	IpAccessHostGpb:pmIcmpInErrors
eNb	IpAccessHostGpb:pmIcmpInMsgs
eNb	IpAccessHostGpb:pmIcmpInParamProbs
eNb	IpAccessHostGpb:pmIcmpInRedirects
eNb	IpAccessHostGpb:pmIcmpInSrcQuenchs
eNb	IpAccessHostGpb:pmIcmpInTimeExcds
eNb	IpAccessHostGpb:pmIcmpOutDestUnreachs
eNb	IpAccessHostGpb:pmIcmpOutEchoReps
eNb	IpAccessHostGpb:pmIcmpOutEchos
eNb	IpAccessHostGpb:pmIcmpOutErrors
eNb	IpAccessHostGpb:pmIcmpOutMsgs
eNb	IpAccessHostGpb:pmIcmpOutParmProbs
eNb	IpAccessHostGpb:pmIpFragCreates
eNb	IpAccessHostGpb:pmIpFragFails
eNb	IpAccessHostGpb:pmIpFragOKs
eNb	IpAccessHostGpb:pmIpInAddrErrors
eNb	IpAccessHostGpb:pmIpInDelivers
eNb	IpAccessHostGpb:pmIpInDiscards
eNb	IpAccessHostGpb:pmIpInHdrErrors
eNb	IpAccessHostGpb:pmIpInReceives
eNb	IpAccessHostGpb:pmIpInUnknownProtos
eNb	IpAccessHostGpb:pmIpOutDiscards
eNb	IpAccessHostGpb:pmIpOutRequests
eNb	IpAccessHostGpb:pmIpReasmFails

eNb	IpAccessHostGpb:pmIpReasmOKs
eNb	IpAccessHostGpb:pmIpReasmReqds
eNb	IpAccessHostGpb:pmUdpInDatagrams
eNb	IpAccessHostGpb:pmUdpInErrors
eNb	IpAccessHostGpb:pmUdpNoPorts
eNb	IpAccessHostGpb:pmUdpOutDatagrams
eNb	IpAccessHostSpb:pmIcmpInDestUnreachs
eNb	IpAccessHostSpb:pmIcmpInEchoReps
eNb	IpAccessHostSpb:pmIcmpInEchos
eNb	IpAccessHostSpb:pmIcmpInErrors
eNb	IpAccessHostSpb:pmIcmpInMsgs
eNb	IpAccessHostSpb:pmIcmpInParamProbs
eNb	IpAccessHostSpb:pmIcmpInRedirects
eNb	IpAccessHostSpb:pmIcmpInSrcQuenchs
eNb	IpAccessHostSpb:pmIcmpInTimeExcds
eNb	IpAccessHostSpb:pmIcmpOutDestUnreachs
eNb	IpAccessHostSpb:pmIcmpOutEchoReps
eNb	IpAccessHostSpb:pmIcmpOutEchos
eNb	IpAccessHostSpb:pmIcmpOutErrors
eNb	IpAccessHostSpb:pmIcmpOutMsgs
eNb	IpAccessHostSpb:pmIcmpOutParmProbs
eNb	IpAccessHostSpb:pmIpFragCreates
eNb	IpAccessHostSpb:pmIpFragFails
eNb	IpAccessHostSpb:pmIpFragOKs
eNb	IpAccessHostSpb:pmIpInAddrErrors
eNb	IpAccessHostSpb:pmIpInDelivers
eNb	IpAccessHostSpb:pmIpInDiscards
eNb	IpAccessHostSpb:pmIpInHdrErrors
eNb	IpAccessHostSpb:pmIpInReceives
eNb	IpAccessHostSpb:pmIpInUnknownProtos
eNb	IpAccessHostSpb:pmIpOutDiscards
eNb	IpAccessHostSpb:pmIpOutRequests
eNb	IpAccessHostSpb:pmIpReasmFails
eNb	IpAccessHostSpb:pmIpReasmOKs
eNb	IpAccessHostSpb:pmIpReasmReqds
eNb	IpAccessHostSpb:pmUdpInDatagrams
eNb	IpAccessHostSpb:pmUdpInErrors
eNb	IpAccessHostSpb:pmUdpNoPorts
eNb	IpAccessHostSpb:pmUdpOutDatagrams
eNb	IpHostLink:pmNoOfIfInDiscards
eNb	IpHostLink:pmNoOfIfInErrors
eNb	IpHostLink:pmNoOfIfInNUcastPkts
eNb	IpHostLink:pmNoOfIfInUcastPkts
eNb	IpHostLink:pmNoOfIfOutDiscards
eNb	IpHostLink:pmNoOfIfOutNUcastPkts

eNb	IpHostLink:pmNoOfIfOutUcastPkts
eNb	IpInterface:pmDot1qTpVlanPortInFrames
eNb	IpInterface:pmDot1qTpVlanPortOutFrames
eNb	IpInterface:pmIfStatsHCInMcastOctets
eNb	IpInterface:pmIfStatsHCInMcastPkts
eNb	IpInterface:pmIfStatsHCOutMcastOctets
eNb	IpInterface:pmIfStatsHCOutMcastPkts
eNb	IpInterface:pmIfStatsIpAddrErrors
eNb	IpInterface:pmIfStatsIpInDiscards
eNb	IpInterface:pmIfStatsIpInHdrErrors
eNb	IpInterface:pmIfStatsIpInReceives
eNb	IpInterface:pmIfStatsIpOutDiscards
eNb	IpInterface:pmIfStatsIpOutRequests
eNb	IpInterface:pmIfStatsIpUnknownProtos
eNb	IpInterface:pmInDiscPolicy
eNb	IpInterface:pmInEsp
eNb	IpInterface:pmInPassedPolicy
eNb	IpInterface:pmIpIfStatsHCInOctets
eNb	IpInterface:pmIpIfStatsHCInReceives
eNb	IpInterface:pmIpIfStatsHCOctets
eNb	IpInterface:pmIpIfStatsHCOutTransmits
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter0
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter1
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter2
eNb	IpMux:pmIpMuxNotApplied
eNb	IpSecTunnel:pmInDiscARFail
eNb	IpSecTunnel:pmInDiscDec
eNb	IpSecTunnel:pmInDiscIntCh
eNb	IpSecTunnel:pmInDiscNoSa
eNb	IpSecTunnel:pmInEspData
eNb	IpSecTunnel:pmInPkt
eNb	IpSecTunnel:pmOutDiscNoSa
eNb	IpSecTunnel:pmOutDiscSeqOw
eNb	IpSecTunnel:pmOutEspData
eNb	IpSecTunnel:pmOutPkt
eNb	Ipv6Interface:pmIfStatsHCInMcastOctets
eNb	Ipv6Interface:pmIfStatsHCInMcastPkts
eNb	Ipv6Interface:pmIfStatsHCOutMcastOctets
eNb	Ipv6Interface:pmIfStatsHCOutMcastPkts
eNb	Ipv6Interface:pmIpIfStatsHCInOctets
eNb	Ipv6Interface:pmIpIfStatsHCInReceives
eNb	Ipv6Interface:pmIpIfStatsHCOctets
eNb	Ipv6Interface:pmIpIfStatsHCOutTransmits
eNb	Ipv6Interface:pmIpIfStatsInAddrErrors
eNb	Ipv6Interface:pmIpIfStatsInDiscards

eNb	Ipv6Interface:pmIplfStatsInHdrErrors
eNb	Ipv6Interface:pmIplfStatsInUnknownProtos
eNb	Ipv6Interface:pmIplfStatsOutDiscards
eNb	Ipv6Interface:pmIplfStatsOutFragCreates
eNb	Ipv6Interface:pmIplfStatsReasmFails
eNb	Ipv6Interface:pmIplfStatsReasmReqds
eNb	Ipv6Interface:pmUdplfStatsInError
eNb	MbmsService:pmMbmsPktDiscSynchPayloadMuted
eNb	MbmsService:pmMbmsPktDiscSynchPayloadTooMuch
eNb	MbmsService:pmMbmsPktDiscSynchPayloadTooOld
eNb	MbmsService:pmMbmsPktLostSynchPayload
eNb	MbmsService:pmMbmsPktRecSynchCtrl
eNb	MbmsService:pmMbmsPktRecSynchPayload
eNb	MbmsService:pmMbmsSessionEnd
eNb	MbmsService:pmMbmsSessionEstabAtt
eNb	MbmsService:pmMbmsSessionEstabFailUpdate
eNb	MbmsService:pmMbmsSessionEstabSucc
eNb	MbmsService:pmMbmsSessionStopAuditTimer
eNb	MbmsService:pmMbmsSessionStopMme
eNb	MbmsService:pmMbmsVolReceived
eNb	MbmsService:pmMbmsVolTrans
eNb	MbmsService:pmZtemporary55
eNb	MceFunction:pmMbmsSessionEstabFailNotSupp
eNb	MceFunction:pmMbmsSessionStopMmeNoSession
eNb	MediumAccessUnit:pmNoOfDot3StatsFCSErrors
eNb	MediumAccessUnit:pmNoOfDot3StatsLateCollisions
eNb	PlugInUnit:pmProcessorCoreLoad
eNb	PlugInUnit:pmProcessorLoad
eNb	PlugInUnit:pmSwitchIngressDiscards
eNb	PlugInUnit:pmSwitchIngressLoad
eNb	PmUeMeasControl:pmUeMeasRsrpDeltaIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrpServIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrqDeltaIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrqServIntraFreq1
eNb	PmUeMeasControl:pmZtemporary44
eNb	ProcessorLoad:pmProcessorLoadDistr
eNb	ProcessorLoad:pmZtemporary46
eNb	Sctp:pmSctpAborted
eNb	Sctp:pmSctpActiveEstab
eNb	Sctp:pmSctpCurrEstab
eNb	Sctp:pmSctpInErrors
eNb	Sctp:pmSctpInNoPorts
eNb	Sctp:pmSctpPassiveEstab
eNb	Sctp:pmSctpShutdowns
eNb	Sctp:pmSctpStatAssocOutOfBlue

eNb	Sctp:pmSctpStatChecksumErrorCounter
eNb	Sctp:pmSctpStatCommResume
eNb	Sctp:pmSctpStatCommStop
eNb	Sctp:pmSctpStatFragmentedUserMsg
eNb	Sctp:pmSctpStatOutOfOrderRecChunks
eNb	Sctp:pmSctpStatOutOfOrderSendChunks
eNb	Sctp:pmSctpStatReassembledUserMsg
eNb	Sctp:pmSctpStatRecChunks
eNb	Sctp:pmSctpStatRecChunksDropped
eNb	Sctp:pmSctpStatReceivedControlChunks
eNb	Sctp:pmSctpStatReceivedPackages
eNb	Sctp:pmSctpStatRetransChunks
eNb	Sctp:pmSctpStatSentChunks
eNb	Sctp:pmSctpStatSentChunksDropped
eNb	Sctp:pmSctpStatSentControlChunks
eNb	Sctp:pmSctpStatSentPackages
eNb	SctpAssociation:pmAbortedS
eNb	SctpAssociation:pmCongestions
eNb	SctpAssociation:pmInControlChunkAbnormal
eNb	SctpAssociation:pmInControlChunkDiscards
eNb	SctpAssociation:pmInControlChunks
eNb	SctpAssociation:pmInDataChunkAbnormal
eNb	SctpAssociation:pmInDataChunkDiscards
eNb	SctpAssociation:pmInDataChunks
eNb	SctpAssociation:pmInOctets
eNb	SctpAssociation:pmInPacks
eNb	SctpAssociation:pmOutControlChunks
eNb	SctpAssociation:pmOutDataChunkDiscards
eNb	SctpAssociation:pmOutDataChunks
eNb	SctpAssociation:pmOutOctets
eNb	SctpAssociation:pmOutPacks
eNb	SctpAssociation:pmOutUserMsgDiscards
eNb	SctpAssociation:pmPeerZeroWindows
eNb	SctpAssociation:pmRtxChunks
eNb	SctpAssociation:pmShutdowns
eNb	SctpAssociation:pmTimeCongested
eNb	SctpAssociation:pmTimePeerZeroWindow
eNb	SctpAssociation:pmTimeUnavail
eNb	SctpAssociation:pmUnavailRetrans
eNb	SectorCarrier:pmActiveUeDISumSectorCarrier
eNb	SectorCarrier:pmActiveUeUISumSectorCarrier
eNb	SectorCarrier:pmBranchDeltaSinrDistr0
eNb	SectorCarrier:pmBranchDeltaSinrDistr1
eNb	SectorCarrier:pmBranchDeltaSinrDistr2
eNb	SectorCarrier:pmBranchDeltaSinrDistr3

eNb	SectorCarrier:pmBranchDeltaSinrDistr4
eNb	SectorCarrier:pmBranchDeltaSinrDistr5
eNb	SectorCarrier:pmBranchDeltaSinrDistr6
eNb	SectorCarrier:pmBranchUsersLevSum
eNb	SectorCarrier:pmZtemporary56
eNb	SecurityHandling:pmRrcSecFailIntegrity
eNb	SecurityHandling:pmRrcSecFailUnexpectedMsg
eNb	SecurityHandling:pmZtemporary45
eNb	Synchronization:pmHDelayVarBest10Pct
eNb	Synchronization:pmHDelayVarBest1Pct
eNb	Synchronization:pmHDelayVarBest50Pct
eNb	Synchronization:pmMaxDelayVariation
eNb	TrafficManagementQueue:pmQueueDroppedOctets
eNb	TrafficManagementQueue:pmQueueDroppedPackets
eNb	TrafficManagementQueue:pmQueueOutOctets
eNb	TrafficManagementQueue:pmQueueOutPackets
eNb	TwampResponder:pmTestInDiscards
eNb	TwampResponder:pmTestInErrors
eNb	TwampResponder:pmTestInReceives
eNb	TwampResponder:pmTestOutTransmits
eNb	TwampResponder:pmTestSessions
eNb	UIBasebandCapacity:pmLicUICapLicense
eNb	UIBasebandCapacity:pmZtemporary41
eNb	UIPrbCapacity:pmLicUIPrbCapLicense
eNb	UIPrbCapacity:pmZtemporary43
eNb	UtranCellRelation:pmHoExeAtt
eNb	UtranCellRelation:pmHoExeAttLb
eNb	UtranCellRelation:pmHoExeSucc
eNb	UtranCellRelation:pmHoExeSuccLb
eNb	UtranCellRelation:pmHoPrepAtt
eNb	UtranCellRelation:pmHoPrepAttLb
eNb	UtranCellRelation:pmHoPrepAttSrvcc
eNb	UtranCellRelation:pmHoPrepAttSrvccLb
eNb	UtranCellRelation:pmHoPrepSucc
eNb	UtranCellRelation:pmHoPrepSuccLb
eNb	UtranCellRelation:pmHoPrepSuccSrvcc
eNb	UtranCellRelation:pmHoPrepSuccSrvccLb
eNb	UtranCellRelation:pmLbQualifiedUe
eNb	UtranCellRelation:pmZtemporary37
eNb	UtranFreqRelation:pmLbMeasuredUe
eNb	VpnInterface:pmOutDroppedPacketsPolicyControl



National_PM_Standard_eNodeB_L14A_GS_14.02.txt

Profile

System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.02
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
No
National_PM_Standard_eNodeB_L14A_GS_14.0
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.0
National_PM_Standard_eNodeB_L14A_GS_14.0
No
No

No

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14A_GS_14.C

National PM Standard eNodeB L14A GS 14.0

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14 C

National PM Standard eNodeB L14A_GS_14 C

National_PM_Standard_eNodeB_L14A_GS_14.C

National FM Standard eNodeB-L14A-GS-14.03
National FM Standard eNodeB-L14A-GS-14.03

National_PM_Standard_eNodeB_L14A_GS_14.C

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.02

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.02

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB 114A GS 14 C

National PM Standard eNodeB L14A GS 14 C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_I_M_Standard_encodedB_E14A_CS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
No
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
No
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
No
System ERBS PRIMARY
System ERBS PRIMARY
No
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
National_PM_Standard_eNodeB_L14A_GS_14.02
National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
No
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National PM Standard eNodeB L14A GS 14.C

[illegible]

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

No

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

No

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.C

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.C

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.0

No

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

No

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

[illegible]

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
No
No
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National PM Standard eNodeB L14A GS 14.C

System ERBS PRIMARY

National_PM_Standard_eNodeB_L14A_GS_14.C

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

System ERBS PRIMARY

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.C

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB 114A GS 14.C

National PM Standard eNodeB 114A GS 14.C

National PM Standard eNodeB 114A GS 14 C

National PM Standard eNodeB 114A GS 14 C

National PM Standard eNodeB L14A GS 14 C

National PM Standard eNodeB 114A GS 14 C

National PM Standard eNodeB I14A GS 14 03

National_PM_Standard_eNodeB | 14A_GS | 14.02

National PM Standard eNodeB L14A GS 14 C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_RM_Standard_eNodeB_E14A_GS_11.03

No

NO
No

System ERPS PRIMARY

System ERDS PRIMARY

System ERBS PRIMARY
System ERBS PRIMARYSystem# ERBS PRIMARY
System# ERBS PRIMARYSystem ERBS PRIMARY
System ERBS PRIMARYSystem ERBS PRIMARY
S... ERBS PRIMARYSystem ERBS PRIMARY
 S... ERBS PRIMARYSystem ERBS PRIMARY
 6.1.1.1 ERBS PRIMARYSystem ERBS PRIMARY
System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
No
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.02
National_PM_Standard_eNodeB_L14A_GS_14.02
National_PM_Standard_eNodeB_L14A_GS_14.02
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY

No

System ERBS PRIMARY

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

No

National PM Standard eNodeB L14A GS 14.0

No

National PM Standard eNodeB L14A GS 14.0

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National PM Standard eNodeB L14A GS 14.C

No

No

No

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
No
No
No
No
No
No
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
No
National_PM_Standard_eNodeB_L14A_GS_14.C
No
No
National_PM_Standard_eNodeB_L14A_GS_14.C
System ERBS PRIMARY

[illegible]

No

No
No
No
No
No
No
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
No
No
No
No

No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No

System ERBS PRIMARY

No
No
No
No

System ERBS PRIMARY

No
No
No
No
No
No
No
No
No
No
No

System ERBS PRIMARY

No
No

System ERBS PRIMARY

No
No
No
No
No
No
No

System ERBS PRIMARY

System ERBS PRIMARY

No

No

No

No

No

System ERBS PRIMARY

No

No

System ERBS PRIMARY

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
No
No
No
No
System ERBS PRIMARY
No
No
No
No
No
No
No
System ERBS PRIMARY
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
No
No
No
System ERBS PRIMARY
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
No
No

No

[illegible]

[illegible]

[illegible]

[illegible]

System ERBS PRIMARY

System ERBS PRIMARY

No

No

No

No

No

System ERBS PRIMARY

System ERBS PRIMARY

No

No

No

No

No

No

No

System ERBS PRIMARY

No

No

System ERBS PRIMARY

System ERBS PRIMARY

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
No
System ERBS PRIMARY
No
No
No
No
No
No
No
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY

No

No

National PM Standard eNodeB L14A GS 14.0

[illegible]

National_PM_Standard_eNodeB_L14A_GS_14.02

National_PM_Standard_eNodeB_L14A_GS_14.02

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.0

National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C
National_PM_Standard_eNodeB_L14A_GS_14.C

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

[illegible]

[illegible]

[illegible]

[illegible]

No

No

No

No

National_PM_Standard_eNodeB_L14A_GS_14.02

National_PM_Standard_eNodeB_L14A_GS_14.C

National PM Standard_eNodeB L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.C

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.C

System ERBS PRIMARY

National PM Standard eNodeB L14A GS 14.C

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National PM Standard eNodeB L14A GS 14.0

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.C

National_PM_Standard_eNodeB_L14A_GS_14.c

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Reason

)2

)2

)2

)2

)2

)2

)2

)2

)2

)2

)2

)2

)2

)2

)2

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12
12
12
12
12
12
12
12
12
12
12
12
12
12
12
12
12

12

12

12

12

12
12
12
12
12
12
12
12
12
12
12

12
12

12
12

12
12

12
12

12
12
12
12
12
12
12
12
12

12

12
12
12

12
12
12
12
12
12
12
12
12

12
12
12
12
12
12
12
12

12
12
12
12

12
12
12
12
12
12
12
12
12

12
12

12
12
12
12

12
12
12
12
12
12
12
12
12
12
12
12
12
12

12
12
12

12
12
12
12
12
12
12
12

12

12
12

12
12
12
12

12

12
12

12
12
12
12
12
12
12
12
12
12

12
12

12
12
12
12
12
12
12
12
12
12

12

12
12
12
12
12
12
12

12
12
12
12
12
12
12
12
12
12

12
12
12
12
12
12
12
12
12
12
12
12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12
12
12
12
12
12
12
12
12
12
12
12
12
12
12
12
12
12
12

12

12
12

12

12
12
12
12
12
12
12
12
12
12
12
12

12
12
12
12
12

12
12
12
12
12
12
12

12
12

12

12
12
12
12
12
12
12
12
12
12
12

12
12

12
12
12
12

12
12
12

12

12
12

12
12
12
12

12
12

12
12
12
12
12
12

12
12
12
12
12
12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

[illegible]

[illegible]

[illegible]

[illegible]

12
12
12
12
12
12

12
12
12

12
12
12
12
12
12
12
12
12
12
12
12
12
12
12
12
12

12
12
12
12
12
12
12
12
12
12
12

12
12
12
12
12
12

12
12
12
12
12
12
12

12
12
12

[illegible]

[illegible]

**Ericsson LTE L13B eNodeB Counter Activation
Standard**

Resolution	MO:Counter
eNb	BbProcessingResource:pmLicDI CapActual
eNb	BbProcessingResource:pmLicDI CapDistr
eNb	BbProcessingResource:pmLicDI PrbCapActual
eNb	BbProcessingResource:pmLicDI PrbCapDistr
eNb	BbProcessingResource:pmLicUI CapActual
eNb	BbProcessingResource:pmLicUI CapDistr
eNb	BbProcessingResource:pmLicUI PrbCapActual
eNb	BbProcessingResource:pmLicUI PrbCapDistr
eNb	BbProcessingResource:pmPdcPktDiscDI Eth
eNb	BbProcessingResource:pmPdcPktDiscDI EthBurst
eNb	BbProcessingResource:pmPdcPktDiscDI EthFormat
eNb	BbProcessingResource:pmPdcPktDiscDI EthX2Fwd
eNb	BbProcessingResource:pmPdcPktDiscDI NoMbmsCtxt
eNb	BbProcessingResource:pmPdcPktDiscDI NoUeCtxt
eNb	BbProcessingResource:pmPdcPktDiscUI EthPacing
eNb	BbProcessingResource:pmRohcCidSamp
eNb	BbProcessingResource:pmRohcCidSum
eNb	BbProcessingResource:pmZtemporary47
eNb	BbProcessingResource:pmZtemporary48
eNb	BbProcessingResource:pmZtemporary49
eNb	BbProcessingResource:pmZtemporary50
eNb	BbProcessingResource:pmZtemporary51
eNb	BbProcessingResource:pmZtemporary52
eNb	BbProcessingResource:pmZtemporary53
eNb	BbProcessingResource:pmZtemporary54
eNb	CapacityConnectedUsers:pmLicConnectedUsersActual
eNb	CapacityConnectedUsers:pmLicConnectedUsersDistr
eNb	CapacityConnectedUsers:pmLicConnectedUsersLevSa
eNb	CapacityConnectedUsers:pmLicConnectedUsersLevSu
eNb	CapacityConnectedUsers:pmLicConnectedUsersLicense
eNb	CapacityConnectedUsers:pmLicConnectedUsersMax
eNb	CapacityConnectedUsers:pmLicConnectedUsersTimeCc
eNb	CapacityConnectedUsers:pmZtemporary38
eNb	CapacityConnectedUsers:pmZtemporary39
eNb	Cdma20001xRttCellRelation:pmHoPrepAttCsfb
eNb	Cdma20001xRttCellRelation:pmHoPrepAttCsfbEm
eNb	Cdma20001xRttCellRelation:pmHoPrepSuccCsfb

eNb	Cdma20001xRttCellRelation:pmHoPrepSuccCsfbEm
eNb	DlBasebandCapacity:pmLicDlCapLicense
eNb	DlBasebandCapacity:pmZtemporary40
eNb	DlPrbCapacity:pmLicDlPrbCapLicense
eNb	DlPrbCapacity:pmZtemporary42
eNb	DscpGroup:pmIfStatsDscplnOctets
eNb	DscpGroup:pmIfStatsDscplnPmts
eNb	DscpGroup:pmIfStatsDscpOutOctets
eNb	DscpGroup:pmIfStatsDscpOutPmts
eNb	ENodeBFunction:pmPagS1Discarded
eNb	ENodeBFunction:pmPagS1Received
eNb	ENodeBFunction:pmZtemporary34
eNb	ENodeBFunction:pmZtemporary35
eNb	EthernetLink:pmNoOfIfInDiscards
eNb	EthernetLink:pmNoOfIfInErrors
eNb	EthernetLink:pmNoOfIfInNUcastPmts
eNb	EthernetLink:pmNoOfIfInUcastPmts
eNb	EthernetLink:pmNoOfIfOutDiscards
eNb	EthernetLink:pmNoOfIfOutNUcastPmts
eNb	EthernetLink:pmNoOfIfOutUcastPmts
eNb	EUtranCellFDD:pmActiveDrbDlSum
eNb	EUtranCellFDD:pmActiveDrbDlSumQci
eNb	EUtranCellFDD:pmActiveDrbUlSum
eNb	EUtranCellFDD:pmActiveUeDlMax
eNb	EUtranCellFDD:pmActiveUeDlSectorCarrierDistr
eNb	EUtranCellFDD:pmActiveUeDlSum
eNb	EUtranCellFDD:pmActiveUeDlSumQci
eNb	EUtranCellFDD:pmActiveUeDrbSamp
eNb	EUtranCellFDD:pmActiveUeUlMax
eNb	EUtranCellFDD:pmActiveUeUlSectorCarrierDistr
eNb	EUtranCellFDD:pmActiveUeUlSum
eNb	EUtranCellFDD:pmActiveUeUlSumLcg
eNb	EUtranCellFDD:pmAdvCellSupDetection
eNb	EUtranCellFDD:pmAdvCellSupRecoveryCellAtt
eNb	EUtranCellFDD:pmAdvCellSupRecoveryCellSucc
eNb	EUtranCellFDD:pmAnrNeighbreAdd
eNb	EUtranCellFDD:pmAnrNeighbreRem
eNb	EUtranCellFDD:pmBadCovEvalReport
eNb	EUtranCellFDD:pmBadCovSearchEvalReport
eNb	EUtranCellFDD:pmBestCellEvalReport
eNb	EUtranCellFDD:pmCaActivatedDlSum
eNb	EUtranCellFDD:pmCaCapableDlSamp
eNb	EUtranCellFDD:pmCaCapableDlSum
eNb	EUtranCellFDD:pmCaConfiguredDlSamp
eNb	EUtranCellFDD:pmCaConfiguredDlSum

eNb	EUtranCellFDD:pmCaScheduledDISum
eNb	EUtranCellFDD:pmCellAdmControlPdcchRej
eNb	EUtranCellFDD:pmCellAdmControlPdcchRejMeas
eNb	EUtranCellFDD:pmCellDownLockAuto
eNb	EUtranCellFDD:pmCellDownLockMan
eNb	EUtranCellFDD:pmCellDowntimeAuto
eNb	EUtranCellFDD:pmCellDowntimeMan
eNb	EUtranCellFDD:pmCellDownUnlockMan
eNb	EUtranCellFDD:pmCompUIDeltaSinrPuschDistr
eNb	EUtranCellFDD:pmContDI
eNb	EUtranCellFDD:pmContDICapLic
eNb	EUtranCellFDD:pmContDIHw
eNb	EUtranCellFDD:pmContDIPdcch
eNb	EUtranCellFDD:pmContUI
eNb	EUtranCellFDD:pmContUICapLic
eNb	EUtranCellFDD:pmContUIHw
eNb	EUtranCellFDD:pmContUIPdcch
eNb	EUtranCellFDD:pmCriticalBorderEvalReport
eNb	EUtranCellFDD:pmDIAssigsTrans
eNb	EUtranCellFDD:pmDIAssigsWithDetectedHarqAck
eNb	EUtranCellFDD:pmDIAssigsWithUnknownReception
eNb	EUtranCellFDD:pmDrbThpTimeDIQci
eNb	EUtranCellFDD:pmDrxSleepTime
eNb	EUtranCellFDD:pmDrxTotalTime
eNb	EUtranCellFDD:pmErabEstabAttAdded
eNb	EUtranCellFDD:pmErabEstabAttAddedArp
eNb	EUtranCellFDD:pmErabEstabAttAddedPa
eNb	EUtranCellFDD:pmErabEstabAttAddedQci
eNb	EUtranCellFDD:pmErabEstabAttInit
eNb	EUtranCellFDD:pmErabEstabAttInitArp
eNb	EUtranCellFDD:pmErabEstabAttInitPa
eNb	EUtranCellFDD:pmErabEstabAttInitQci
eNb	EUtranCellFDD:pmErabEstabFailAddedLic
eNb	EUtranCellFDD:pmErabEstabFailGbrDIEnb
eNb	EUtranCellFDD:pmErabEstabFailGbrUIEnb
eNb	EUtranCellFDD:pmErabEstabFailInitLic
eNb	EUtranCellFDD:pmErabEstabSuccAdded
eNb	EUtranCellFDD:pmErabEstabSuccAddedArp
eNb	EUtranCellFDD:pmErabEstabSuccAddedPa
eNb	EUtranCellFDD:pmErabEstabSuccAddedQci
eNb	EUtranCellFDD:pmErabEstabSuccInit
eNb	EUtranCellFDD:pmErabEstabSuccInitArp
eNb	EUtranCellFDD:pmErabEstabSuccInitPa
eNb	EUtranCellFDD:pmErabEstabSuccInitQci
eNb	EUtranCellFDD:pmErabLevRopStartQci

eNb	EUtranCellFDD:pmErabLevSamp
eNb	EUtranCellFDD:pmErabLevSum
eNb	EUtranCellFDD:pmErabMax
eNb	EUtranCellFDD:pmErabModAttQci
eNb	EUtranCellFDD:pmErabModFailLic
eNb	EUtranCellFDD:pmErabModSuccQci
eNb	EUtranCellFDD:pmErabQciLevSum
eNb	EUtranCellFDD:pmErabQciMax
eNb	EUtranCellFDD:pmErabRelAbnormalEnb
eNb	EUtranCellFDD:pmErabRelAbnormalEnbAct
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActArp
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActCdt
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActHo
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActHpr
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActPe
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActQci
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActTnFail
eNb	EUtranCellFDD:pmErabRelAbnormalEnbActUeLost
eNb	EUtranCellFDD:pmErabRelAbnormalEnbArp
eNb	EUtranCellFDD:pmErabRelAbnormalEnbLic
eNb	EUtranCellFDD:pmErabRelAbnormalEnbPe
eNb	EUtranCellFDD:pmErabRelAbnormalEnbQci
eNb	EUtranCellFDD:pmErabRelAbnormalMmeAct
eNb	EUtranCellFDD:pmErabRelAbnormalMmeActArp
eNb	EUtranCellFDD:pmErabRelAbnormalMmeActQci
eNb	EUtranCellFDD:pmErabRelMme
eNb	EUtranCellFDD:pmErabRelMmeAct
eNb	EUtranCellFDD:pmErabRelMmeActEutra
eNb	EUtranCellFDD:pmErabRelMmeActQci
eNb	EUtranCellFDD:pmErabRelMmeActUnspecified
eNb	EUtranCellFDD:pmErabRelMmeActUserInactivity
eNb	EUtranCellFDD:pmErabRelMmeArp
eNb	EUtranCellFDD:pmErabRelMmeQci
eNb	EUtranCellFDD:pmErabRelNormalEnb
eNb	EUtranCellFDD:pmErabRelNormalEnbAct
eNb	EUtranCellFDD:pmErabRelNormalEnbActArp
eNb	EUtranCellFDD:pmErabRelNormalEnbActQci
eNb	EUtranCellFDD:pmErabRelNormalEnbArp
eNb	EUtranCellFDD:pmErabRelNormalEnbQci
eNb	EUtranCellFDD:pmHoExeOutAttQci
eNb	EUtranCellFDD:pmHoExeOutSuccQci
eNb	EUtranCellFDD:pmHoPrepRejInBearerAdmissionRej
eNb	EUtranCellFDD:pmHoPrepRejInHighLoad
eNb	EUtranCellFDD:pmHoPrepRejInLicConnUsers
eNb	EUtranCellFDD:pmHoPrepRejInLicMob

eNb	EUtranCellFDD:pmHoPrepRejInLicMultiErab
eNb	EUtranCellFDD:pmHoPrepRejInLicRlcUm
eNb	EUtranCellFDD:pmHoPrepRejInOverload
eNb	EUtranCellFDD:pmLbSubRatioSamp
eNb	EUtranCellFDD:pmLbSubRatioSum
eNb	EUtranCellFDD:pmLcgThpTimeUILcg
eNb	EUtranCellFDD:pmLcgThpVolUILcg
eNb	EUtranCellFDD:pmMacDelayTimeDI
eNb	EUtranCellFDD:pmMacHarqDIAck16qam
eNb	EUtranCellFDD:pmMacHarqDIAck64qam
eNb	EUtranCellFDD:pmMacHarqDIAckQpsk
eNb	EUtranCellFDD:pmMacHarqDIDtx16qam
eNb	EUtranCellFDD:pmMacHarqDIDtx64qam
eNb	EUtranCellFDD:pmMacHarqDIDtxQpsk
eNb	EUtranCellFDD:pmMacHarqDINack16qam
eNb	EUtranCellFDD:pmMacHarqDINack64qam
eNb	EUtranCellFDD:pmMacHarqDINackQpsk
eNb	EUtranCellFDD:pmMacHarqUIDtx16qam
eNb	EUtranCellFDD:pmMacHarqUIDtxQpsk
eNb	EUtranCellFDD:pmMacHarqUIFail16qam
eNb	EUtranCellFDD:pmMacHarqUIFailQpsk
eNb	EUtranCellFDD:pmMacHarqUISucc16qam
eNb	EUtranCellFDD:pmMacHarqUISuccQpsk
eNb	EUtranCellFDD:pmMeasMissingNeighRel
eNb	EUtranCellFDD:pmPagDiscarded
eNb	EUtranCellFDD:pmPagReceived
eNb	EUtranCellFDD:pmPdcchCceActivity
eNb	EUtranCellFDD:pmPdcchCceUsedDIQci
eNb	EUtranCellFDD:pmPdcchCceUsedUIQci
eNb	EUtranCellFDD:pmPdcchCceUtil
eNb	EUtranCellFDD:pmPdcchCfiUtil
eNb	EUtranCellFDD:pmPdcchMaxCceAvail
eNb	EUtranCellFDD:pmPdcchResyncAtt
eNb	EUtranCellFDD:pmPdcchResyncSucc
eNb	EUtranCellFDD:pmPdcchTxAggressive
eNb	EUtranCellFDD:pmPdcchTxConservative
eNb	EUtranCellFDD:pmPdcPBitrateDIDrbMax
eNb	EUtranCellFDD:pmPdcPBitrateDIDrbMin
eNb	EUtranCellFDD:pmPdcPBitrateUIDrbMax
eNb	EUtranCellFDD:pmPdcPBitrateUIDrbMin
eNb	EUtranCellFDD:pmPdcPLatPktTransDI
eNb	EUtranCellFDD:pmPdcPLatPktTransDIDrxNoSync
eNb	EUtranCellFDD:pmPdcPLatPktTransDIDrxSync
eNb	EUtranCellFDD:pmPdcPLatPktTransDINoDrxSync
eNb	EUtranCellFDD:pmPdcPLatPktTransDIQci

eNb	EUtranCellFDD:pmPdcplLatTimeDI
eNb	EUtranCellFDD:pmPdcplLatTimeDIDrxNoSync
eNb	EUtranCellFDD:pmPdcplLatTimeDIDrxSync
eNb	EUtranCellFDD:pmPdcplLatTimeDINoDrxSync
eNb	EUtranCellFDD:pmPdcplLatTimeDIQci
eNb	EUtranCellFDD:pmPdcplPktDiscDIAqm
eNb	EUtranCellFDD:pmPdcplPktDiscDIAqmQci
eNb	EUtranCellFDD:pmPdcplPktDiscDIHo
eNb	EUtranCellFDD:pmPdcplPktDiscDIHoQci
eNb	EUtranCellFDD:pmPdcplPktDiscDIPelr
eNb	EUtranCellFDD:pmPdcplPktDiscDIPelrQci
eNb	EUtranCellFDD:pmPdcplPktDiscDIPelrUu
eNb	EUtranCellFDD:pmPdcplPktDiscDIPelrUuQci
eNb	EUtranCellFDD:pmPdcplPktFwdDI
eNb	EUtranCellFDD:pmPdcplPktLostUI
eNb	EUtranCellFDD:pmPdcplPktLostUIQci
eNb	EUtranCellFDD:pmPdcplPktPdbUIOkVoip
eNb	EUtranCellFDD:pmPdcplPktReceivedDI
eNb	EUtranCellFDD:pmPdcplPktReceivedDIQci
eNb	EUtranCellFDD:pmPdcplPktReceivedUI
eNb	EUtranCellFDD:pmPdcplPktReceivedUIQci
eNb	EUtranCellFDD:pmPdcplPktTransDI
eNb	EUtranCellFDD:pmPdcplPktTransDIQci
eNb	EUtranCellFDD:pmPdcplVolDICmpHdrQci
eNb	EUtranCellFDD:pmPdcplVolDIDrb
eNb	EUtranCellFDD:pmPdcplVolDIDrbLastTTI
eNb	EUtranCellFDD:pmPdcplVolDIDrbLastTTIQci
eNb	EUtranCellFDD:pmPdcplVolDIDrbQci
eNb	EUtranCellFDD:pmPdcplVolDIDrbTransPlmn0
eNb	EUtranCellFDD:pmPdcplVolDIDrbTransPlmn1
eNb	EUtranCellFDD:pmPdcplVolDIDrbTransPlmn2
eNb	EUtranCellFDD:pmPdcplVolDIDrbTransPlmn3
eNb	EUtranCellFDD:pmPdcplVolDIDrbTransPlmn4
eNb	EUtranCellFDD:pmPdcplVolDIDrbTransPlmn5
eNb	EUtranCellFDD:pmPdcplVolDIDrbTransPlmn6
eNb	EUtranCellFDD:pmPdcplVolDIDrbTransQci
eNb	EUtranCellFDD:pmPdcplVolDIHdrQci
eNb	EUtranCellFDD:pmPdcplVolDISrb
eNb	EUtranCellFDD:pmPdcplVolDISrbTrans
eNb	EUtranCellFDD:pmPdcplVolUICmpHdrQci
eNb	EUtranCellFDD:pmPdcplVolUIDrb
eNb	EUtranCellFDD:pmPdcplVolUIDrbPlmn0
eNb	EUtranCellFDD:pmPdcplVolUIDrbPlmn1
eNb	EUtranCellFDD:pmPdcplVolUIDrbPlmn2
eNb	EUtranCellFDD:pmPdcplVolUIDrbPlmn3

eNb	EUtranCellFDD:pmPdcVolUIDrbPlmn4
eNb	EUtranCellFDD:pmPdcVolUIDrbPlmn5
eNb	EUtranCellFDD:pmPdcVolUIDrbPlmn6
eNb	EUtranCellFDD:pmPdcVolUIDrbQci
eNb	EUtranCellFDD:pmPdcVolUIHdrQci
eNb	EUtranCellFDD:pmPdcVolUISrb
eNb	EUtranCellFDD:pmPrbAvailDI
eNb	EUtranCellFDD:pmPrbAvailDIMbms
eNb	EUtranCellFDD:pmPrbAvailUI
eNb	EUtranCellFDD:pmPrbUsedDIAilgHighPrio
eNb	EUtranCellFDD:pmPrbUsedDIAilgTot
eNb	EUtranCellFDD:pmPrbUsedDIBcch
eNb	EUtranCellFDD:pmPrbUsedDIDtch
eNb	EUtranCellFDD:pmPrbUsedDIDtchFirstTransQci
eNb	EUtranCellFDD:pmPrbUsedDIFirstTrans
eNb	EUtranCellFDD:pmPrbUsedDIMbms
eNb	EUtranCellFDD:pmPrbUsedDIPcch
eNb	EUtranCellFDD:pmPrbUsedDIReTrans
eNb	EUtranCellFDD:pmPrbUsedDISrbFirstTrans
eNb	EUtranCellFDD:pmPrbUsedUIAilgTot
eNb	EUtranCellFDD:pmPrbUsedUIDtch
eNb	EUtranCellFDD:pmPrbUsedUIDtchQci
eNb	EUtranCellFDD:pmPrbUsedUISrb
eNb	EUtranCellFDD:pmPrbUtilDI
eNb	EUtranCellFDD:pmPrbUtilUI
eNb	EUtranCellFDD:pmPucchFailSr
eNb	EUtranCellFDD:pmPucchSr
eNb	EUtranCellFDD:pmPucchSrCqiResAllocAtt
eNb	EUtranCellFDD:pmPucchSrCqiResCongCqi
eNb	EUtranCellFDD:pmPucchSrCqiResCongSr
eNb	EUtranCellFDD:pmPucchSrMax
eNb	EUtranCellFDD:pmRaAllocCfra
eNb	EUtranCellFDD:pmRaAttCbra
eNb	EUtranCellFDD:pmRaAttCfra
eNb	EUtranCellFDD:pmRachNumContentionReport
eNb	EUtranCellFDD:pmRachPreambleDist
eNb	EUtranCellFDD:pmRadioRecInterferencePwr
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb1
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb10
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb100
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb11
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb12
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb13
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb14
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb15

[illegible]

eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb57
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb58
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb59
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb60
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb61
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb62
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb63
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb64
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb65
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb66
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb67
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb68
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb69
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb70
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb71
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb72
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb73
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb74
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb75
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb76
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb77
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb78
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb79
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb80
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb81
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb82
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb83
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb84
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb85
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb86
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb87
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb88
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb89
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb90
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb91
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb92
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb93
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb94
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb95
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb96
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb97

eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb98
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPrb99
eNb	EUtranCellFDD:pmRadioRecInterferencePwrPucch
eNb	EUtranCellFDD:pmRadioTbsPwrRestricted
eNb	EUtranCellFDD:pmRadioTbsPwrUnrestricted
eNb	EUtranCellFDD:pmRadioThpResDI
eNb	EUtranCellFDD:pmRadioThpResUI
eNb	EUtranCellFDD:pmRadioThpVoIDI
eNb	EUtranCellFDD:pmRadioThpVoIDISCell
eNb	EUtranCellFDD:pmRadioThpVoIUI
eNb	EUtranCellFDD:pmRadioTxRankDistr
eNb	EUtranCellFDD:pmRadioUeOutLoopAdjDistr
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband0Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband10Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband11Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband12Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband1Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband2Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband3Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband4Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband5Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband6Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband7Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband8Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2Subband9Sum
eNb	EUtranCellFDD:pmRadioUeRepCqi2SubbandSamp
eNb	EUtranCellFDD:pmRadioUeRepCqiDistr
eNb	EUtranCellFDD:pmRadioUeRepCqiDistr2
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband0Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband10Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband11Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband12Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband1Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband2Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband3Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband4Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband5Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband6Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband7Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband8Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubband9Sum
eNb	EUtranCellFDD:pmRadioUeRepCqiSubbandSamp
eNb	EUtranCellFDD:pmRadioUeRepRankDistr
eNb	EUtranCellFDD:pmRaFailCbraMsg2Disc
eNb	EUtranCellFDD:pmRaFailCfraMsg2Disc

eNb	EUtranCellFDD:pmRaSuccCbra
eNb	EUtranCellFDD:pmRaSuccCfra
eNb	EUtranCellFDD:pmRaSuccSrInSync
eNb	EUtranCellFDD:pmRaSuccSrOutOfSync
eNb	EUtranCellFDD:pmRaSuccTa
eNb	EUtranCellFDD:pmRateShapeTimeUl
eNb	EUtranCellFDD:pmRaUnassignedCfraFalse
eNb	EUtranCellFDD:pmRaUnassignedCfraSum
eNb	EUtranCellFDD:pmRlcArqDIAck
eNb	EUtranCellFDD:pmRlcArqDINack
eNb	EUtranCellFDD:pmRlcArqUIAck
eNb	EUtranCellFDD:pmRlcArqUINack
eNb	EUtranCellFDD:pmRlcDelayPktTransDI
eNb	EUtranCellFDD:pmRlcDelayPktTransDIQci
eNb	EUtranCellFDD:pmRlcDelayTimeDI
eNb	EUtranCellFDD:pmRlcDelayTimeDIQci
eNb	EUtranCellFDD:pmRohcEstabFailCid
eNb	EUtranCellFDD:pmRohcEstabFailLic
eNb	EUtranCellFDD:pmRohcEstabFailUeCap
eNb	EUtranCellFDD:pmRrcConnEstabAtt
eNb	EUtranCellFDD:pmRrcConnEstabAttDta
eNb	EUtranCellFDD:pmRrcConnEstabAttEm
eNb	EUtranCellFDD:pmRrcConnEstabAttHpa
eNb	EUtranCellFDD:pmRrcConnEstabAttMod
eNb	EUtranCellFDD:pmRrcConnEstabAttMos
eNb	EUtranCellFDD:pmRrcConnEstabAttMta
eNb	EUtranCellFDD:pmRrcConnEstabAttReatt
eNb	EUtranCellFDD:pmRrcConnEstabAttReattDta
eNb	EUtranCellFDD:pmRrcConnEstabAttReattEm
eNb	EUtranCellFDD:pmRrcConnEstabAttReattHpa
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMod
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMos
eNb	EUtranCellFDD:pmRrcConnEstabAttReattMta
eNb	EUtranCellFDD:pmRrcConnEstabFailBearerAdmissionRe
eNb	EUtranCellFDD:pmRrcConnEstabFailHighLoad
eNb	EUtranCellFDD:pmRrcConnEstabFailLic
eNb	EUtranCellFDD:pmRrcConnEstabFailOverload
eNb	EUtranCellFDD:pmRrcConnEstabSucc
eNb	EUtranCellFDD:pmRrcConnEstabSuccDta
eNb	EUtranCellFDD:pmRrcConnEstabSuccEm
eNb	EUtranCellFDD:pmRrcConnEstabSuccGummeiNative
eNb	EUtranCellFDD:pmRrcConnEstabSuccHpa
eNb	EUtranCellFDD:pmRrcConnEstabSuccMod
eNb	EUtranCellFDD:pmRrcConnEstabSuccMos
eNb	EUtranCellFDD:pmRrcConnEstabSuccMta

eNb	EUtranCellFDD:pmRrcConnLevSamp
eNb	EUtranCellFDD:pmRrcConnLevSum
eNb	EUtranCellFDD:pmRrcConnLevSumUIOutOfSync
eNb	EUtranCellFDD:pmRrcConnMax
eNb	EUtranCellFDD:pmRrcConnReconfAttNoMob
eNb	EUtranCellFDD:pmRrcConnReconfSuccNoMob
eNb	EUtranCellFDD:pmRrcConnReestAtt
eNb	EUtranCellFDD:pmRrcConnReestAttHo
eNb	EUtranCellFDD:pmRrcConnReestFailLicMtReest
eNb	EUtranCellFDD:pmRrcConnReestSucc
eNb	EUtranCellFDD:pmRrcConnReestSuccHo
eNb	EUtranCellFDD:pmRrcConnTuneOutLevSamp
eNb	EUtranCellFDD:pmRrcConnTuneOutLevSum
eNb	EUtranCellFDD:pmS1SigConnEstabAtt
eNb	EUtranCellFDD:pmS1SigConnEstabAttDta
eNb	EUtranCellFDD:pmS1SigConnEstabAttEm
eNb	EUtranCellFDD:pmS1SigConnEstabAttHpa
eNb	EUtranCellFDD:pmS1SigConnEstabAttMod
eNb	EUtranCellFDD:pmS1SigConnEstabAttMos
eNb	EUtranCellFDD:pmS1SigConnEstabAttMta
eNb	EUtranCellFDD:pmS1SigConnEstabSucc
eNb	EUtranCellFDD:pmS1SigConnEstabSuccDta
eNb	EUtranCellFDD:pmS1SigConnEstabSuccEm
eNb	EUtranCellFDD:pmS1SigConnEstabSuccHpa
eNb	EUtranCellFDD:pmS1SigConnEstabSuccMod
eNb	EUtranCellFDD:pmS1SigConnEstabSuccMos
eNb	EUtranCellFDD:pmS1SigConnEstabSuccMta
eNb	EUtranCellFDD:pmSchedActivityCellDI
eNb	EUtranCellFDD:pmSchedActivityCellUI
eNb	EUtranCellFDD:pmSchedActivityUeDI
eNb	EUtranCellFDD:pmSchedActivityUeUI
eNb	EUtranCellFDD:pmSchedRestrictUeCatDI
eNb	EUtranCellFDD:pmSchedRestrictUeCatUI
eNb	EUtranCellFDD:pmServiceTimeDrb
eNb	EUtranCellFDD:pmServiceTimeDrbQci
eNb	EUtranCellFDD:pmServiceTimeUe
eNb	EUtranCellFDD:pmSessionTimeDrb
eNb	EUtranCellFDD:pmSessionTimeDrbQci
eNb	EUtranCellFDD:pmSessionTimeUe
eNb	EUtranCellFDD:pmSinrPucchDistr
eNb	EUtranCellFDD:pmSinrPuschDistr
eNb	EUtranCellFDD:pmTtiBundlingUeMax
eNb	EUtranCellFDD:pmTtiBundlingUeSamp
eNb	EUtranCellFDD:pmTtiBundlingUeSum
eNb	EUtranCellFDD:pmUeCategoryDistr

eNb	EUtranCellFDD:pmUeCtxtEstabAtt
eNb	EUtranCellFDD:pmUeCtxtEstabSucc
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnb
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbAct
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActCdt
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActHo
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActPe
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActTnFail
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbActUeLost
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbLic
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbPe
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalEnbTuneOut
eNb	EUtranCellFDD:pmUeCtxtRelAbnormalMmeAct
eNb	EUtranCellFDD:pmUeCtxtRelCsfbCdma1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbCdma1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbGsm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbGsmEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbHoPrepFail1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbHoPrepFail1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbLimitedDualRadioUeC
eNb	EUtranCellFDD:pmUeCtxtRelCsfbMeasTO1xRtt
eNb	EUtranCellFDD:pmUeCtxtRelCsfbMeasTO1xRttEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbTdScdma
eNb	EUtranCellFDD:pmUeCtxtRelCsfbTdScdmaEm
eNb	EUtranCellFDD:pmUeCtxtRelCsfbWcdma
eNb	EUtranCellFDD:pmUeCtxtRelCsfbWcdmaEm
eNb	EUtranCellFDD:pmUeCtxtRelMme
eNb	EUtranCellFDD:pmUeCtxtRelMmeAct
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnb
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnbAct
eNb	EUtranCellFDD:pmUeCtxtRelNormalEnbTuneOut
eNb	EUtranCellFDD:pmUeCtxtRelSCCdma
eNb	EUtranCellFDD:pmUeCtxtRelSCEUtra
eNb	EUtranCellFDD:pmUeCtxtRelSCGsm
eNb	EUtranCellFDD:pmUeCtxtRelSCTdScdma
eNb	EUtranCellFDD:pmUeCtxtRelSCWcdma
eNb	EUtranCellFDD:pmUeCtxtTa
eNb	EUtranCellFDD:pmUeThpDIDistr
eNb	EUtranCellFDD:pmUeThpTimeDI
eNb	EUtranCellFDD:pmUeThpTimeUI
eNb	EUtranCellFDD:pmUeThpUIDistr
eNb	EUtranCellFDD:pmUeThpVolUI
eNb	EUtranCellFDD:pmUIGrantsTrans
eNb	EUtranCellFDD:pmUIGrantsWithDetectedPusch
eNb	EUtranCellFDD:pmVoipQualityUeUILowSampl

eNb	EUtranCellFDD:pmVoipQualityUeUINok
eNb	EUtranCellFDD:pmVoipQualityUeUIOk
eNb	EUtranCellFDD:pmZtemporary1
eNb	EUtranCellFDD:pmZtemporary10
eNb	EUtranCellFDD:pmZtemporary11
eNb	EUtranCellFDD:pmZtemporary12
eNb	EUtranCellFDD:pmZtemporary13
eNb	EUtranCellFDD:pmZtemporary14
eNb	EUtranCellFDD:pmZtemporary15
eNb	EUtranCellFDD:pmZtemporary16Qci
eNb	EUtranCellFDD:pmZtemporary17Qci
eNb	EUtranCellFDD:pmZtemporary18Qci
eNb	EUtranCellFDD:pmZtemporary19
eNb	EUtranCellFDD:pmZtemporary2
eNb	EUtranCellFDD:pmZtemporary20
eNb	EUtranCellFDD:pmZtemporary21
eNb	EUtranCellFDD:pmZtemporary22
eNb	EUtranCellFDD:pmZtemporary23
eNb	EUtranCellFDD:pmZtemporary24
eNb	EUtranCellFDD:pmZtemporary25
eNb	EUtranCellFDD:pmZtemporary26
eNb	EUtranCellFDD:pmZtemporary27
eNb	EUtranCellFDD:pmZtemporary28
eNb	EUtranCellFDD:pmZtemporary29
eNb	EUtranCellFDD:pmZtemporary3
eNb	EUtranCellFDD:pmZtemporary30
eNb	EUtranCellFDD:pmZtemporary31
eNb	EUtranCellFDD:pmZtemporary32
eNb	EUtranCellFDD:pmZtemporary33
eNb	EUtranCellFDD:pmZtemporary4
eNb	EUtranCellFDD:pmZtemporary5
eNb	EUtranCellFDD:pmZtemporary57
eNb	EUtranCellFDD:pmZtemporary58
eNb	EUtranCellFDD:pmZtemporary59
eNb	EUtranCellFDD:pmZtemporary6
eNb	EUtranCellFDD:pmZtemporary60
eNb	EUtranCellFDD:pmZtemporary61
eNb	EUtranCellFDD:pmZtemporary62
eNb	EUtranCellFDD:pmZtemporary63
eNb	EUtranCellFDD:pmZtemporary64
eNb	EUtranCellFDD:pmZtemporary65
eNb	EUtranCellFDD:pmZtemporary66
eNb	EUtranCellFDD:pmZtemporary67
eNb	EUtranCellFDD:pmZtemporary68
eNb	EUtranCellFDD:pmZtemporary69

eNb	EUtranCellFDD:pmZtemporary7
eNb	EUtranCellFDD:pmZtemporary70
eNb	EUtranCellFDD:pmZtemporary71
eNb	EUtranCellFDD:pmZtemporary8
eNb	EUtranCellFDD:pmZtemporary9
eNb	EUtranCellRelation:pmHoExeAttLteInterF
eNb	EUtranCellRelation:pmHoExeAttLteInterFLb
eNb	EUtranCellRelation:pmHoExeAttLteIntraF
eNb	EUtranCellRelation:pmHoExeAttLteIntraFTuneOut
eNb	EUtranCellRelation:pmHoExeSuccLteInterF
eNb	EUtranCellRelation:pmHoExeSuccLteInterFLb
eNb	EUtranCellRelation:pmHoExeSuccLteIntraF
eNb	EUtranCellRelation:pmHoExeSuccLteIntraFTuneOut
eNb	EUtranCellRelation:pmHoOscInterF
eNb	EUtranCellRelation:pmHoOscIntraF
eNb	EUtranCellRelation:pmHoPrepAttLteInterF
eNb	EUtranCellRelation:pmHoPrepAttLteInterFLb
eNb	EUtranCellRelation:pmHoPrepAttLteIntraF
eNb	EUtranCellRelation:pmHoPrepSuccLteInterF
eNb	EUtranCellRelation:pmHoPrepSuccLteInterFLb
eNb	EUtranCellRelation:pmHoPrepSuccLteIntraF
eNb	EUtranCellRelation:pmHoTooEarlyHoInterF
eNb	EUtranCellRelation:pmHoTooEarlyHoIntraF
eNb	EUtranCellRelation:pmHoTooLateHoInterF
eNb	EUtranCellRelation:pmHoTooLateHoIntraF
eNb	EUtranCellRelation:pmHoWrongCellInterF
eNb	EUtranCellRelation:pmHoWrongCellIntraF
eNb	EUtranCellRelation:pmHoWrongCellReestInterF
eNb	EUtranCellRelation:pmHoWrongCellReestIntraF
eNb	EUtranCellRelation:pmLbQualifiedUe
eNb	EUtranCellRelation:pmZtemporary36
eNb	EUtranCellRelation:pmZtemporary72
eNb	EUtranCellRelation:pmZtemporary73
eNb	EUtranCellRelation:pmZtemporary74
eNb	EUtranCellRelation:pmZtemporary75
eNb	EUtranCellRelation:pmZtemporary76
eNb	EUtranCellRelation:pmZtemporary77
eNb	EUtranCellRelation:pmZtemporary78
eNb	EUtranCellRelation:pmZtemporary79
eNb	EUtranCellTDD:pmActiveDrbDISum
eNb	EUtranCellTDD:pmActiveDrbDISumQci
eNb	EUtranCellTDD:pmActiveDrbUISum
eNb	EUtranCellTDD:pmActiveUeDIMax
eNb	EUtranCellTDD:pmActiveUeDISectorCarrierDistr
eNb	EUtranCellTDD:pmActiveUeDISum

eNb	EUtranCellTDD:pmActiveUeDlSumQci
eNb	EUtranCellTDD:pmActiveUeDrbSamp
eNb	EUtranCellTDD:pmActiveUeUlMax
eNb	EUtranCellTDD:pmActiveUeUlSectorCarrierDistr
eNb	EUtranCellTDD:pmActiveUeUlSum
eNb	EUtranCellTDD:pmActiveUeUlSumLcg
eNb	EUtranCellTDD:pmAnrNeighbreIAdd
eNb	EUtranCellTDD:pmAnrNeighbreIRem
eNb	EUtranCellTDD:pmBadCovEvalReport
eNb	EUtranCellTDD:pmBadCovSearchEvalReport
eNb	EUtranCellTDD:pmBestCellEvalReport
eNb	EUtranCellTDD:pmCellAdmControlPdcchRej
eNb	EUtranCellTDD:pmCellAdmControlPdcchRejMeas
eNb	EUtranCellTDD:pmCellDownLockAuto
eNb	EUtranCellTDD:pmCellDownLockMan
eNb	EUtranCellTDD:pmCellDowntimeAuto
eNb	EUtranCellTDD:pmCellDowntimeMan
eNb	EUtranCellTDD:pmCellDownUnlockMan
eNb	EUtranCellTDD:pmCompUlDeltaSinrPuschDistr
eNb	EUtranCellTDD:pmContDl
eNb	EUtranCellTDD:pmContDlCapLic
eNb	EUtranCellTDD:pmContDlHw
eNb	EUtranCellTDD:pmContDlPdcch
eNb	EUtranCellTDD:pmContUl
eNb	EUtranCellTDD:pmContUlCapLic
eNb	EUtranCellTDD:pmContUlHw
eNb	EUtranCellTDD:pmContUlPdcch
eNb	EUtranCellTDD:pmCriticalBorderEvalReport
eNb	EUtranCellTDD:pmDlAssigsTrans
eNb	EUtranCellTDD:pmDlAssigsWithDetectedHarqAck
eNb	EUtranCellTDD:pmDlAssigsWithUnknownReception
eNb	EUtranCellTDD:pmDrbThpTimeDlQci
eNb	EUtranCellTDD:pmDrxSleepTime
eNb	EUtranCellTDD:pmDrxTotalTime
eNb	EUtranCellTDD:pmErabEstabAttAdded
eNb	EUtranCellTDD:pmErabEstabAttAddedArp
eNb	EUtranCellTDD:pmErabEstabAttAddedPa
eNb	EUtranCellTDD:pmErabEstabAttAddedQci
eNb	EUtranCellTDD:pmErabEstabAttInit
eNb	EUtranCellTDD:pmErabEstabAttInitArp
eNb	EUtranCellTDD:pmErabEstabAttInitPa
eNb	EUtranCellTDD:pmErabEstabAttInitQci
eNb	EUtranCellTDD:pmErabEstabFailAddedLic
eNb	EUtranCellTDD:pmErabEstabFailGbrDlEnb
eNb	EUtranCellTDD:pmErabEstabFailGbrUlEnb

eNb	EUtranCellTDD:pmErabEstabFailInitLic
eNb	EUtranCellTDD:pmErabEstabSuccAdded
eNb	EUtranCellTDD:pmErabEstabSuccAddedArp
eNb	EUtranCellTDD:pmErabEstabSuccAddedPa
eNb	EUtranCellTDD:pmErabEstabSuccAddedQci
eNb	EUtranCellTDD:pmErabEstabSuccInit
eNb	EUtranCellTDD:pmErabEstabSuccInitArp
eNb	EUtranCellTDD:pmErabEstabSuccInitPa
eNb	EUtranCellTDD:pmErabEstabSuccInitQci
eNb	EUtranCellTDD:pmErabLevRopStartQci
eNb	EUtranCellTDD:pmErabLevSamp
eNb	EUtranCellTDD:pmErabLevSum
eNb	EUtranCellTDD:pmErabMax
eNb	EUtranCellTDD:pmErabModAttQci
eNb	EUtranCellTDD:pmErabModFailLic
eNb	EUtranCellTDD:pmErabModSuccQci
eNb	EUtranCellTDD:pmErabQciLevSum
eNb	EUtranCellTDD:pmErabQciMax
eNb	EUtranCellTDD:pmErabRelAbnormalEnb
eNb	EUtranCellTDD:pmErabRelAbnormalEnbAct
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActArp
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActCdt
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActHo
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActHpr
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActPe
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActQci
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActTnFail
eNb	EUtranCellTDD:pmErabRelAbnormalEnbActUeLost
eNb	EUtranCellTDD:pmErabRelAbnormalEnbArp
eNb	EUtranCellTDD:pmErabRelAbnormalEnbLic
eNb	EUtranCellTDD:pmErabRelAbnormalEnbPe
eNb	EUtranCellTDD:pmErabRelAbnormalEnbQci
eNb	EUtranCellTDD:pmErabRelAbnormalMmeAct
eNb	EUtranCellTDD:pmErabRelAbnormalMmeActArp
eNb	EUtranCellTDD:pmErabRelAbnormalMmeActQci
eNb	EUtranCellTDD:pmErabRelMme
eNb	EUtranCellTDD:pmErabRelMmeAct
eNb	EUtranCellTDD:pmErabRelMmeActEutra
eNb	EUtranCellTDD:pmErabRelMmeActQci
eNb	EUtranCellTDD:pmErabRelMmeActUnspecified
eNb	EUtranCellTDD:pmErabRelMmeActUserInactivity
eNb	EUtranCellTDD:pmErabRelMmeArp
eNb	EUtranCellTDD:pmErabRelMmeQci
eNb	EUtranCellTDD:pmErabRelNormalEnb
eNb	EUtranCellTDD:pmErabRelNormalEnbAct

eNb	EUtranCellTDD:pmErabRelNormalEnbActArp
eNb	EUtranCellTDD:pmErabRelNormalEnbActQci
eNb	EUtranCellTDD:pmErabRelNormalEnbArp
eNb	EUtranCellTDD:pmErabRelNormalEnbQci
eNb	EUtranCellTDD:pmHoExeOutAttQci
eNb	EUtranCellTDD:pmHoExeOutSuccQci
eNb	EUtranCellTDD:pmHoPrepRejInBearerAdmissionRej
eNb	EUtranCellTDD:pmHoPrepRejInHighLoad
eNb	EUtranCellTDD:pmHoPrepRejInLicConnUsers
eNb	EUtranCellTDD:pmHoPrepRejInLicMob
eNb	EUtranCellTDD:pmHoPrepRejInLicMultiErab
eNb	EUtranCellTDD:pmHoPrepRejInLicRlcUm
eNb	EUtranCellTDD:pmHoPrepRejInOverload
eNb	EUtranCellTDD:pmLbSubRatioSamp
eNb	EUtranCellTDD:pmLbSubRatioSum
eNb	EUtranCellTDD:pmLcgThpTimeUilCg
eNb	EUtranCellTDD:pmLcgThpVolUilCg
eNb	EUtranCellTDD:pmMacDelayTimeDI
eNb	EUtranCellTDD:pmMacHarqDIAck16qam
eNb	EUtranCellTDD:pmMacHarqDIAck64qam
eNb	EUtranCellTDD:pmMacHarqDIAckQpsk
eNb	EUtranCellTDD:pmMacHarqDIDtx16qam
eNb	EUtranCellTDD:pmMacHarqDIDtx64qam
eNb	EUtranCellTDD:pmMacHarqDIDtxQpsk
eNb	EUtranCellTDD:pmMacHarqDINack16qam
eNb	EUtranCellTDD:pmMacHarqDINack64qam
eNb	EUtranCellTDD:pmMacHarqDINackQpsk
eNb	EUtranCellTDD:pmMacHarqUIDtx16qam
eNb	EUtranCellTDD:pmMacHarqUIDtxQpsk
eNb	EUtranCellTDD:pmMacHarqUIFail16qam
eNb	EUtranCellTDD:pmMacHarqUIFailQpsk
eNb	EUtranCellTDD:pmMacHarqUISucc16qam
eNb	EUtranCellTDD:pmMacHarqUISuccQpsk
eNb	EUtranCellTDD:pmMeasMissingNeighRel
eNb	EUtranCellTDD:pmPagDiscarded
eNb	EUtranCellTDD:pmPagReceived
eNb	EUtranCellTDD:pmPdcchCceActivity
eNb	EUtranCellTDD:pmPdcchCceUsedDIQci
eNb	EUtranCellTDD:pmPdcchCceUsedUIQci
eNb	EUtranCellTDD:pmPdcchCceUtil
eNb	EUtranCellTDD:pmPdcchCfiUtil
eNb	EUtranCellTDD:pmPdcchMaxCceAvail
eNb	EUtranCellTDD:pmPdcchResyncAtt
eNb	EUtranCellTDD:pmPdcchResyncSucc
eNb	EUtranCellTDD:pmPdcchTxAggressive

eNb	EUtranCellTDD:pmPdcchTxConservative
eNb	EUtranCellTDD:pmPdcPBitrateDIDrbMax
eNb	EUtranCellTDD:pmPdcPBitrateDIDrbMin
eNb	EUtranCellTDD:pmPdcPBitrateUIDrbMax
eNb	EUtranCellTDD:pmPdcPBitrateUIDrbMin
eNb	EUtranCellTDD:pmPdcPLatPktTransDI
eNb	EUtranCellTDD:pmPdcPLatPktTransDIDrxNoSync
eNb	EUtranCellTDD:pmPdcPLatPktTransDIDrxSync
eNb	EUtranCellTDD:pmPdcPLatPktTransDINoDrxSync
eNb	EUtranCellTDD:pmPdcPLatPktTransDIQci
eNb	EUtranCellTDD:pmPdcPLatTimeDI
eNb	EUtranCellTDD:pmPdcPLatTimeDIDrxNoSync
eNb	EUtranCellTDD:pmPdcPLatTimeDIDrxSync
eNb	EUtranCellTDD:pmPdcPLatTimeDINoDrxSync
eNb	EUtranCellTDD:pmPdcPLatTimeDIQci
eNb	EUtranCellTDD:pmPdcPktDiscDIAqm
eNb	EUtranCellTDD:pmPdcPktDiscDIAqmQci
eNb	EUtranCellTDD:pmPdcPktDiscDIHo
eNb	EUtranCellTDD:pmPdcPktDiscDIHoQci
eNb	EUtranCellTDD:pmPdcPktDiscDIPelr
eNb	EUtranCellTDD:pmPdcPktDiscDIPelrQci
eNb	EUtranCellTDD:pmPdcPktDiscDIPelrUu
eNb	EUtranCellTDD:pmPdcPktDiscDIPelrUuQci
eNb	EUtranCellTDD:pmPdcPktFwdDI
eNb	EUtranCellTDD:pmPdcPktLostUI
eNb	EUtranCellTDD:pmPdcPktLostUIQci
eNb	EUtranCellTDD:pmPdcPktPdbUIOkVoip
eNb	EUtranCellTDD:pmPdcPktReceivedDI
eNb	EUtranCellTDD:pmPdcPktReceivedDIQci
eNb	EUtranCellTDD:pmPdcPktReceivedUI
eNb	EUtranCellTDD:pmPdcPktReceivedUIQci
eNb	EUtranCellTDD:pmPdcPktTransDI
eNb	EUtranCellTDD:pmPdcPktTransDIQci
eNb	EUtranCellTDD:pmPdcPVolDICmpHdrQci
eNb	EUtranCellTDD:pmPdcPVolDIDrb
eNb	EUtranCellTDD:pmPdcPVolDIDrbLastTTI
eNb	EUtranCellTDD:pmPdcPVolDIDrbLastTTIQci
eNb	EUtranCellTDD:pmPdcPVolDIDrbQci
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn0
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn1
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn2
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn3
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn4
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn5
eNb	EUtranCellTDD:pmPdcPVolDIDrbTransPlmn6

eNb	EUtranCellTDD:pmPdcPVolDIDrbTransQci
eNb	EUtranCellTDD:pmPdcPVolDIHdrQci
eNb	EUtranCellTDD:pmPdcPVolDISrb
eNb	EUtranCellTDD:pmPdcPVolDISrbTrans
eNb	EUtranCellTDD:pmPdcPVolUICmpHdrQci
eNb	EUtranCellTDD:pmPdcPVolUIDrb
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn0
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn1
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn2
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn3
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn4
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn5
eNb	EUtranCellTDD:pmPdcPVolUIDrbPlmn6
eNb	EUtranCellTDD:pmPdcPVolUIDrbQci
eNb	EUtranCellTDD:pmPdcPVolUIHdrQci
eNb	EUtranCellTDD:pmPdcPVolUISrb
eNb	EUtranCellTDD:pmPrbAvailDI
eNb	EUtranCellTDD:pmPrbAvailDIMbms
eNb	EUtranCellTDD:pmPrbAvailUI
eNb	EUtranCellTDD:pmPrbUsedDIAilgHighPrio
eNb	EUtranCellTDD:pmPrbUsedDIAilgTot
eNb	EUtranCellTDD:pmPrbUsedDIBcch
eNb	EUtranCellTDD:pmPrbUsedDIDtch
eNb	EUtranCellTDD:pmPrbUsedDIDtchFirstTransQci
eNb	EUtranCellTDD:pmPrbUsedDIFirstTrans
eNb	EUtranCellTDD:pmPrbUsedDIMbms
eNb	EUtranCellTDD:pmPrbUsedDIPcch
eNb	EUtranCellTDD:pmPrbUsedDIReTrans
eNb	EUtranCellTDD:pmPrbUsedDISrbFirstTrans
eNb	EUtranCellTDD:pmPrbUsedUIAilgTot
eNb	EUtranCellTDD:pmPrbUsedUIDtch
eNb	EUtranCellTDD:pmPrbUsedUIDtchQci
eNb	EUtranCellTDD:pmPrbUsedUISrb
eNb	EUtranCellTDD:pmPrbUtilDI
eNb	EUtranCellTDD:pmPrbUtilUI
eNb	EUtranCellTDD:pmPucchFailSr
eNb	EUtranCellTDD:pmPucchSr
eNb	EUtranCellTDD:pmPucchSrCqiResAllocAtt
eNb	EUtranCellTDD:pmPucchSrCqiResCongCqi
eNb	EUtranCellTDD:pmPucchSrCqiResCongSr
eNb	EUtranCellTDD:pmPucchSrMax
eNb	EUtranCellTDD:pmRaAllocCfra
eNb	EUtranCellTDD:pmRaAttCbra
eNb	EUtranCellTDD:pmRaAttCfra
eNb	EUtranCellTDD:pmRachNumContentionReport

eNb	EUtranCellTDD:pmRachPreambleDist
eNb	EUtranCellTDD:pmRadioCalibAttFail
eNb	EUtranCellTDD:pmRadioRecInterferencePwr
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb1
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb10
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb100
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb11
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb12
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb13
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb14
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb15
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb16
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb17
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb18
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb19
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb2
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb20
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb21
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb22
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb23
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb24
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb25
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb26
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb27
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb28
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb29
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb3
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb30
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb31
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb32
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb33
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb34
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb35
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb36
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb37
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb38
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb39
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb4
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb40
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb41
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb42
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb43
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb44
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb45
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb46

eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb47
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb48
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb49
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb50
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb51
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb52
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb53
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb54
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb55
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb56
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb57
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb58
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb59
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb60
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb61
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb62
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb63
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb64
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb65
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb66
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb67
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb68
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb69
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb70
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb71
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb72
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb73
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb74
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb75
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb76
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb77
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb78
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb79
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb80
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb81
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb82
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb83
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb84
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb85
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb86
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb87

eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb88
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb89
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb9
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb90
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb91
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb92
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb93
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb94
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb95
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb96
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb97
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb98
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPrb99
eNb	EUtranCellTDD:pmRadioRecInterferencePwrPucch
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf1
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf2
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf3
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf6
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf7
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSf8
eNb	EUtranCellTDD:pmRadioRecInterferencePwrSfSamp
eNb	EUtranCellTDD:pmRadioTbsPwrRestricted
eNb	EUtranCellTDD:pmRadioTbsPwrUnrestricted
eNb	EUtranCellTDD:pmRadioThpResDI
eNb	EUtranCellTDD:pmRadioThpResUI
eNb	EUtranCellTDD:pmRadioThpVolDI
eNb	EUtranCellTDD:pmRadioThpVolUI
eNb	EUtranCellTDD:pmRadioTxRankDistr
eNb	EUtranCellTDD:pmRadioUeOutLoopAdjDistr
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband0Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband10Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband11Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband12Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband1Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband2Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband3Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband4Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband5Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband6Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband7Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband8Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2Subband9Sum
eNb	EUtranCellTDD:pmRadioUeRepCqi2SubbandSamp
eNb	EUtranCellTDD:pmRadioUeRepCqiDistr
eNb	EUtranCellTDD:pmRadioUeRepCqiDistr2

eNb	EUtranCellTDD:pmRadioUeRepCqiSubband0Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband10Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband11Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband12Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband1Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband2Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband3Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband4Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband5Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband6Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband7Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband8Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubband9Sum
eNb	EUtranCellTDD:pmRadioUeRepCqiSubbandSamp
eNb	EUtranCellTDD:pmRadioUeRepRankDistr
eNb	EUtranCellTDD:pmRaFailCbraMsg2Disc
eNb	EUtranCellTDD:pmRaFailCfraMsg2Disc
eNb	EUtranCellTDD:pmRaSuccCbra
eNb	EUtranCellTDD:pmRaSuccCfra
eNb	EUtranCellTDD:pmRaSuccSrInSync
eNb	EUtranCellTDD:pmRaSuccSrOutOfSync
eNb	EUtranCellTDD:pmRaSuccTa
eNb	EUtranCellTDD:pmRateShapeTimeUl
eNb	EUtranCellTDD:pmRaUnassignedCfraFalse
eNb	EUtranCellTDD:pmRaUnassignedCfraSum
eNb	EUtranCellTDD:pmRlcArqDIAck
eNb	EUtranCellTDD:pmRlcArqDINack
eNb	EUtranCellTDD:pmRlcArqUIAck
eNb	EUtranCellTDD:pmRlcArqUINack
eNb	EUtranCellTDD:pmRlcDelayPktTransDI
eNb	EUtranCellTDD:pmRlcDelayPktTransDIQci
eNb	EUtranCellTDD:pmRlcDelayTimeDI
eNb	EUtranCellTDD:pmRlcDelayTimeDIQci
eNb	EUtranCellTDD:pmRohcEstabFailCid
eNb	EUtranCellTDD:pmRohcEstabFailLic
eNb	EUtranCellTDD:pmRohcEstabFailUeCap
eNb	EUtranCellTDD:pmRrcConnEstabAtt
eNb	EUtranCellTDD:pmRrcConnEstabAttDta
eNb	EUtranCellTDD:pmRrcConnEstabAttEm
eNb	EUtranCellTDD:pmRrcConnEstabAttHpa
eNb	EUtranCellTDD:pmRrcConnEstabAttMod
eNb	EUtranCellTDD:pmRrcConnEstabAttMos
eNb	EUtranCellTDD:pmRrcConnEstabAttMta
eNb	EUtranCellTDD:pmRrcConnEstabAttReatt
eNb	EUtranCellTDD:pmRrcConnEstabAttReattDta

eNb	EUtranCellTDD:pmRrcConnEstabAttReattEm
eNb	EUtranCellTDD:pmRrcConnEstabAttReattHpa
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMod
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMos
eNb	EUtranCellTDD:pmRrcConnEstabAttReattMta
eNb	EUtranCellTDD:pmRrcConnEstabFailBearerAdmissionRe
eNb	EUtranCellTDD:pmRrcConnEstabFailHighLoad
eNb	EUtranCellTDD:pmRrcConnEstabFailLic
eNb	EUtranCellTDD:pmRrcConnEstabFailOverload
eNb	EUtranCellTDD:pmRrcConnEstabSucc
eNb	EUtranCellTDD:pmRrcConnEstabSuccDta
eNb	EUtranCellTDD:pmRrcConnEstabSuccEm
eNb	EUtranCellTDD:pmRrcConnEstabSuccGummeiNative
eNb	EUtranCellTDD:pmRrcConnEstabSuccHpa
eNb	EUtranCellTDD:pmRrcConnEstabSuccMod
eNb	EUtranCellTDD:pmRrcConnEstabSuccMos
eNb	EUtranCellTDD:pmRrcConnEstabSuccMta
eNb	EUtranCellTDD:pmRrcConnLevSamp
eNb	EUtranCellTDD:pmRrcConnLevSum
eNb	EUtranCellTDD:pmRrcConnLevSumUIOutOfSync
eNb	EUtranCellTDD:pmRrcConnMax
eNb	EUtranCellTDD:pmRrcConnReconfAttNoMob
eNb	EUtranCellTDD:pmRrcConnReconfSuccNoMob
eNb	EUtranCellTDD:pmRrcConnReestAtt
eNb	EUtranCellTDD:pmRrcConnReestAttHo
eNb	EUtranCellTDD:pmRrcConnReestFailLicMtReest
eNb	EUtranCellTDD:pmRrcConnReestSucc
eNb	EUtranCellTDD:pmRrcConnReestSuccHo
eNb	EUtranCellTDD:pmRrcConnTuneOutLevSamp
eNb	EUtranCellTDD:pmRrcConnTuneOutLevSum
eNb	EUtranCellTDD:pmS1SigConnEstabAtt
eNb	EUtranCellTDD:pmS1SigConnEstabAttDta
eNb	EUtranCellTDD:pmS1SigConnEstabAttEm
eNb	EUtranCellTDD:pmS1SigConnEstabAttHpa
eNb	EUtranCellTDD:pmS1SigConnEstabAttMod
eNb	EUtranCellTDD:pmS1SigConnEstabAttMos
eNb	EUtranCellTDD:pmS1SigConnEstabAttMta
eNb	EUtranCellTDD:pmS1SigConnEstabSucc
eNb	EUtranCellTDD:pmS1SigConnEstabSuccDta
eNb	EUtranCellTDD:pmS1SigConnEstabSuccEm
eNb	EUtranCellTDD:pmS1SigConnEstabSuccHpa
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMod
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMos
eNb	EUtranCellTDD:pmS1SigConnEstabSuccMta
eNb	EUtranCellTDD:pmSchedActivityCellIdI

eNb	EUtranCellTDD:pmSchedActivityCellUI
eNb	EUtranCellTDD:pmSchedActivityUeDI
eNb	EUtranCellTDD:pmSchedActivityUeUI
eNb	EUtranCellTDD:pmSchedRestrictUeCatDI
eNb	EUtranCellTDD:pmSchedRestrictUeCatUI
eNb	EUtranCellTDD:pmServiceTimeDrb
eNb	EUtranCellTDD:pmServiceTimeDrbQci
eNb	EUtranCellTDD:pmServiceTimeUe
eNb	EUtranCellTDD:pmSessionTimeDrb
eNb	EUtranCellTDD:pmSessionTimeDrbQci
eNb	EUtranCellTDD:pmSessionTimeUe
eNb	EUtranCellTDD:pmSinrPucchDistr
eNb	EUtranCellTDD:pmSinrPuschDistr
eNb	EUtranCellTDD:pmUeCategoryDistr
eNb	EUtranCellTDD:pmUeCtxtEstabAtt
eNb	EUtranCellTDD:pmUeCtxtEstabSucc
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnb
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbAct
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActCdt
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActHo
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActPe
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActTnFail
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbActUeLost
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbLic
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbPe
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalEnbTuneOut
eNb	EUtranCellTDD:pmUeCtxtRelAbnormalMmeAct
eNb	EUtranCellTDD:pmUeCtxtRelCsfbCdma1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbCdma1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbGsm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbGsmEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbHoPrepFail1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbHoPrepFail1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbLimitedDualRadioUeC
eNb	EUtranCellTDD:pmUeCtxtRelCsfbMeasTO1xRtt
eNb	EUtranCellTDD:pmUeCtxtRelCsfbMeasTO1xRttEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbTdScdma
eNb	EUtranCellTDD:pmUeCtxtRelCsfbTdScdmaEm
eNb	EUtranCellTDD:pmUeCtxtRelCsfbWcdma
eNb	EUtranCellTDD:pmUeCtxtRelCsfbWcdmaEm
eNb	EUtranCellTDD:pmUeCtxtRelMme
eNb	EUtranCellTDD:pmUeCtxtRelMmeAct
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnb
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnbAct
eNb	EUtranCellTDD:pmUeCtxtRelNormalEnbTuneOut

eNb	EUtranCellTDD:pmUeCtxtRelSCCdma
eNb	EUtranCellTDD:pmUeCtxtRelSCEUtra
eNb	EUtranCellTDD:pmUeCtxtRelSCGsm
eNb	EUtranCellTDD:pmUeCtxtRelSCTdScdma
eNb	EUtranCellTDD:pmUeCtxtRelSCWcdma
eNb	EUtranCellTDD:pmUeCtxtTa
eNb	EUtranCellTDD:pmUeThpDIDistr
eNb	EUtranCellTDD:pmUeThpTimeDI
eNb	EUtranCellTDD:pmUeThpTimeUI
eNb	EUtranCellTDD:pmUeThpUIDistr
eNb	EUtranCellTDD:pmUeThpVolUI
eNb	EUtranCellTDD:pmUIGrantsTrans
eNb	EUtranCellTDD:pmUIGrantsWithDetectedPusch
eNb	EUtranCellTDD:pmVoipQualityUeUILowSampl
eNb	EUtranCellTDD:pmVoipQualityUeUINok
eNb	EUtranCellTDD:pmVoipQualityUeUIOk
eNb	EUtranCellTDD:pmZtemporary1
eNb	EUtranCellTDD:pmZtemporary10
eNb	EUtranCellTDD:pmZtemporary11
eNb	EUtranCellTDD:pmZtemporary12
eNb	EUtranCellTDD:pmZtemporary13
eNb	EUtranCellTDD:pmZtemporary14
eNb	EUtranCellTDD:pmZtemporary15
eNb	EUtranCellTDD:pmZtemporary16Qci
eNb	EUtranCellTDD:pmZtemporary17Qci
eNb	EUtranCellTDD:pmZtemporary18Qci
eNb	EUtranCellTDD:pmZtemporary19
eNb	EUtranCellTDD:pmZtemporary2
eNb	EUtranCellTDD:pmZtemporary20
eNb	EUtranCellTDD:pmZtemporary21
eNb	EUtranCellTDD:pmZtemporary22
eNb	EUtranCellTDD:pmZtemporary23
eNb	EUtranCellTDD:pmZtemporary24
eNb	EUtranCellTDD:pmZtemporary25
eNb	EUtranCellTDD:pmZtemporary26
eNb	EUtranCellTDD:pmZtemporary27
eNb	EUtranCellTDD:pmZtemporary28
eNb	EUtranCellTDD:pmZtemporary29
eNb	EUtranCellTDD:pmZtemporary3
eNb	EUtranCellTDD:pmZtemporary30
eNb	EUtranCellTDD:pmZtemporary31
eNb	EUtranCellTDD:pmZtemporary32
eNb	EUtranCellTDD:pmZtemporary33
eNb	EUtranCellTDD:pmZtemporary4
eNb	EUtranCellTDD:pmZtemporary5

eNb	EUtranCellTDD:pmZtemporary57
eNb	EUtranCellTDD:pmZtemporary58
eNb	EUtranCellTDD:pmZtemporary59
eNb	EUtranCellTDD:pmZtemporary6
eNb	EUtranCellTDD:pmZtemporary60
eNb	EUtranCellTDD:pmZtemporary61
eNb	EUtranCellTDD:pmZtemporary62
eNb	EUtranCellTDD:pmZtemporary63
eNb	EUtranCellTDD:pmZtemporary64
eNb	EUtranCellTDD:pmZtemporary65
eNb	EUtranCellTDD:pmZtemporary66
eNb	EUtranCellTDD:pmZtemporary67
eNb	EUtranCellTDD:pmZtemporary68
eNb	EUtranCellTDD:pmZtemporary69
eNb	EUtranCellTDD:pmZtemporary7
eNb	EUtranCellTDD:pmZtemporary70
eNb	EUtranCellTDD:pmZtemporary71
eNb	EUtranCellTDD:pmZtemporary8
eNb	EUtranCellTDD:pmZtemporary9
eNb	EUtranFreqRelation:pmLbMeasuredUe
eNb	FastEthernet:pmIfInBroadcastPkts
eNb	FastEthernet:pmIfInDiscards
eNb	FastEthernet:pmIfInErrors
eNb	FastEthernet:pmIfInMulticastPkts
eNb	FastEthernet:pmIfInOctetsHi
eNb	FastEthernet:pmIfInOctetsLo
eNb	FastEthernet:pmIfInUcastPkts
eNb	FastEthernet:pmIfInUnknownProtos
eNb	FastEthernet:pmIfOutBroadcastPkts
eNb	FastEthernet:pmIfOutDiscards
eNb	FastEthernet:pmIfOutErrors
eNb	FastEthernet:pmIfOutMulticastPkts
eNb	FastEthernet:pmIfOutOctetsHi
eNb	FastEthernet:pmIfOutOctetsLo
eNb	FastEthernet:pmIfOutUcastPkts
eNb	GeranCellRelation:pmHoExeAtt
eNb	GeranCellRelation:pmHoExeSucc
eNb	GeranCellRelation:pmHoPrepAtt
eNb	GeranCellRelation:pmHoPrepSucc
eNb	GigaBitEthernet:pmDot1qTpVlanPortInDiscardsLink1
eNb	GigaBitEthernet:pmDot1qTpVlanPortInDiscardsLink2
eNb	GigaBitEthernet:pmIfInBroadcastPktsLink1
eNb	GigaBitEthernet:pmIfInBroadcastPktsLink2
eNb	GigaBitEthernet:pmIfInDiscardsLink1
eNb	GigaBitEthernet:pmIfInDiscardsLink2

eNb	GigaBitEthernet:pmlfInErrorsLink1
eNb	GigaBitEthernet:pmlfInErrorsLink2
eNb	GigaBitEthernet:pmlfInMulticastPktsLink1
eNb	GigaBitEthernet:pmlfInMulticastPktsLink2
eNb	GigaBitEthernet:pmlfInOctetsLink1Hi
eNb	GigaBitEthernet:pmlfInOctetsLink1Lo
eNb	GigaBitEthernet:pmlfInOctetsLink2Hi
eNb	GigaBitEthernet:pmlfInOctetsLink2Lo
eNb	GigaBitEthernet:pmlfInUcastPktsLink1
eNb	GigaBitEthernet:pmlfInUcastPktsLink2
eNb	GigaBitEthernet:pmlfInUnknownProtosLink1
eNb	GigaBitEthernet:pmlfInUnknownProtosLink2
eNb	GigaBitEthernet:pmlfOutBroadcastPktsLink1
eNb	GigaBitEthernet:pmlfOutBroadcastPktsLink2
eNb	GigaBitEthernet:pmlfOutDiscardsLink1
eNb	GigaBitEthernet:pmlfOutDiscardsLink2
eNb	GigaBitEthernet:pmlfOutErrorsLink1
eNb	GigaBitEthernet:pmlfOutErrorsLink2
eNb	GigaBitEthernet:pmlfOutMulticastPktsLink1
eNb	GigaBitEthernet:pmlfOutMulticastPktsLink2
eNb	GigaBitEthernet:pmlfOutOctetsLink1Hi
eNb	GigaBitEthernet:pmlfOutOctetsLink1Lo
eNb	GigaBitEthernet:pmlfOutOctetsLink2Hi
eNb	GigaBitEthernet:pmlfOutOctetsLink2Lo
eNb	GigaBitEthernet:pmlfOutUcastPktsLink1
eNb	GigaBitEthernet:pmlfOutUcastPktsLink2
eNb	Icmp:pmlcmpStatsInErrors
eNb	Icmp:pmlcmpStatsInMsgs
eNb	Icmp:pmlcmpStatsInPktsDestUnreach
eNb	Icmp:pmlcmpStatsInPktsEchoRep
eNb	Icmp:pmlcmpStatsInPktsEchos
eNb	Icmp:pmlcmpStatsInPktsNeighAdv
eNb	Icmp:pmlcmpStatsInPktsNeighSol
eNb	Icmp:pmlcmpStatsInPktsParmProb
eNb	Icmp:pmlcmpStatsInPktsRedir
eNb	Icmp:pmlcmpStatsInPktsRoutAdv
eNb	Icmp:pmlcmpStatsInPktsRoutSol
eNb	Icmp:pmlcmpStatsInPktsTimeExcds
eNb	Icmp:pmlcmpStatsInPktsTooBig
eNb	Icmp:pmlcmpStatsOutErrors
eNb	Icmp:pmlcmpStatsOutMsgs
eNb	Icmp:pmlcmpStatsOutPktsDestUnreach
eNb	Icmp:pmlcmpStatsOutPktsEchoRep
eNb	Icmp:pmlcmpStatsOutPktsEchos
eNb	Icmp:pmlcmpStatsOutPktsNeighAdv

eNb	Icmp:pmlcmpStatsOutPktsNeighSol
eNb	Icmp:pmlcmpStatsOutPktsParmProb
eNb	Icmp:pmlcmpStatsOutPktsRedir
eNb	Icmp:pmlcmpStatsOutPktsRoutAdv
eNb	Icmp:pmlcmpStatsOutPktsRoutSol
eNb	Icmp:pmlcmpStatsOutPktsTimeExcds
eNb	Icmp:pmlcmpStatsOutPktsTooBig
eNb	IkePeer:pmChildSaRekey
eNb	IkePeer:pmInAuthReq
eNb	IkePeer:pmInAuthRsp
eNb	IkePeer:pmInCrChildReq
eNb	IkePeer:pmInCrChildRsp
eNb	IkePeer:pmInInfoReq
eNb	IkePeer:pmInInfoRsp
eNb	IkePeer:pmInInitReq
eNb	IkePeer:pmInInitRsp
eNb	IkePeer:pmInInvalid
eNb	IkePeer:pmInInvalidSpi
eNb	IkePeer:pmOutAuthReq
eNb	IkePeer:pmOutAuthRsp
eNb	IkePeer:pmOutCrChildReq
eNb	IkePeer:pmOutCrChildRsp
eNb	IkePeer:pmOutInfoReq
eNb	IkePeer:pmOutInfoRsp
eNb	IkePeer:pmOutInitReq
eNb	IkePeer:pmOutInitRsp
eNb	InternalEthernetPort:pmDot1qTpVlanPortInDiscardsLink
eNb	InternalEthernetPort:pmIfInBroadcastPkts
eNb	InternalEthernetPort:pmIfInDiscards
eNb	InternalEthernetPort:pmIfInErrors
eNb	InternalEthernetPort:pmIfInMulticastPkts
eNb	InternalEthernetPort:pmIfInOctetsHi
eNb	InternalEthernetPort:pmIfInOctetsLo
eNb	InternalEthernetPort:pmIfInUcastPkts
eNb	InternalEthernetPort:pmIfInUnknownProtos
eNb	InternalEthernetPort:pmIfOutBroadcastPkts
eNb	InternalEthernetPort:pmIfOutDiscards
eNb	InternalEthernetPort:pmIfOutErrors
eNb	InternalEthernetPort:pmIfOutMulticastPkts
eNb	InternalEthernetPort:pmIfOutOctetsHi
eNb	InternalEthernetPort:pmIfOutOctetsLo
eNb	InternalEthernetPort:pmIfOutUcastPkts
eNb	Ip:pmNoOfHdrErrors
eNb	Ip:pmNoOfIpAddrErrors
eNb	Ip:pmNoOfIpForwDatagrams

eNb	Ip:pmNoOfIpInDiscards
eNb	Ip:pmNoOfIpInReceives
eNb	Ip:pmNoOfIpOutDiscards
eNb	Ip:pmNoOfIpReasmOKs
eNb	Ip:pmNoOfIpReasmReqds
eNb	IpAccessHostEt:pmlcmpInDestUnreachs
eNb	IpAccessHostEt:pmlcmpInEchoReps
eNb	IpAccessHostEt:pmlcmpInEchos
eNb	IpAccessHostEt:pmlcmpInErrors
eNb	IpAccessHostEt:pmlcmpInMsgs
eNb	IpAccessHostEt:pmlcmpInParamProbs
eNb	IpAccessHostEt:pmlcmpInRedirects
eNb	IpAccessHostEt:pmlcmpInSrcQuenchs
eNb	IpAccessHostEt:pmlcmpInTimeExcds
eNb	IpAccessHostEt:pmlcmpOutDestUnreachs
eNb	IpAccessHostEt:pmlcmpOutEchoReps
eNb	IpAccessHostEt:pmlcmpOutEchos
eNb	IpAccessHostEt:pmlcmpOutErrors
eNb	IpAccessHostEt:pmlcmpOutMsgs
eNb	IpAccessHostEt:pmlcmpOutParamProbs
eNb	IpAccessHostEt:pmlnAppLayerError
eNb	IpAccessHostEt:pmlpFragCreates
eNb	IpAccessHostEt:pmlpFragFails
eNb	IpAccessHostEt:pmlpFragOKs
eNb	IpAccessHostEt:pmlpInAddrErrors
eNb	IpAccessHostEt:pmlpInDelivers
eNb	IpAccessHostEt:pmlpInDiscards
eNb	IpAccessHostEt:pmlpInHdrErrors
eNb	IpAccessHostEt:pmlpInReceives
eNb	IpAccessHostEt:pmlpInUnknownProtos
eNb	IpAccessHostEt:pmlpOutDiscards
eNb	IpAccessHostEt:pmlpOutRequests
eNb	IpAccessHostEt:pmlpPortUnreachable
eNb	IpAccessHostEt:pmlpReasmFails
eNb	IpAccessHostEt:pmlpReasmOKs
eNb	IpAccessHostEt:pmlpReasmReqds
eNb	IpAccessHostEt:pmMeanAtmConnSetupIntensity
eNb	IpAccessHostEt:pmPeakAtmConnSetupIntensity
eNb	IpAccessHostEt:pmStdDevAtmSetupIntensity
eNb	IpAccessHostEt:pmUdpInDatagrams
eNb	IpAccessHostEt:pmUdpInErrors
eNb	IpAccessHostEt:pmUdpOutDatagrams
eNb	IpAccessHostGpb:pmlcmpInDestUnreachs
eNb	IpAccessHostGpb:pmlcmpInEchoReps
eNb	IpAccessHostGpb:pmlcmpInEchos

eNb	IpAccessHostGpb:pmlcmpInErrors
eNb	IpAccessHostGpb:pmlcmpInMsgs
eNb	IpAccessHostGpb:pmlcmpInParamProbs
eNb	IpAccessHostGpb:pmlcmpInRedirects
eNb	IpAccessHostGpb:pmlcmpInSrcQuenchs
eNb	IpAccessHostGpb:pmlcmpInTimeExcds
eNb	IpAccessHostGpb:pmlcmpOutDestUnreachs
eNb	IpAccessHostGpb:pmlcmpOutEchoReps
eNb	IpAccessHostGpb:pmlcmpOutEchos
eNb	IpAccessHostGpb:pmlcmpOutErrors
eNb	IpAccessHostGpb:pmlcmpOutMsgs
eNb	IpAccessHostGpb:pmlcmpOutParmProbs
eNb	IpAccessHostGpb:pmlpFragCreates
eNb	IpAccessHostGpb:pmlpFragFails
eNb	IpAccessHostGpb:pmlpFragOKs
eNb	IpAccessHostGpb:pmlpInAddrErrors
eNb	IpAccessHostGpb:pmlpInDelivers
eNb	IpAccessHostGpb:pmlpInDiscards
eNb	IpAccessHostGpb:pmlpInHdrErrors
eNb	IpAccessHostGpb:pmlpInReceives
eNb	IpAccessHostGpb:pmlpInUnknownProtos
eNb	IpAccessHostGpb:pmlpOutDiscards
eNb	IpAccessHostGpb:pmlpOutRequests
eNb	IpAccessHostGpb:pmlpReasmFails
eNb	IpAccessHostGpb:pmlpReasmOKs
eNb	IpAccessHostGpb:pmlpReasmReqds
eNb	IpAccessHostGpb:pmUdpInDatagrams
eNb	IpAccessHostGpb:pmUdpInErrors
eNb	IpAccessHostGpb:pmUdpNoPorts
eNb	IpAccessHostGpb:pmUdpOutDatagrams
eNb	IpAccessHostSpb:pmlcmpInDestUnreachs
eNb	IpAccessHostSpb:pmlcmpInEchoReps
eNb	IpAccessHostSpb:pmlcmpInEchos
eNb	IpAccessHostSpb:pmlcmpInErrors
eNb	IpAccessHostSpb:pmlcmpInMsgs
eNb	IpAccessHostSpb:pmlcmpInParamProbs
eNb	IpAccessHostSpb:pmlcmpInRedirects
eNb	IpAccessHostSpb:pmlcmpInSrcQuenchs
eNb	IpAccessHostSpb:pmlcmpInTimeExcds
eNb	IpAccessHostSpb:pmlcmpOutDestUnreachs
eNb	IpAccessHostSpb:pmlcmpOutEchoReps
eNb	IpAccessHostSpb:pmlcmpOutEchos
eNb	IpAccessHostSpb:pmlcmpOutErrors
eNb	IpAccessHostSpb:pmlcmpOutMsgs
eNb	IpAccessHostSpb:pmlcmpOutParmProbs

eNb	IpAccessHostSpb:pmIpFragCreates
eNb	IpAccessHostSpb:pmIpFragFails
eNb	IpAccessHostSpb:pmIpFragOKs
eNb	IpAccessHostSpb:pmIpInAddrErrors
eNb	IpAccessHostSpb:pmIpInDelivers
eNb	IpAccessHostSpb:pmIpInDiscards
eNb	IpAccessHostSpb:pmIpInHdrErrors
eNb	IpAccessHostSpb:pmIpInReceives
eNb	IpAccessHostSpb:pmIpInUnknownProtos
eNb	IpAccessHostSpb:pmIpOutDiscards
eNb	IpAccessHostSpb:pmIpOutRequests
eNb	IpAccessHostSpb:pmIpReasmFails
eNb	IpAccessHostSpb:pmIpReasmOKs
eNb	IpAccessHostSpb:pmIpReasmReqds
eNb	IpAccessHostSpb:pmUdpInDatagrams
eNb	IpAccessHostSpb:pmUdpInErrors
eNb	IpAccessHostSpb:pmUdpNoPorts
eNb	IpAccessHostSpb:pmUdpOutDatagrams
eNb	IpHostLink:pmNoOfIfInDiscards
eNb	IpHostLink:pmNoOfIfInErrors
eNb	IpHostLink:pmNoOfIfInNUcastPkts
eNb	IpHostLink:pmNoOfIfInUcastPkts
eNb	IpHostLink:pmNoOfIfOutDiscards
eNb	IpHostLink:pmNoOfIfOutNUcastPkts
eNb	IpHostLink:pmNoOfIfOutUcastPkts
eNb	IpInterface:pmDot1qTpVlanPortInFrames
eNb	IpInterface:pmDot1qTpVlanPortOutFrames
eNb	IpInterface:pmIfStatsIpAddrErrors
eNb	IpInterface:pmIfStatsIpInDiscards
eNb	IpInterface:pmIfStatsIpInHdrErrors
eNb	IpInterface:pmIfStatsIpInReceives
eNb	IpInterface:pmIfStatsIpOutDiscards
eNb	IpInterface:pmIfStatsIpOutRequests
eNb	IpInterface:pmIfStatsIpUnknownProtos
eNb	IpInterface:pmInDiscPolicy
eNb	IpInterface:pmInEsp
eNb	IpInterface:pmInPassedPolicy
eNb	IpInterface:pmIpIfStatsHCInOctets
eNb	IpInterface:pmIpIfStatsHCInReceives
eNb	IpInterface:pmIpIfStatsHCOctets
eNb	IpInterface:pmIpIfStatsHCOutTransmits
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter0
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter1
eNb	IpInterface:pmNoOfFailedPingsDefaultRouter2
eNb	IpMux:pmIpMuxNotApplied

eNb	IpSecTunnel:pmInDiscAReFail
eNb	IpSecTunnel:pmInDiscDec
eNb	IpSecTunnel:pmInDiscIntCh
eNb	IpSecTunnel:pmInDiscNoSa
eNb	IpSecTunnel:pmInEspData
eNb	IpSecTunnel:pmInPkt
eNb	IpSecTunnel:pmOutDiscNoSa
eNb	IpSecTunnel:pmOutDiscSeqOw
eNb	IpSecTunnel:pmOutEspData
eNb	IpSecTunnel:pmOutPkt
eNb	Ipv6Interface:pmIfStatsHCInMcastOctets
eNb	Ipv6Interface:pmIfStatsHCInMcastPkts
eNb	Ipv6Interface:pmIfStatsHCInOutMcastOctets
eNb	Ipv6Interface:pmIfStatsHCInOutMcastPkts
eNb	Ipv6Interface:pmIfStatsHCInOctets
eNb	Ipv6Interface:pmIfStatsHCInReceives
eNb	Ipv6Interface:pmIfStatsHCOutOctets
eNb	Ipv6Interface:pmIfStatsHCOutTransmits
eNb	Ipv6Interface:pmIfStatsInAddrErrors
eNb	Ipv6Interface:pmIfStatsInDiscards
eNb	Ipv6Interface:pmIfStatsInHdrErrors
eNb	Ipv6Interface:pmIfStatsInUnknownProtos
eNb	Ipv6Interface:pmIfStatsOutDiscards
eNb	Ipv6Interface:pmIfStatsOutFragCreates
eNb	Ipv6Interface:pmIfStatsReasmFails
eNb	Ipv6Interface:pmIfStatsReasmReqds
eNb	Ipv6Interface:pmUdpIfStatsInError
eNb	MbmsService:pmMbmsPktDiscSynchPayloadMuted
eNb	MbmsService:pmMbmsPktDiscSynchPayloadTooMuch
eNb	MbmsService:pmMbmsPktDiscSynchPayloadTooOld
eNb	MbmsService:pmMbmsPktLostSynchPayload
eNb	MbmsService:pmMbmsPktRecSynchCtrl
eNb	MbmsService:pmMbmsPktRecSynchPayload
eNb	MbmsService:pmMbmsSessionEnd
eNb	MbmsService:pmMbmsSessionEstabAtt
eNb	MbmsService:pmMbmsSessionEstabFailNotSupp
eNb	MbmsService:pmMbmsSessionEstabFailUpdate
eNb	MbmsService:pmMbmsSessionEstabSucc
eNb	MbmsService:pmMbmsSessionStopAuditTimer
eNb	MbmsService:pmMbmsSessionStopMme
eNb	MbmsService:pmMbmsSessionStopMmeNoSession
eNb	MbmsService:pmMbmsVolReceived
eNb	MbmsService:pmMbmsVolTrans
eNb	MbmsService:pmZtemporary55
eNb	MediumAccessUnit:pmNoOfDot3StatsFCSErrors

eNb	MediumAccessUnit:pmNoOfDot3StatsLateCollisions
eNb	PlugInUnit:pmProcessorCoreLoad
eNb	PlugInUnit:pmProcessorLoad
eNb	PlugInUnit:pmSwitchIngressDiscards
eNb	PlugInUnit:pmSwitchIngressLoad
eNb	PmUeMeasControl:pmUeMeasRsrpDeltaIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrpServIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrqDeltaIntraFreq1
eNb	PmUeMeasControl:pmUeMeasRsrqServIntraFreq1
eNb	PmUeMeasControl:pmZtemporary44
eNb	ProcessorLoad:pmProcessorLoadDistr
eNb	ProcessorLoad:pmZtemporary46
eNb	Sctp:pmSctpAborted
eNb	Sctp:pmSctpActiveEstab
eNb	Sctp:pmSctpCurrEstab
eNb	Sctp:pmSctpInErrors
eNb	Sctp:pmSctpInNoPorts
eNb	Sctp:pmSctpPassiveEstab
eNb	Sctp:pmSctpShutdowns
eNb	Sctp:pmSctpStatAssocOutOfBlue
eNb	Sctp:pmSctpStatChecksumErrorCounter
eNb	Sctp:pmSctpStatCommResume
eNb	Sctp:pmSctpStatCommStop
eNb	Sctp:pmSctpStatFragmentedUserMsg
eNb	Sctp:pmSctpStatOutOfOrderRecChunks
eNb	Sctp:pmSctpStatOutOfOrderSendChunks
eNb	Sctp:pmSctpStatReassembledUserMsg
eNb	Sctp:pmSctpStatRecChunks
eNb	Sctp:pmSctpStatRecChunksDropped
eNb	Sctp:pmSctpStatReceivedControlChunks
eNb	Sctp:pmSctpStatReceivedPackages
eNb	Sctp:pmSctpStatRetransChunks
eNb	Sctp:pmSctpStatSentChunks
eNb	Sctp:pmSctpStatSentChunksDropped
eNb	Sctp:pmSctpStatSentControlChunks
eNb	Sctp:pmSctpStatSentPackages
eNb	SctpAssociation:pmAbortedS
eNb	SctpAssociation:pmCongestions
eNb	SctpAssociation:pmInControlChunkAbnormal
eNb	SctpAssociation:pmInControlChunkDiscards
eNb	SctpAssociation:pmInControlChunks
eNb	SctpAssociation:pmInDataChunkAbnormal
eNb	SctpAssociation:pmInDataChunkDiscards
eNb	SctpAssociation:pmInDataChunks
eNb	SctpAssociation:pmInOctets

eNb	SctpAssociation:pmInPacks
eNb	SctpAssociation:pmOutControlChunks
eNb	SctpAssociation:pmOutDataChunkDiscards
eNb	SctpAssociation:pmOutDataChunks
eNb	SctpAssociation:pmOutOctets
eNb	SctpAssociation:pmOutPacks
eNb	SctpAssociation:pmOutUserMsgDiscards
eNb	SctpAssociation:pmPeerZeroWindows
eNb	SctpAssociation:pmRtxChunks
eNb	SctpAssociation:pmShutdowns
eNb	SctpAssociation:pmTimeCongested
eNb	SctpAssociation:pmTimePeerZeroWindow
eNb	SctpAssociation:pmTimeUnavail
eNb	SctpAssociation:pmUnavailRetrans
eNb	SectorCarrier:pmActiveUeDISumSectorCarrier
eNb	SectorCarrier:pmActiveUeUISumSectorCarrier
eNb	SectorCarrier:pmZtemporary56
eNb	SecurityHandling:pmRrcSecFailIntegrity
eNb	SecurityHandling:pmRrcSecFailUnexpectedMsg
eNb	SecurityHandling:pmZtemporary45
eNb	Synchronization:pmHDelayVarBest10Pct
eNb	Synchronization:pmHDelayVarBest1Pct
eNb	Synchronization:pmHDelayVarBest50Pct
eNb	Synchronization:pmMaxDelayVariation
eNb	TermPointToENB:pmUeCtxtFetchAtt
eNb	TermPointToENB:pmUeCtxtFetchSucc
eNb	TrafficManagementQueue:pmQueueDroppedOctets
eNb	TrafficManagementQueue:pmQueueDroppedPackets
eNb	TrafficManagementQueue:pmQueueOutOctets
eNb	TrafficManagementQueue:pmQueueOutPackets
eNb	TwampResponder:pmTestInDiscards
eNb	TwampResponder:pmTestInErrors
eNb	TwampResponder:pmTestInReceives
eNb	TwampResponder:pmTestOutTransmits
eNb	TwampResponder:pmTestSessions
eNb	UIBasebandCapacity:pmLicUICapLicense
eNb	UIBasebandCapacity:pmZtemporary41
eNb	UIPrbCapacity:pmLicUIPrbCapLicense
eNb	UIPrbCapacity:pmZtemporary43
eNb	UtranCellRelation:pmHoExeAtt
eNb	UtranCellRelation:pmHoExeAttLb
eNb	UtranCellRelation:pmHoExeSucc
eNb	UtranCellRelation:pmHoExeSuccLb
eNb	UtranCellRelation:pmHoPrepAtt
eNb	UtranCellRelation:pmHoPrepAttLb

eNb	UtranCellRelation:pmHoPrepAttSrvcc
eNb	UtranCellRelation:pmHoPrepAttSrvccLb
eNb	UtranCellRelation:pmHoPrepSucc
eNb	UtranCellRelation:pmHoPrepSuccLb
eNb	UtranCellRelation:pmHoPrepSuccSrvcc
eNb	UtranCellRelation:pmHoPrepSuccSrvccLb
eNb	UtranCellRelation:pmLbQualifiedUe
eNb	UtranCellRelation:pmZtemporary37
eNb	UtranFreqRelation:pmLbMeasuredUe
eNb	VpnInterface:pmOutDroppedPacketsPolicyControl



National_PM_Standard_eNodeB_L13B_GS_13.20.txt

Profile

System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.20
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
No

National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

No

No

No

No

No

No

No

No

No

National_PM_Standard_eNodeB_L13B_GS_13.20

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

No

National_PM_Standard_eNodeB_L13B_GS_13.2

No

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2

[illegible]

No
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
No
No
No
No
No
No
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
No
No
No
No
No
No
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
No
No
No
No
No
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
No
No
No
No
No
No

National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.20
National_PM_Standard_eNodeB_L13B_GS_13.20
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.20
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.20
National_PM_Standard_eNodeB_L13B_GS_13.20
National_PM_Standard_eNodeB_L13B_GS_13.20
National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
National_PM_Standard_eNodeB_L13B_GS_13.2
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2

No

No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No

System ERBS PRIMARY
System ERBS PRIMARY

No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No

System ERBS PRIMARY
No
No

System ERBS PRIMARY
System ERBS PRIMARY
No
No

System ERBS PRIMARY
System ERBS PRIMARY
No
No

System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY

System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No
No
No
No
System ERBS PRIMARY
No
No
No
System ERBS PRIMARY
No
No
No
No
No
No
No
System ERBS PRIMARY

No

No

No

No

System ERBS PRIMARY

No

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No
No
No
No
No
System ERBS PRIMARY
No
No
No
No
System ERBS PRIMARY
No
No
No
No
No
No
No
No
System ERBS PRIMARY
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
No
No
No
No
System ERBS PRIMARY
No
System ERBS PRIMARY
No
No
System ERBS PRIMARY
System ERBS PRIMARY
System ERBS PRIMARY
No
No
No
No
No
No
No
No
No

No

No

System ERBS PRIMARY

No

No

No

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

No

No

No

No

No

No

[illegible]

[illegible]

[illegible]

System ERBS PRIMARY

No

No

No

No

No

No

No

No

No

System ERBS PRIMARY

No

System ERBS PRIMARY

No

No

No

No

No

No

System ERBS PRIMARY

No

No

No

No

No

No

No

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

No

No

System ERBS PRIMARY

No

No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

No

System ERBS PRIMARY

No

No

No

No

No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No

National_PM_Standard_eNodeB_L13B_GS_13.2

No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

System ERBS PRIMARY

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

National_PM_Standard_eNodeB_L13B_GS_13.2

[illegible]

National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2

[illegible]

[illegible]

No

No
No
No
No
No
No
No
No
No
No
No
No
No
No

National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2
National_PM_Standard_eNodeB_L13B_GS_13.2

No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No
No

National_PM_Standard_eNodeB_L13B_GS_13.2

[illegible]

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Reason

!0
!0

!0

!0
!0
!0
!0
!0
!0
!0
!0
!0
!0

!0
!0

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20
20
20
20
20

20

20
20
20

20
20

20
20

20
20

20
20

20
20
20

20
20
20
20
20
20

20

20
20
20
20
20
20
20
20
20
20
20
20
20

20
20
20

20
20
20
20
20
20
20

20
20

20
20
20
20
20

20
20
20
20
20

[illegible]

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20
20
20
20
20

20

20
20
20
20
20
20
20

20
20
20
20
20
20
20
20
20
20

20
20
20

20

20
20
20

20
20
20
20
20

[illegible]

!0

!0

!0

!0

[illegible]

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20
20

20
20
20
20

20

20
20
20
20

20
20
20

20

20
20

20

20
20
20

20
20
20
20
20
20
20

20

20
20

20
20

20

20
20
20

[illegible]

20

20

20

20

20

20

20

20

20

20

20
20
20
20
20
20

[illegible]

!0
!0
!0
!0
!0
!0
!0

!0
!0
!0

[illegible]

[illegible]

20
20
20
20
20
20
20
20
20
20
20
20
20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20
1020
2020
2020
2020
2020
2020
20

20

20

20

0

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20

20
20
20
20
20
20
20
20
20
20
20
20
20
20

20
20
20
20
20
20
20

20
20
20
20
20
20
20
20
20
20

20

20
20
20
20
20
20
20

20
20
20
20
20
20
20
20
20
20

Ericsson LTE eNodeB Enumeration Parameter List

Parameter	Index
AclActionTypes	0
AclActionTypes	1
ActivationVals	0
ActivationVals	1
ActualEthernetSpeedDuplex	0
ActualEthernetSpeedDuplex	1
ActualEthernetSpeedDuplex	2
ActualEthernetSpeedDuplex	3
ActualEthernetSpeedDuplex	4
ActualEthernetSpeedDuplex	5
ActualEthernetSpeedDuplex	6
AdminState	0
AdminState	1
AdmState	0
AdmState	1
AdmState	2
AntNearUnit	0
AntNearUnit	1
AntNearUnit	2
AuthenticationMethod	0
AuthenticationMethod	1
	1
AutoConfigurationMode	
AutoConfigurationMode	2
AutoConfStatus	0
AutoConfStatus	1
	0
AvailabilityStatus	
AvailabilityStatus	1
AvailabilityStatus	2
AvailabilityStatus	4
AvailabilityStatus	8

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

AvailabilityStatus	16
AvailabilityStatus	64
AvailabilityStatus	128
AvailabilityStatus	256
AvailabilityStatus	544
AvailabilityStatus	1056
AvailabilityStatus	2080
AvailabilityStatus	
BadCoverageMeasSelection	0
BadCoverageMeasSelection	1
BadCoverageMeasSelection	2
BadCoverageMeasSelection	3
BandIndicator	0
BandIndicator	1
BatteryTestInitiation	0
BatteryTestInitiation	1
BatteryTestInitiation	2
BatteryTestInitiation	3
	4
BatteryTestInitiation	
	5
BatteryTestInitiation	
BatteryTestMode	0
BatteryTestMode	1
BatteryTestMode	2
BatteryTestOutcome	0
	1
BatteryTestOutcome	
	2
BatteryTestOutcome	
	0
BatteryTestState	
BatteryTestState	1
BatteryTestState	2
BatteryTestType	0
BatteryTestType	1
BatteryType	0
BatteryType	1
BatteryType	2
BundlingActivated	0
BundlingActivated	1
Cdma2000SysTimeVals	0
Cdma2000SysTimeVals	1
Cdma2000SysTimeVals	2
CellBarred	0
CellBarred	1
CellReservedForOperatorUse	0
CellReservedForOperatorUse	1

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

	0
CertCategory	
	1
CertCategory	
	2
CertCategory	
	3
CertCategory	
	0
CertEnrollState	
CertEnrollState	1
	2
CertEnrollState	
	3
CertEnrollState	
	4
CertEnrollState	
ChargingMode	0
ChargingMode	1
ChildSaDirection	0
ChildSaDirection	1
ChildSaEncryptionAlgorithm	0
ChildSaEncryptionAlgorithm	1
ChildSaEncryptionAlgorithm	2
ChildSaEncryptionAlgorithm	3
ChildSaIntegrityAlgorithm	0
ChildSaIntegrityAlgorithm	1
ChildSaIntegrityAlgorithm	2
ChildSaIntegrityAlgorithm	3
	0
CipheringPriority	
CipheringPriority	1
CipheringPriority	2
CipheringPriority	3
CipheringPriority	4
CipheringPriority	5
CipheringPriority	6
CipheringPriority	7
CipheringPriority	8
CipheringPriority	9
CipheringPriority	10
CipheringPriority	11

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

CipheringPriority	12
CipheringPriority	13
CipheringPriority	14
ClimateSystem	0
ClimateSystem	1
ClockState	0
ClockState	1
	2
ClockState	
	3
ClockState	
	4
ClockState	
	5
ClockState	
	6
ClockState	
	7
ClockState	
ConfigurationVersionType	0
	1
ConfigurationVersionType	
ConfigurationVersionType	2
ConfigurationVersionType	3
	4
ConfigurationVersionType	
	5

ConfigurationVersionType

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

	6
ConfigurationVersionType	7
ConfigurationVersionType	8
ConfigurationVersionType	0
CVActionMainResult	1
CVActionMainResult	2
CVActionMainResult	0
CVActionResultInformation	1
CVActionResultInformation	2
CVActionResultInformation	3
CVActionResultInformation	4
CVActionResultInformation	5
CVActionResultInformation	6
CVActionResultInformation	7
CVActionResultInformation	8
CVActionResultInformation	9
CVActionResultInformation	10
CVActionResultInformation	11
CVActionResultInformation	12
CVActionResultInformation	13
CVActionResultInformation	14
CVActionResultInformation	15
CVActionResultInformation	16
CVActionResultInformation	

	17
CVActionResultInformation	18
CVActionResultInformation	19
CVActionResultInformation	20
CVActionResultInformation	21
CVActionResultInformation	22
CVActionResultInformation	23
CVActionResultInformation	24
CVActionResultInformation	25
CVActionResultInformation	26
CVActionResultInformation	27
CVActionResultInformation	28
CVActionResultInformation	29
CVActionResultInformation	0
CVAutoConfigurationInformation	1
CVAutoConfigurationInformation	2
CVCCurrentDetailedActivity	0
CVCCurrentDetailedActivity	1
CVCCurrentDetailedActivity	2
CVCCurrentDetailedActivity	3
CVCCurrentDetailedActivity	4
CVCCurrentDetailedActivity	5
CVCCurrentDetailedActivity	6
CVCCurrentDetailedActivity	7
CVCCurrentDetailedActivity	8
CVCCurrentDetailedActivity	9
CVCCurrentDetailedActivity	10
CVCCurrentDetailedActivity	11
CVCCurrentDetailedActivity	

	12
CVCurrentDetailedActivity	
	13
CVCurrentDetailedActivity	
CVCurrentDetailedActivity	14
CVCurrentDetailedActivity	15
CVCurrentDetailedActivity	16
CVCurrentDetailedActivity	17
CVCurrentDetailedActivity	18
	19
CVCurrentDetailedActivity	
CVCurrentDetailedActivity	20
CVCurrentDetailedActivity	21
	22
CVCurrentDetailedActivity	
	23
CVCurrentDetailedActivity	
	24
CVCurrentDetailedActivity	
	25
CVCurrentDetailedActivity	
	26
CVCurrentDetailedActivity	
	27
CVCurrentDetailedActivity	
CVCurrentDetailedActivity	28
	29
CVCurrentDetailedActivity	
	30
CVCurrentDetailedActivity	
CVCurrentMainActivity	0
CVCurrentMainActivity	1
CVCurrentMainActivity	2
CVCurrentMainActivity	3
CVCurrentMainActivity	4
CVCurrentMainActivity	5
CVCurrentMainActivity	6
CVCurrentMainActivity	7
CVCurrentMainActivity	8
	9
CVCurrentMainActivity	
	10
CVCurrentMainActivity	
	11
CVCurrentMainActivity	
CVCurrentMainActivity	12
	13
CVCurrentMainActivity	
CVInvokedAction	0

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

	1
CVInvokedAction	
CVInvokedAction	2
	3
CVInvokedAction	
CVInvokedAction	4
	5
CVInvokedAction	
	0

DefaultTraffic	
DefaultTraffic	1
DefaultTraffic	2
DiffieHellmanGroup	0
DiffieHellmanGroup	1
DiscardReturnServiceMsg	0
DiscardReturnServiceMsg	1
DIcyclicPrefix	0
DIcyclicPrefix	1
DIcyclicPrefix	2
DnsLookup	0
DnsLookup	1
	0

EmergencyStatus	
	1

EmergencyStatus	
	2

EmergencyStatus

3

EmergencyStatus

4

EmergencyStatus

0

EthFrameFormat

EthFrameFormat

1

FanConfiguration

0

FanConfiguration

1

2

FanConfiguration

3

FanConfiguration

0

FaultCriteria

1

FaultCriteria

FaultReason

0

FaultReason

1

FaultReason

2

FaultReason

3

FaultReason

4

FaultReason

5

FaultReason

6

FaultReason

7

FaultReason

8

FaultReason

9

FaultReason

10

11

FaultReason

12

FaultReason

FaultReason

13

FaultReason

14

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

FaultReason	15
FileState	0
FileState	1
	0
FileXferClient	
FileXferClient	1
FunctionName	0
FunctionName	1
FunctionName	2
FunctionName	3
	4
FunctionName	
	5
FunctionName	
	6
FunctionName	
	7
FunctionName	
	8
FunctionName	
	9
FunctionName	
	10
FunctionName	
	11
FunctionName	
FunctionName	12
FunctionName	13
FunctionName	14
FunctionName	15
FunctionName	16
FunctionName	17
FunctionName	18
FunctionName	19
FunctionName	20
FunctionName	21
FunctionName	22
HeaderCompression	0
HealthCheckActionResult	0
	1
HealthCheckActionResult	
	2
HealthCheckActionResult	
	0
HealthCheckResultCode	
	1
HealthCheckResultCode	
	2
HealthCheckResultCode	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

HealthCheckResultCode	
HealthCheckResultCode	4
	99
HealthCheckResultCode	
HrpdBandClass	0
HrpdBandClass	1
HrpdBandClass	2
HrpdBandClass	3
HrpdBandClass	4
HrpdBandClass	5
HrpdBandClass	6
HrpdBandClass	7
HrpdBandClass	8
HrpdBandClass	9
HrpdBandClass	10
HrpdBandClass	11
HrpdBandClass	12
HrpdBandClass	13
HrpdBandClass	14
HrpdBandClass	15
HrpdBandClass	16
HrpdBandClass	17
IdType	0
IdType	1
IdType	2
IkeEncryptionAlgorithm	1
IkeEncryptionAlgorithm	2
IkeEncryptionAlgorithm	3
IkeIntegrityAlgorithm	0
IkeIntegrityAlgorithm	1
IkeIntegrityAlgorithm	2
	0

Information

1

Information

2

Information

	3
Information	4
Information	5
Information	6
Information	7
Information	8
Information	9
Information	10
Information	11
Information	12
Information	13
Information	14
Information	15
Information	16
Information	17
Information	

	18
Information	
	19
Information	
	20
Information	
	21
Information	
	22
Information	
	23
Information	
Information	
IntegrityPriority	5
IntegrityPriority	6
IntegrityPriority	7
IntegrityPriority	8
InvokedAction	1
InvokedAction	2
InvokedAction	3
InvokedAction	4
InvokedAction	
IpSecCertEnrollState	0
IpSecCertEnrollState	1
IpSecCertEnrollState	2
IpSecTrustedCertInstallState	0
IpSecTrustedCertInstallState	1
IpSecTrustedCertInstallState	2
IpTrafficType	0
IpTrafficType	1
IpTrafficType	2
IpTrafficType	3
IpTrafficType	4
IpTrafficType	5
IpTrafficType	6
IpTrafficType	7
IpTrafficType	8
KeyLength	0
KeyLength	1
	0
LedStatus	
LedStatus	1

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

LoadClass	
LoadModuleLoaderType	0
LoadModuleLoaderType	1
LoadModuleLoaderType	2
LoadModuleLoaderType	3
LoadModuleLoaderType	4
LoadModuleLoaderType	5
LoadModuleLoaderType	6
LoadModuleLoaderType	99
LoadModulePreLoadType	0
LoadModulePreLoadType	1
LoadModulePreLoadType	2
MauDuplexMode	0
MauDuplexMode	1
	0
MeasDest	
	1
MeasDest	
MeasSelectionEUltra	0
MeasSelectionEUltra	1
MeasSelectionEUltra	2
MeasSelectionEUltra	3
MeasSelectionEUltra	4
	5
MeasSelectionEUltra	
Month	1
Month	2
Month	3
Month	4
Month	5
Month	6
Month	7
Month	8
Month	9
Month	10
Month	11
Month	12
NBValue	0
NBValue	1
NBValue	2
NBValue	3
NBValue	4
NBValue	5
NBValue	6
NBValue	7
	1
NetworkSignallingValue	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

	3
NetworkSignallingValue	
	4
NetworkSignallingValue	
	5
NetworkSignallingValue	
	7
NetworkSignallingValue	
NodeBFunction_CollectTraceStatus	0
NodeBFunction_CollectTraceStatus	1
NodeBFunction_CollectTraceStatus	2
NodeBFunction_CollectTraceStatus	3
NodeRestartType	1
NodeRestartType	2
NodeRestartType	3
NodeRestartType	4
	0
NtpServerMode	
	1
NtpServerMode	
OperationalMode	0
OperationalMode	1
OperState	0
OperState	1
OperVals	0
OperVals	1
OrderCode	0
OrderCode	2
Orientation	0
Orientation	1
	0
OspfMetricType	
OspfMetricType	1
OutputMode	0
	1
OutputMode	
	2
OutputMode	
	0
PathSelectionType	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

	1
PathSelectionType	
	2
PathSelectionType	
PerceivedSeverity	2
PerceivedSeverity	3
PerceivedSeverity	4
PerceivedSeverity	5
PiuRole	1
PiuRole	2
PiuRole	3
PiuRole	4
PortStatus	0
PortStatus	1
PreSharedKeyEncoding	0
PreSharedKeyEncoding	1
ProgressInformation	0
ProgressInformation	1
ProgressInformation	2
ProgressInformation	3
ProgressInformation	4
ProgressInformation	5
ProgressInformation	6
ProgressInformation	7
ProgressInformation	8
ProgressInformation	9
ProgressInformation	10
ProgressInformation	11
ProgressInformation	12
	13
ProgressInformation	
	14
ProgressInformation	
ProgressInformation	15
ProgressInformation	16
ProgressInformation	17
ProgressInformation	18
ProgressInformation	19
ProgressInformation	20
ProgressInformation	21
ProgressInformation	22
ProgressInformation	23
ProgressInformation	24
ProgressInformation	25
ProtocolType	0
ProtocolType	1

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

ProtocolType	6
ProtocolType	17
ProtocolType	132
ProtocolType	255
PseudoRandomFunction	0
PseudoRandomFunction	1
PseudoRandomFunction	2
RbsConfigLevel	0
RbsConfigLevel	1
RbsConfigLevel	3
RbsConfigLevel	4
	5
RbsConfigLevel	
RbsConfigLevel	6
RbsConfigLevel	7
RbsConfigLevel	8
RbsConfigLevel	9
RbsConfigLevel	10
RbsConfigLevel	11
RbsConfigLevel	12
	13
RbsConfigLevel	
	14
RbsConfigLevel	
RbsConfigLevel	15
RbsConfigLevel	16
RbsConfigLevel	17
	1
RefActivity	
RefActivity	2
	0
RefState	
	1
RefState	
	2
RefState	
	3
RefState	
	4
RefState	
	5
RefState	
	6
RefState	
	7
RefState	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

ReportInterval	0
ReportInterval	1
ReportInterval	2
ReportInterval	3
ReportInterval	4
ReportInterval	5
ReportInterval	6
ReportInterval	7
ReportInterval	8
ReportInterval	9
ReportInterval	10
ReportInterval	11
ReportInterval	12
ReportQuantity	0
ReportQuantity	1
	1

RestartCause	
	2
RestartCause	
	0

RestartRank	
	1

RestartRank	
	2

RestartRank	
	3

RestartRank	
	0

RestartReason	
RestartReason	1
RestartReason	2
RestartReason	3
RestartReason	4
RestartReason	5
RestartReason	6
RestartReason	7
RestartReason	8

RPUReplicationMode

2

RPUReplicationMode

3

RPUReplicationMode

4

RPUReplicationMode

RPUSwitchOverMode

1

RPUSwitchOverMode

2

RPUSwitchOverMode

SchedulingStrategy	0
SchedulingStrategy	1
SchedulingStrategy	3
SchedulingStrategy	4
SchedulingStrategy	5
SchedulingStrategy	6
SchedulingStrategy	7
SchedulingStrategy	8
SchedulingStrategy	0

SecurityLevel

1

SecurityLevel

2

SecurityLevel

3

SecurityLevel

4

SecurityLevel

SendLogs	0
----------	---

SendLogs	1
----------	---

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

	2
SendLogs	-1
SeqRestarts	0
SeqRestarts	1
SeqRestarts	2
SeqRestarts	3
SeqRestarts	0
SfpState	1
SfpState	2
SfpState	3
SfpState	1
SilPortState	
SilPortState	2
SilPortState	3
SilPortState	4
SilPortState	5
SlotState	0
SlotState	1
SlotState	2
StartState	0
StartState	1
StateVals	0
StateVals	1
SubjectAltNameType	1
SubjectAltNameType	2
SubrackType	0
SubrackType	1
SupportedMobilityRelationType	0
SupportedMobilityRelationType	1
	0
SyncMode	
SyncMode	1
SyncMode	2
SyncStatus	0
SyncStatus	1
SyncStatus	2
TestStatus	0
TestStatus	1
TestStatus	2

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

TracePmFileStatusEnum	0
TracePmFileStatusEnum	1
TracePmFileStatusEnum	2
TracePmStreamStatusEnum	0
TracePmStreamStatusEnum	1
TracePmStreamStatusEnum	2
TracePmStreamStatusEnum	3
TracePmStreamStatusEnum	4
TracePmStreamStatusEnum	5
TraceType	0
TraceType	1
TraceType	2
TraceType	3
TraceType	4
TransmissionType	1
	2
TransmissionType	
	3
TransmissionType	
TriggerQuantity	0
TriggerQuantity	1
	0
TypeOfStorage	
TypeOfStorage	1
TypeOfStorage	2
UICyclicPrefix	0
UICyclicPrefix	1
UpgradePackageState	0
UpgradePackageState	1
	2
UpgradePackageState	
	3
UpgradePackageState	
	4
UpgradePackageState	
	5
UpgradePackageState	
	6
UpgradePackageState	
	7
UpgradePackageState	
	0
UpgradePackageType	
UpgradePackageType	1
	2
UpgradePackageType	
UpgradePackageType	3
	4
UpgradePackageType	

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

UpgradePackageType	5
UpgradeProgressInformation	0
UpgradeProgressInformation	1
UpgradeProgressInformation	2
UpgradeProgressInformation	3
UpgradeProgressInformation	4
UpgradeProgressInformation	5
UpgradeProgressInformation	6
UpgradeProgressInformation	7
	8
UpgradeProgressInformation	
UpgradeProgressInformation	9
UpgradeProgressInformation	10
UpgradeProgressInformation	11
UpgradeProgressInformation	12
UpgradeProgressInformation	13
UpgradeProgressInformation	14
UpgradeProgressInformation	15
	16
UpgradeProgressInformation	
	17
UpgradeProgressInformation	
	18
UpgradeProgressInformation	
	19
UpgradeProgressInformation	
	20
UpgradeProgressInformation	
UpgradeProgressInformation	21
UpgradeProgressInformation	22
UpgradeProgressInformation	23
UpgradeProgressInformation	24
UpgradeProgressInformation	25
UpgradeProgressInformation	26
UpgradeProgressInformation	27
UpgradeProgressInformation	28
UpgradeProgressInformation	29
	30
UpgradeProgressInformation	
UpgradeProgressInformation	31
UpgradeProgressInformation	32
	33
UpgradeProgressInformation	
	34
UpgradeProgressInformation	
	36
UpgradeProgressInformation	
UpgradeProgressInformation	37
	38
UpgradeProgressInformation	
UpgradeProgressInformation	39

UpgradeProgressInformation	40
	41
UpgradeProgressInformation	
	42
UpgradeProgressInformation	
	43
UpgradeProgressInformation	
	44
UpgradeProgressInformation	
	45
UpgradeProgressInformation	
	46
UpgradeProgressInformation	
UsageState	0
	1
UsageState	
	2
UsageState	
Weekday	1
Weekday	2
Weekday	3
Weekday	4
Weekday	5
Weekday	6
Weekday	7
WorkingMode	0
WorkingMode	1
XpProgram_StartState	0
XpProgram_StartState	1

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Proprietary (Restricted)

Use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

	Value
--	-------

BYPASS
DROP
DEACTIVATED
ACTIVATED
NO_LINK
ETH_10_MB_HALF
ETH_10_MB_FULL
ETH_100_MB_HALF
ETH_100_MB_FULL
ETH_1000_MB_HALF
ETH_1000_MB_FULL
LOCKED
UNLOCKED
LOCKED
UNLOCKED
SHUTTING_DOWN
IUANT
ASC
ERET
PRESHARED_KEY
CERTIFICATE
ON

OFF
IDLE
IN_PROGRESS
NO_STATUS

IN_TEST
FAILED
POWER_OFF
OFF_LINE

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

OFF_DUTY
DEGRADED
NOT_INSTALLED
LOG_FULL
DEPENDENCY_LOCKED
DEPENDENCY_FAILED
DEPENDENCY_SHUTTINGDOWN

PRIM
SEC
BOTH
NONE
DCS_1800
PCS_1900
UNDEFINED
AUTOMATIC_PERIODIC
CONFIGURED_PERIODIC
MAINS_FAILURE_PERIODIC
ON_DEMAND

ON_DEMAND_FORCED

AUTOMATIC
CONFIGURED
DISABLED
UNDEFINED
PASSED

FAILED

UNDEFINED

PENDING
IN_PROGRESS
PERIODIC
ON_DEMAND
UNKNOWN
TYPE01
TYPE02
DISABLED
ENABLED
NONE
SYNCHRONOUS
ASYNCHRONOUS
BARRED
NOT_BARRED
RESERVED
NOT_RESERVED

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

LOCAL_AA_DB_FILE_SIGNERS

AA_SERVERS

CORBA_PEERS

ERICSSON_1

IDLE

PREPARING_REQUEST
POLLING

NEW_CREDS_AWAIT_CONF

ERROR

AUTOMATIC
USER_DEFINED
INGRESS
EGRESS
NULL
AES_CBC_128
AES_CBC_256
ALG_3DES_CBC
NULL
AES_XCBC_MAC_96
HMAC_SHA_1_96
HMAC_MD5_96
EEA1_EEA2_EEA0

EEA1_EEA0_EEA2
EEA2_EEA1_EEA0
EEA2_EEA0_EEA1
EEA0_EEA1_EEA2
EEA0_EEA2_EEA1
EEA1_EEA2
EEA1_EEA0
EEA2_EEA1
EEA2_EEA0
EEA0_EEA1
EEA0_EEA2

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

EEA1
EEA2
EEA0
STANDARD
EXTENDED
UNKNOWN_MODE
STARTUP_MODE
LOCKED_MODE

HOLD_OVER_MODE

FREE_RUNNING_MODE

FAILED_MODE

LOSS_OF_TRACKING_MODE

NOT_APPLICABLE

STANDARD
UPGRADE

MINIMAL
TEST
AUTOCREATE

OTHER

UPGRADE_TOLERATE_ERROR

DOWNLOADED

RESTORED

EXECUTED

EXECUTED_WITH_WARNINGS

EXECUTION_FAILED
CORE_CENTRAL_MP_POSITION_NOT_MATCHING

CV_BACKUP_NOT_FOUND
CV_IS_DAMAGED
CV_IS_INCOMPLETE
CV_IS_INVALID_FOR_BACKUP
CV_NAME_ALREADY_EXISTS

CV_IS_NOT_FOUND
FORMAT_OF_IP_ADDRESS_IS_FAULTY
FTP_ACCESS_OR_TRANSFER_FAILED

FTP_SERVER_IS_NOT_ACCESSIBLE

HARDWARE_IS_INCOMPATIBLE

HARDWARE_SOFTWARE_IS_INCOMPATIBLE
INSUFFICIENT_DISKSPACE_ON_NODE
MAX_NUMBER_OF_CVS_WILL_BE_EXCEEDED

NETWORK_CONFIGURATION_MISMATCH_FOR_IP_ATM

UNKNOWN_NODE_IDENTITY

UNSPECIFIED

UPGRADE_PACKAGE_IS_CORRUPTED

UPGRADE_PACKAGE_IS_MISSING

ILLEGAL_VALUE_RECEIVED_IN_INPUT_PARAMETER
CV_BACKUP_NAME

INSUFFICIENT_DISKSPACE_ON_FTP
CV_IS_INVALID_FOR_RESTORE

CV_IS_NOT_CONNECTED_TO_AN_UPGRADE_PACKAGE

RESTORE_MANUALLY_CANCELLED

ACTION_RESTORE_IS_ALLOWED

ACTION_RESTORE_IS_NOT_ALLOWED

ACTION_FORCED_RESTORE_IS_ALLOWED

ACTION_FORCED_RESTORE_IS_NOT_ALLOWED

CORE_CENTRAL_MP_POSITION_PARTLY_MATCHING

OFF

ON

AS_CONFIGURED

IDLE

CREATING_BACKUP

TRANSFERING_BACKUP_TO_REMOTE_SERVER

RETRIEVING_BACKUP_FROM_REMOTE_SERVER

UNPACKING_RETRIEVED_BACKUP

RESTORE_REQUESTED

VERIFYING_UPGRADE_PACKAGE_PRESENT

VERIFYING_CHECKSUM_FOR_LOAD_MODULES

VERIFYING_CORE_CENTRAL_MP

VERIFYING_HARDWARE_SOFTWARE_COMPATIBILITY

VERIFYING_NODE_IDENTITY

VERIFYING_APPLICATION_CONFIGURATION_DATA

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

VERIFYING_NETWORK_CONFIGURATION_FOR_IP_ATM

RESTORE_INITIATED

SAVING_ROLLBACK_CV
NODE_RESTART_REQUEST
INITIATING_CONFIRM_RESTORE_TIME_SUPERVISION
AWAITING_RESTORE_CONFIRMATION
RESTORE_CONFIRMATION_RECEIVED
TERMINATING_CONFIRM_RESTORE_TIME_SUPERVISION

SAVING_FINAL_CV
RESTORE_EXECUTED
EXECUTION_FAILED

EXECUTING_BLOCKING_ACTION

VERIFYING_HARDWARE_COMPATIBILITY

VERIFY_RESTORE_REQUESTED

RESTORE_CANCELLED

VERIFYING_POSSIBLE_TO_CREATE_REQUIRED_NUMBER_OF_CVS
EXPORT_OF_BACKUP_CV_REQUESTED
IMPORT_OF_BACKUP_CV_REQUESTED

CONFIG_COUNTDOWN_ONGOING

IDLE
CREATING_CV
DELETING_CV
REMOVING_CV_FROM_ROLLBACK_LIST
SETTING_CV_FIRST_IN_ROLLBACK_LIST
SETTING_CV_AS_STARTABLE
EXPORTING_BACKUP_CV
IMPORTING_BACKUP_CV
RESTORING_DOWNLOADED_BACKUP_CV
VERIFYING_DOWNLOADED_BACKUP_CV_BEFORE_RESTORE
CANCELLING_RESTORE_OF_DOWNLOADED_BACKUP_CV
CONFIRMING_RESTORE_OF_DOWNLOADED_BACKUP_CV
CHANGING_RESTORE_CONFIRMATION_TIMEOUT
CONFIG_COUNTDOWN_ONGOING

CONFIRM_RESTORE

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

FORCED_RESTORE

GET_FROM_FTP_SERVER
PUT_TO_FTP_SERVER

RESTORE
VERIFY_RESTORE

TRAFFIC_DEF_ROUTER_0

TRAFFIC_DEF_ROUTER_1
TRAFFIC_DEF_ROUTER_2
GROUP_2
GROUP_14
DISCARD
RETURN
NORMAL_15khz
EXTENDED_15khz
EXTENDED_7_5khz
OFF
ON
NEVER_USED

ACTIVE

USE_DEGRADED

ACTIVE_AGAIN

USE_DISABLED

ETHERNET_2_DIX

IEEE_802_3_LLC_SNAP
NO_CPP_FAN
BFD7422019_ONE
BFD528_ONE

BFD528_TWO

DEGR_NOT_FAULT

DEGR_IS_FAULT

SMRS_CONNECTION_FAULT
OSS_CONNECTION_FAULT
WRONG_INITIAL_CONFIG_LEVEL
DHCP_FAULT
MO_CONFIGURATION_FAULT
SUMMARY_FILE_FAULT
OAM_CONFIG_FILE_FAULT
SITE_EQUIPMENT_FILE_FAULT
LICENSING_FAULT
UPGRADE_FAULT
UNDEFINED
CERTIFICATE_ENROLLMENT_FAULT

SECURITY_LEVEL_3_ACTIVATION_FAULT

OTHER_FAULT
SECURITY_CONFIGURATION_FAULT

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

SECURITY_ACTIVATION_FAULT
NOT_INSTALLED
INSTALLED
FTP

SFTP
CREATE_UP
CREATE_VIRTUAL_UP
INSTALL_UP
DELETE_UP
VER_UPGRADE_FROM_VERSION

VER_UPGRADE_CV

VER_UPGRADE_PIU_SUPPORTED

VER_UPGRADE_CHECKSUM_FOR_LM

VER_UPGRADE_PIU_NOT_FAULTY

RECONF_MO_REP_HANDLING

RECONF_MO_PIU_TYPE_HANDLING

RECONF_MO_RPU_HANDLING

TRIGGER_INITIATE
TRIGGER_EXECUTE
TRIGGER_FINISH
TRIGGER_HANDLING
SAVING_CV
REBOOT_NODE_UPGRADE
REBOOT_JVM_UPGRADE
REBOOT_PIU_UPGRADE
SOFT_PIU_UPGRADE
PLUG_AND_PLAY_PIU
PLUG_AND_PLAY_FAN
NULL
STARTED
HEALTH_CHECK_ONGOING

UPGRADE_ONGOING

OK

NOT_OK

ABORTED

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

ABORTED_NOT_OK

HEALTH_CHECK_ONGOING
INITIAL_VALUE

BAND_CLASS_0
BAND_CLASS_1
BAND_CLASS_2
BAND_CLASS_3
BAND_CLASS_4
BAND_CLASS_5
BAND_CLASS_6
BAND_CLASS_7
BAND_CLASS_8
BAND_CLASS_9
BAND_CLASS_10
BAND_CLASS_11
BAND_CLASS_12
BAND_CLASS_13
BAND_CLASS_14
BAND_CLASS_15
BAND_CLASS_16
BAND_CLASS_17
ANY
IP_V4_ADDRESS
FQDN
AES_CBC_128
AES_CBC_256
ALG_3DES_CBC
AES_XCBC_MAC_96
HMAC_MD5_96
HMAC_SHA_1_96
EXECUTED

UNSPECIFIED

LM_CHECKSUM_VER_FAILED

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NOT_ENOUGH_AVAIL_DISK_SPACE

MAX_NO_CV_WILL_BE_EXCEEDED

UPGRADE_FROM_CURRENT_UP_NOT_ALLOWED

NON_SUPPORTED_PIU

FAULTY_PIU

CREATION_OF_CV_FAILED

ACTION_NOT_ALLOWED

INST_MANUALLY_CANCELLED

FTP_SERVER_NOT_ACCESSIBLE

INSUF_DISK_FOR_LMS

FTP_SERVER_IP_ADDR_ERROR

DELTA_INSTALL_MERGE_ERROR

SELECTIVE_INSTALL_ERROR

EXECUTION_FAILED

EXECUTED_WITH_WARNINGS

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

LM_FILES_NOT_INST

NOT_SUPPORTED_SUBRACK_TYPE

SLOT_OF_PIU_NOT_CONNECTED_TO_SWA

LM_TYPE_NOT_ALLOWED

PIUTYPE_NOT_UNIQUE

PIUTYPE_LOADLIST_INCONSISTENT

EIA1_EIA2

EIA2_EIA1

EIA1

EIA2

VERIFY_UPGRADE

UPGRADE

INSTALL

CANCEL_INSTALL

IDLE

ONGOING

ERROR

IDLE

ONGOING

ERROR

NOT_USED

SIGNALING

PAYLOAD

SIGNALING_AND_PAYLOAD

SYNCHRONIZATION

SIGNALING_AND_SYNCHRONIZATION

PAYLOAD_AND_SYNCHRONIZATION

SIGNALING_AND_PAYLOAD_AND_SYNCHRONIZATION

OPERATION_AND_MAINTENENCE

KEY_1024

KEY_2048

NOT_APPLICABLE

NOT_AVAILABLE

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

OUT

STEADY_LIGHT

SLOW_BLINK

FAST_BLINK
FLICKERING

PRIMARY_ACTIVE
SECONDARY_ACTIVE
LINK_ONE_PRIMARY_LINK_TWO_SECONDARY

LINK_TWO_PRIMARY_LINK_ONE_SECONDARY
FRONT_PORTS
BACKPLANE_PORTS
NOT_INSTALLED

PARTLY_INSTALLED

INSTALLED

CORE_0S
CORE_DEVICE_TEST_0
CORE_DEVICE_TEST_1
CORE_DEVICE_TEST_2
CORE_DEVICE_TEST_3
CORE_DEVICE_TEST_4
CORE_DEVICE
CORE_DEVICE_TEST_5
CORE_DEVICE_TEST_6
CORE_DEVICE_TEST_7
CORE_DEVICE_TEST_8
CORE_DEVICE_TEST_9
LOAD_LIST_PROVIDER
CORE_EARLY
NCH_HW_INIT
APPLICATION_HW_INIT
UPGRADE_EARLY
CORE_LATE
NETWORK_AND_CONNECTION_HANDLING
NCH_LATE
APPLICATION
APPLICATION_LATE
UPGRADE

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

OSE_LOADER
SPM_LOADER
JVM
WEB_SERVER
SPM_FPGA_LOADER
XP_LOADER
DEVICE_LOADER
OTHER
NO
MUST
WISH
HALF_DUPLEX
FULL_DUPLEX
SRIO

ETHERNET

PERIODICAL
EVENT_A1
EVENT_A2
EVENT_A3
EVENT_A4
EVENT_A5

JANUARY
FEBRUARY
MARCH
APRIL
MAY
JUNE
JULY
AUGUST
SEPTEMBER
OCTOBER
NOVEMBER
DECEMBER
T4
T2
T
T1_2
T1_4
T1_8
T1_16
T1_32
NS_01

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

NS_03

NS_04

NS_05

NS_07

NOT_STARTED
COLLECTING
FINISHED
FAILED
COLD_AT_PIU_FAULT
WARM_AT_PIU_FAULT
COLD_AT_PIU_RESTART
WARM_AT_PIU_RESTART
DISABLED

ENABLED

PASSIVE
ACTIVE
DISABLED
ENABLED
INOPERABLE
OPERABLE
RETAIN_EXISTING
RENEW_ALL_EXISTING
VERTICAL
HORIZONTAL
COMPARABLE_COST

NON_COMPARABLE
FILE
SERIAL_PORT

TE_LOG

SCTP_PATHS

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

IP_PATHS

IP_PATHS_OPTIMIZED

CRITICAL

MAJOR

MINOR

WARNING

MP

BP

OTHERS

CMXB

OFF

ON

HEX

ASCII

CONFIGURATION_NOT_STARTED

FETCHING_BASIC_IP_CONFIGURATION_VIA_DHCP

ACTIVATING_BASIC_IP_CONFIGURATION

FETCHING_SITE_BASIC_FILE

FETCHING_SITE_EQUIPMENT_FILE

FETCHING_LICENSE_KEY_FILE

FETCHING_UPGRADE_PACKAGE

FETCHING_SUMMARY_FILE

ACTIVATING_SITE_BASIC_DATA

ACTIVATING_SITE_EQUIPMENT_DATA

INSTALLING_LICENSE_KEY

UPGRADING

NOTIFYING_OSS

INITIATING_CERTIFICATE_ENROLLMENT

ACTIVATING_SECURITY_LEVEL_3

WAITING_FOR_OSS_CONFIGURATION

OSS_ACTIVATING_CONFIGURATION

WAITING_FOR_S1

OSS_UNLOCKING_CELLS

AUTO_INTEGRATION_COMPL

GIGABIT_LINK_DETECTED

DETECTING_GIGABIT_LINK

GIGABIT_LINK_DETECTION_FAULT

INITIATING_SECURITY_CONFIGURATION

ACTIVATING_SECURITY_CONFIGURATION

ACTIVATING_IPSEC_CONFIGURATION

ANY

ICMP

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

TCP
UDP
SCTP
RAWIP
AES_XCBC_PRF128
HMAC_SHA1
HMAC_MD5
UNDEFINED
BASIC_CV
SITE_BASIC
SITE_EQUIPMENT
SITE_CONFIG_COMPLETE

OSS_ACTIVATING_CONFIGURATION
OSS_CONFIGURATION_SUCCESSFUL
OSS_CONFIGURATION_FAILED
S1_COMPLETE
INTEGRATION_COMPLETE
NPC_CONFIGURATION
NPC_COMPLETE
CERTIFICATE_ENROLLMENT_COMPLETE

SECURITY_LEVEL_3_ACTIVE

GIGABIT_LINK_DETECTED
SECURITY_PREPARATION_COMPLETE
SECURITY_ACTIVE
INACTIVE

ACTIVE
FAILED

DEGRADED

LOSS_OF_TRACKING

OK

REF_PATH_FAILED_A

REF_PATH_FAILED_B

NOT_RELIABLE

LOW_QUALITY

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

MS_120
MS_240
MS_480
MS_640
MS_1024
MS_5120
MS_10240
MIN_1
MIN_6
MIN_12
MIN_30
MIN_60
MS_2048
SAME_AS_TRIGGER_QUANTITY
BOTH
PIU_RESTART_ERROR

PIU_RESTART_UPGRADE

RESTART_WARM

RESTART_REFRESH

RESTART_COLD

RESTART_COLDWTEST

PLANNED_RECONFIGURATION

UNPLANNED_NODE_EXTERNAL_PROBLEMS
UNPLANNED_NODE_UPGRADE_PROBLEMS
UNPLANNED_O_AND_M_ISSUE
UNPLANNED_CYCLIC_RECOVERY
UNPLANNED_LOCKED_RESOURCES
UNPLANNED_COLD_WITH_HW_TEST
UNPLANNED_CALL_PROCESSING_DEGRADATION
UNPLANNED_LOW_COVERAGE

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

UPGRADE_BOARD_RESTART

NOT_DEFINED

RECOVERY_ACTION

SOFTWARE_UPGRADE

AM

UM

TM

INET RTPROTO_OTHER

INET RTPROTO_LOCAL

INET RTPROTO_NETMGMT

INET RTPROTR_ICMP

INET RTPROTO_OSPF

MANUAL

AUTOMATIC

AS_CONFIGURED

SWITCHED_OVER

UNAVAILABLE

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

ALWAYS

NEVER

AT_SHUTDOWN

APPL_CONTROLLED

AT_PIU_FAULT
AT_PIU_RESTART

STRICT_PRIORITY
ROUND_ROBIN
RESOURCE_FAIR
PROPORTIONAL_FAIR_MEDIUM
PROPORTIONAL_FAIR_LOW
PROPORTIONAL_FAIR_HIGH
MAXIMUM_CQI
EQUAL_RATE
LEVEL_UNDEFINED

LEVEL_1

LEVEL_2

LEVEL_3

LEVEL_3_UNCONFIRMED

DISABLED
ENABLED_WITH_LIMITATIONS

FULLY_ENABLED

RESTARTS_WITH_NO_LIMITS

RESTARTS_WITH_FAULT_MARKED

RESTARTS_WITH_COLD_TEST

RESTARTS_WITH_COLD

RESTARTS_WITH_WARM

VALID

INVALID

NOT_INSTALLED

NOT_APPLICABLE

PORT_ACTIVE

PORT_PASSIVE

PORT_NOT_CONNECTED

PORT_LOCKED

PORT_NOT_INSTALLED

FREE

USED

COVERED_BY_PIU

DISABLED

ENABLED

DISABLED

ENABLED

IPV4

FQDN

HUB

DEVICE

HANDOVER

HANDOVER_AND_CELL_RESELECTION

NOT_USED

CDMA

WCDMA

NOT_REACHABLE

NOT_RELIABLE

OK

NO_TEST_RESULTS

TEST_RESULTS_OK

TEST_RESULTS_NOT_OK

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

INACTIVE
ACTIVE
FILECLOSED
INACTIVE
ACTIVE
CONNECTING
RECONNECTING
ERROR
NOT_LICENSED
DEBUG
ERROR
INFO
LOG
WARNING
ATM_TRANSMISSION
ETHERNET10G

ETHERNET_CABLE

RSRP
RSRQ
NON_PERSISTENT

DATABASE
FILE
NORMAL_15khz
EXTENDED_15khz
NOT_INSTALLED
INSTALL_COMPLETED
UPGRADE_EXECUTING

AWAITING_CONFIRMATION

ONLY_DELETEABLE

INSTALL_EXECUTING

INSTALL_NOT_COMPLETED

UPGRADE_COMPLETED

ADAPTED

DELTA_ADAPTED
SELECTIVE

DELTA_SELECTIVE
HW_SENSITIVE

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

DELTA_HW_SENSITIVE
IDLE
DOWNLOADING_FILES
SAVING_CV
RECONFIGURE_MOS
INITIATE_LOADER_INFO
PRELOADING
CONV_OF_PERSISTENT_DATA
APPL_SPECIFIC_ACTION
NODE_RESTART_REQ

TAKE_NEW_SW_INTO_SERVICE
FINISH_AND_CLEAN_UP
ENTER_NORMAL_MODE
EXECUTION_FAILED
CANCEL_OF_INST_IS_EXECUTING
CANCEL_OF_INST_FAILED
VERIFICATION_INITIATED
VERIFY_UPGR_FROM_VER

VERIFY_CREATE_REQ_CVS

VERIFY_PIUS_SUPPORTED

VERIFY_CHECKSUM_FOR_LM

VERIFY_PIUS_NOT_FAULTY

VERIFICATION_FINISHED
VERIFICATION_FAILED
JVM_RESTART_REQ
ENTER_UPGRADE_MODE
PIU_UPGRADE_REQ
SOFT_PIU_UPGRADE_REQ
PROGRAM_ADD_REMOVE
NODE_UPGRADE_REQ
CONF_NORMAL_WORKING_STATE
HANDLING_FINAL_CV_FAILED

WAIT_FOR_CONF_UPGRADE
UPGRADE_EXECUTED
UPGRADE_REQUESTED

AUE_PROGRESS

AUE_FAILURE

AUE_CONF_WITH_WARNING
VERIFY_INIT_CONF_PIUS

VERIFY_JVM_PIUS

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

VERIFY_FTC
VERIFY_LM_FILES

VERIFY_SUBRACK_TYPE

VERIFY_PIUTYPE_UNIQUE

VERIFYING_SLOTS_OF_PIUS_CONNECTED_TO_SWA

VERIFYING_LM_TYPE_ALLOWED

VERIFY_PIUTYPE_LOADLIST

IDLE
ACTIVE

BUSY

SUNDAY
MONDAY
TUESDAY
WEDNESDAY
THURSDAY
FRIDAY
SATURDAY
HOST_MODE
ROUTER_MODE
DISABLED
ENABLED

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution



Comment1

Comment2

Denotes whether the autoConfiguration mode for the IpAccessHost is turned on or off.

The availability status is used to qualify the operational state. It indicates why the operational state has changed its value to disabled.

Periodic test if testMode is AUTOMATIC.
Periodic test if testMode is CONFIGURED.
Periodic test initiated from mains power failure.
Initiated via action startBatteryTest and parameter forced = false.
Initiated via action startBatteryTest and parameter forced = true.
Pre-defined values are used at the periodic test.
User configured values are used at the periodic test.
Periodic tests are disabled.
Test did not indicate underperforming batteries.
Test indicated underperforming batteries and an alarm was raised.
No automatic evaluation was done due to forced initiation. The test result needs manual evaluation.

Current state of the
battery test.

On demand test is pending.
Battery test is in progress.

Trusted certificates for verifying signatures on local AA database and authorization files.

These certificate usage categories distinguish between different kinds of root certificates which can be installed as trusted certificates in the node.

Trusted certificates for verifying authenticity of AA servers in the network.

Trusted certificates for verifying the authenticity of CORBA peers in the network.

Trusted Ericsson certificate for verifying the classification files and the permission files. This certificate cannot be removed or changed.

Idle. An initCertEnrollment request will be accepted.

Certificate Enrollment State

The node is preparing the certificate enrollment sequence.

An enrollment request has been sent to the enrollment server. The node is polling for a new certificate but the requested certificate has not yet been issued.

Awaiting confirmation for the use of new credentials. An event is issued.

An error has occurred. An alarm is issued. See the certEnrollErrorMsg attribute for a description of the error. The only way to leave this state is by using the action, cancelCertEnrollment.

EEA1_EEA2_EEA0 means that EEA1 has the highest priority

EEA0 means that no ciphering is applied.

The system clock is starting up.

The system clock signal on the Timing Unit is locked: a synchronization reference is used to generate the system clock, the clock accuracy is 50 ppb or better.

The system clock signal on the Timing Unit has holdover quality: no synchronization reference is used to generate the system clock, the clock accuracy is 50 ppb or better.

The system clock signal on the Timing Unit is free-running: no synchronization reference is used to generate the system clock, the clock accuracy is 4.6 ppm or better.

The system clock signal on the Timing Unit is failed: there is fault in generating the system clock, no guarantee of clock accuracy level.

The frequency of the system clock is at its upper or lower limit.

The system clock signal on Timing Unit is not applicable: the TUB or the CBU is not present.

The value normally used for manually created CVs.

A CV created during system upgrade, after reconfigurations are completed and before the new SW is taken into operation. UPGRADE_TOLERATE_ERROR is used if the Upgrade Control File states that the function Tolerate Error is to be used in the upgrade path. The name of the CV starts with SU_.

A daily CV created automatically by the periodical CV function activated by setting autoCreatedCVIsTurnedOn to true. The name of the CV starts with Au_.

CVs of this type are created in many situations: - After a successful installation of an Upgrade package. The name of the CV starts with Si_. - A rollback CV created in the beginning of an upgrade after the prechecks are done and before any reconfiguration is started. The name of the CV starts with Rb_. - The final CV created after a successful upgrade. The name of the CV starts with Fi_. - A rollback CV created in the beginning of a restoration of an external CV. The name of the CV starts with RR_. - A CV created when the Autoconfiguration is switched off in order to save the configuration created during a PIU replacement. The name of the CV starts with CA_. - CVs created by the Robust Reconfiguration function. The name of the CV created when the function is activated starts with CB_. The name of the CV created when the function is confirmed starts with CC_.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

A CV created during system upgrade, after reconfigurations are completed and before the new SW is taken into operation. UPGRADE_TOLERATE_ERROR is used if the Upgrade Control File states that the function Tolerate Error is to be used in the upgrade path. The name of the CV starts with SU_.

A backup CV downloaded to the node from an FTP server. The CV has previously been created by the external CV function. This type of CV can not be set as startable. The CV can have any name.

A CV created after a successful restoration of a CV. It is created by the external CV function. Depending on the method used, the name of the CV starts with RR_ or RF_.

The invoked action has been successfully executed without warnings.

The action has been successfully executed but warnings were generated.

The execution of the invoked action failed.

The node core central MP position(s) is/are not the same as in the downloaded backup CV.

The CV backup was not found on the FTP server.

The CV is damaged (not useable).

Some CV files are missing.

The CV type is invalid for creation of a remote backup.

The downloaded backup CV contains a CV with a name that is identical to a CV already existing on the node.

The CV does not exist.

Erroneous IP Address Format.

An error was encountered during FTP file access or transfer.

FTP server is not accessible. This reason may be one or several of the following: - Erroneous IP address, username or password - IP communication with the FTP server is down - The FTP server itself is malfunctioning.

Mismatch detected in the node board/slot configuration compared to the downloaded backup CV.

Boards in the node are not supported by the UCF(s).

There are not enough with disk space on node.

The maximum number of allowed CVs will be exceeded if the required action is executed.

Mismatch detected when comparing the node network configuration for IP/ATM with corresponding data in the downloaded backup CV.

The node identity/site in the downloaded backup CV doesn't match the existing node identity/site.

A not specified error/ warning has been detected (see additional info for further details).

Software integrity problems detected, that is, one or more of the load modules related to the downloaded backup CV have checksum errors. The found checksum errors are corrected by requesting forced install on any upgrade package that contains the faulty load modules. See further attribute `corruptedUpgradePackages`.

Upgrade package(s) referenced in the downloaded backup CV are not present on the node. See further attribute `missingUpgradePackages`.

An input parameter has been assigned an illegal value.

This is the name with which a CV is saved in the FTP server after having executed the `putToFtpServer` action. Notice that the name will have the form `*.zip`

There are not enough with disk space on the FTP server.

The CV type is invalid for restore (only CV of type `downloaded` is valid for `restore/forcedRestore`).

The CV is not connected to an Upgrade Package.

The execution of `restore/forcedRestore` has been cancelled (during the verify phase of restore, that is when action `cancelRestore` has been invoked).

The verify restore action has determined that action restore is allowed.

The verify restore action has determined that action restore is not allowed.

The verify restore action has determined that action forced restore is allowed.

The verify restore action has determined that action forced restore is not allowed.

One node core central MP position is not the same as in the downloaded backup CV.

Auto configuration is turned off.

Auto configuration is turned on.

Auto configuration according to downloaded CV.

The CV function is idle.

Creating a backup of a CV existing on the node.

The backup CV is transferred to a remote FTP Server.

Downloads a remote backup of a CV to the node.

The retrieved backup CV is unpacked.

Variant of restore action initiated (that is, `restore/forcedRestore`).

Verifying that there are no missing upgrade packages.

Verifying the checksum for all load modules used by the CV.

Verifying that the node core central MP position is the same as in the downloaded backup CV.

Verifying the node board/slot configuration with the board/slot configuration in the downloaded backup CV.

Verifying if the downloaded backup CV originates from this node/site or from another node/site.

Verifying node configuration data with application configuration data in the downloaded backup CV.

Verifying node network configuration for IP/ATM with the network configuration for IP/ATM in the downloaded backup CV.

The restore has been initiated, that is the verification phase has been successfully executed.

Saving a rollback Configuration Version.

The node is to be restarted.

The confirm restore time supervision is to be started.

Waiting for confirmation of the restore request.

The restore of the node is made permanent.

The confirm restore time supervision is to be stopped.

Saving a final Configuration Version.

Restore has been executed successfully.

The execution of an action has been aborted due to not possible to continue.

A blocking action is executing (no detailed information is available).

Verifying that the hardware configuration in the downloaded backup CV is compatible with node hardware configuration.

Verification before restore requested, that is, action verifyRestore has been invoked.

Restore has been cancelled (requested by the action cancelRestore).

Verifying that it is possible to create the required number of CVs at restore.

Export of a node CV to a FTP server has been requested.

Import of a backup CV from a FTP server to the node has been requested.

Counting down the time left to confirm a configuration change.

The CV function is idle.

Creating a CV.

Deleting a CV.

Removing a CV from the rollback list.

Setting a CV first in the rollback list.

Setting a CV as startable.

Uploading a backup CV to a FTP Server.

Downloading a backup CV from a FTP Server.

Restoring a downloaded backup CV.

Verifying downloaded backup CV before restore.

Cancelling restore of a downloaded backup CV.

Confirming the restore of the downloaded backup CV.

Changing the restore confirmation timeout value.

Counting down the time left to confirm a configuration change.

Makes the restore permanent.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Restores the node to a previously downloaded backup CV
irrespectively of warnings are detected or not during the
verification phase.

Downloads a remote backup of a CV to the node.

Creates a backup of a CV existing on the node and uploads it
to an FTP server.

Restores the node to a previously downloaded backup CV.

Verifies that restore of a downloaded backup CV is possible.

Indicates the default
router, to which the
traffic is flowing. 0 =
traffic toward default
router 0 1 = traffic
toward default router 1 2
= traffic toward default
router 2 Values 1 and 2
are possible, only if
these default routers are
configured.

EmergencyStatus has not been activated since installation of
the LKF.

This enumeration
specifies the different
stages of the
emergency state.

EmergencyStatus goes from NEVER_USED to ACTIVE, the
first time the node is emergency-unlocked. The licenses are
open for the emergency state as described in the
documentation about licensing. The maximum time in this
state is 7 days. After expiry, EmergencyStatus goes to
USE_DEGRADED. EmergencyStatus goes from ACTIVE to
NEVER_USED when the LKF is installed with emergency
unlock reset.

EmergencyStatus goes to USE_DEGRADED from ACTIVE.
All features and capacities are license-controlled in
accordance with the installed LKF. EmergencyStatus remains
in USE_DEGRADED until: an emergency unlock of the node
and EmergencyStatus goes to ACTIVE_AGAIN or, an LKF is
installed with an entry, emergency unlock reset. Then
EmergencyStatus goes to NEVER_USED.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for
general distribution

The EmergencyStatus goes from USE_DEGRADED to ACTIVE_AGAIN at emergency unlock of the node. The licenses are open for the emergency state as described in the documentation about licensing. The maximum time in this state is 7 days. After expiry the EmergencyStatus goes from ACTIVE_AGAIN to USE_DISABLED. The EmergencyStatus goes from ACTIVE_AGAIN to NEVER_USED at installation of an emergency unlock reset LKF.

The EmergencyStatus goes to USE_DISABLED from ACTIVE_AGAIN. All features and capacities are license-controlled in accordance with the installed LKF. The node remains in USE_DISABLED until an LKF with the entry, emergency unlock reset, is installed. Then it goes to NEVER_USED.

Ethernet outgoing frame
format. 0 - Ethernet 2.0
(DIX) 1- IEEE 802.3
LCC/SNAP

Indicates that there are no fans controlled by CPP.
Subrack BFD7422019 with one fan.

Subrack BFD528 with one CPP fan. But if external fan devices are used, then the CPP fan limit is irrelevant, and the number of fans indicated by the attribute numberOfDenibDevices is included.

Subrack BFD528 with two CPP fans. But if external fan devices are used, then the CPP fan limit is irrelevant, and the number of fans indicated by the attribute numberOfDenibDevices is included.

Degradation of the transmission link is NOT interpreted as a synchronization reference fault.

Degradation of the transmission link is interpreted as a synchronization reference fault.

The connection to the SMRS failed.

The connection to the OSS failed.

The attribute rbsconfigLevel has wrong initial level.

Unsuccessful DHCP request.

The configuration of an MO failed.

Erroneous or missing summary file.

Erroneous or missing O&M Configuration file.

Erroneous or missing site equipment file.

Activation of Licensing Key File failed.

Software Upgrade failed.

No fault has occurred.

Deprecated: Since L10B. Planned to be removed. Installation of security credentials has failed.

Deprecated: Since L10B. Planned to be removed. Security level 3 activation failed.

Unexpected software fault.

Security configuration failed.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Security activation failed.
The load module file is not installed on the disk.
The load module file is installed on the disk.

File Transfer Protocol

The protocol used by
the node for transferring
files

Secure File Transfer Protocol
Creation of a MO Upgrade Package.
Creation of a virtual MO Upgrade Package during recovery.
Installation of an upgrade package.
Deletion of a upgrade package.
Verifying that the upgrade window defined in the Upgrade
Control File allows an upgrade.
Verifying that it is possible to create the required number of
CV's during the upgrade phase.
Verifying that the used plugin-units in the node are supported
according to the Upgrade Control File.
Verifying the checksum for all load modules that have a
checksum value defined in the Upgrade Control File.
Verifying that plugin-units on the node are not faulty before the
upgrade is initiated.
Reconfiguring instances of the MO Repertoire as specified to
the Upgrade Control File.
Reconfiguring instances of the MO PiuType as specified to the
Upgrade Control File.
Reconfiguring instances of the MO ReliableProgramUnit as
specified to the Upgrade Control File.
Executing trigger Initiate.
Executing trigger Execute.
Executing trigger Finish.
Trigger handling.
Saving a configuration version.
UCF operation RebootNodeUpgrade handling.
UCF operation RebootJvmUpgrade handling.
UCF operation RebootPiuUpgrade handling.
UCF operation SoftPiuUpgrade handling.
Plug-and-play handling of a plugin-unit.
Plug-and-play handling of a fan.

The health check is successfully started.
The health check is not started, since a health check is already
in progress.
The health check is not started, since an upgrade of the node
is in progress.
The health check has passed. All file systems, configuration
versions and upgrade packages are OK.
The health check has found one or more errors, see the
alarms: - File System Diagnostic Error - Configuration Version
Corrupt - Upgrade Package Corrupt One alarm per error and
MO is raised.
The health check is aborted, since a PlugInUnit MO is not
responding.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for
general distribution

The health check is aborted, since a PlugInUnit MO is not responding. The health check has found one or more errors, see the alarms: - File System Diagnostic Error - Configuration Version Corrupt - Upgrade Package Corrupt One alarm per error and MO is raised.

The health check is still in progress.

The health check has not been performed since the last node restart.

800 MHz cellular band

1.8 to 2.0 GHz PCS band

872 to 960 MHz TACS band

832 to 925 MHz JTACS band

1.75 to 1.87 GHz Korean PCS band

450 MHz NMT band

2 GHz IMT-2000 band

700 MHz band

1800 MHz band

900 MHz band

Secondary 800 MHz band

400 MHz European PAMR band

800 MHz PAMR band

2.5 GHz IMT-2000 Extension Band

US PCS 1.9GHz Band

AWS Band

US 2.5GHz Band

US 2.5GHz Forward Link Only Band

Any type of address is accepted.

IPv4 address.

A fully qualified domain name.

The invoked action has been successfully executed without warnings. One of three possible main results of executed action. The other two are: EXECUTED_WITH_WARNINGS and EXECUTION_FAILED. Valid values for type of invoked action: INSTALL CANCEL_INSTALL VERIFY_UPGRADE UPGRADE

An error or warning that is not specified is detected. See additionalInfo in the structure ActionResultData for further details. Valid values for type of invoked action: INSTALL CANCEL_INSTALL VERIFY_UPGRADE UPGRADE

A load module checksum verification has failed.Value valid for type of invoked action:INSTALL VERIFY_UPGRADE UPGRADE

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

There is not enough disk space for the required number of new CVs to be created automatically during an upgrade. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

The maximum number of allowed CVs will be exceeded if the required number of new CVs is created automatically during an upgrade. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

The Upgrade Window element in the UCF does not specify the current Upgrade Package as a valid upgrade-from version. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

A plug-in-unit that is not supported is detected, that is, the plug-in-unit in the node is not defined in the UCF. This fault does not prevent an upgrade execution. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

A faulty plug-in-unit has been detected. This fault does not prevent an upgrade execution. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

The auto-creation of an install CV failed. Value valid for type of invoked action: INSTALL

The requested action is not allowed as another action is already in progress for another UpgradePackage MO. Valid values for type of invoked action: INSTALL CANCEL_INSTALL VERIFY_UPGRADE UPGRADE

An ongoing installation has been cancelled (aborted) due to request from client. Value valid for type of invoked action: INSTALL

The FTP server to be used for downloads of load modules is not accessible. Value valid for type of invoked action: INSTALL

The required disk space for load modules to be installed is insufficient. Value valid for type of invoked action: INSTALL

Error detected in the IP address of the FTP server. Value valid for type of invoked action: INSTALL

The install of the delta UCF failed, that is, the analysis of the delta UCF with the current active UP's UCF failed. Valid value for type of invoked action: INSTALL

Error detected during the selection phase of an install. Value valid for type of invoked action: INSTALL

The execution of invoked action failed. One of three possible main results of executed action. The other two are: EXECUTED and EXECUTED_WITH_WARNINGS. Valid values for type of invoked action: INSTALL CANCEL_INSTALL VERIFY_UPGRADE UPGRADE

The action has been successfully executed but with warnings. One of three possible main results of executed action. The other two are: EXECUTED and EXECUTION_FAILED. Valid values for type of invoked action: INSTALL CANCEL_INSTALL VERIFY_UPGRADE

All load module files required for a supported plug-in-unit (according to the UCF) are not installed. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

A subrack that is not supported is detected, that is, the subrack in the node is not defined in the UCF. This will prevent an upgrade from being executed.

A Slot related to a plug-in-unit is not connected to an SwAllocation. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

ManagedObject(s) will be connected (via an SwAllocation) to Repertoire(s) referencing load modules of not allowed types. Both configured data and data in the UCF has been used to predict the SwAllocation connections during upgrade. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

Several SwAllocations connected to the same Slot define the same PiuType. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

All Repertoires in a SwAllocation do not support the same set of PiuTypes. Valid values for type of invoked action: VERIFY_UPGRADE UPGRADE

EIA1_EIA2 means that EIA1 has the highest priority

The verifyUpgrade action has been invoked.

An upgrade action (one of the variants) has been invoked.

An install action (one of the variants) has been invoked.

The cancellInstall action has been invoked.

This MO does not support LED states.

The LED state is not available at the moment.

Possible states for
green, yellow and red
LEDs.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Depends on the color of the LED. See the description of the corresponding LED status attribute.

Depends on the color of the LED. See the description of the corresponding LED status attribute.

Depends on the color of the LED. See the description of the corresponding LED status attribute.

Load or test in progress.

Busy. See the description of the corresponding LED status attribute.

Primary link is active, selected for traffic.

Secondary link is active, selected for traffic.

Specifies which link is primary and secondary.
0- link 1 is primary link, 2 is secondary 1- link 2 is primary link, 1 is secondary Link 1 is the lower connector on the board.

None of the load module file(s) required for this PiuType is installed.

One or several load module file(s) required for this PiuType is not installed.

All required load module file(s) for this PiuType are installed.

Defines the phase in the
load and start
sequence.

Indicates if the RDR measurements are transported over SRIO
or Ethernet.

Indicates if the RDR measurements are transported over SRIO
or Ethernet.

Periodical reporting.

Serving becomes better than absolute threshold.

Serving becomes worse than absolute threshold.

Neighbor becomes amount of offset better than serving.

Neighbor becomes better than absolute threshold.

Serving becomes worse than absolute threshold1 AND
Neighbor becomes better than another absolute threshold2.

Network Signalling value NS_01 according to TS 36.101, Table
6.2.4-1. This literal value corresponds to no additional
spectrum emission requirements.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for
general distribution

Network Signalling value NS_03 according to TS 36.101, Table 6.2.4-1. This literal value corresponds to additional spectrum emission requirements on E-UTRA bands 2, 4, 10, 35 and 36 with channel bandwidths 3, 5, 10, 15 and 20 MHz.

Network Signalling value NS_04 according to TS 36.101, Table 6.2.4-1.

Network Signalling value NS_05 according to TS 36.101, Table 6.2.4-1. This literal value corresponds to additional spectrum emission requirements on E-UTRA band 1 with channel bandwidths 10, 15 and 20 MHz.

Network Signalling value NS_07 according to TS 36.101, Table 6.2.4-1. This literal value corresponds to additional spectrum emission requirements on E-UTRA band 13 with channel bandwidth 10 MHz.

Initial value.

Trace collection ongoing.

Trace collection has finished OK.

Trace collection failed.

Cold node restart at fault mark of the last PIU.

Warm node restart at fault mark of the last PIU.

Cold node restart at restart of the last PIU.

Warm node restart at restart of the last PIU.

The host acts as a client, and generates NTP requests toward a server in order to synchronize itself.

The host acts as a server, and replies only to NTP requests from clients. IP synchronization references cannot be defined in the node.

Open Shortest Path
First metric type.

Logs are directed to a file.

Logs are directed to the serial port on the active JVM MP. Note that this may result in radically slower execution of the function if many traces are activated.

Logs are directed to the Trace and Error log on the active JVM MP.

Path management where retransmissions are counted per destination IP address. Specification: RFC 4960

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Path management based on the concept of IP path. An IP path is a pair of local and remote transport addresses. Retransmissions are counted per IP path. The attribute pathMaxRtx specifies the maximum number of retransmissions per IP path.

Path management similar to IP_PATHS, with the addition that the primary path is avoided, if the previous transmission through it failed. New data will be transmitted over other paths, even though the primary path is not detected as broken yet.

The board is a Main processor.
The board is a device board.
The board is not a Main processor or a device board.
The board is a CMXB board.

Hexadecimal encoding.
ASCII encoding.
Configuration not started.
Fetching basic IP configuration data from DHCP server.
Setting up IP configuration for O&M.
Fetching Site Basic file from SMRS.
Fetching Site Equipment file from SMRS.
Fetching License Key file from SMRS.
Fetching Upgrade Package from SMRS.
Fetching Summary File from SMRS.
Configuring Site Basic Data.
Configuring Site Equipment Data.
Installing License Key file.
Performing upgrade.
Notifying OSS to start MIB synchronization.
Deprecated: Since L10B. Planned to be removed. Initiating Certificate Enrollment.
Deprecated: Since L10B. Planned to be removed. Activating Security Level 3.
Waiting for MIB synchronization to complete.
Activating configuration.
Waiting for establishment of S1 connection to MME.
Unlocking cells.
Auto-integration complete.
Deprecated: Since L10A. Planned to be removed.

Deprecated: Since L10A. Planned to be removed.
Initiating Security Configuration.
Activating Security Configuration.
Activating IPSec Configuration.

The RBS has not been configured.
The RBS has basic configuration version.
O&M access MOs are configured.
All Equipment MOs are configured.
Site Configuration is completed. The RBS is ready for integration by OSS.
OSS continues with configuration.
Node successfully configured by OSS.
Node configuration by OSS failed.
The S1 interface is configured.
The RBS is integrated in OSS.
NPC config data is configured.
NPC test configuration is complete.
Deprecated: Since L10B. Planned to be removed. Installation of security credentials is completed.
Deprecated: Since L10B. Planned to be removed. The RBS is running in security level 3.

Installation of security configuration is completed.
The RBS is running at requested security level.
Synchronization reference is currently not used in system clock generation.
Synchronization is used in system clock generation.
Synchronization reference cannot perform its required tasks.

Capability of the synchronization reference to perform its required tasks is degraded, for example, because of high bit error rate. This value is applicable only for synchronization references that carry traffic, that is, for ET physical path terminations.

The algorithm for system clock regulation cannot follow the synchronization reference signal either because of the poor quality of the signal or because of a HW fault.
Synchronization reference is capable of performing its required tasks.

Synchronization reference cannot be distributed on plane A.

Synchronization reference cannot be distributed on plane B.

No NTP packets are received from the server. This value is only used for IP synchronization references.

The time stamp packets received from the NTP server are not reliable and the synchronization algorithm cannot lock to IP reference. This value is only used for IP synchronization references.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

This attributes indicates that the Piu restart cause is error.	This attribute indicates the restart cause of pluginUnit. The defined values are: 1. piuRestartError: restart because of error. 2. piuRestartUpgrade: restart because of system upgrade.
---	---

This attributes indicates that the Piu restart cause is upgrade.

Restarts the MO with the same software. The software is not reloaded from the disk. The traffic is affected least.	This is used in the manualRestart action for the MOs ManagedElement, PluginUnit and PiuDevice.
---	---

Reloads the software from the disk, restarts the MO, and resets parts of the hardware. The traffic is affected more than for a warm restart.

Reloads the software from the disk, restarts the MO, and resets all hardware. The traffic is affected more than for a refresh restart.

Reloads the software from the disk, restarts the MO, and resets and tests the hardware. The traffic is affected most.

Restart ordered to perform planned activities such as reconfigurations.

Restart ordered to resolve node external problems.

Restart ordered to resolve upgrade problems.

Restart ordered to resolve O&M issues.

Restart ordered to stop further auto recovery attempts.

Restart ordered to release locked resources.

Restart ordered to perform HW tests.

Restart ordered to improve Call Set Up or Call Drop Rate.

Restart ordered to improve Cell Availability.

Restart ordered to effectuate autoconfiguration of a plug-in unit. This is only used for PlugInUnit MO.

No defined reason for restart

Restart of unit due to recovery action

Restart of unit due to software upgrade

The source of information is unknown.

Route created from local configuration data (both static and interface routes). Each interface created gets an entry in the routing table of the RO.

Route added by SNMP.

Route added by ICMP redirect message.

Route added by OSPF.

The types of the routes found in the IP routing table.

This enumeration can have the following values: Manual = Indicates that no normalisation is performed by cello until the operator issues a "switch" action. Automatic = Indicates that Cello performs the normalisation automatically, after the failed RPU is available again. This is the default value.

This enumeration contains the following values: AsConfigured = The RSHs runs as the RPU is configured. SwitchOver = The RSHs has been switched over. Unavailable = No RSHs, that uses this RPU, are running.

Always = Data replication is always performed. This overrides the characteristics set on the each container (that is associated with the RPU).

Data replication is never performed. This overrides the characteristics set on the each container (that is associated with the RPU).

AtShutdown = Each time the RSH (which handles the RPU) is shut down, a complete snapshot is taken and replicated to the other MP, if necessary. Otherwise, the replication is performed according to the characteristics set on each container (that is associated with the RPU).

ApplControlled = The data replication is made according to the characteristics set on each container (that is associated with the RPU). This is the default value.

This enumeration contains the following values: Always = Data replication is always performed. This overrides the characteristics set on the each container (that is associated with the RPU). Never = Data replication is never performed. This overrides the characteristics set on the each container (that is associated with the RPU). AtShutdown = Each time the RSH (which handles the RPU) is shut down, a complete snapshot is taken and replicated to the other MP, if necessary. Otherwise, the replication is performed according to the characteristics set on each container (that is associated with the RPU). ApplControlled = The data replication is made according to the characteristics set on each container (that is associated with the RPU). This is the default value.

This attribute can have the following values:
AtPiuFault = When the PlugInUnit (where the reliable program is activated) is fault marked (HW fault or others) or when the PlugInUnit is restarted with rank ColdWithTest. This is the default value.
AtPiuRestart = When the PlugInUnit (where the reliable program is activated) is restarted with any rank or when the PlugInUnit is fault marked (HW fault or others).

Undefined. Equivalent to level 1. Use the action adaptSecurityLevel to set the attribute requestedSecurityLevel to LEVEL_1, or the secmode command. This value applies only during initial configuration of the node and does not normally occur in operation.

The security level of the node. Describes both the requested and the operational security levels.

Security Level 1, which is the lowest level. Corba security is not activated. It is possible to login to the node remotely using Telnet, FTP, SSH, SFTP. Debug and Trace Port access may be enabled.

Security Level 2 adds secure Corba communication with authentication using an external database.

At Security Level 3, Authentication and Authorization using an external data base, is added to all remote access points. Telnet, FTP and debug access is not possible at this level (Timeout value is specified when calling the setSecurityLevel3 action).

Security Level 3 has been activated, but it has not yet been confirmed with the command, secmode. If the confirmation is not made within the timeout, the security level drops back to level 2.

No logs will be sent as notifications.

Only level 2 trace logs will be sent as notifications.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

All trace logs that are sent as specified by outputMode, will also be sent as notifications.

This attributes indicates unlimited restarts and no faulty marking of the PIU. Used for critical PIU's such as TUBs, SCBs and some ET-boards.

This attributes indicates the following sequential restarts: -cold with fault marked (not loaded). Alarm sent.

This attributes indicates the following sequential restarts: -cold with test -cold with fault marked (not loaded). Alarm sent.

This attributes indicates the following sequential restarts: -cold -cold with test -cold with fault marked (not loaded). Alarm sent.

This attributes indicates the following sequential restarts: -warm -cold -cold with test -cold with fault marked (not loaded). Alarm sent.

The SFP module is valid.

The state of the SFP port.

The SFP module is invalid and not approved to be used for this board.

There is no SFP module installed on this port.

The port is no SFP port.

Indication of Switch Internal Link port status.

It is free to be preconfigured with a new plug-in unit.

A plug-in unit is inserted in the slot.

Currently not supported.

IPv4 address.

A fully qualified domain name.

The Sync Mode Operation of the node.

No reply from the NTP server.

Unreliable clock information received from the NTP server.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

null
null
null
null
null
null
null
null
null
null

Detailed debug messages.

Error messages.

Information messages.

Default log messages.

Warning messages.

ATM transmission supported by the subrack backplane.

10 GB Ethernet and ATM transmission supported by the subrack backplane.

The plug-in units are connected through an Ethernet cable. No backplane is used.

The trace properties do not survive a restart of the JVM or of the node.

The trace properties are stored in the database.

The trace properties are stored in a file.

The upgrade package is not installed.

The upgrade package has been completely installed.

Upgrade (the action update, upgrade or rebootNodeUpgrade) is executing.

The execution of upgrade needs confirmation before it proceeds.

In this state the only allowed operations are delete and action updateFTPServerData. If any other type of action is invoked exception ActionNotAllowedException is thrown.

Installation of the UpgradePackage or PiuType MO is executing.

The upgrade package is not completely installed, that is, only parts of it has been installed.

The upgrade (the action update, upgrade or rebootNodeUpgrade) has been successfully executed. If this was the current state when an action was invoked it will also be the end state.

A normal upgrade package that is adapted to a node type.

Everything in this UP is installed in the node.

A delta version of type ADAPTED.

A selective upgrade package can include SW for more than one node type but only configured SW is installed.

A delta version of type SELECTIVE.

A type of upgrade package that installs only load modules required for the existing HW in the node.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

A delta version of type HW_SENSITIVE.
No action is in progress.
Downloading of files (load modules) in progress.
Saving a Configuration Version.
Reconfiguring MOs according to the UCF.
Executing trigger Initiate.
Executing trigger Preload.
Executing trigger Convert.
Executing an application unique trigger.
The node is to be restarted, for example, due to rollback at failure, or as a normal action in the upgrade sequence.
Executing trigger Execute.
Executing trigger Finish.
The execution mode is switched back to normal.
Execution of an install or an upgrade action has failed.
Cancellation of an ongoing installation is in progress.
Execution of the cancelInstall action failed.
The verification phase has been initiated.
Verifying that the upgrade Window defined in the UCF allows an upgrade.
Verifying that it is possible to create the required number of CVs during the upgrade phase.
Verifying that the used plug-in-units in the node are supported according to the UCF.
Verifying the checksum for all load modules that has a checksum value defined in the UCF.
Verifying that plug-in-units on the node are not faulty before the upgrade is initiated.
The verification phase is finished.
The verification phase has failed.
The JVM is to be restarted.
The execution mode is switched to upgrade.
One or several plug-in-units are to be upgraded.
A number of programs are started, stopped or upgraded.
One or several programs are added and/or removed.
Node upgrade requested.
Executing trigger Confirmed.
Handling of final configuration version failed, for example, creation, setting as startable.
Waiting for confirmation of the upgrade.
Upgrade has been executed successfully.
Variant of upgrade action initiated (that is, update, upgrade or rebootNodeUpgrade).

Progress indication from an AUE that is part of the upgrade.

An AUE has reported failure or has not answered within an expected time.
An AUE has confirmed with warning.
Verifying that initial configured PIUs (with programs) are supported by the Upgrade Package (in UCF) and that all load modules referenced in programs are valid.
Verifying that the JVM MP(s) is operational.

AT&T Proprietary (Restricted)

Only for use by authorized individuals or any above-designated team(s) within the AT&T companies and not for general distribution

Verifying the Fault Tolerant Core (FTC) states.

Verifying that all required load module files are installed for the supported plug-in-units according to the UCF.

Verifying that the subbracks in the node are supported according to the UCF.

Verifying that SwAllocations connected to the same slot do not define the same PiuType.

Verifying that Slots related to plug-in-units are connected to an SWA.

Verifying that only allowed types of load modules are referenced in Repertoires to be connected to ManagedObject(s) via an SWA. Both configured data and data in the UCF will be used to predict the SwAllocation connections during upgrade.

Verifying that all Repertoires in a SwAllocation support the same set of PiuTypes.

The resource is not currently in use.

The resource is in use, and has sufficient spare capacity to provide for additional users simultaneously.

The resource is in use, but it has no spare capacity to provide for additional users at this instant.

Not allowed to be used.

Allowed to be used.

CTR (profile name 'CTR_STEM_EE_13A_L13A_v1', file & streaming output, streaming to EE Streaming Server OR STEM F5 SB IP ports 4000-4009, Network Plug and Play when part of Gold Standard) :

RRC_MEASUREMENT_REPORT
S1_DOWNLINK_NAS_TRANSPORT
S1_UE_CONTEXT_MODIFICATION_REQUEST
S1_UE_CONTEXT_MODIFICATION_RESPONSE
S1_UPLINK_NAS_TRANSPORT
INTERNAL_EVENT_NEIGHBCELL_CHANGE
INTERNAL_EVENT_NEIGHBENB_CHANGE
INTERNAL_EVENT_NEIGHBREL_ADD
INTERNAL_EVENT_NEIGHBREL_REMOVE
INTERNAL_EVENT_S1_ERROR_INDICATION
INTERNAL_EVENT_S1_NAS_NON_DELIVERY_INDICATION
INTERNAL_EVENT_UE_MOBILITY_EVAL
INTERNAL_EVENT_X2_ERROR_INDICATION
INTERNAL_PROC_S1_SETUP
INTERNAL_PROC_X2_RESET
INTERNAL_PROC_X2_SETUP
INTERNAL_PER_PRB_LICENSE_UTIL_REP
INTERNAL_PER_PROCESSOR_LOAD

CCTR (profile name 'Continuous ERBS 13A, file & streaming output, streaming to EE Streaming Server OR STEM F5 SB IP ports 4000-4009):

INTERNAL_PER_RADIO_UE_MEASUREMENT_TA

INTERNAL_PER_RADIO_UTILIZATION

INTERNAL_PROC_ERAB_RELEASE
INTERNAL_PROC_ERAB_SETUP
INTERNAL_PROC_HO_EXEC_S1_IN
INTERNAL_PROC_HO_EXEC_S1_OUT
INTERNAL_PROC_HO_EXEC_X2_IN
INTERNAL_PROC_HO_EXEC_X2_OUT
INTERNAL_PROC_HO_PREP_S1_IN
INTERNAL_PROC_HO_PREP_S1_OUT
INTERNAL_PROC_HO_PREP_X2_IN
INTERNAL_PROC_HO_PREP_X2_OUT
INTERNAL_PROC_INITIAL_CTXT_SETUP
INTERNAL_PROC_RRC_CONN_SETUP
INTERNAL_PROC_S1_SIG_CONN_SETUP
INTERNAL_PROC_UE_CTXT_RELEASE




General Rules and C

Topic

Updating the Gold Standard

Caution

Rule

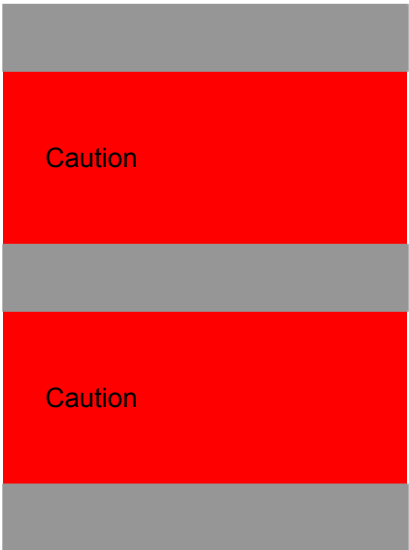

Caution

Caution

Cautions

General Description

This syntax is to be used whenever requesting a change to the Gold Standard. A screenshot of the revised GS columns and rows with changes highlighted is also required as part of the change.

Please see recent changes in the 'Doc Rev History' tab for examples.

This is a statement to be considered whenever referencing a document that includes parameter value recommendations.

A rule concerning Global vs. Local designation including a exception made for the GPC team.

A statement that if followed could have precluded at least one SEV1 outage.

A cautionary statement intended to improve the GS while reducing the instance of incorrect parameter changes.

Rule or Guideline

[update][version][MO::Attribute(suffix)][column] value in [tab] from [old value] to/of [new value] per [reference].

where:

- update = Added, Changed, Corrected, Removed, Corrected/Added, Corrected/Removed.
 - Note: Added, Changed or Removed updates must go through the GSGB. Corrections do not.
- version = version of software to which the update is to be applied. Omit if applied to all.
- MO:Attribute(suffix) = the MO or RDN plus :: plus the Attribute (Parameter) name and suffix (if applicable).
 - Multiple attributes can be listed (comma separated) for the same MO.
- column = abbreviated name of column in GS, e.g. ATTGS for “AT&T Gold Standard”. Omit if removal.
 - Multiple columns can be changed for the same MO:Attribute(suffix).
- tab = appropriate tab in the GS. Usually Radio or Transport. Optional for LTE GS.
- old value = previous value. Omit if addition or removal.
- new value = the new value. Omit if removal.
- reference = the FGA or MOP name. These can be grouped. Omit if correction.

The parameter values indicated in the Ericsson Gold Standard located at the Gold Standards Governance Team website supersede any parameter values recommended by any Field Guide Alert or other document that provides recommendations for parameter values. Please consult the Ericsson Gold Standard when in doubt.

All Global parameters shall have a single instance with a single acceptable value and all Local parameters shall have a single instance with multiple acceptable values, except;

- Parameters that influence the entire RNC can be marked Local and have multiple instances of a single value where each instance is distinguished by a unique suffix.
- If the parameter must exist in the network element, then its permission shall be set to Global if there is a single acceptable value and Local if there are multiple acceptable values as denoted in the ATTGS column.
- If the parameter might exist in the network element, then its permission shall be set to GlobalOptional if there is a single acceptable value and LocalOptional if there are multiple acceptable values as denoted in the ATTGS column.
- If a parameter falls into the “must” category, then it must be audited.
- If a parameter falls into the “might” category, and the parameter exists in the network element, then it must be audited.
- If a parameter falls into the “might” category, and the parameter does not exist in the network element then it will not be audited.

The ‘stare and compare’ method of making changes to one network element based upon settings in another is very dangerous and should not be done under any circumstances.

If the parameter you’re researching is not in the Gold Standard, then please notify the GSGB. Do not make any changes to the network without further information.



