


Notification No.88 of MIC TEST REPORT

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Description:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Brand Name:	N/A
Tested Model:	SKI.WB800D80S.1
Report No.:	JCF251201101-009
Received Date:	Dec. 01, 2025
Tested Date:	Dec. 01, 2025 - Dec. 30, 2025
Issued Date:	Dec. 30, 2025
Test Standards:	Notification No.88 of MIC, Annex 43 Article 2 Paragraph 1 of Item 19
Test Result:	Pass

Prepared By:  <u>Kennys Zhang/Engineer</u>	Date: Dec. 30, 2025
--	----------------------------

Reviewed By:  <u>Roger Li/Engineer</u>	Date: Dec. 30, 2025
--	----------------------------

Approved By:  <u>Talent Zhang/Engineer</u>	Date: Dec. 30, 2025
--	----------------------------

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 30, 2025	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description Of EUT	7
4.2. Channel List	7
4.3. Test Channel Configuration	8
4.4. Test Environment Conditions	8
4.5. The Worse Case Power Setting Parameter	9
4.6. Description of Available Antennas	10
5. Description of Test Setup	10
5.1. Accessory	10
5.2. Support Equipment	10
5.3. Test Setup	10
5.4. Setup Diagram for Tests	10
6. Measurement Uncertainty	10
7. Measuring Instrument and Software Used	11
8. Frequency Tolerance Measurement	12
8.1. Block Diagram of Test Setup	12
8.2. Limits	12
8.3. Test Procedure	12
8.4. Results	12
8.5. Original Test Data	13
9. Occupied Frequency Bandwidth	15
9.1. Block Diagram of Test Setup	15
9.2. Limit	15
9.3. Test Procedure	15
9.4. Results	15
9.5. Original Test Data	16
10. Antenna Power	22
10.1. Block Diagram of Test Setup	22
10.2. Limits	22
10.3. Test Procedure	22
10.4. Results	22
10.5. Original Test Data	24
11. Transmitter Spurious Emission	36
11.1. Block Diagram of Test Setup	36
11.2. Limits	36
11.3. Test Procedure	36
11.4. Results	36
11.5. Original Test Data	39
12. Secondary Radiated Emissions	70
12.1. Block Diagram of Test Setup	70
12.2. Limits	70
12.3. Test Procedure	70
12.4. Results	70
12.5. Original Test Data	71
13. Carrier Sense Measurement	84
13.1. Block Diagram of Test Setup	84
13.2. Test Procedure	84
13.3. Results	85

13.4. Original Test Data 85

14. Interference prevention function 87

14.1. Block Diagram of Test Setup 87

14.2. Test Procedure 87

14.3. Results 87

1. Test Report Declare

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Name:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Brand Name:	N/A
Model Name:	SKI.WB800D80S.1
Difference Description:	N/A

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary Test Results

Clause	Test Item	Results
3.2 (2)	Antenna Power	PASS
3.2 (3)	Tolerances for Antenna Power	PASS
3.2 (4)	Frequency Tolerance	PASS
3.2 (5)	Transmission Rate	N/A
3.2 (7)	Occupied Frequency Bandwidth	PASS
3.2 (10)	Number of Carriers	PASS
3.2 (11)	Dwell Time	N/A
3.2 (6)	Spurious Emissions	PASS
---	Carrier Sense	PASS
3.6	Process Gain	N/A
3.3 (1)	Secondary Radiated Emissions	PASS
N/A is an abbreviation for Not Applicable.		

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT* Name:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Model Number:	SKI.WB800D80S.1
EUT Function Description:	Please refer to user manual of this device
Power Supply:	DC 3.3V
Sample No.:	251201101-01-01
Hardware Version:	N/A
Software Version:	N/A
Radio Specification:	IEEE802.11b/g/n/ax
Operation Frequency:	IEEE 802.11b: 2412MHz—2472MHz IEEE 802.11g: 2412MHz—2472MHz IEEE 802.11n HT20, HT40: 2412MHz—2472MHz IEEE 802.11ax HE20, HE40: 2412MHz—2472MHz
Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n (HT20/40): OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax (HT20/40): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Shrapnel Antenna, MAX. Gain: 1.4 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel List for 802.11b/g/n/ax (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452	13	2472
2	2417	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	12	2467	/	/
Channel List for 802.11n/ax (40 MHz)							
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
3	2422	7	2442	11	2462		
4	2427	8	2447	/	/		
5	2432	9	2452	/	/		
6	2437	10	2457	/	/		

4.3. Test Channel Configuration


Tested mode, channel and rand data rate information			
Mode	Data rate (Mbps) (see Note)	Channel	Frequency (MHz)
802.11b	1	Low: CH1	2412
	1	Middle: CH7	2442
	1	High: CH13	2472
802.11g	6	Low: CH1	2412
	6	Middle: CH7	2442
	6	High: CH13	2472
802.11n HT20	MCS 0	Low: CH1	2412
	MCS 0	Middle: CH7	2442
	MCS 0	High: CH13	2472
802.11n HT40	MCS 0	Low: CH3	2422
	MCS 0	Middle: CH7	2442
	MCS 0	High: CH11	2462
802.11ax HT20	MCS 0	Low: CH1	2412
	MCS 0	Middle: CH7	2442
	MCS 0	High: CH13	2472
802.11ax HT40	MCS 0	Low: CH3	2422
	MCS 0	Middle: CH7	2442
	MCS 0	High: CH11	2462
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.			

4.4. Test Environment Conditions

/	Normal Conditions
Temperature range	21-25 °C
Humidity range	40-75%
Power supply	DC 3.3V

When EUT be operated at 10% from the normal supply voltage, the supply voltage of RF part was varied within 1%. All test cased were done under the normal supply voltage.

Power supply voltage 3.3Vdc (Normal)	Power supply voltage 3.63Vdc (+10%)	Power supply voltage 2.97Vdc (-10%)
3.312V	3.312V	3.312V
Measurement point		

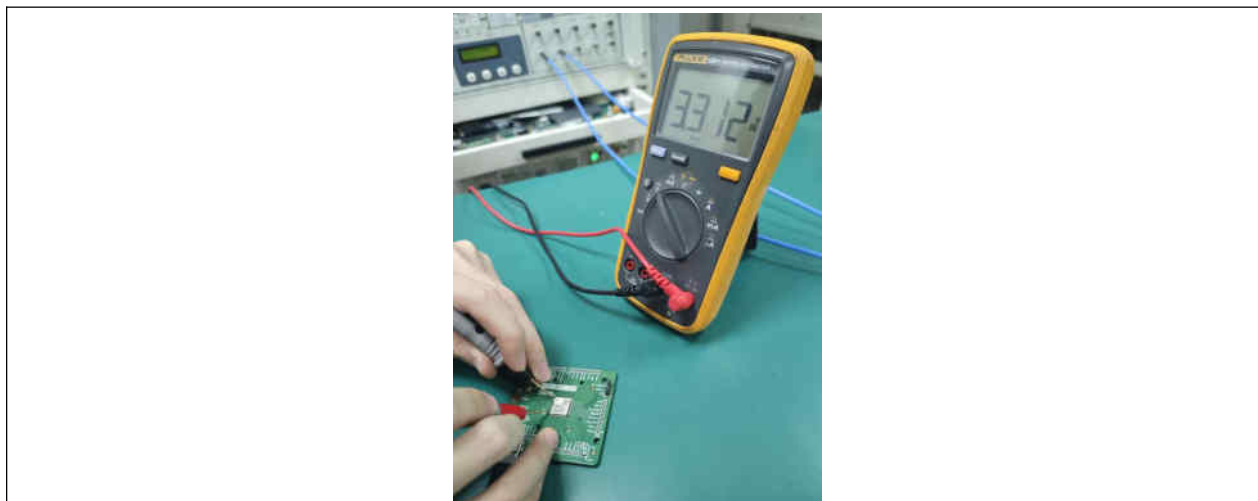

4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band			
Test Software		QATool_Dbg	
Modulation Mode	Transmit Antenna Number	Test Software Setting Value	
		Channel	ANT1
802.11b	1	CH1	1 0 0 14
		CH7	1 0 0 15
		CH13	1 0 0 16
802.11g	1	CH1	1 0 4 16
		CH7	1 0 4 16
		CH13	1 0 4 16
802.11HT20	1	CH1	1 1 0 16
		CH7	1 1 0 16
		CH13	1 1 0 16
802.11n HT40	1	CH3	1 1 0 16
		CH7	1 1 0 16
		CH11	1 1 0 16
802.11ax HT20	1	CH1	1 2 0 16
		CH7	1 2 0 16
		CH13	1 2 0 16
802.11ax HT40	1	CH3	1 2 0 16
		CH7	1 2 0 16
		CH11	1 2 0 16

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11ax HT20	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11ax HT40	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in fixed frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Test Item	Uncertainty
Occupied Channel Bandwidth	1.1%
Uncertainty for radio frequency	$\pm 35.28\text{Hz}$
RF Output power, conducted	0.76dB
Power Spectral Density, Conducted	0.82dB
Unwanted Emissions, Conducted	3.09dB
Temperature	0.4°C
Humidity	1.3%
DC and Low frequency voltage	$\pm 0.006\text{V}$
Time	0.6%

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul. 31, 2025	Jul. 30, 2026
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Generator	Keysight	N5171B	MY57280639	Jul. 31, 2025	Jul. 30, 2026
☒	DC POWER	Keysight	E342A	MY59020356	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer		Name		Version
☒	Test software	TS+		JS1120-3		V3.3.10

Measuring Equipment Calibration Information		
Used	Calibration Company Abbreviation	Full Name of calibration company
☒	GRG	GRG METROLOGY & TEST GROUP CO.,LTD.
Calibration Information (Article 24-2, Paragraph 4 of the Radio Act)		
☐	(a) Calibration conducted by the National institute of information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act	
☐	(b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act	
☒	(c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act	
☐	(d) Calibration, etc. Conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above	

8. Frequency Tolerance Measurement

8.1. Block Diagram of Test Setup

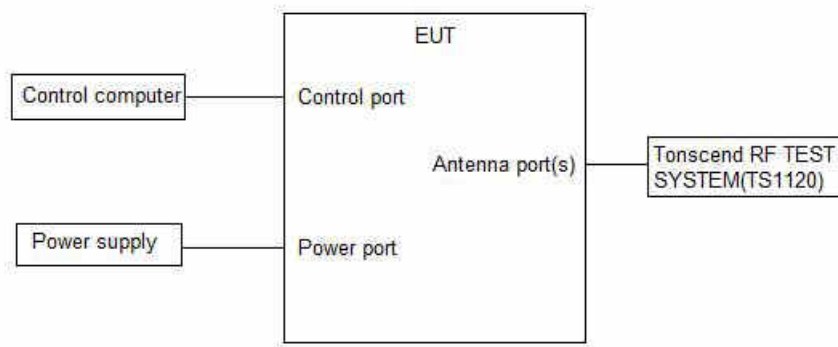

8.2. Limits

Tolerance of frequency shall be +/- 50ppm

8.3. Test Procedure

- (1) Set EUT work in carrier TX mode.
- (2) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the channel under test.
 - Resolution BW: 10 kHz.
 - Video BW: 10 kHz.
 - Span: 1MHz.
 - Detector: Peak.
 - Trace Mode: Max Hold.
- (3) When the trace is complete, find the peak value of the power envelope and record the frequency.

8.4. Results

Test Condition	Test Mode	Ant.	Freq. (MHz)	Result (ppm)	Limit (ppm)	Verdict
NTNV	11N20SISO	Ant1	2412	0.00000	±50	PASS
			2442	0.00000	±50	PASS
			2472	0.00000	±50	PASS
	11N40SISO	Ant1	2422	0.00000	±50	PASS
			2442	0.00000	±50	PASS
			2462	0.00000	±50	PASS



9. Occupied Frequency Bandwidth

9.1. Block Diagram of Test Setup

Same as section 8.1

9.2. Limit

Item	Limit	Remark
Occupied bandwidth	<26MHz	For 802.11b, g & 802.11n (HT20), 802.11ax (HT20)
Occupied bandwidth	<40MHz	For 802.11n (HT40), 802.11ax (HT40)

9.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 300 kHz

Video BW: 300 kHz

Span: 40MHz

Sweep data points: 1001 or greater

Sweep time: Auto

Detector: Peak.


Trace Mode: Max Hold.


(2) When the trace is complete, measure the Occupied bandwidth (99% bandwidth) with spectrum analyzer's bandwidth measure function.

9.4. Results

Test Condition	Test Mode	Antenna	Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
NTNV	11B	Ant1	2412	13.105	≤26	PASS
			2442	13.145	≤26	PASS
			2472	13.174	≤26	PASS
	11G	Ant1	2412	16.546	≤26	PASS
			2442	16.592	≤26	PASS
			2472	16.554	≤26	PASS
	11N20SISO	Ant1	2412	17.659	≤26	PASS
			2442	17.704	≤26	PASS
			2472	17.675	≤26	PASS
	11N40SISO	Ant1	2422	36.116	26-40	PASS
			2442	36.125	26-40	PASS
			2462	36.047	26-40	PASS
	11AX20SISO	Ant1	2412	18.915	≤26	PASS
			2442	18.885	≤26	PASS
			2472	18.876	≤26	PASS
	11AX40SISO	Ant1	2422	37.542	26-40	PASS
			2442	37.612	26-40	PASS
			2462	37.566	26-40	PASS

9.5. Original Test Data

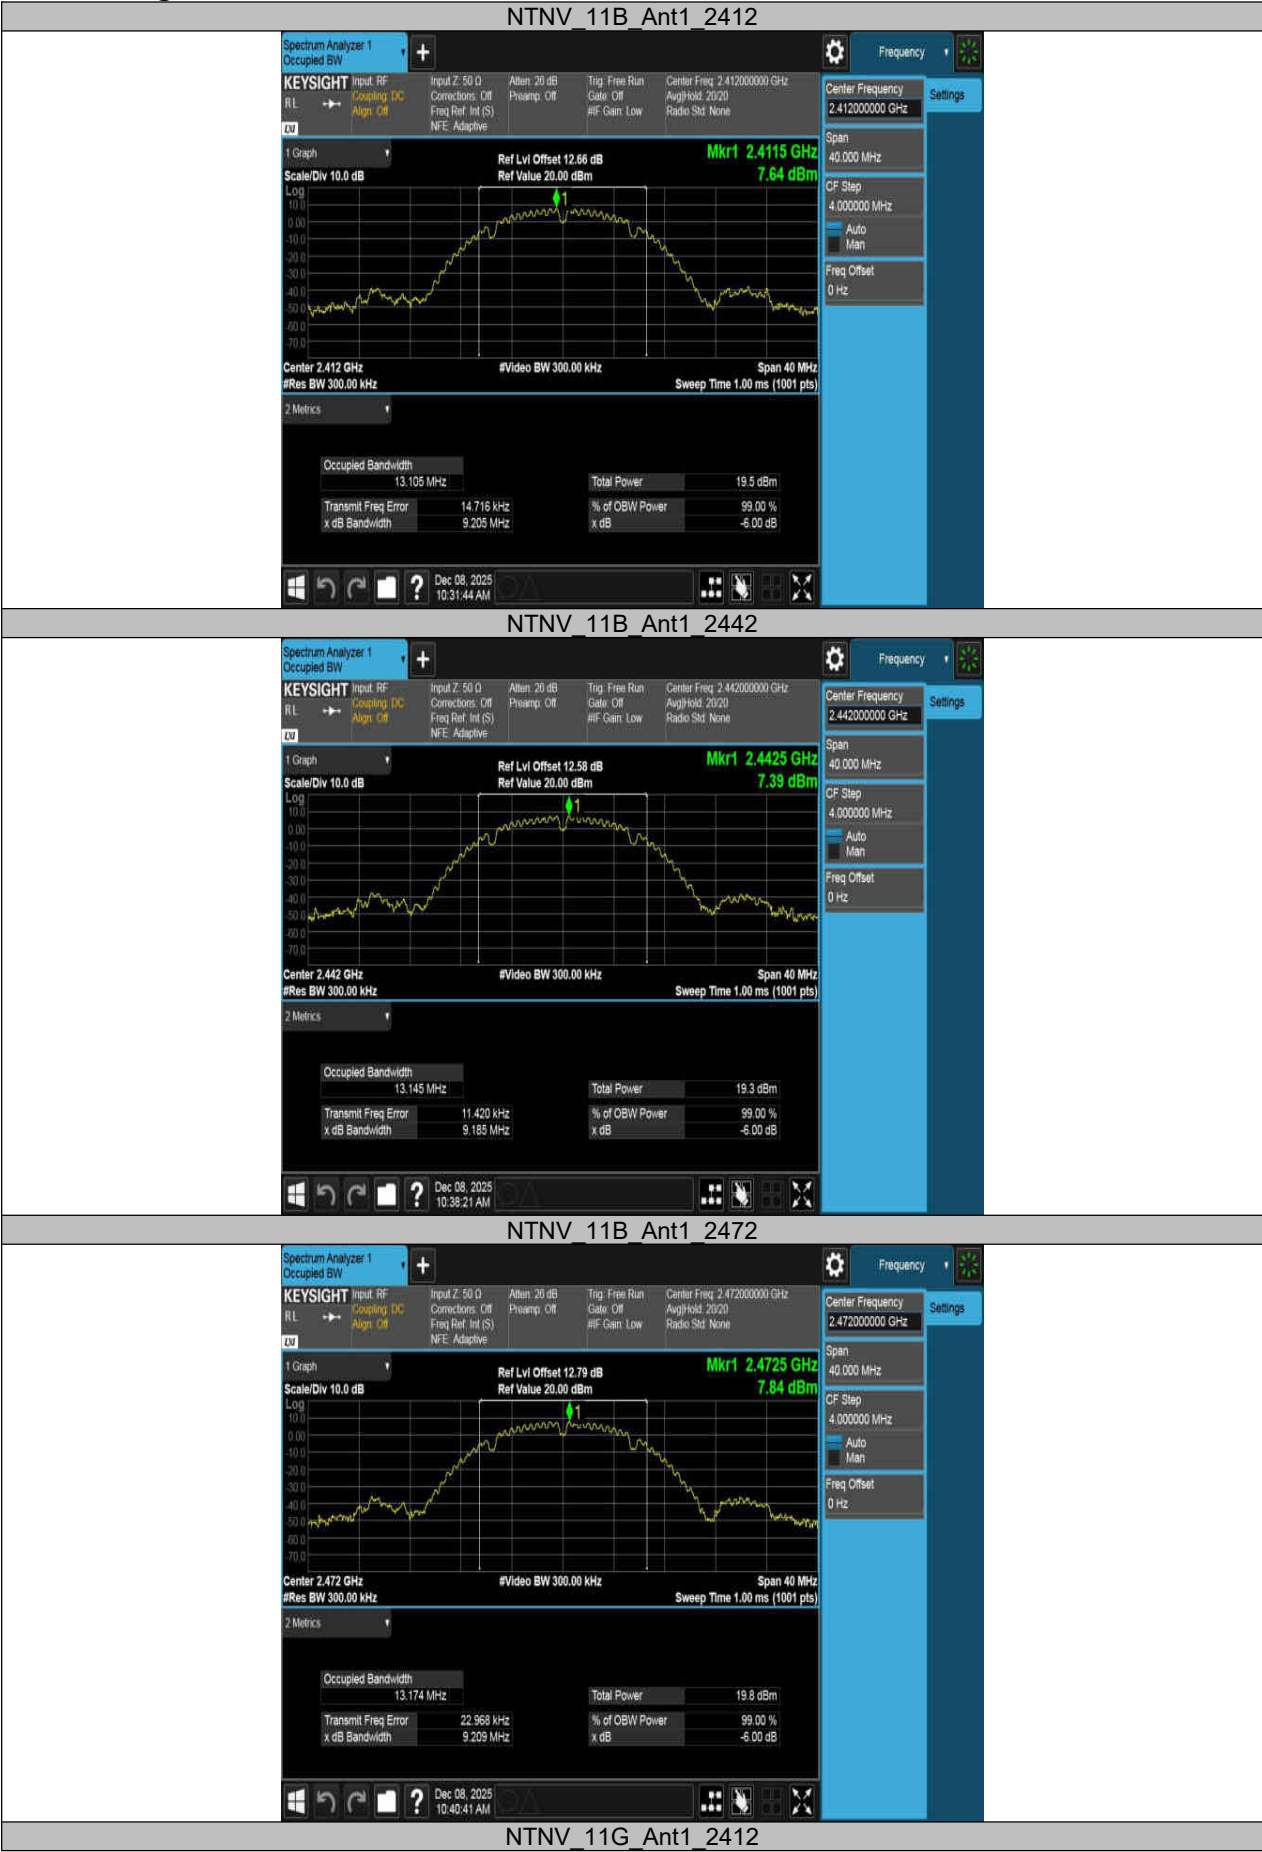

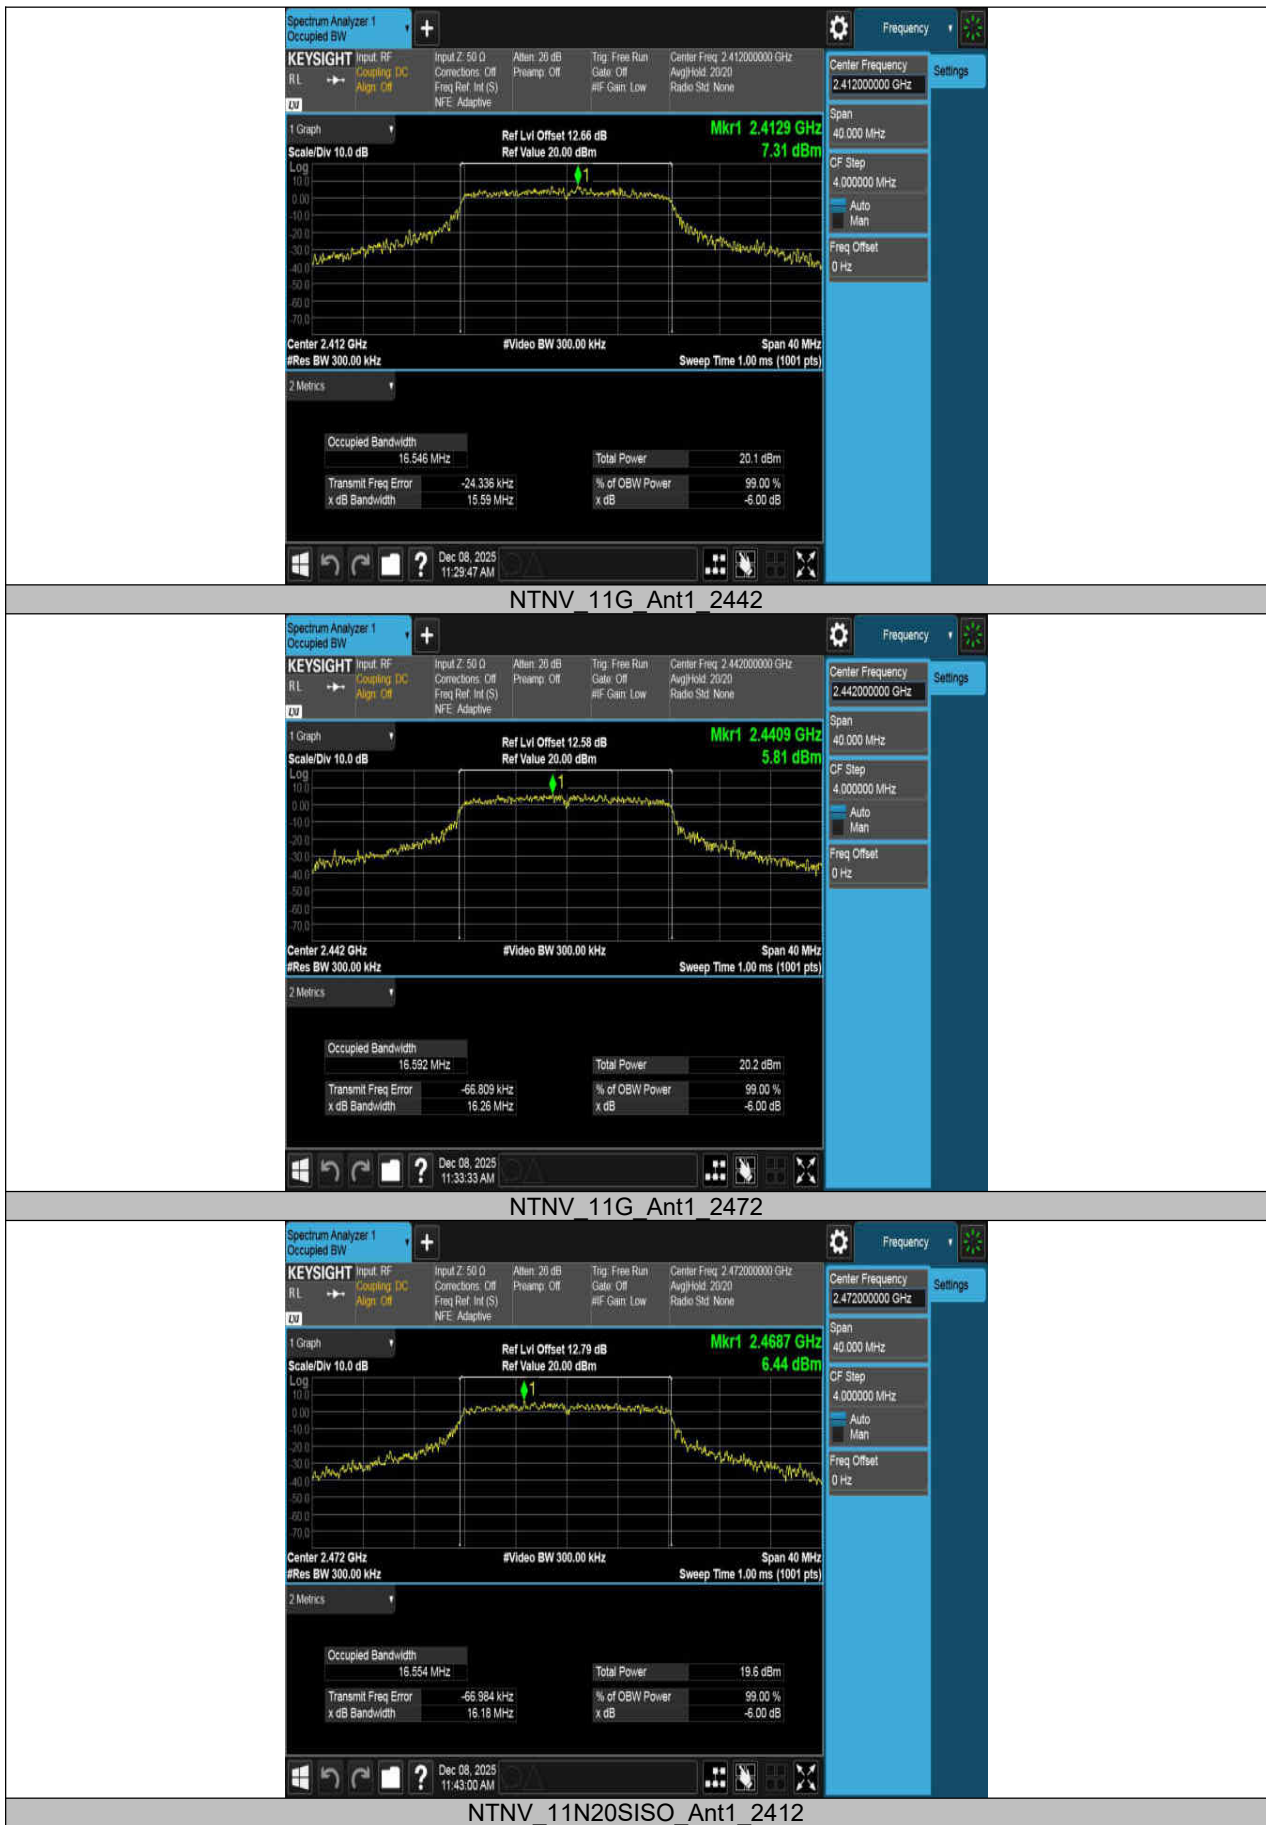









10. Antenna Power

10.1. Block Diagram of Test Setup

Same as section 8.1

10.2. Limits

IEEE802.11b/g/n/ax (HT20): 10mW/MHz

IEEE802.11n/ax (HT40): 5mW/MHz

10.3. Test Procedure

(1) Search for peak power frequency

Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 1MHz

Video BW: 1MHz

Span: 40MHz

Sweep time: Auto

Sweep data points: 1001 or greater

Detector: Peak

Trace Mode: Max Hold.

(2) Measurement of average antenna power

Centre Frequency: Frequency of peak power found in step (1)

Span: 0 Hz

Resolution BW: 1MHz

Video BW: 1MHz

Detector: Sample

Sweep: Minimum time required to make an accurate measurement. For burst type (intermittent) transmission, sweep time shall be greater than one burst interval.

Sweep data points: 1001 or greater

Note: The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.


10.4. Results

Antenna Power							
Test Condition	Test Mode	Antenna	Frequency (MHz)	Result (dBm/MHz)	Result (mW/MHz)	Limit (mW/MHz)	Verdict
NTNV	11B	Ant1	2412	8.62	7.2778	≤10	PASS
			2442	8.32	6.7920	≤10	PASS
			2472	8.21	6.6222	≤10	PASS
	11G	Ant1	2412	5.87	3.8637	≤10	PASS
			2442	6.01	3.9902	≤10	PASS
			2472	5.33	3.4119	≤10	PASS
	11N20SISO	Ant1	2412	5.64	3.6644	≤10	PASS
			2442	5.54	3.5810	≤10	PASS
			2472	5.05	3.1989	≤10	PASS
	11N40SISO	Ant1	2422	1.99	1.5812	≤5	PASS
			2442	2.24	1.6749	≤5	PASS
			2462	2.04	1.5996	≤5	PASS
	11AX20SISO	Ant1	2412	5.58	3.6141	≤10	PASS
			2442	5.79	3.7931	≤10	PASS
			2472	5.32	3.4041	≤10	PASS
	11AX40SISO	Ant1	2422	2.50	1.7783	≤5	PASS
			2442	2.74	1.8793	≤5	PASS
			2462	2.42	1.7458	≤5	PASS

Tolerance								
Test Condition	Test Mode	Antenna	Frequency (MHz)	Power (mW/MHz)	Rated Power (mW/MHz)	Result (%)	Limit (%)	Verdict
NTNV	11B	Ant1	2412	7.2778	10	-27.22	+20	PASS
			2442	6.7920	10	-32.08	+20	PASS
			2472	6.6222	10	-33.78	+20	PASS
	11G	Ant1	2412	3.8637	10	-61.36	+20	PASS
			2442	3.9902	10	-60.10	+20	PASS
			2472	3.4119	10	-65.88	+20	PASS
	11N20SISO	Ant1	2412	3.6644	10	-63.36	+20	PASS
			2442	3.5810	10	-64.19	+20	PASS
			2472	3.1989	10	-68.01	+20	PASS
	11N40SISO	Ant1	2422	1.5812	5	-68.38	+20	PASS
			2442	1.6749	5	-66.50	+20	PASS
			2462	1.5996	5	-68.01	+20	PASS
	11AX20SISO	Ant1	2412	3.6141	10	-63.86	+20	PASS
			2442	3.7931	10	-62.07	+20	PASS
			2472	3.4041	10	-65.96	+20	PASS
	11AX40SISO	Ant1	2422	1.7783	5	-64.43	+20	PASS
			2442	1.8793	5	-62.41	+20	PASS
			2462	1.7458	5	-65.08	+20	PASS

EIRP								
Test Condition	Test Mode	Antenna	Frequency (MHz)	Result(dBm/MHz)	ANT Gain	EIRP(dBm/MHz)	Limit(dBm/MHz)	Verdict
NTNV	11B	Ant1	2412	8.62	1.4	10.02	≤12.14	PASS
			2442	8.32	1.4	9.72	≤12.14	PASS
			2472	8.21	1.4	9.61	≤12.14	PASS
	11G	Ant1	2412	5.87	1.4	7.27	≤12.14	PASS
			2442	6.01	1.4	7.41	≤12.14	PASS
			2472	5.33	1.4	6.73	≤12.14	PASS
	11N20SISO	Ant1	2412	5.64	1.4	7.04	≤12.14	PASS
			2442	5.54	1.4	6.94	≤12.14	PASS
			2472	5.05	1.4	6.45	≤12.14	PASS
	11N40SISO	Ant1	2422	1.99	1.4	3.39	≤9.13	PASS
			2442	2.24	1.4	3.64	≤9.13	PASS
			2462	2.04	1.4	3.44	≤9.13	PASS
	11AX20SISO	Ant1	2412	5.58	1.4	6.98	≤12.14	PASS
			2442	5.79	1.4	7.19	≤12.14	PASS
			2472	5.32	1.4	6.72	≤12.14	PASS
	11AX40SISO	Ant1	2422	2.50	1.4	3.90	≤9.13	PASS
			2442	2.74	1.4	4.14	≤9.13	PASS
			2462	2.42	1.4	3.82	≤9.13	PASS

10.5. Original Test Data

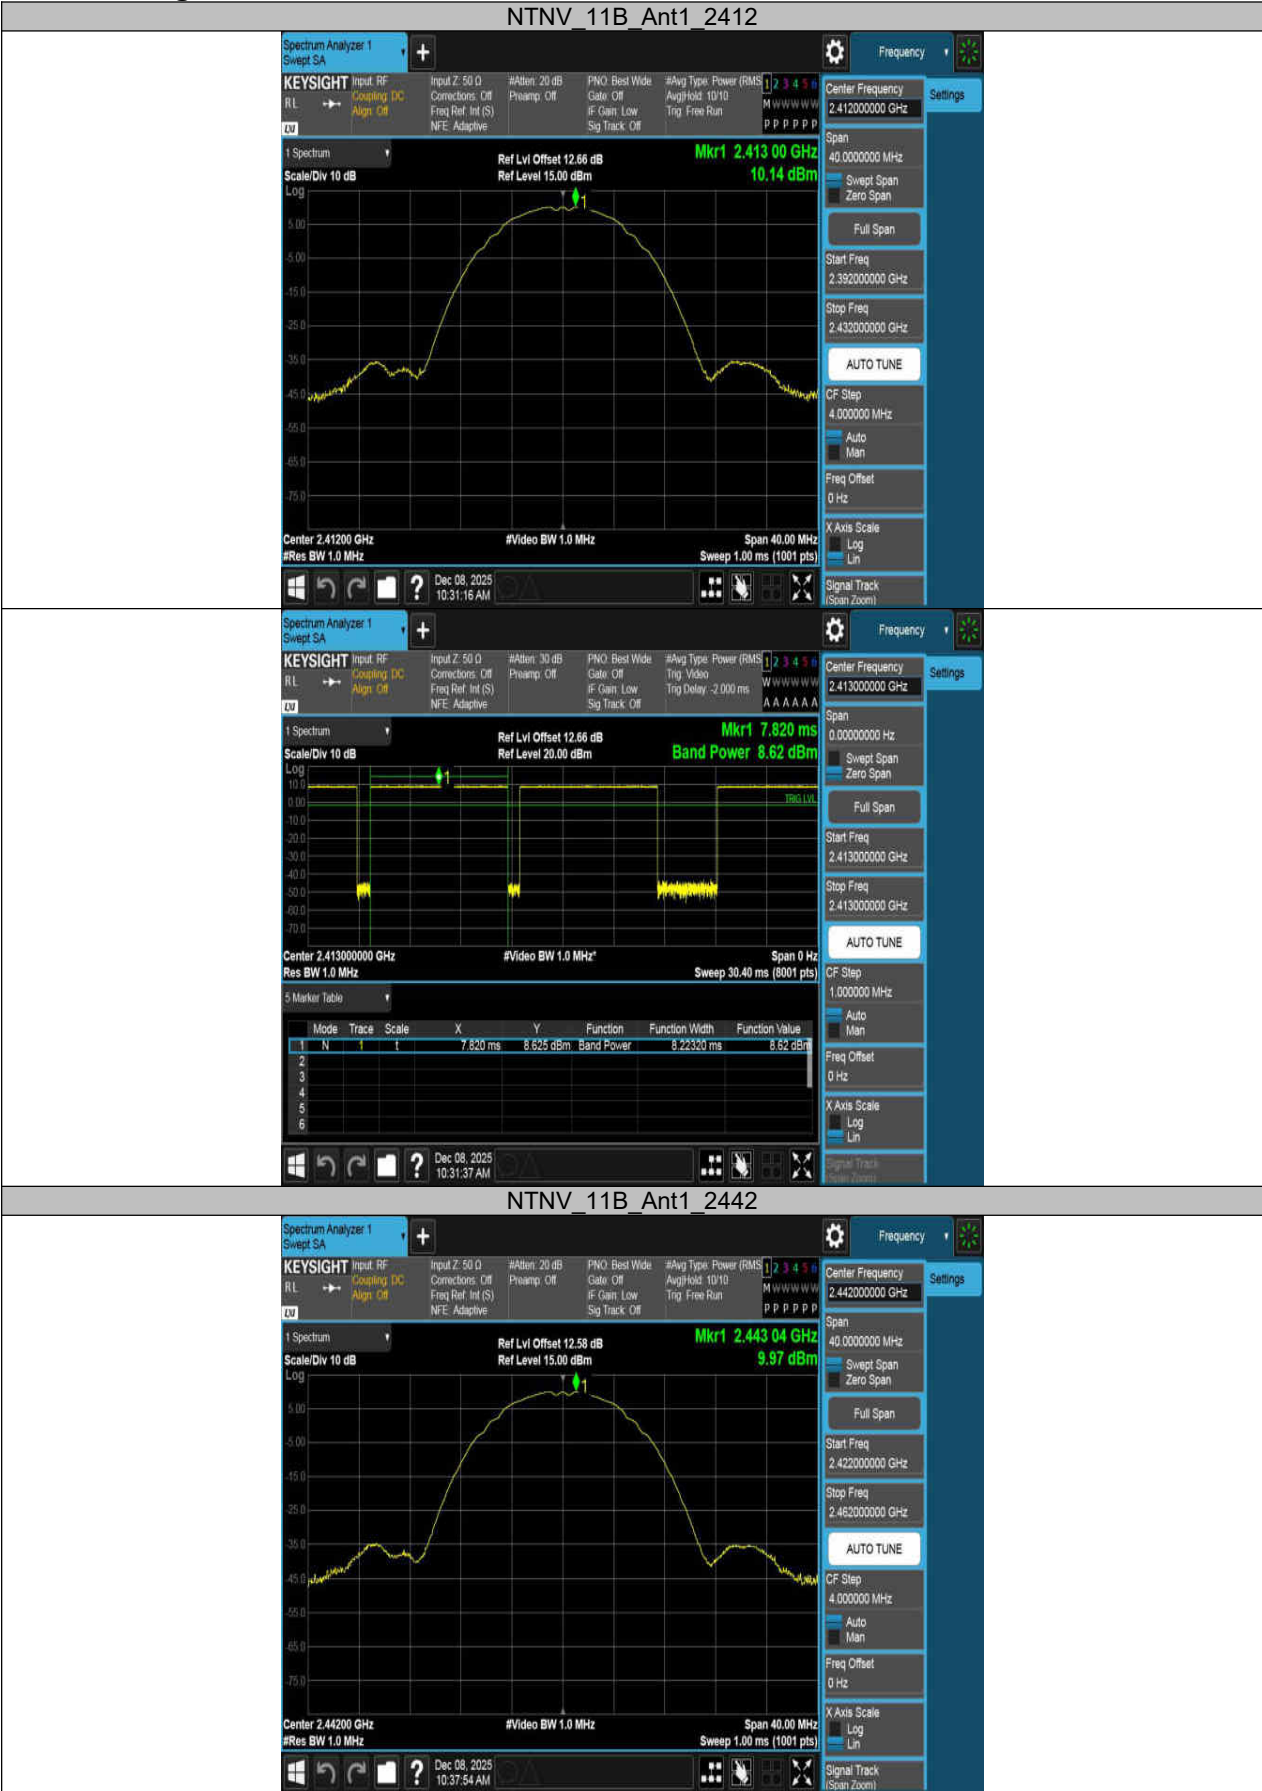





NTNV_11B_Ant1_2472





NTNV_11G_Ant1_2412

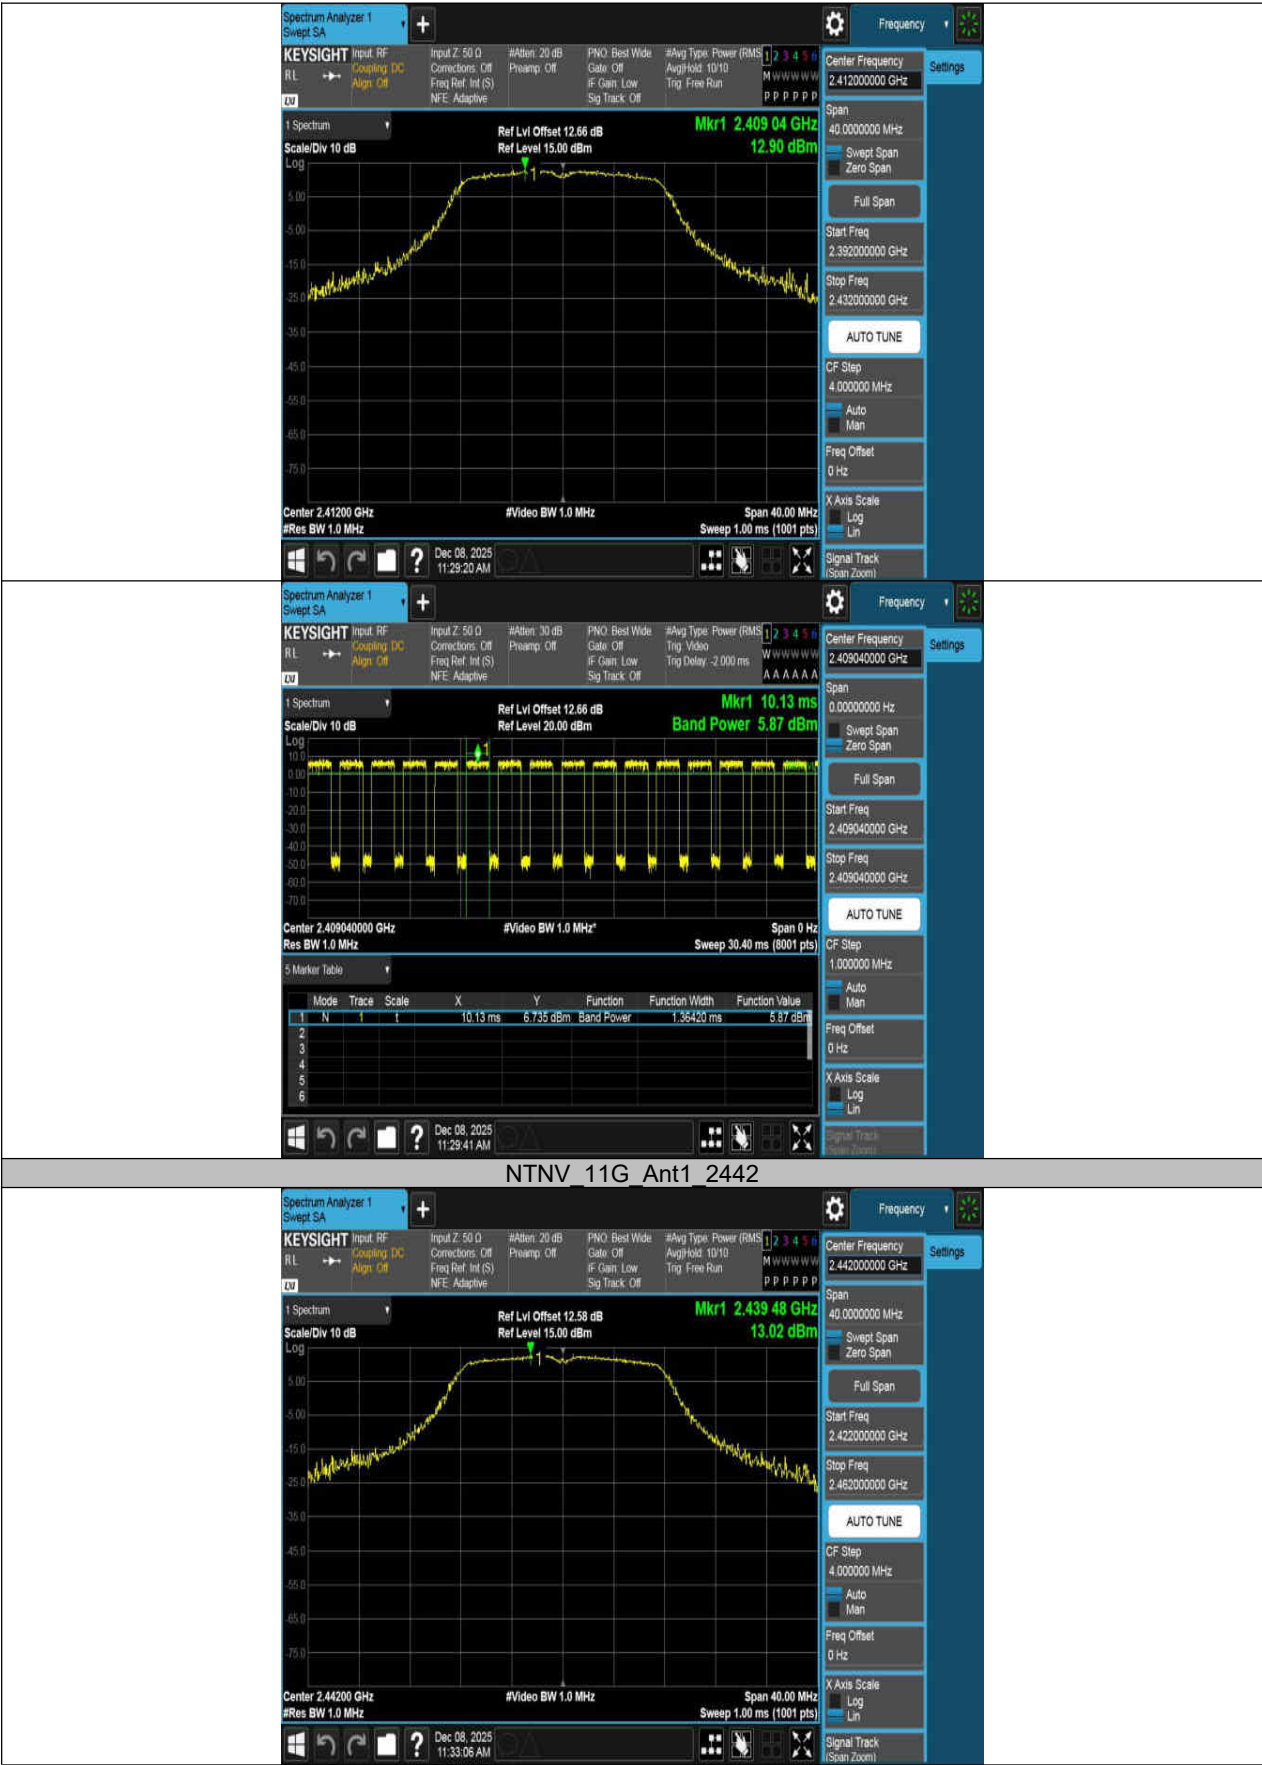



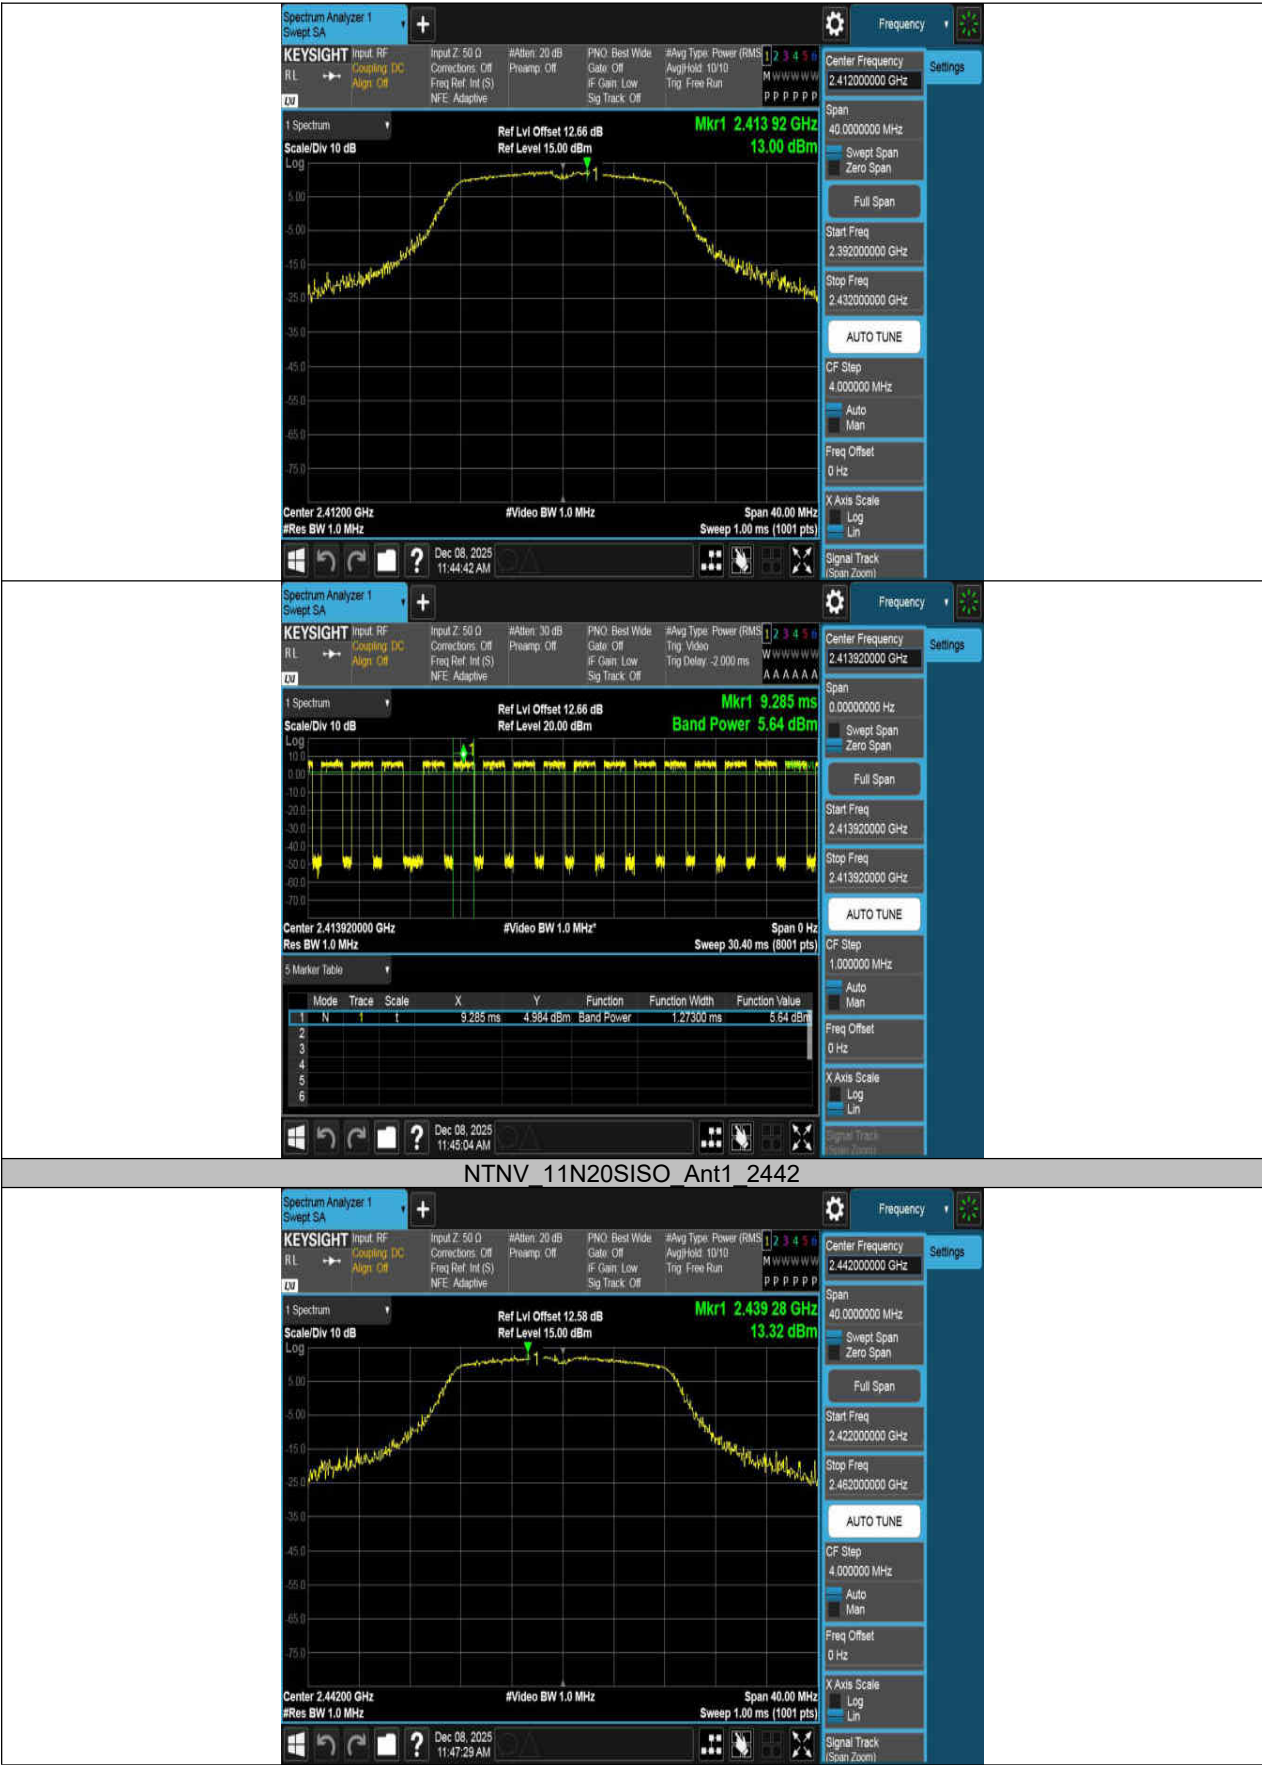

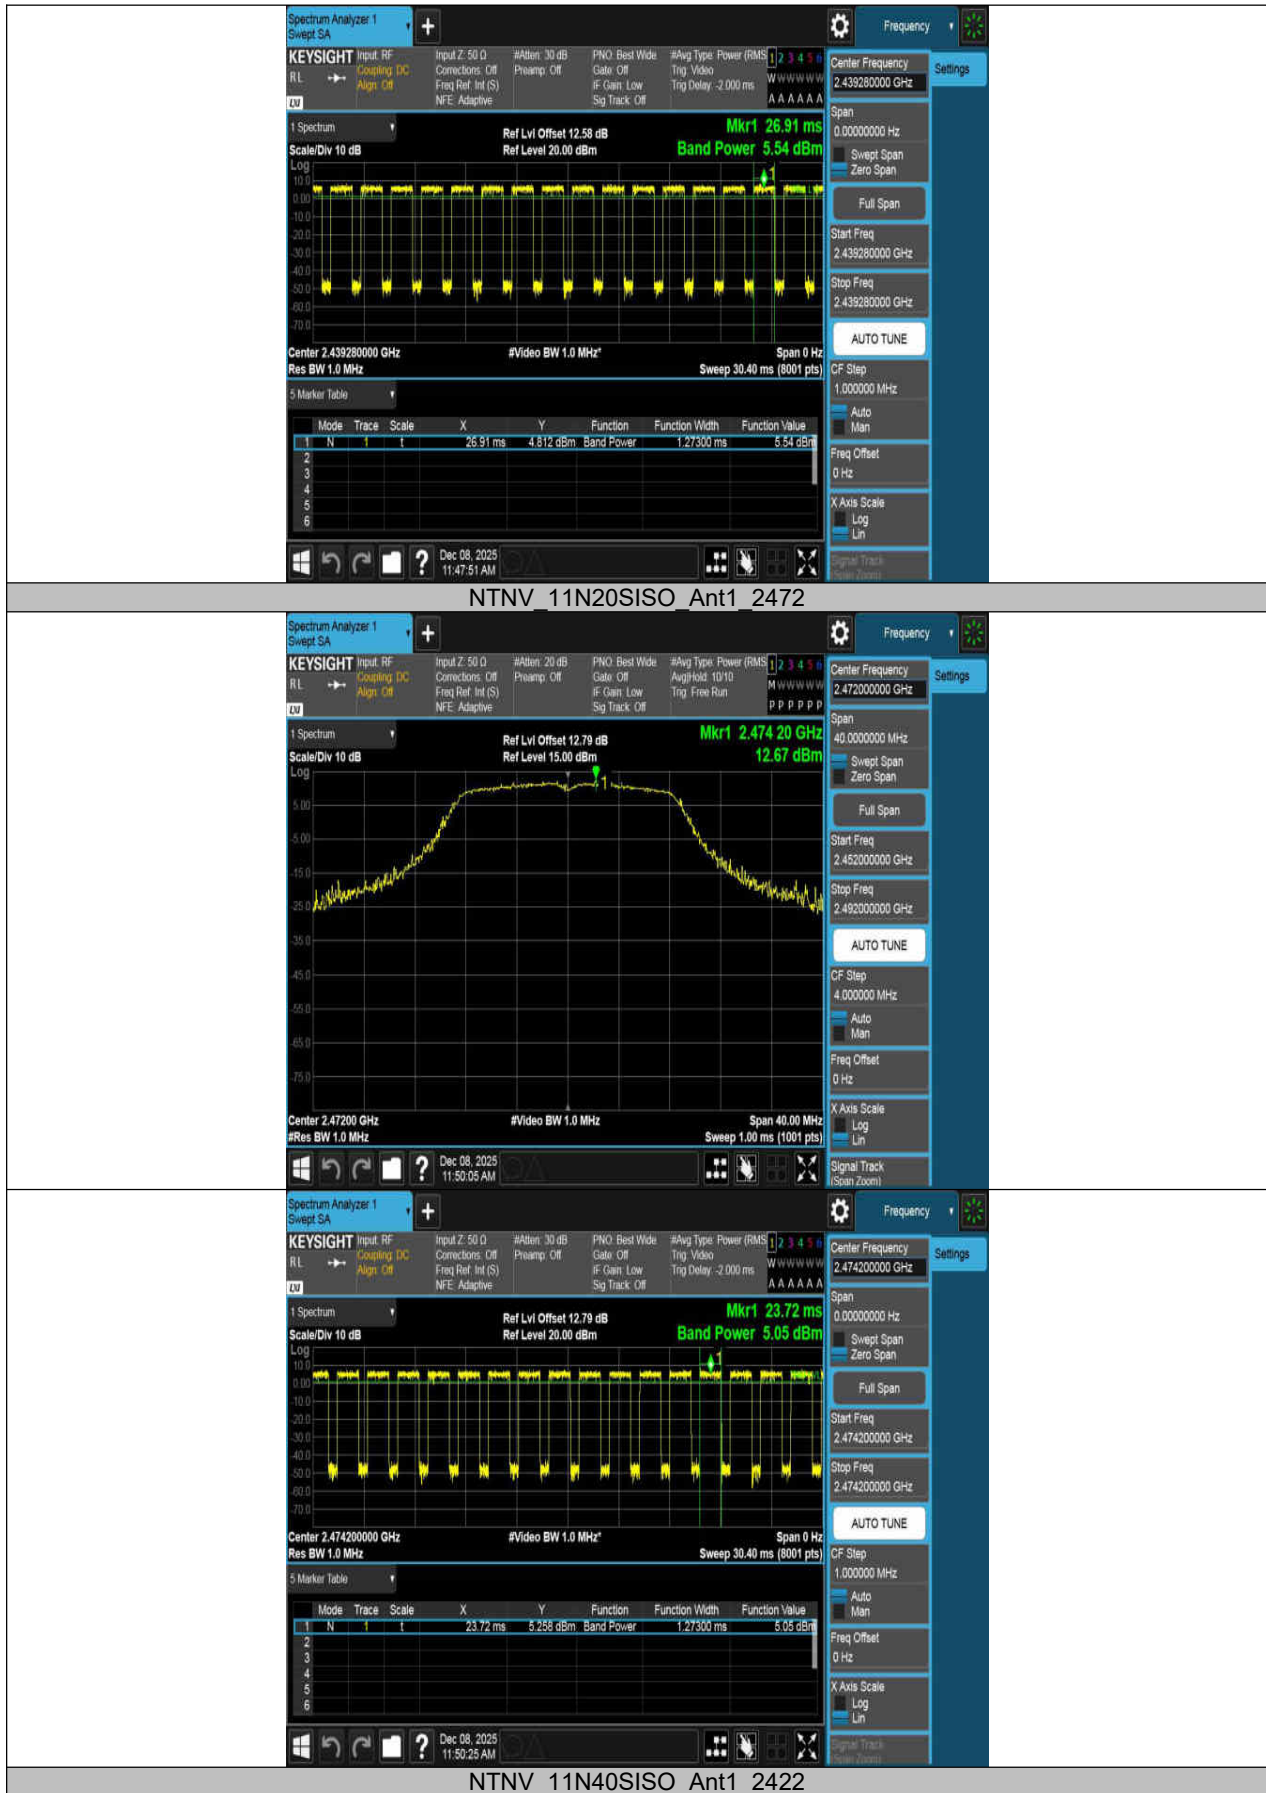

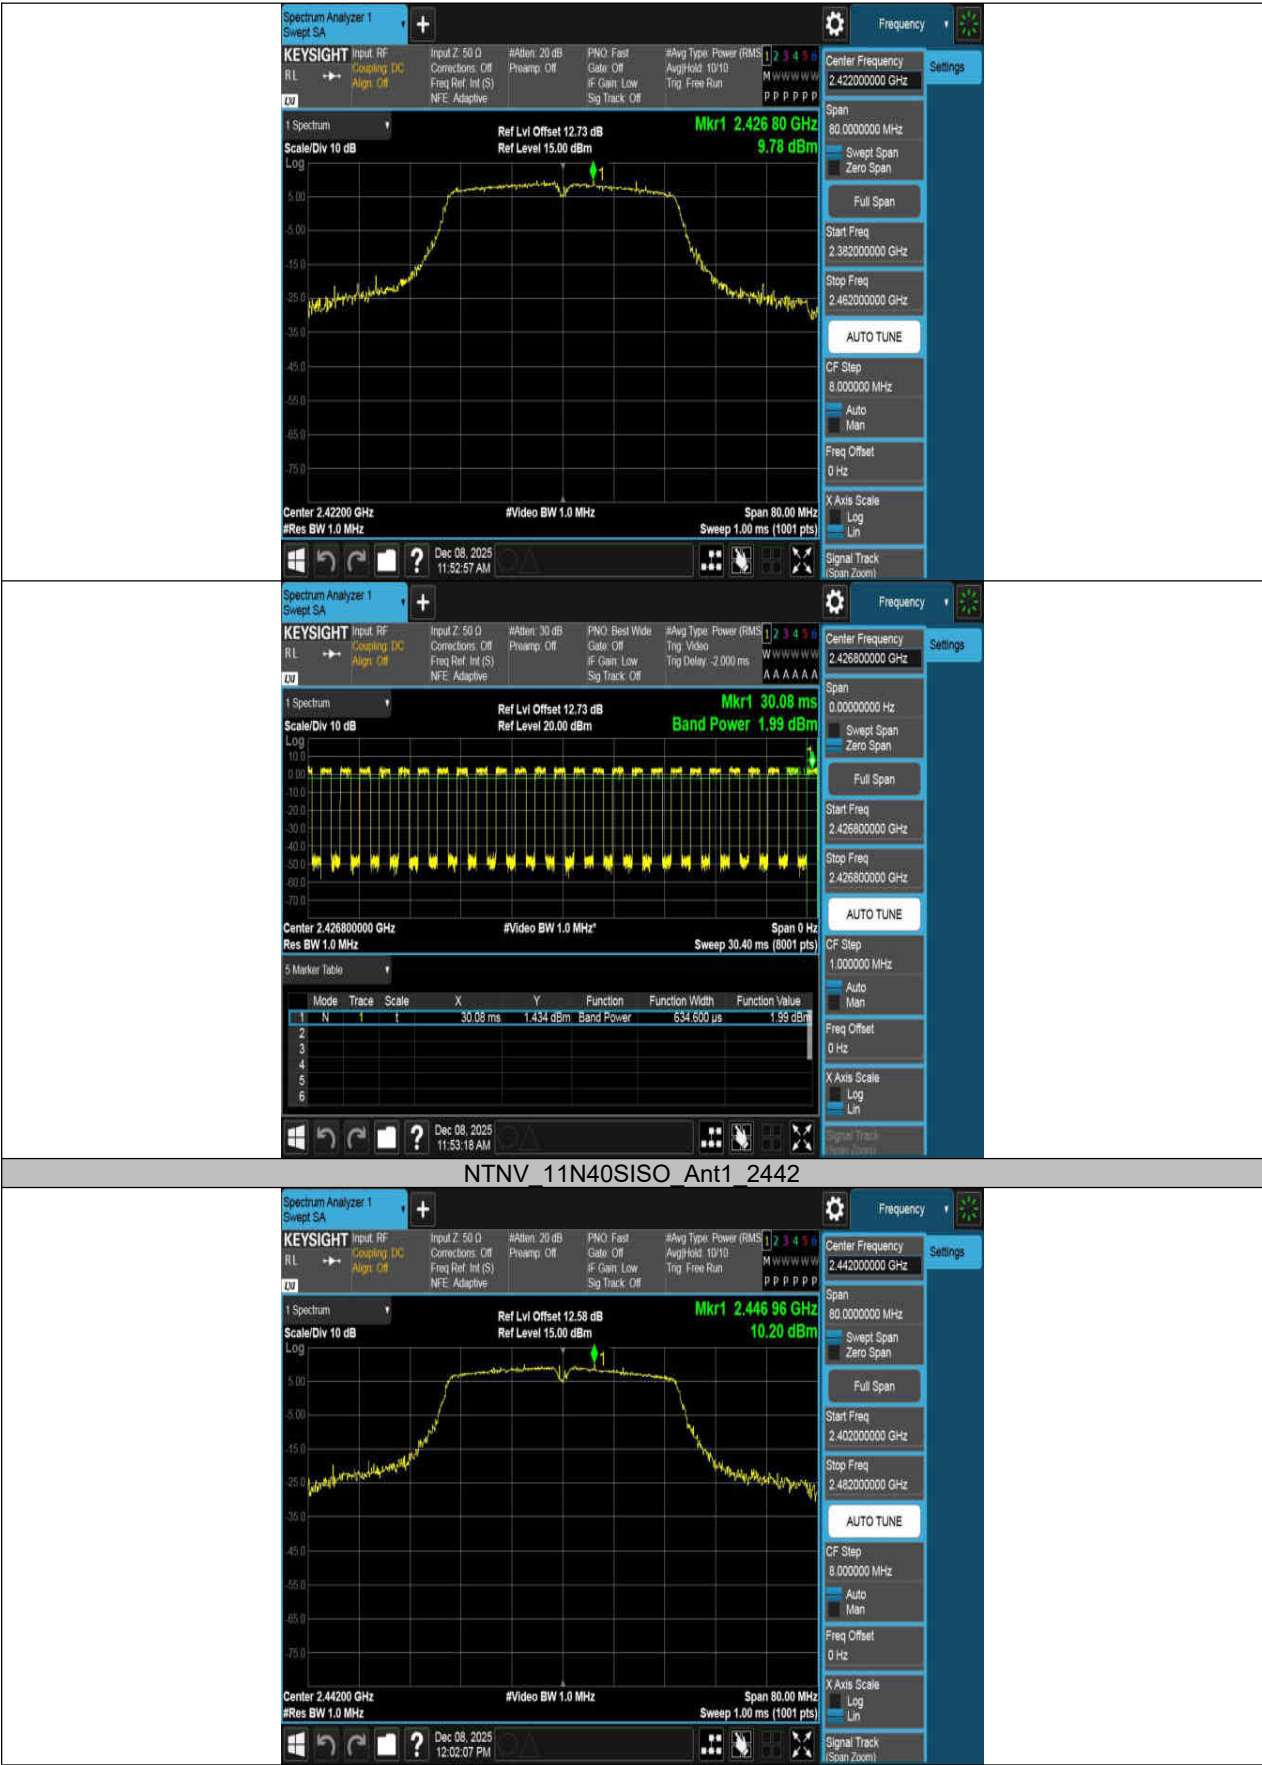











11. Transmitter Spurious Emission

11.1. Block Diagram of Test Setup

Same as section 8.1

11.2. Limits

Permissible mean power of spurious emission of each frequency supplied to a feeder, that is, mean power of spurious emission in the 1 MHz bandwidth at frequency f other than frequency band used shall be as follows:

- $2,387\text{MHz} \leq f \leq 2,400\text{MHz}$ and $2,483.5\text{MHz} < f \leq 2,496.5\text{MHz}$ 25 μW or less
- $2,387\text{MHz} > f$ and $2,496.5\text{MHz} < f$ 2.5 μW or less

11.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Resolution BW: 1MHz. Video BW: 1MHz.

Detector: Peak. Trace Mode: Max Hold.

(2) All the emissions from 30MHz to 13GHz were measured and record.

11.4. Results

Note: If spurious emissions are greater than (limit -3dB) in 1MHz RBW, then more detailed measurements are required. Repeat the test in 30kHz RBW, the spurious emission value using following the formula below:

Calculated Value = (Measured Value + 15.2dB)

15.2dB adjustment is derived from the Conversion Factor of RBW

Conversion Factor of RBW = $10 \times \log(\text{Reference Bandwidth} / \text{RBW of measurement}) = 15.2(\text{dB})$

Where: Reference Bandwidth = 1MHz

RBW of measurement = 30kHz


Test Condition	Test Mode	Ant.	Freq. (MHz)	Freq. Range (MHz)	Result (dBm)	Limit (dBm)	Result (μW)	Limit (μW)	Verdict
NTNV	11B	Ant1	2412	30~1000	-57.85	≤ -36	0.00164	≤ 0.3	PASS
				1000~2387	-50.36	≤ -26	0.00920	≤ 2.5	PASS
				2387~2400	-38.56	≤ -16	0.13932	≤ 25	PASS
				2483.5~2496.5	-49.76	≤ -16	0.01057	≤ 25	PASS
				2496.5~13000	-44.28	≤ -26	0.03733	≤ 2.5	PASS
			2442	30~1000	-59.38	≤ -36	0.00115	≤ 0.3	PASS
				1000~2387	-50.21	≤ -26	0.00953	≤ 2.5	PASS
				2387~2400	-50.03	≤ -16	0.00993	≤ 25	PASS
				2483.5~2496.5	-49.73	≤ -16	0.01064	≤ 25	PASS
				2496.5~13000	-42.17	≤ -26	0.06067	≤ 2.5	PASS
			2472	30~1000	-59.39	≤ -36	0.00115	≤ 0.3	PASS
				1000~2387	-50.94	≤ -26	0.00805	≤ 2.5	PASS
				2387~2400	-50.30	≤ -16	0.00933	≤ 25	PASS
				2483.5~2496.5	-35.55	≤ -16	0.27861	≤ 25	PASS

				2496.5~1 3000	-41.93	≤-26	0.064 12	≤2.5	PASS
	11G	Ant1	2412	30~1000	-60.46	≤-36	0.000 90	≤0.3	PASS
				1000~23 87	-42.13	≤-26	0.061 24	≤2.5	PASS
				2387~24 00	-21.64	≤-16	6.854 88	≤25	PASS
				2483.5~2 496.5	-51.35	≤-16	0.007 33	≤25	PASS
				2496.5~1 3000	-46.80	≤-26	0.020 89	≤2.5	PASS
			2442	30~1000	-59.20	≤-36	0.001 20	≤0.3	PASS
				1000~23 87	-41.64	≤-26	0.068 55	≤2.5	PASS
				2387~24 00	-49.27	≤-16	0.011 83	≤25	PASS
				2483.5~2 496.5	-49.58	≤-16	0.011 02	≤25	PASS
				2496.5~1 3000	-46.47	≤-26	0.022 54	≤2.5	PASS
			2472	30~1000	-58.95	≤-36	0.001 27	≤0.3	PASS
				1000~23 87	-40.12	≤-26	0.097 27	≤2.5	PASS
				2387~24 00	-48.80	≤-16	0.013 18	≤25	PASS
				2483.5~2 496.5	-21.77	≤-16	6.652 73	≤25	PASS
				2496.5~1 3000	-45.43	≤-26	0.028 64	≤2.5	PASS
	11N20 SISO	Ant1	2412	30~1000	-59.11	≤-36	0.001 23	≤0.3	PASS
				1000~23 87	-42.24	≤-26	0.059 70	≤2.5	PASS
				2387~24 00	-21.77	≤-16	6.652 73	≤25	PASS
				2483.5~2 496.5	-50.97	≤-16	0.008 00	≤25	PASS
				2496.5~1 3000	-48.36	≤-26	0.014 59	≤2.5	PASS
			2442	30~1000	-60.00	≤-36	0.001 00	≤0.3	PASS
				1000~23 87	-41.76	≤-26	0.066 68	≤2.5	PASS
				2387~24 00	-49.85	≤-16	0.010 35	≤25	PASS
				2483.5~2 496.5	-50.64	≤-16	0.008 63	≤25	PASS
				2496.5~1 3000	-45.50	≤-26	0.028 18	≤2.5	PASS
			2472	30~1000	-59.81	≤-36	0.001 04	≤0.3	PASS
				1000~23 87	-40.40	≤-26	0.091 20	≤2.5	PASS
				2387~24 00	-50.32	≤-16	0.009 29	≤25	PASS
				2483.5~2 496.5	-21.32	≤-16	7.379 04	≤25	PASS
				2496.5~1 3000	-44.53	≤-26	0.035 24	≤2.5	PASS

	11N40 SISO	Ant1	2422	30~1000	-61.61	≤-36	0.000 69	≤0.3	PASS
				1000~23 87	-35.96	≤-26	0.253 51	≤2.5	PASS
				2387~24 00	-24.57	≤-16	3.491 40	≤25	PASS
				2483.5~2 496.5	-50.43	≤-16	0.009 06	≤25	PASS
				2496.5~1 3000	-50.41	≤-26	0.009 10	≤2.5	PASS
			2442	30~1000	-62.41	≤-36	0.000 57	≤0.3	PASS
				1000~23 87	-41.80	≤-26	0.066 07	≤2.5	PASS
				2387~24 00	-36.35	≤-16	0.231 74	≤25	PASS
				2483.5~2 496.5	-38.15	≤-16	0.153 11	≤25	PASS
				2496.5~1 3000	-45.99	≤-26	0.025 18	≤2.5	PASS
			2462	30~1000	-61.42	≤-36	0.000 72	≤0.3	PASS
				1000~23 87	-41.36	≤-26	0.073 11	≤2.5	PASS
				2387~24 00	-49.59	≤-16	0.010 99	≤25	PASS
				2483.5~2 496.5	-24.84	≤-16	3.280 95	≤25	PASS
				2496.5~1 3000	-29.91	≤-26	1.020 94	≤2.5	PASS
	11AX20 SISO	Ant1	2412	30~1000	-59.67	≤-36	0.001 08	≤0.3	PASS
				1000~23 87	-40.96	≤-26	0.080 17	≤2.5	PASS
				2387~24 00	-22.92	≤-16	5.105 05	≤25	PASS
				2483.5~2 496.5	-50.58	≤-16	0.008 75	≤25	PASS
				2496.5~1 3000	-48.52	≤-26	0.014 06	≤2.5	PASS
			2442	30~1000	-59.81	≤-36	0.001 04	≤0.3	PASS
				1000~23 87	-41.47	≤-26	0.071 29	≤2.5	PASS
				2387~24 00	-46.67	≤-16	0.021 53	≤25	PASS
				2483.5~2 496.5	-49.39	≤-16	0.011 51	≤25	PASS
				2496.5~1 3000	-45.06	≤-26	0.031 19	≤2.5	PASS
			2472	30~1000	-58.94	≤-36	0.001 28	≤0.3	PASS
				1000~23 87	-39.99	≤-26	0.100 23	≤2.5	PASS
				2387~24 00	-49.63	≤-16	0.010 89	≤25	PASS
				2483.5~2 496.5	-22.57	≤-16	5.533 50	≤25	PASS
				2496.5~1 3000	-41.89	≤-26	0.064 71	≤2.5	PASS
	11AX40 SISO	Ant1	2422	30~1000	-60.93	≤-36	0.000 81	≤0.3	PASS

				1000~2387	-35.05	≤-26	0.31261	≤2.5	PASS
				2387~2400	-25.05	≤-16	3.12608	≤25	PASS
				2483.5~2496.5	-49.41	≤-16	0.01146	≤25	PASS
				2496.5~13000	-48.77	≤-26	0.01327	≤2.5	PASS
			2442	30~1000	-61.10	≤-36	0.00078	≤0.3	PASS
				1000~2387	-41.37	≤-26	0.07295	≤2.5	PASS
				2387~2400	-35.46	≤-16	0.28445	≤25	PASS
				2483.5~2496.5	-36.78	≤-16	0.20989	≤25	PASS
				2496.5~13000	-46.30	≤-26	0.02344	≤2.5	PASS
			2462	30~1000	-60.35	≤-36	0.00092	≤0.3	PASS
				1000~2387	-40.53	≤-26	0.08851	≤2.5	PASS
				2387~2400	-48.52	≤-16	0.01406	≤25	PASS
				2483.5~2496.5	-25.59	≤-16	2.76058	≤25	PASS
				2496.5~13000	-35.09	≤-26	0.30974	≤2.5	PASS

11.5. Original Test Data

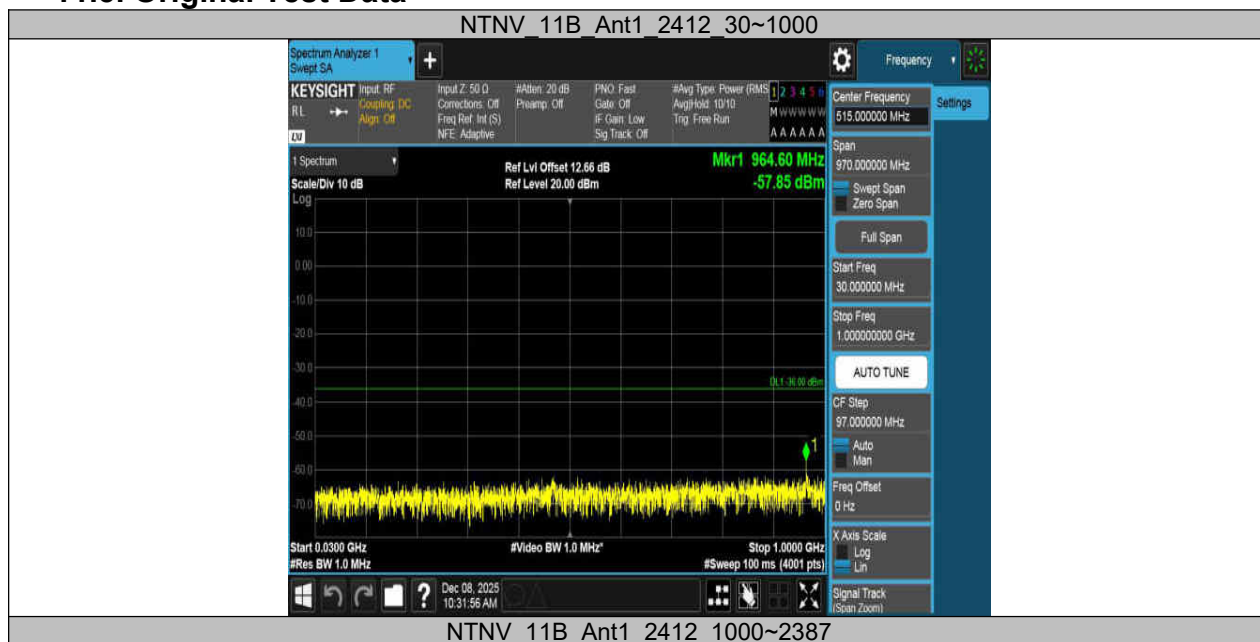











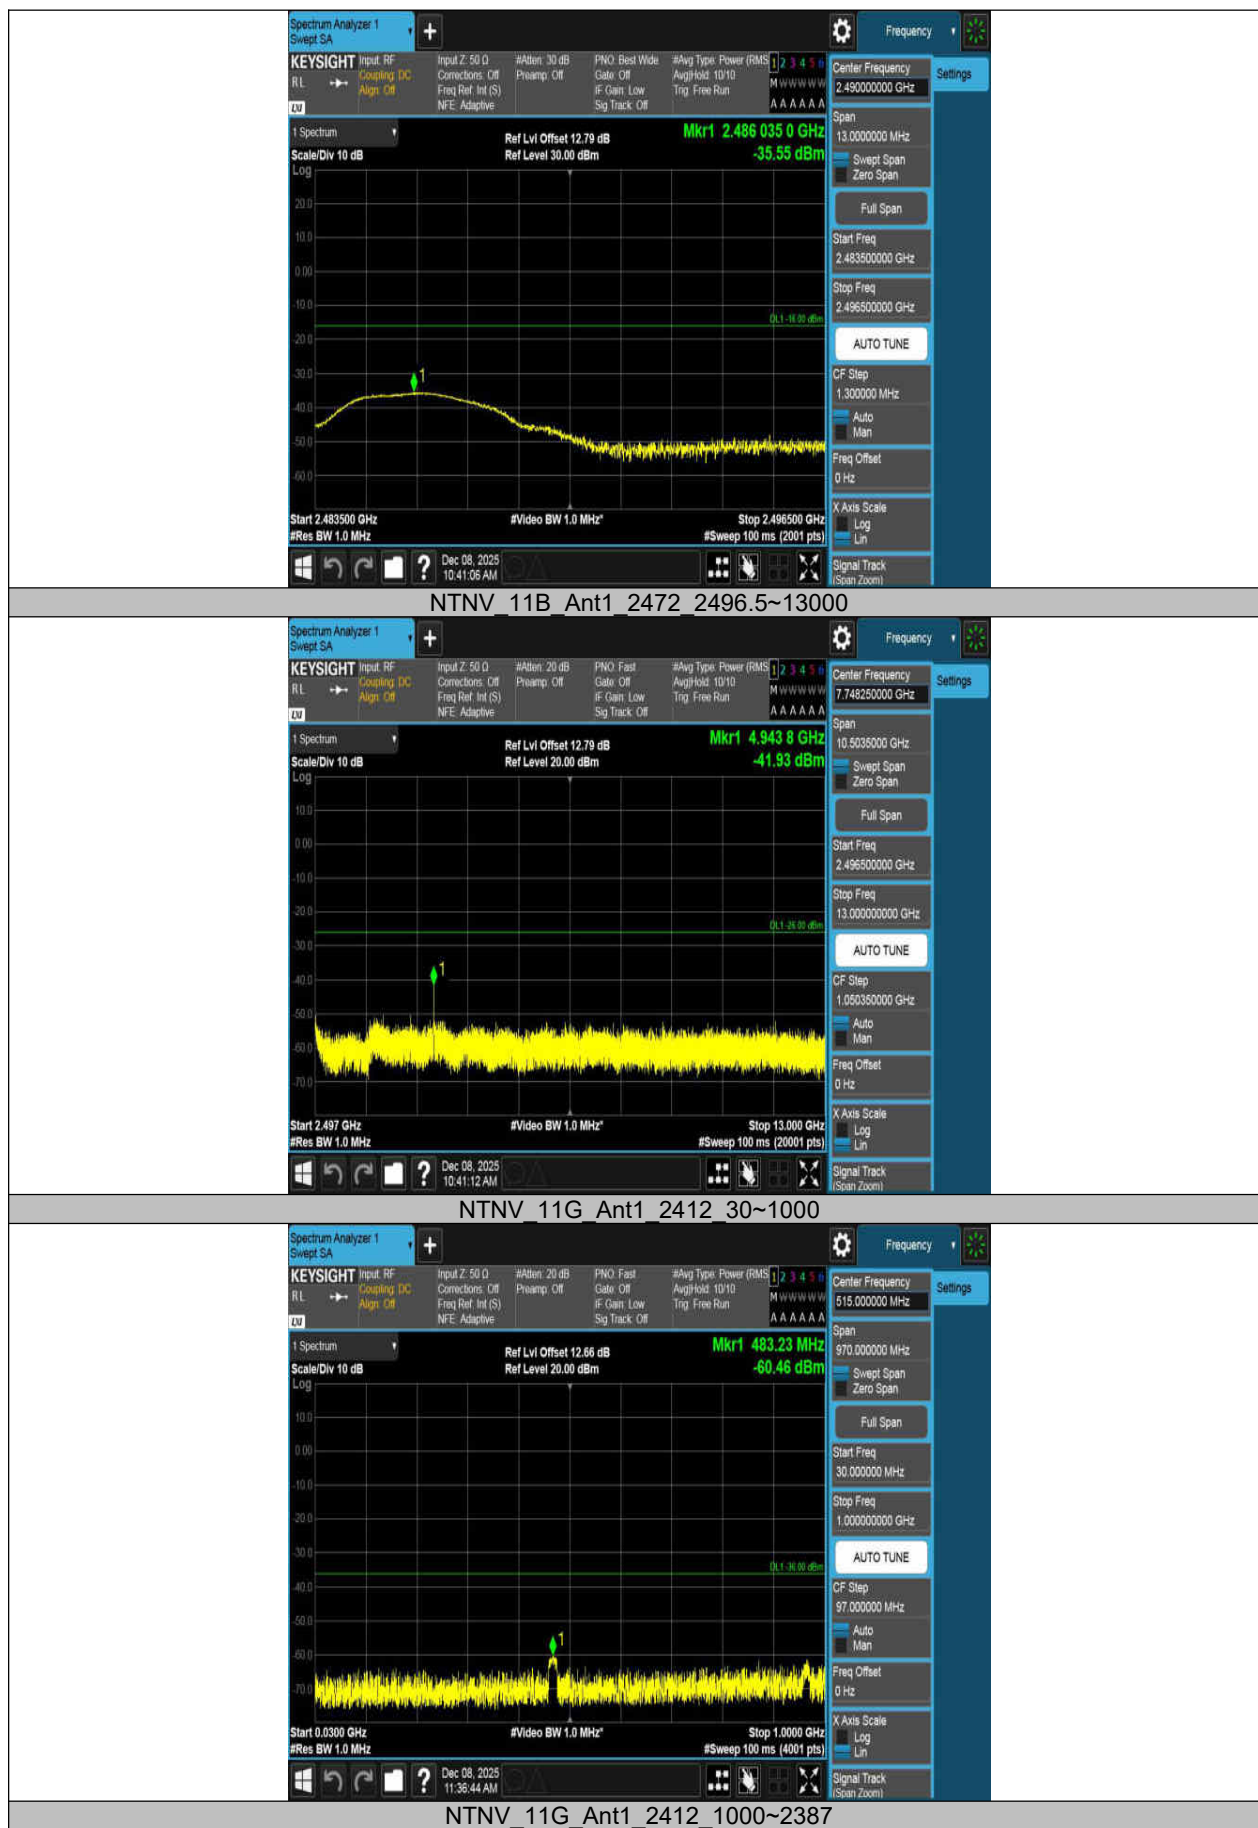








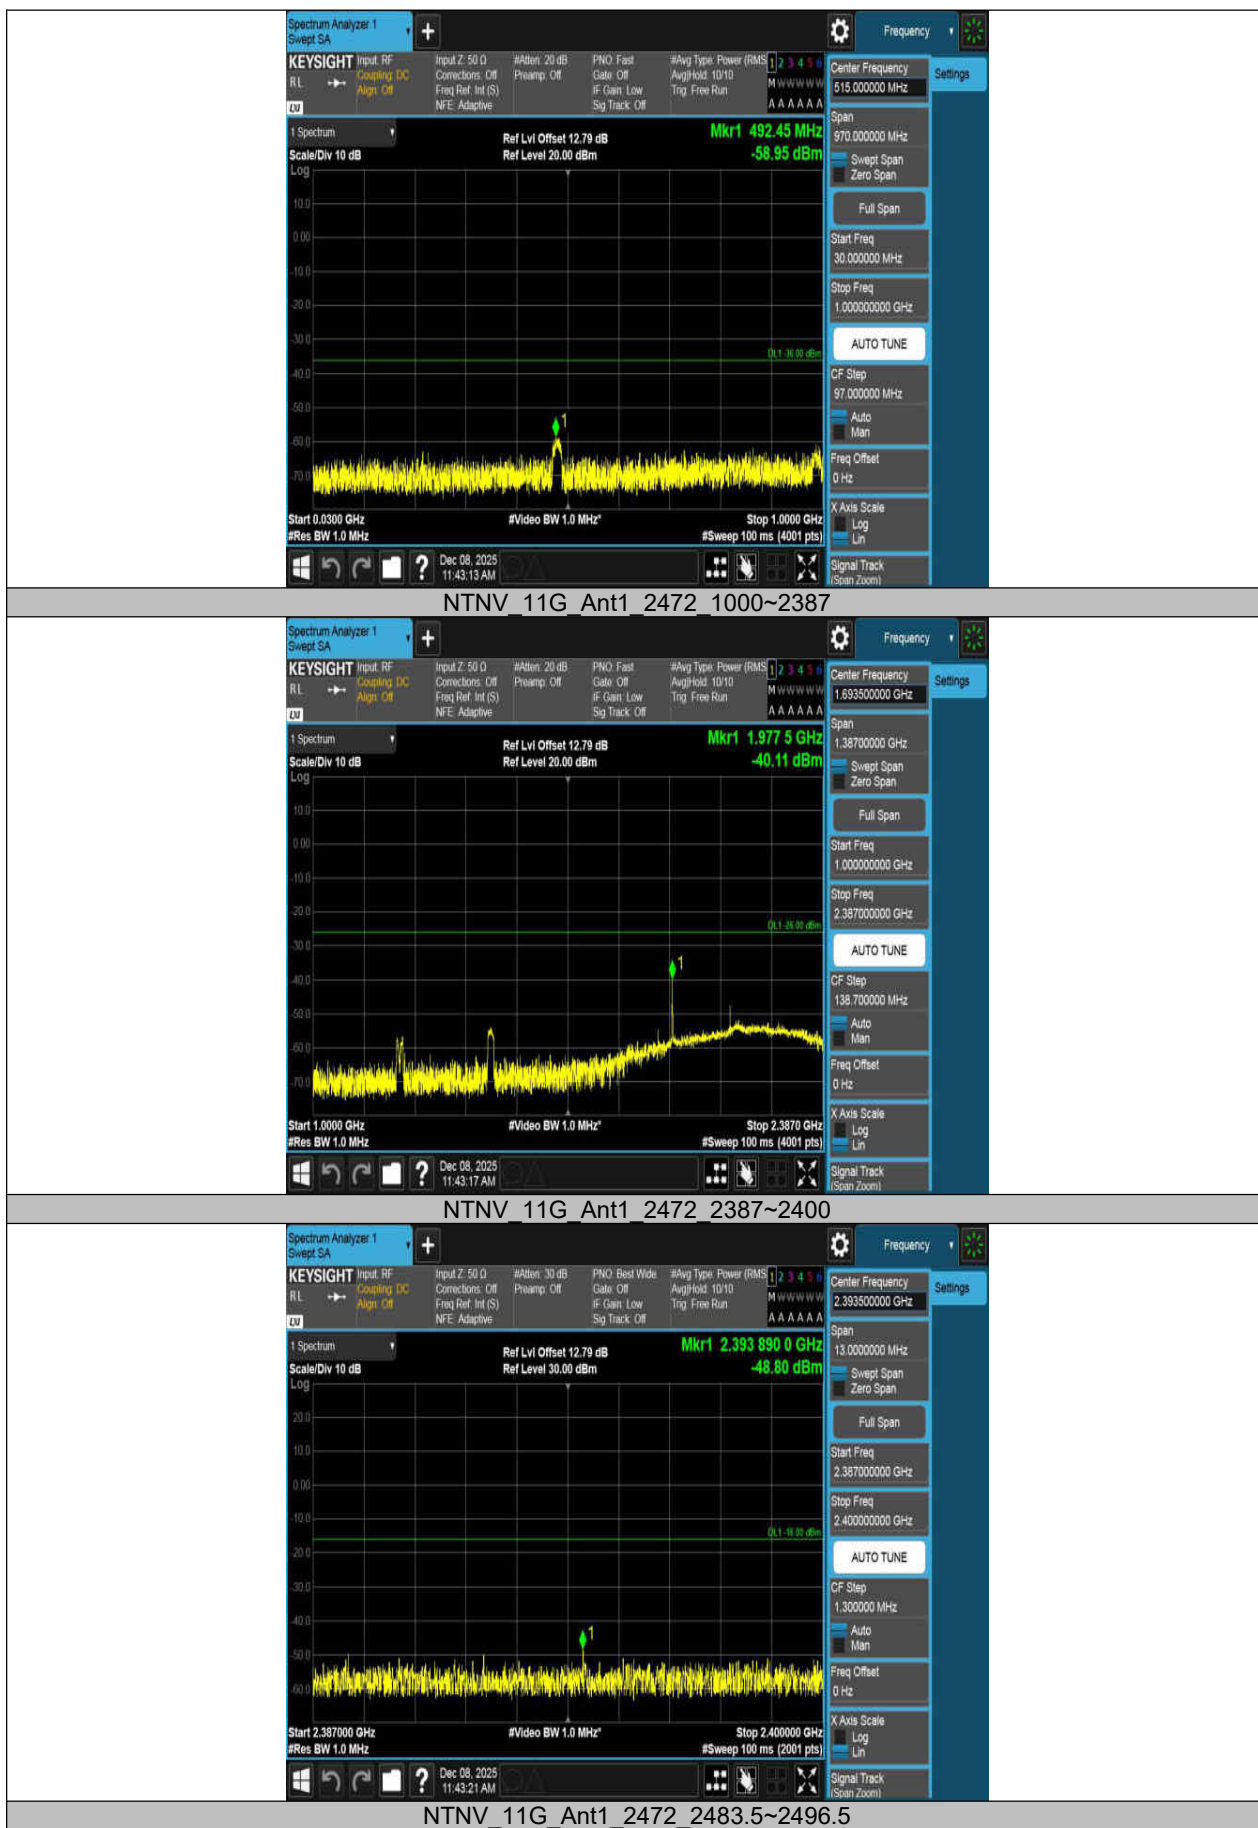


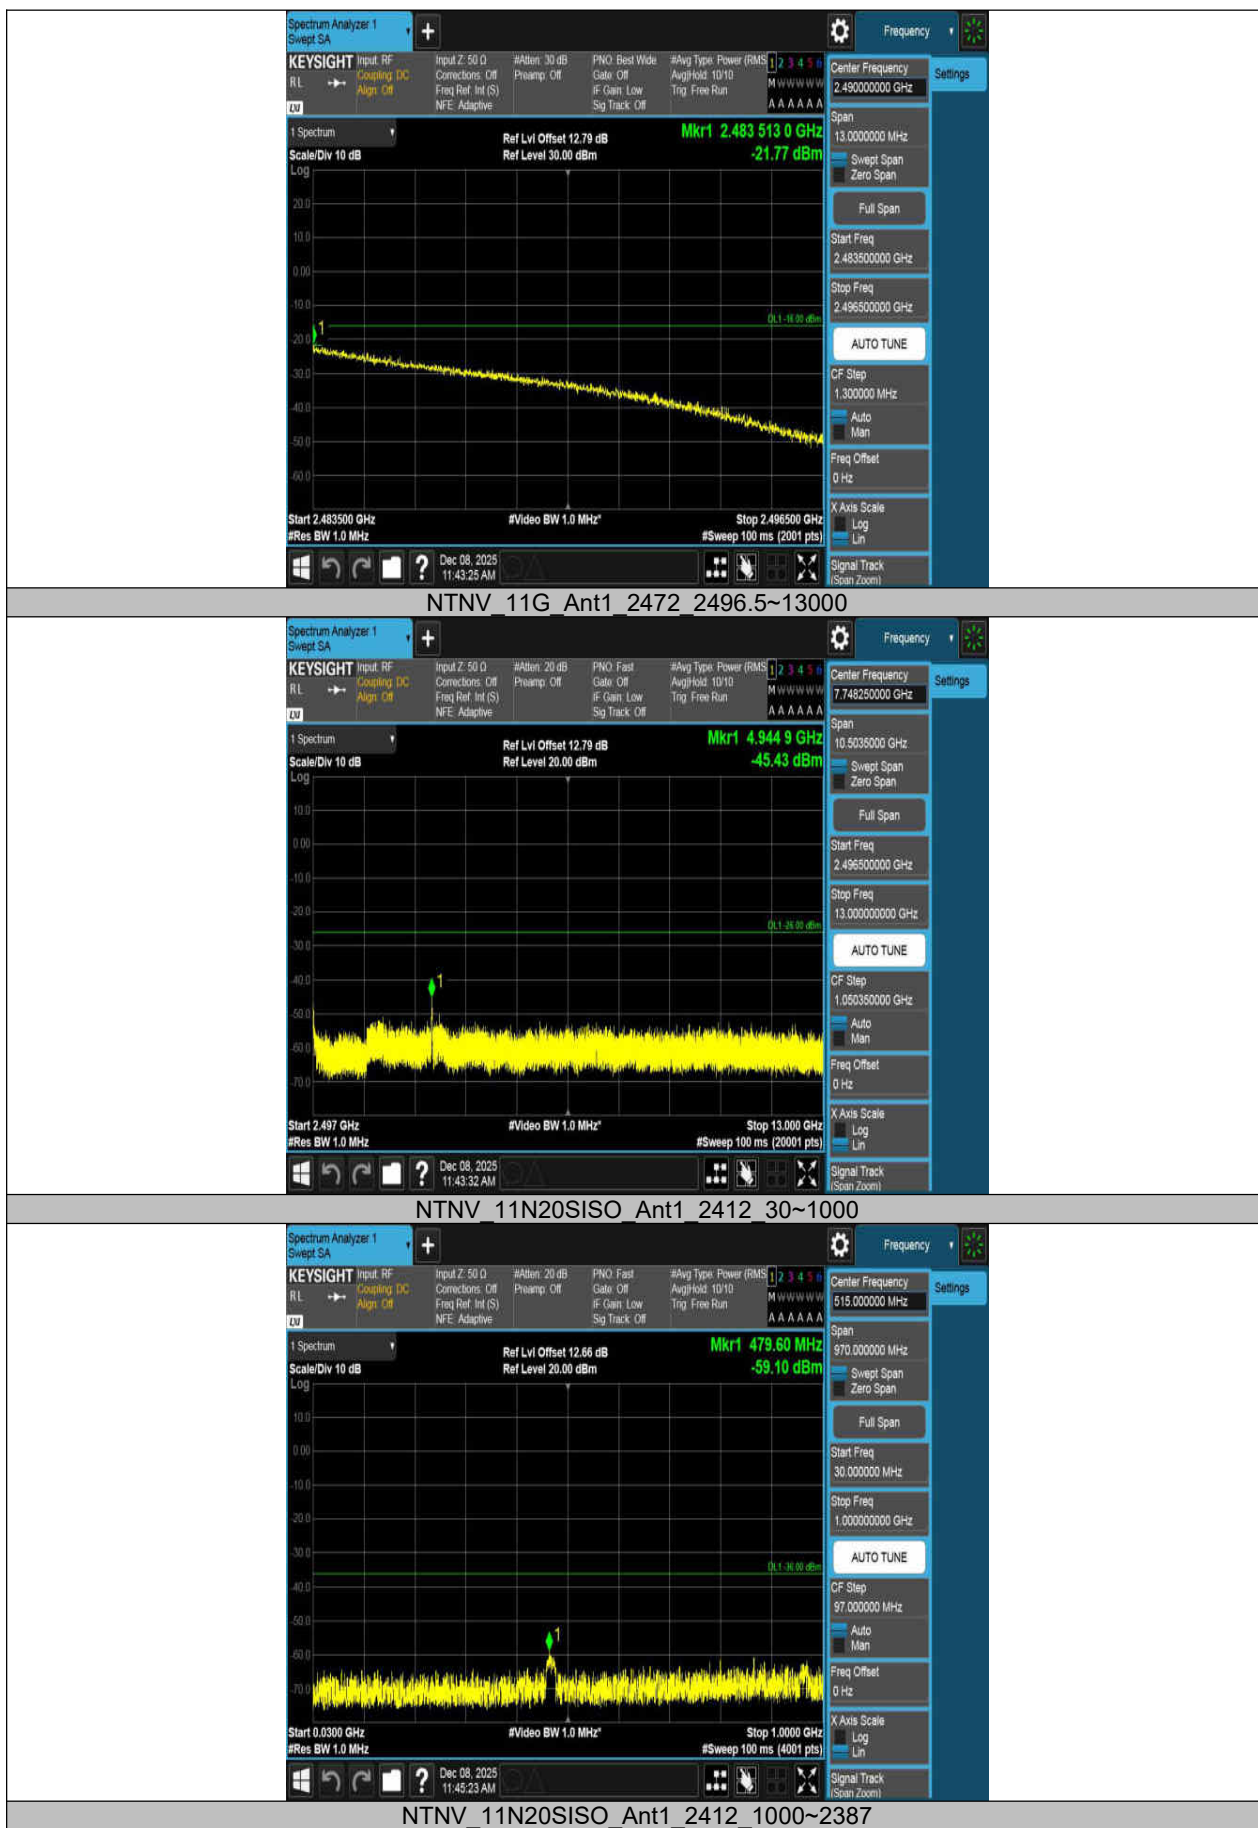









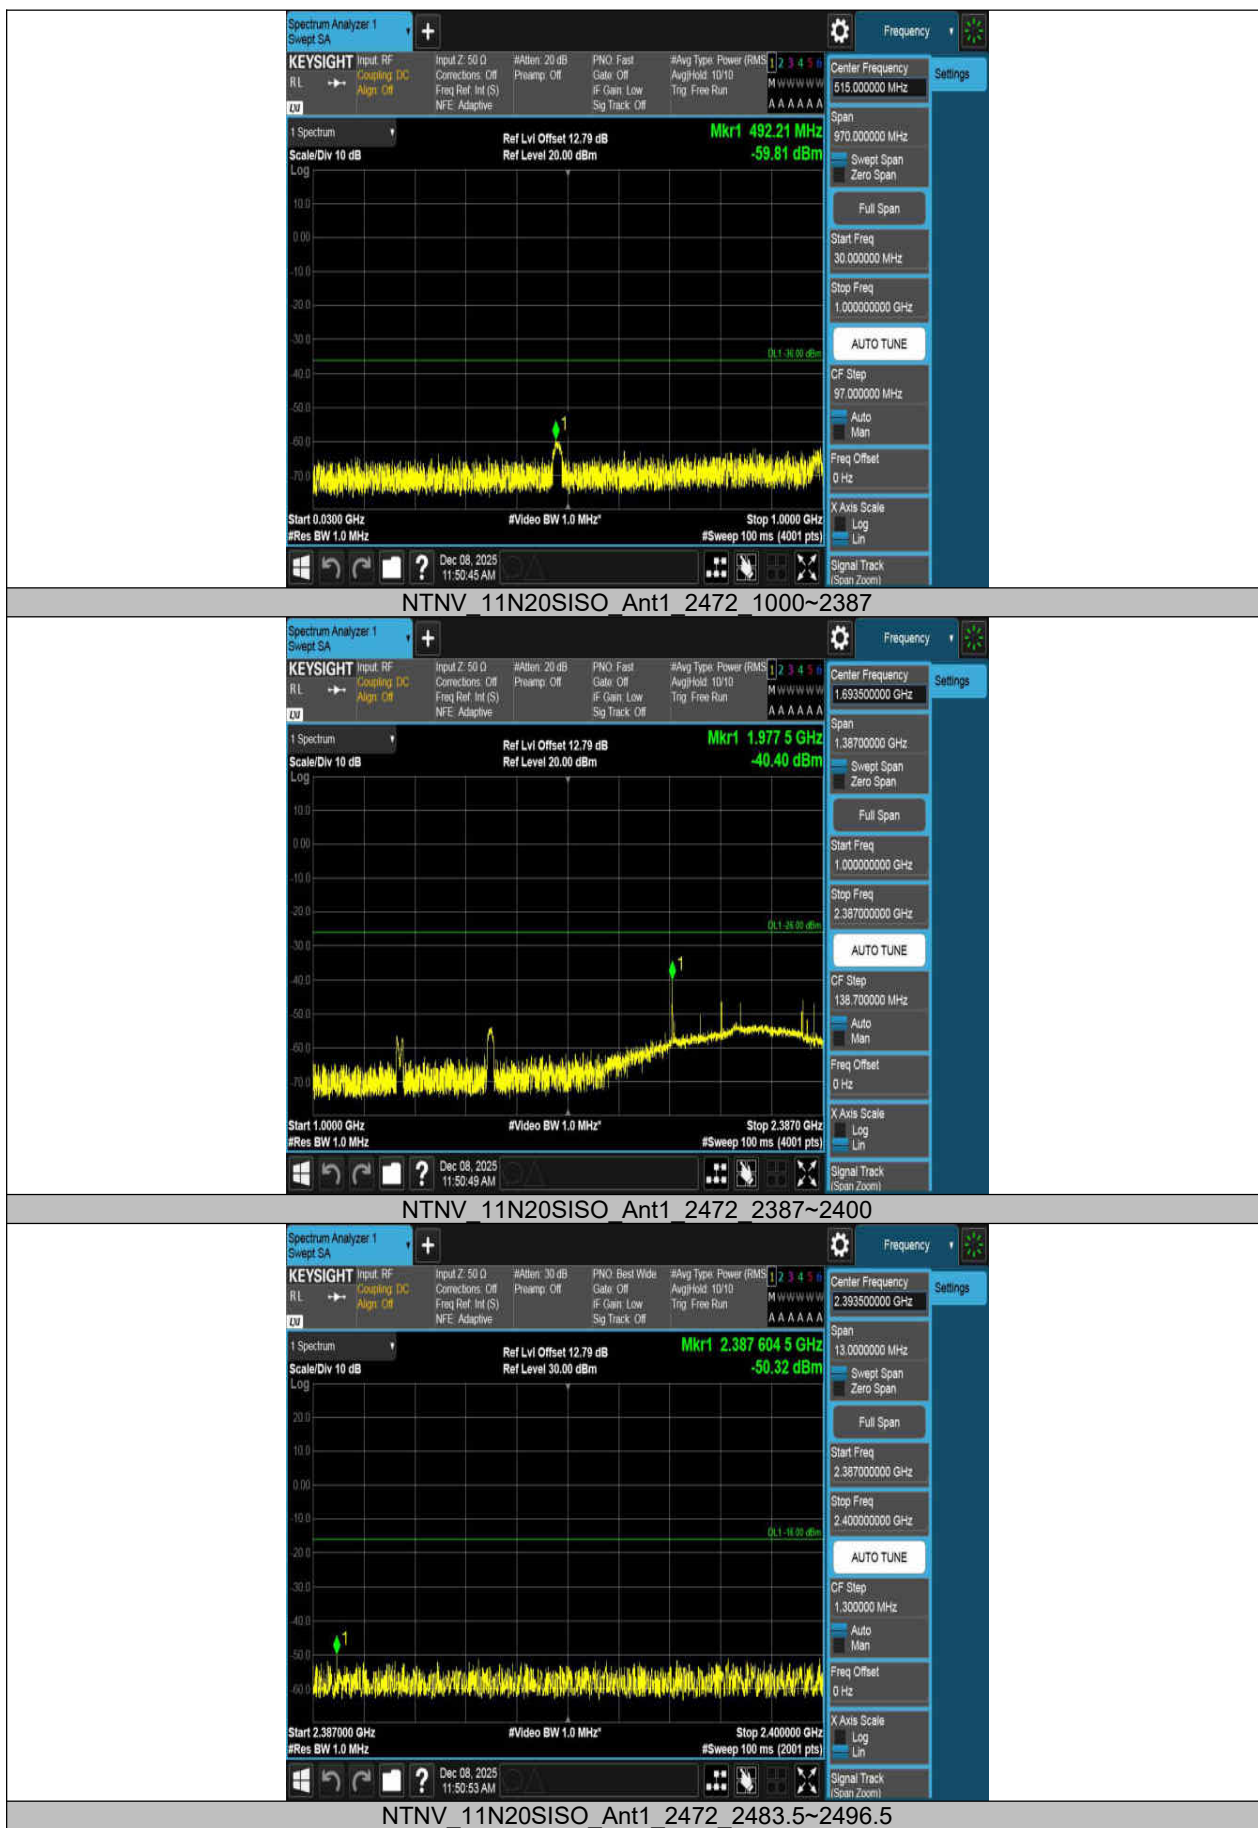

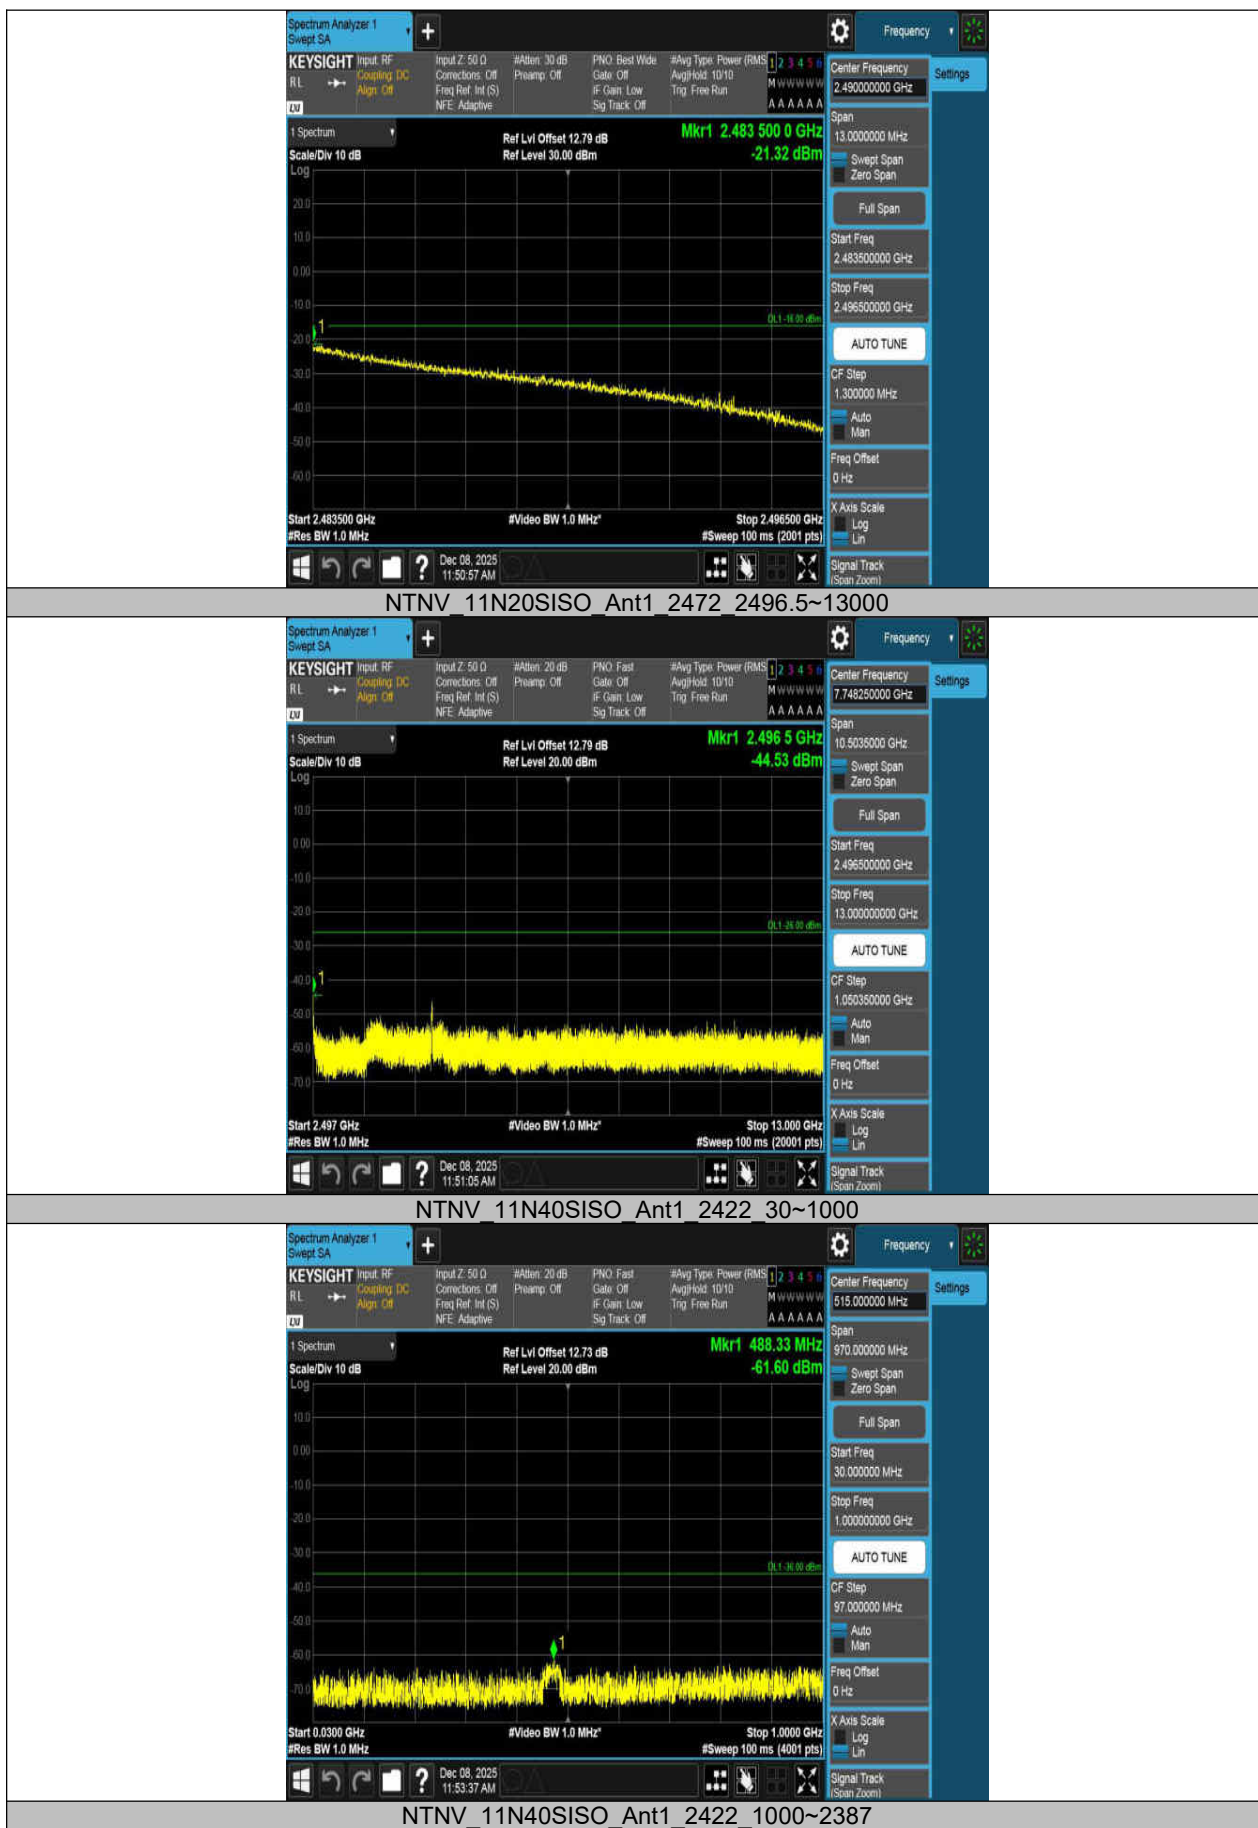







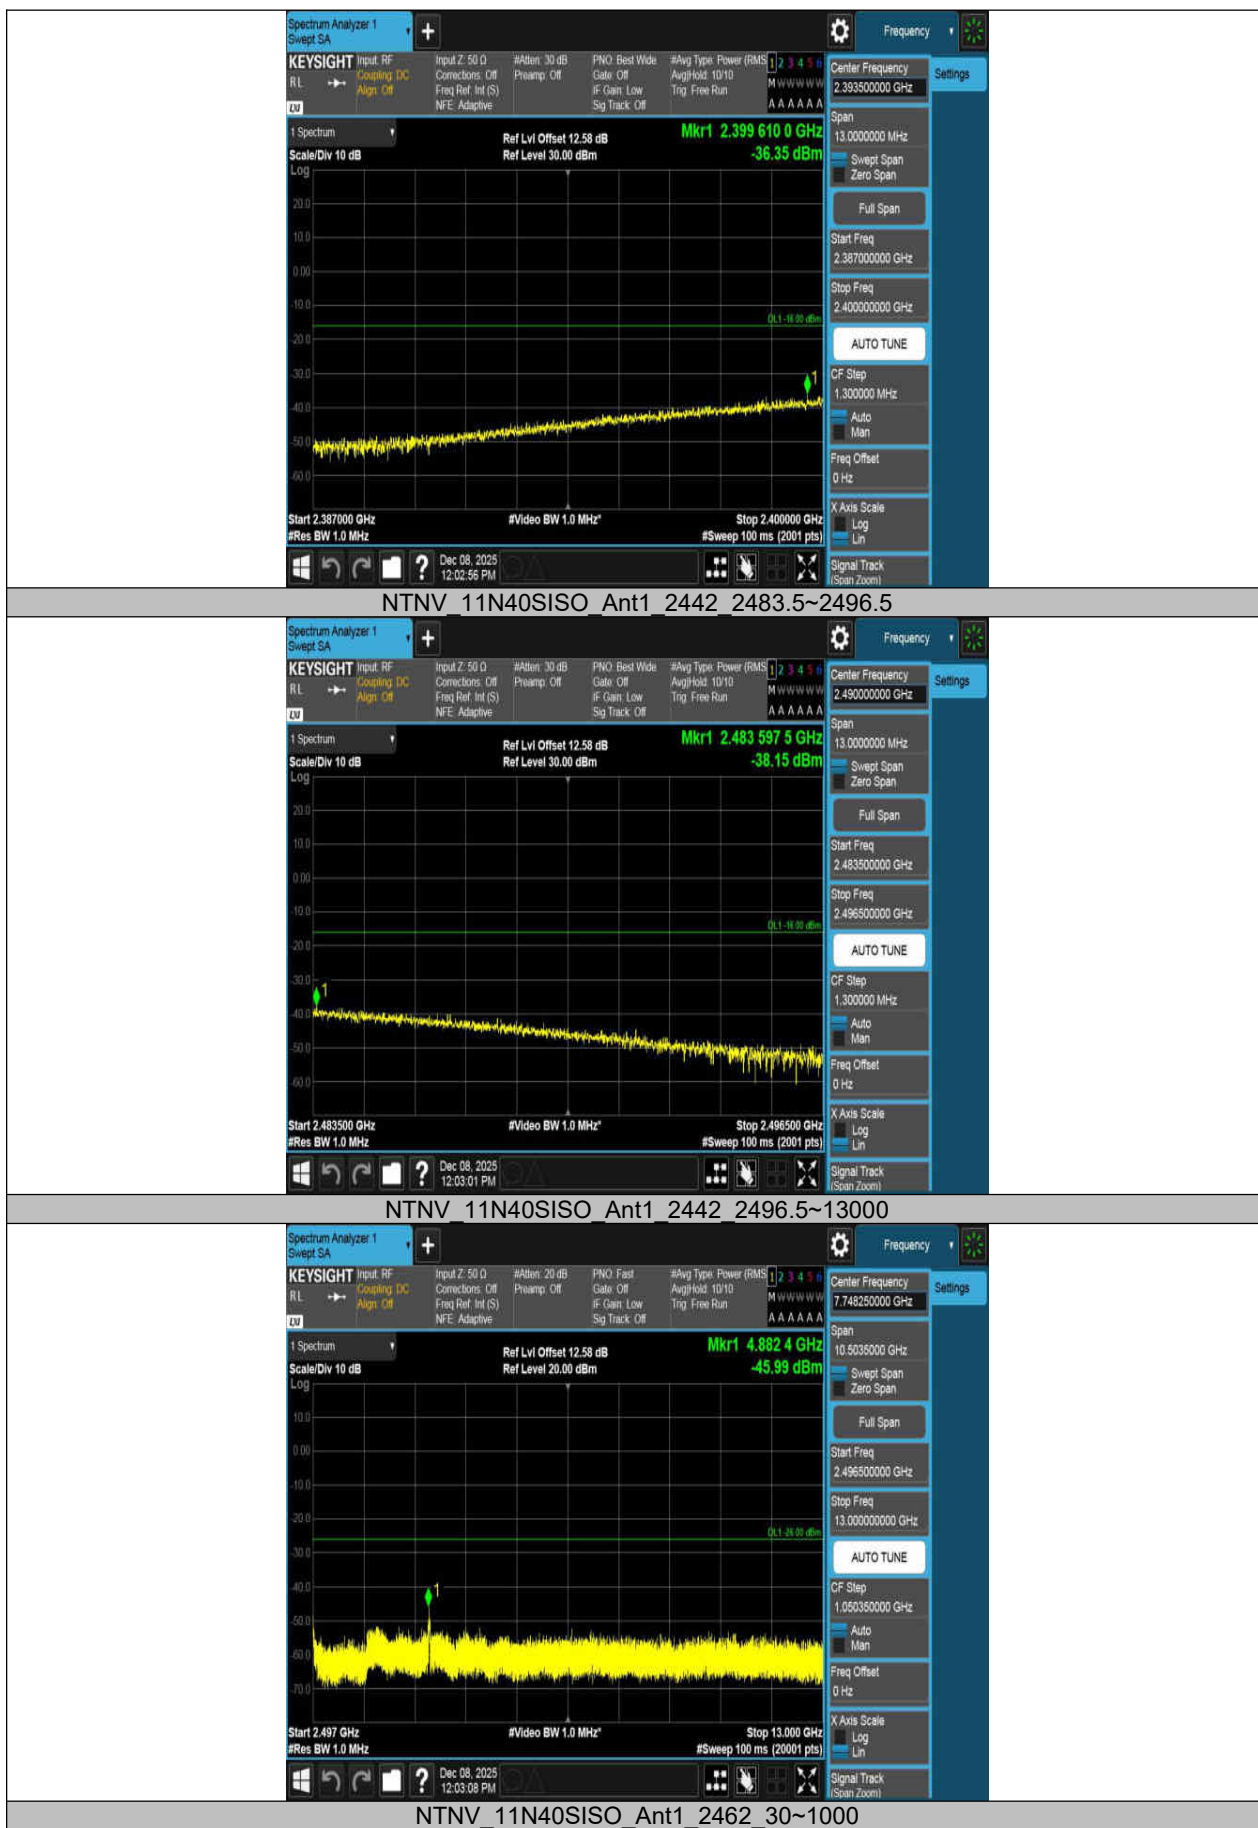




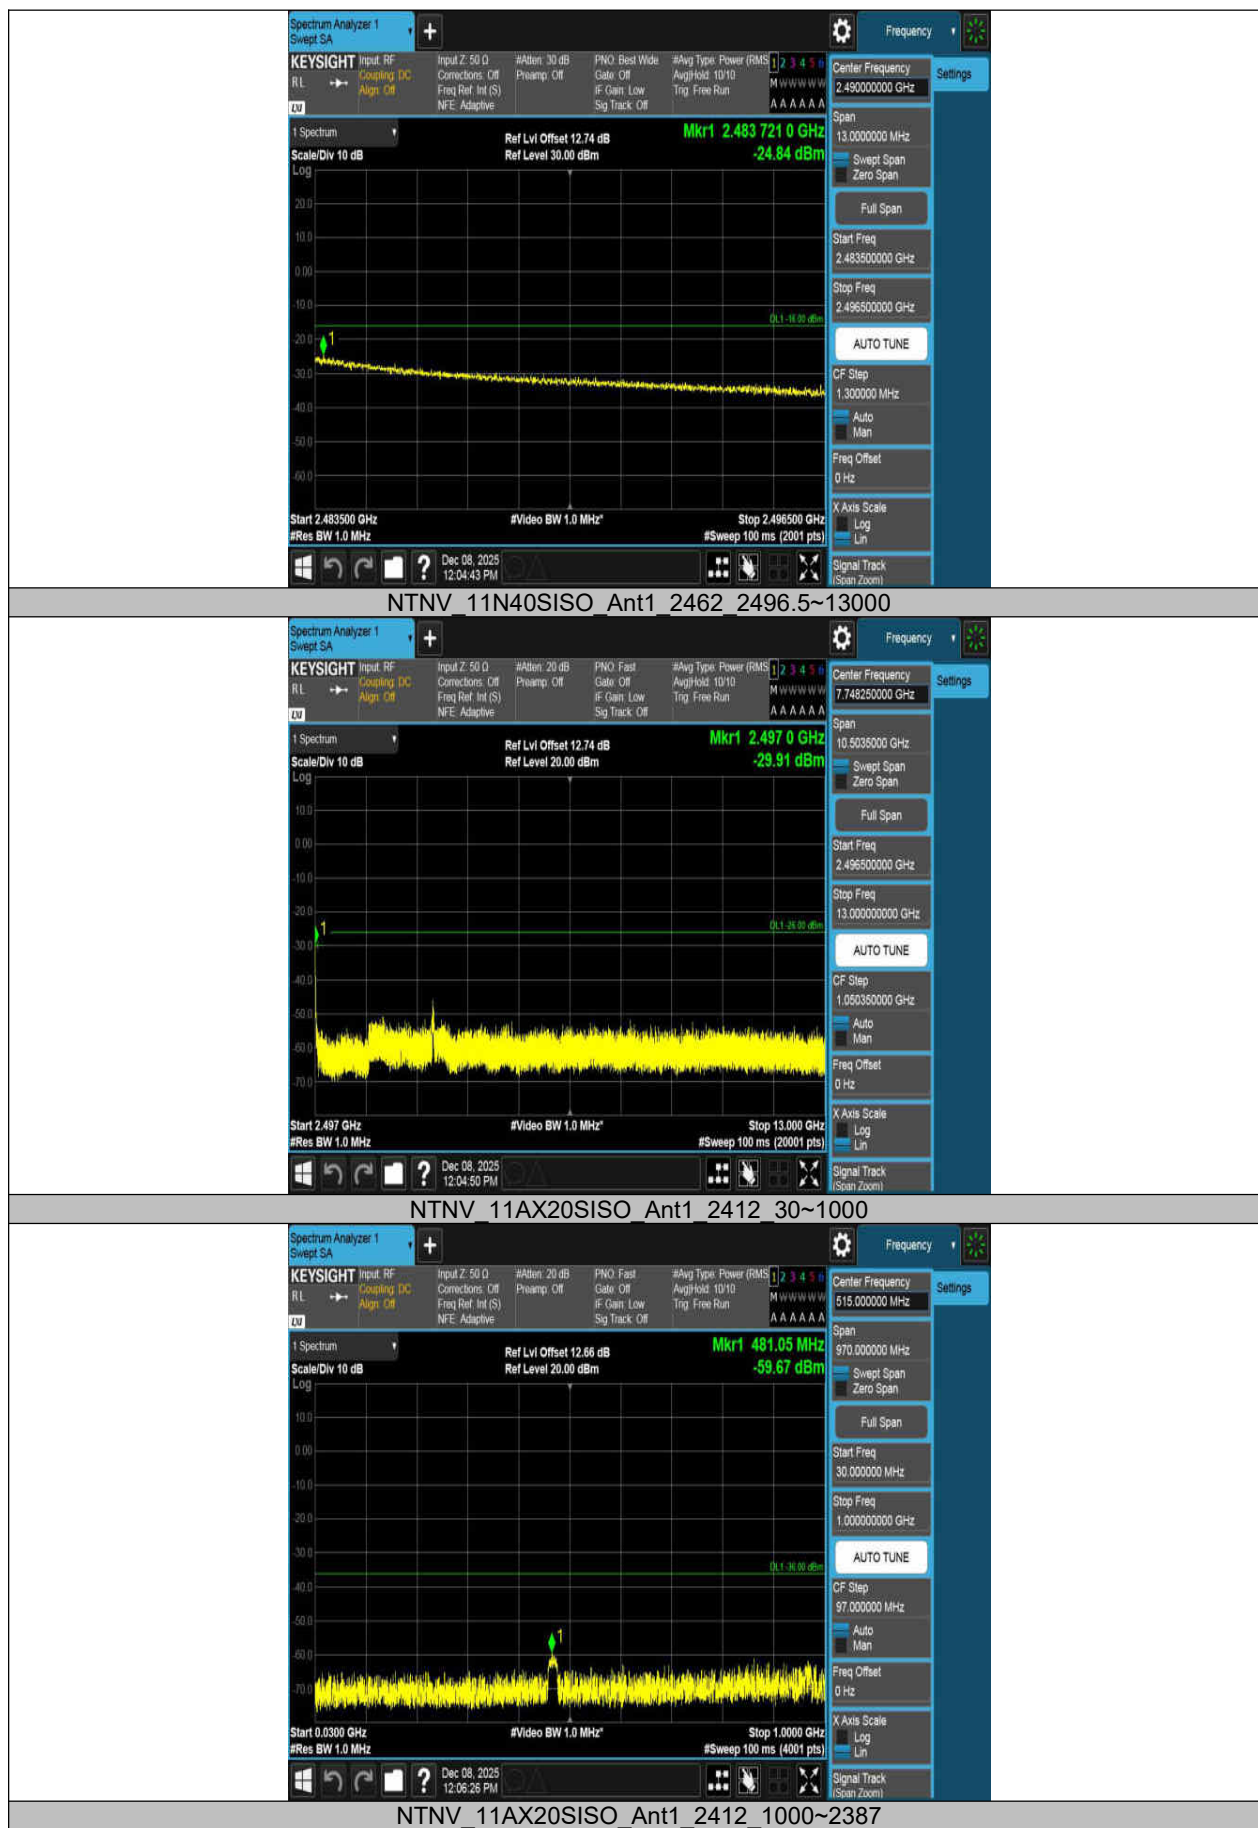


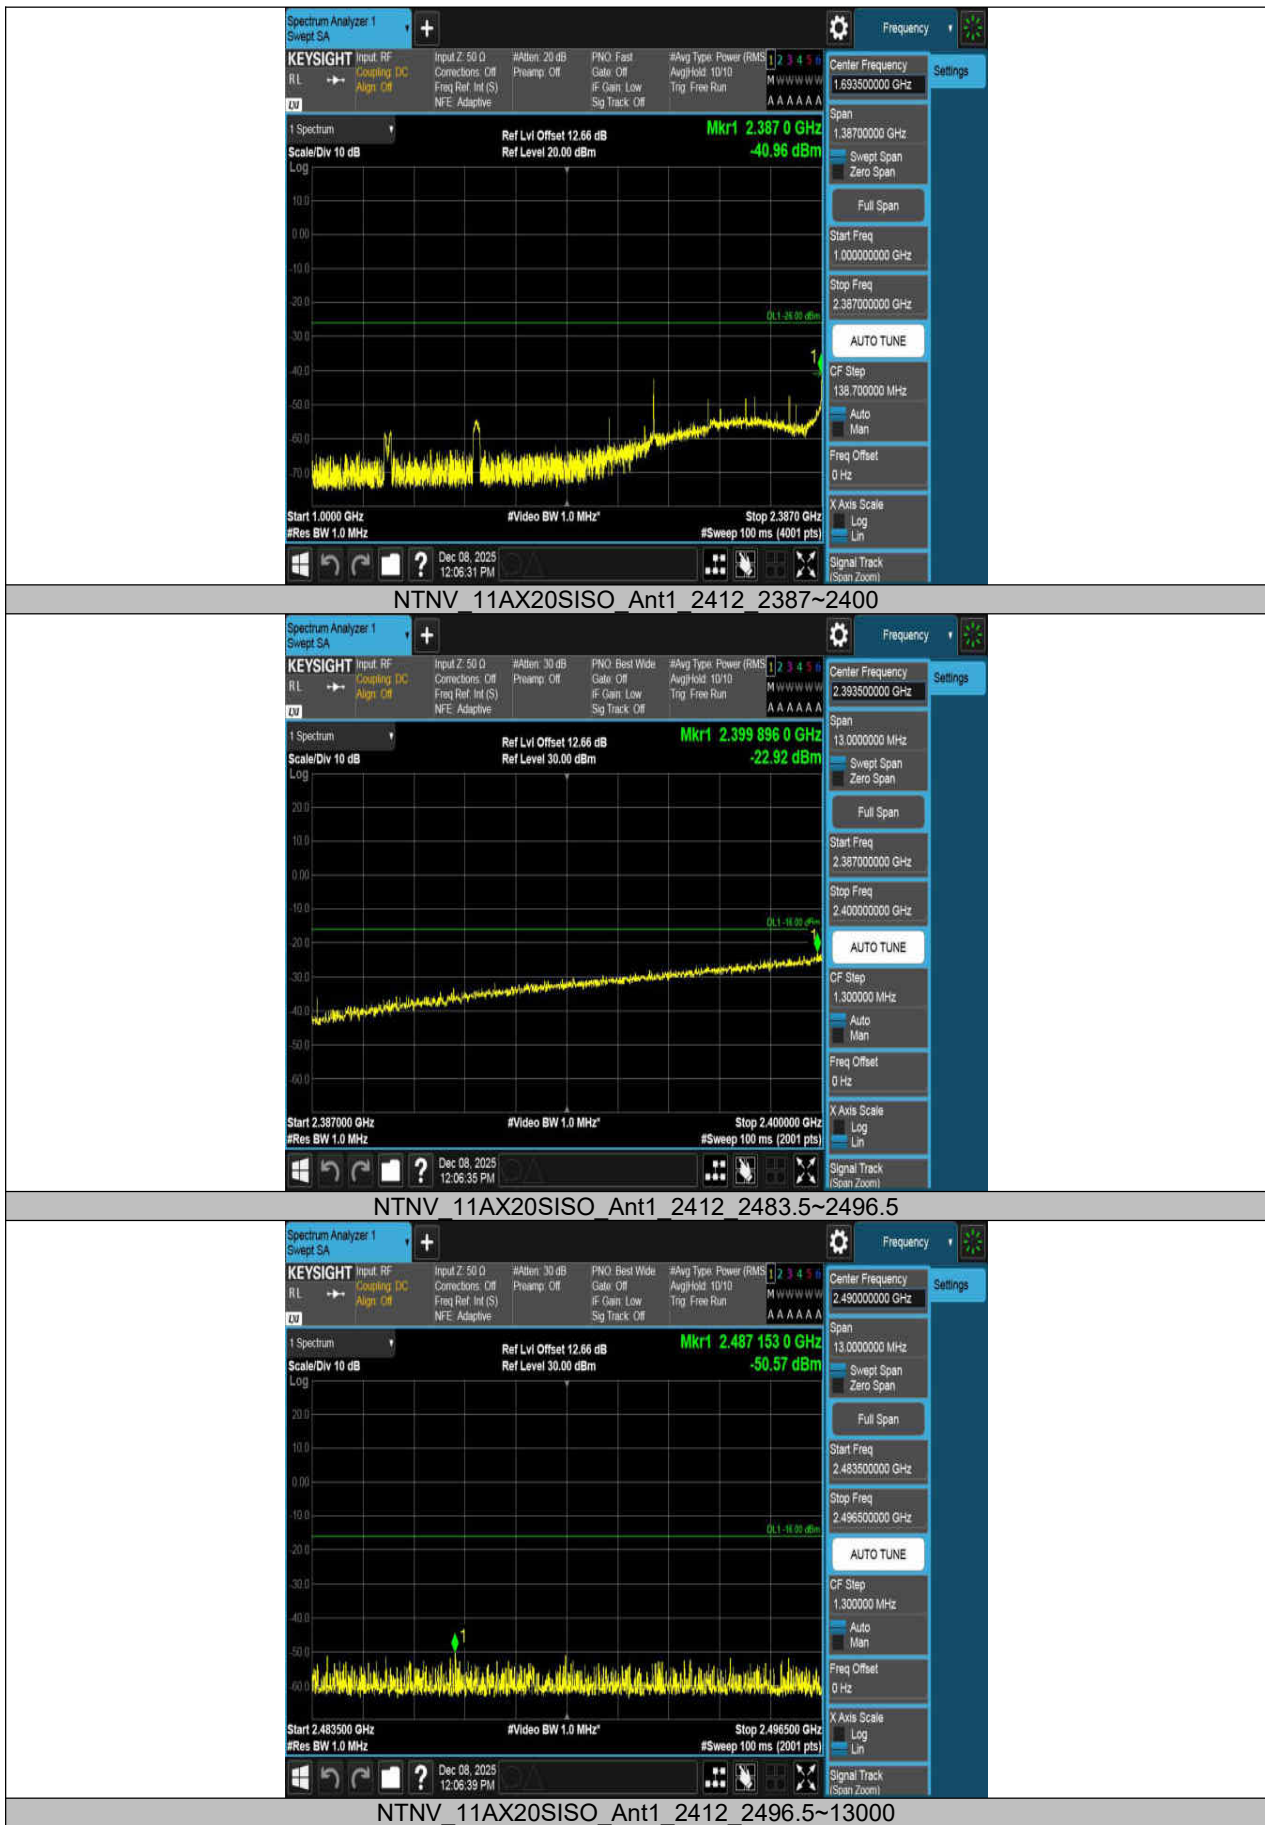





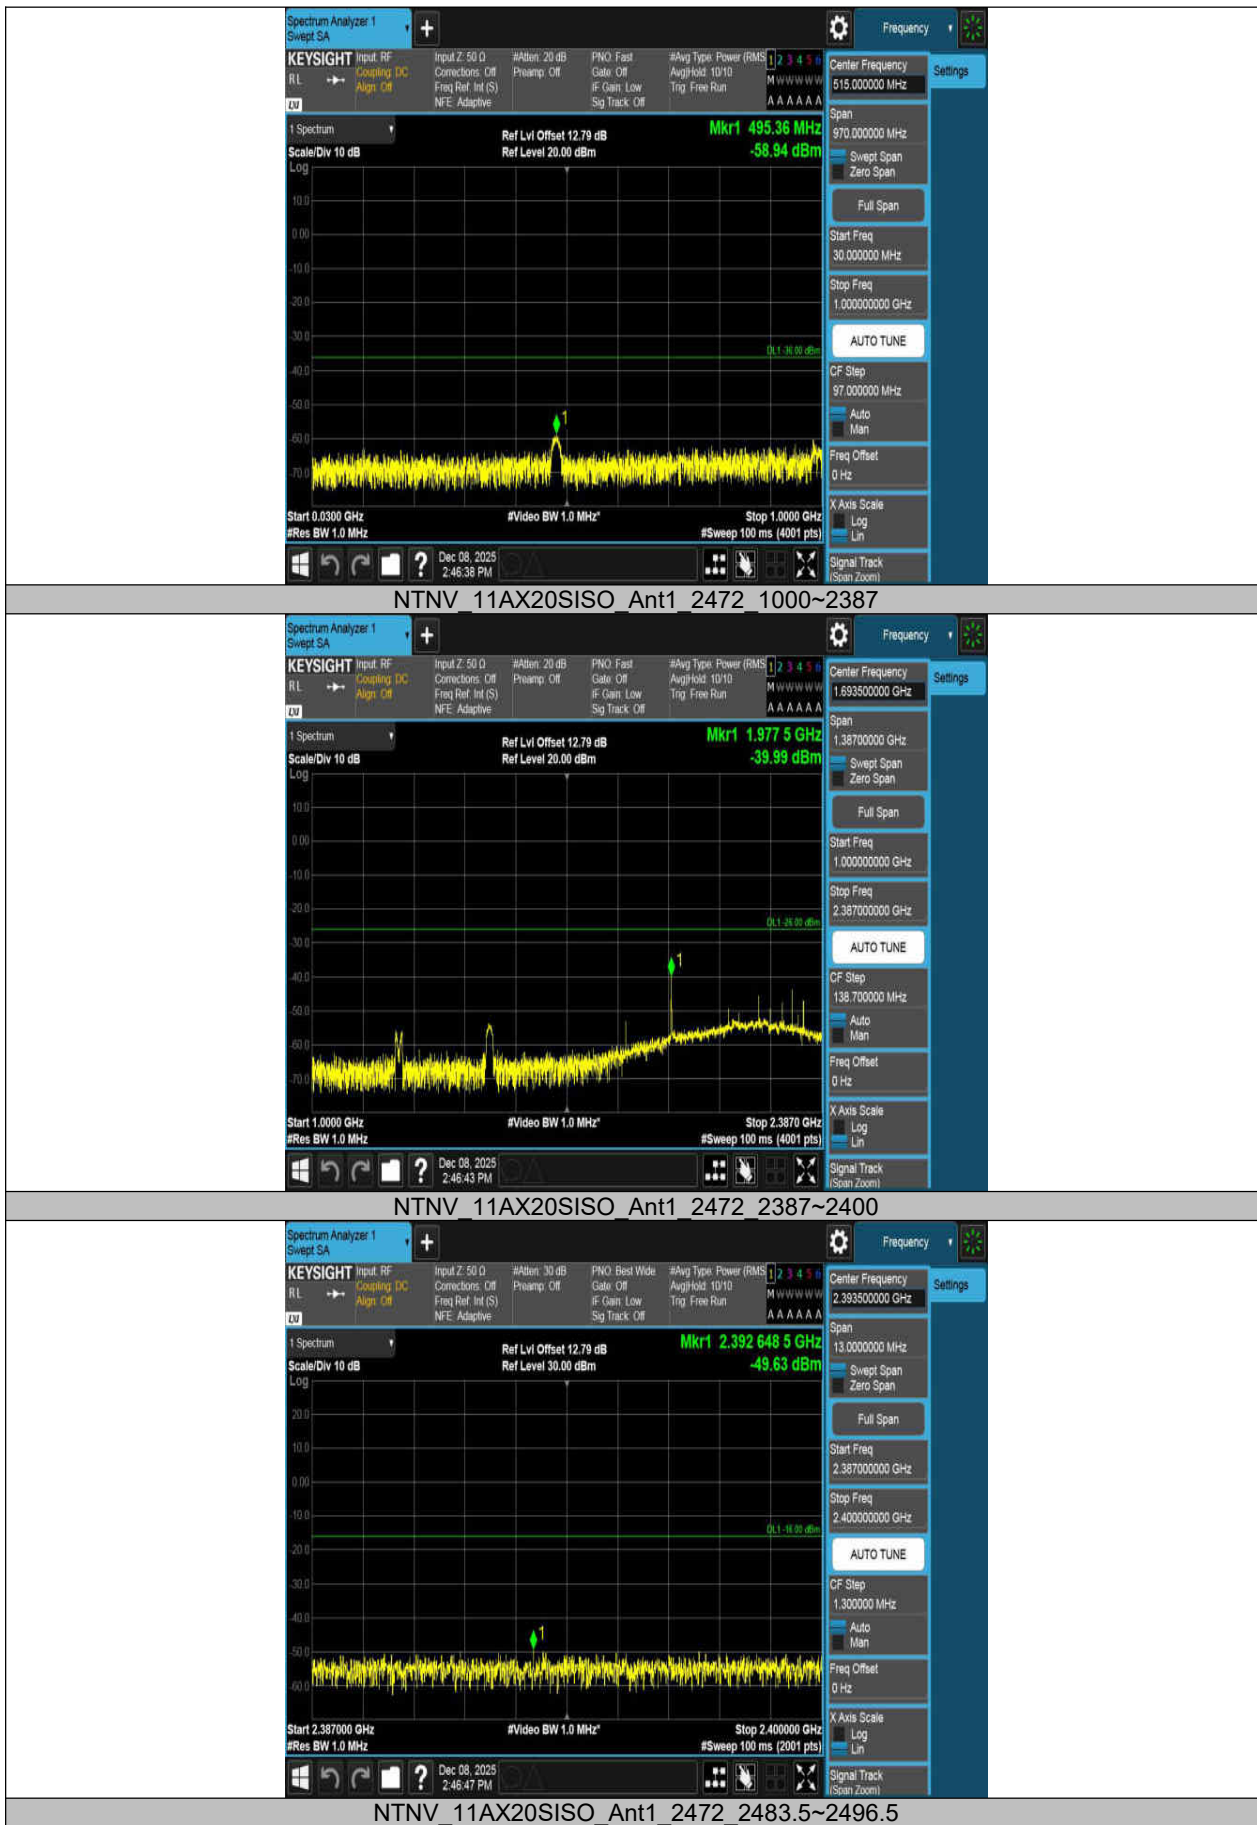


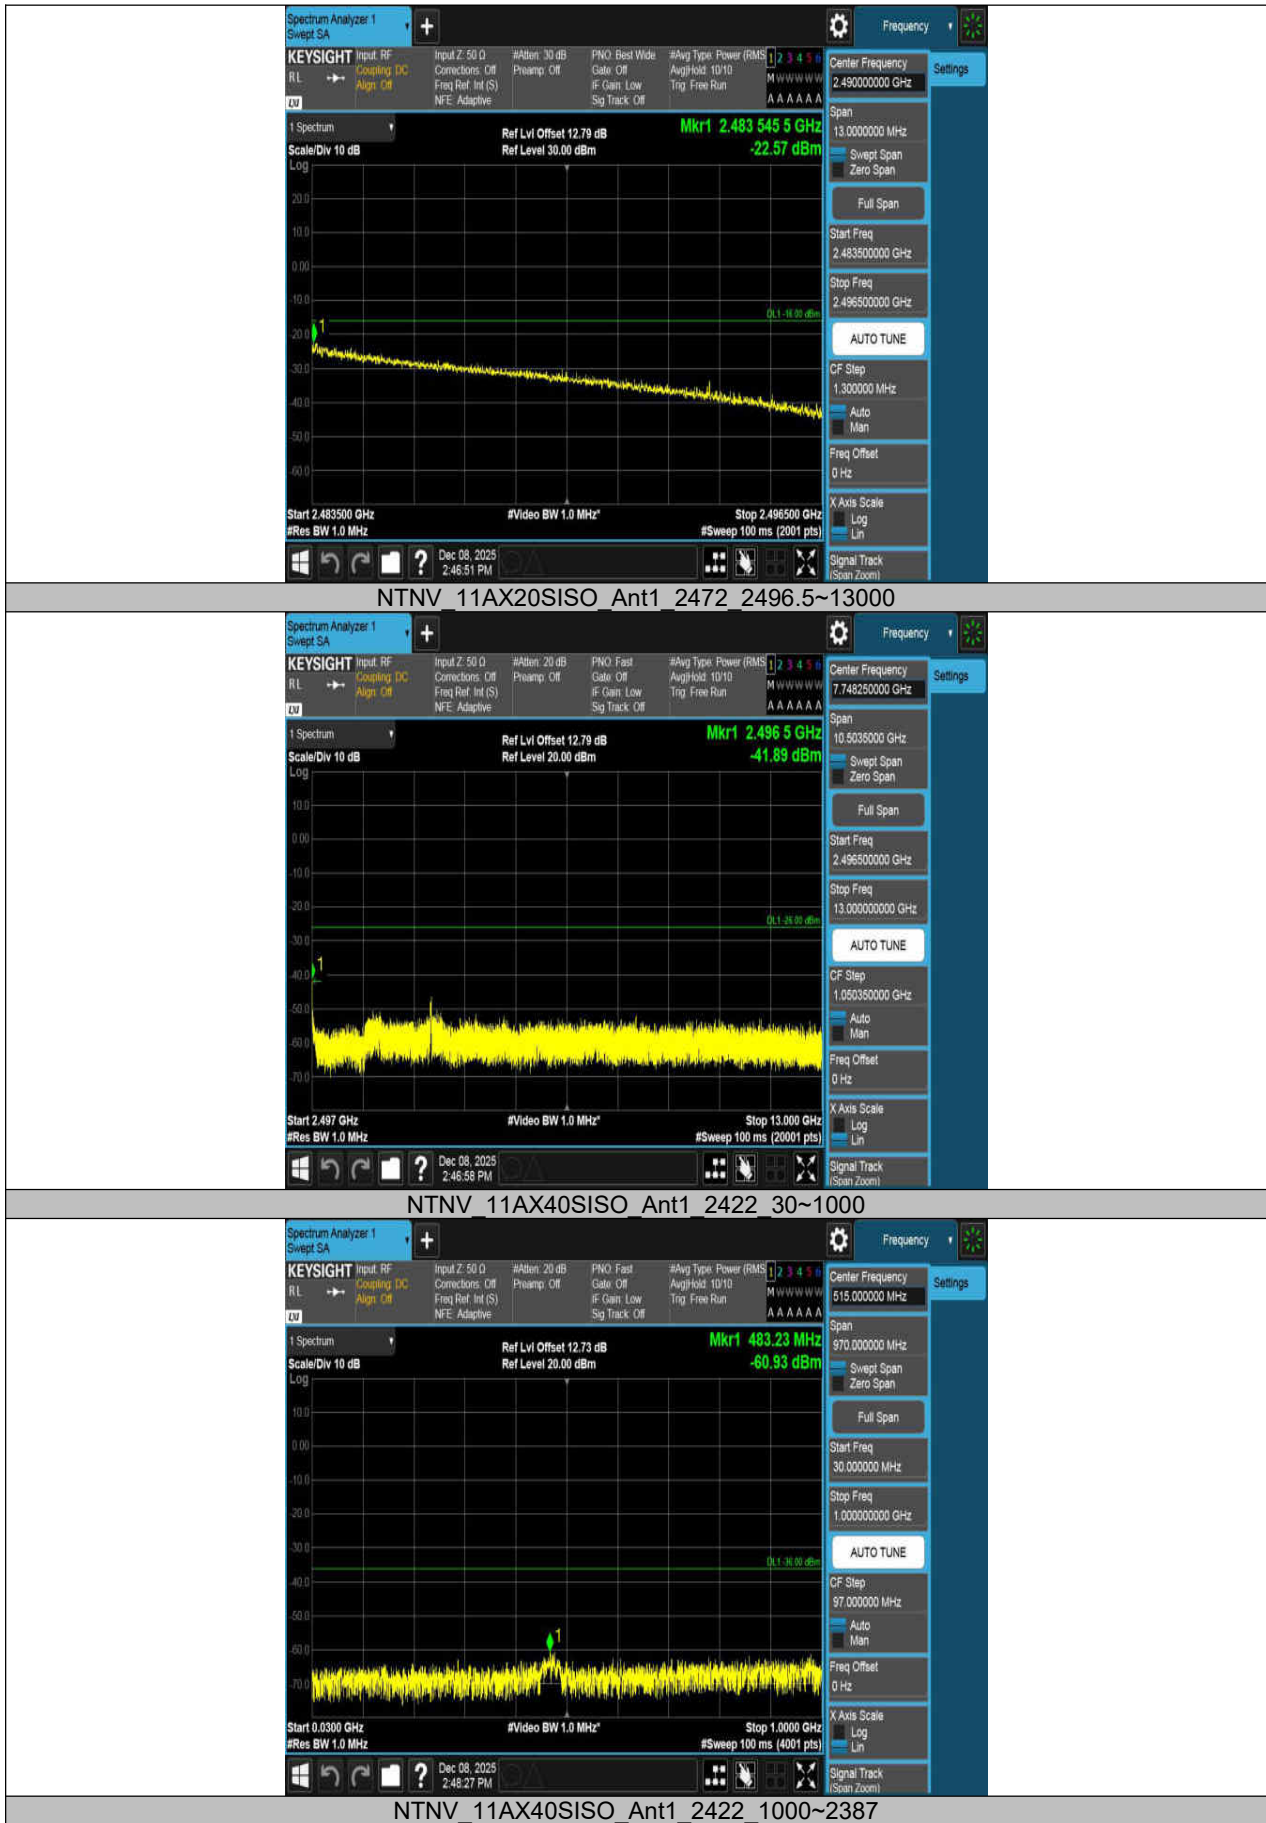








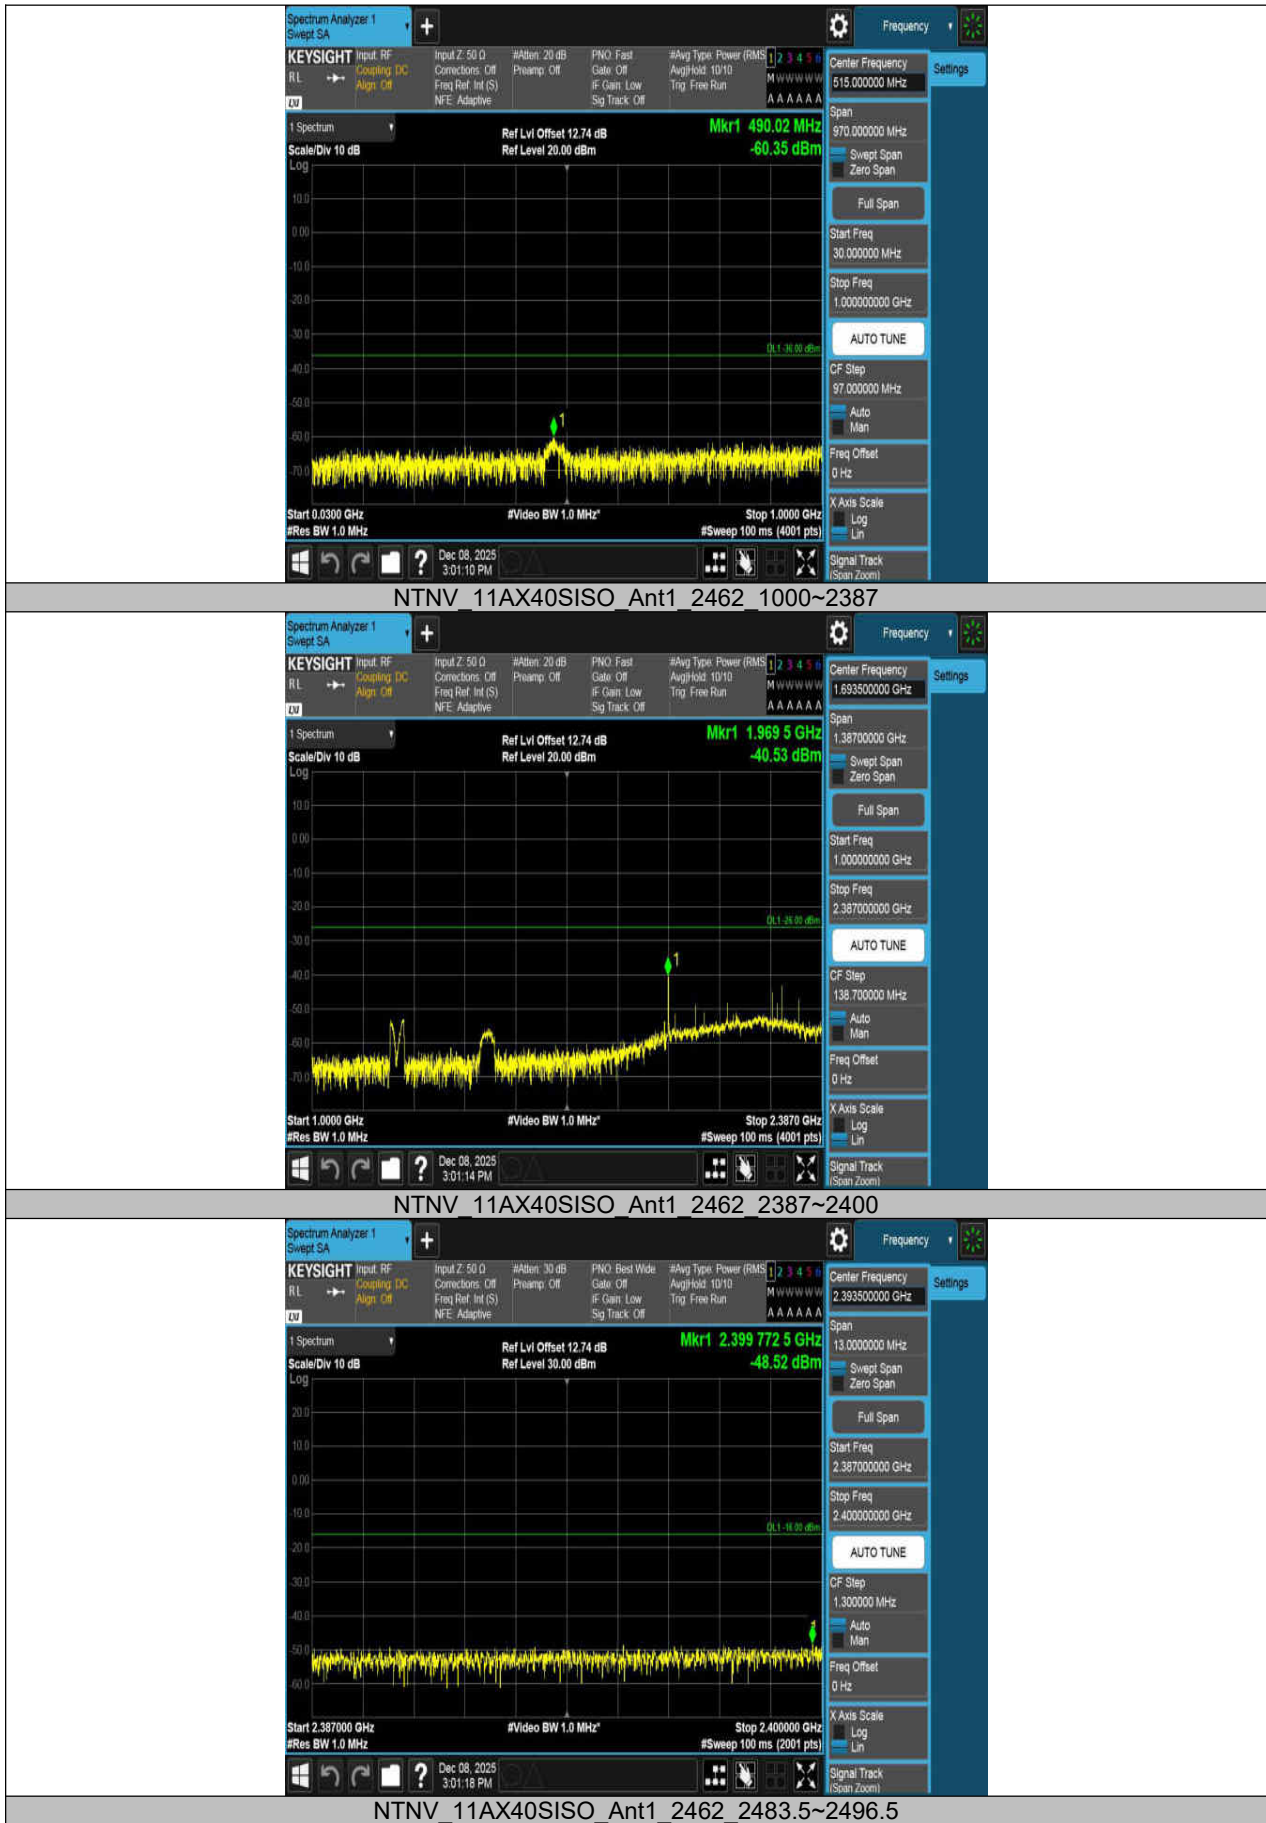

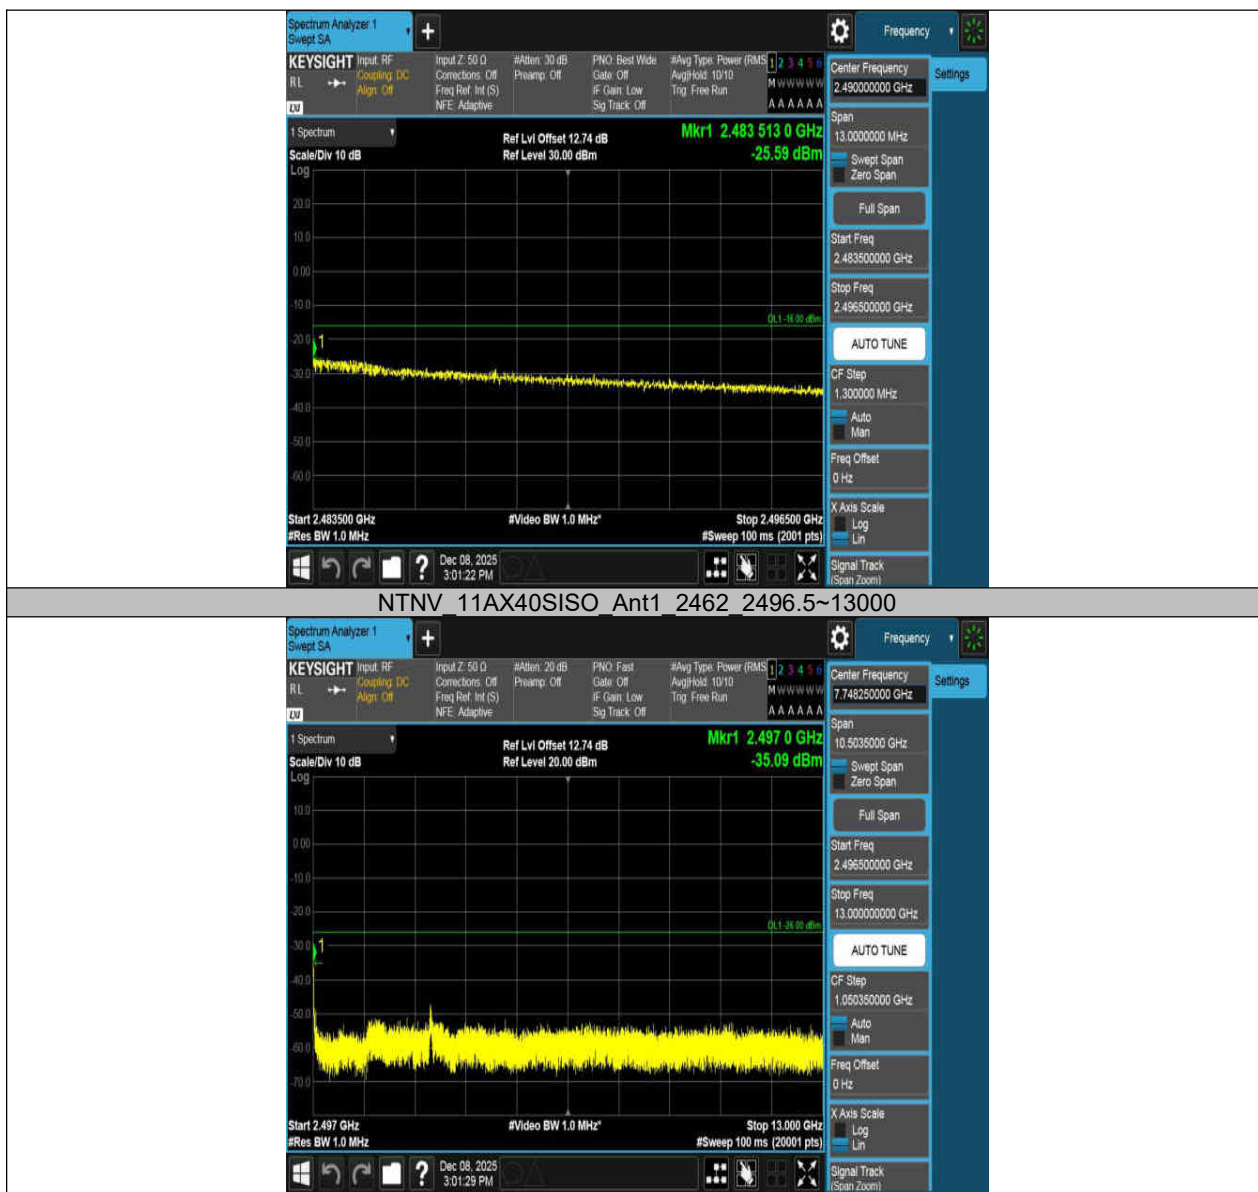

12. Secondary Radiated Emissions

12.1. Block Diagram of Test Setup

Same as section 8.1

12.2. Limits

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4 nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit.

12.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Resolution BW: 100 kHz for frequency below 1GHz and 1MHz for frequency above 1GHz

Video BW: 100 kHz for frequency below 1GHz and 1MHz for frequency above 1GHz

Detector: Peak.

Trace Mode: Max Hold.


(2) All the emissions from 30MHz to 13GHz were measured and record.

12.4. Results

Test Condition	Test Mode	Ant.	Freq. (MHz)	Freq. Range (MHz)	Result (dBm)	Limit (dBm)	Result (nW)	Limit (nW)	Verdict
NTNV	11B	Ant1	2412	30~1000	-83.36	≤-54	0.0046 ₁	≤4	PASS
				1000~12500	-71.60	≤-47	0.0691 ₈	≤20	PASS
			2442	30~1000	-83.40	≤-54	0.0045 ₇	≤4	PASS
				1000~12500	-62.30	≤-47	0.5888 ₄	≤20	PASS
			2472	30~1000	-83.38	≤-54	0.0045 ₉	≤4	PASS
				1000~12500	-71.38	≤-47	0.0727 ₈	≤20	PASS
	11G	Ant1	2412	30~1000	-83.39	≤-54	0.0045 ₈	≤4	PASS
				1000~12500	-72.02	≤-47	0.0628 ₁	≤20	PASS
			2442	30~1000	-83.17	≤-54	0.0048 ₂	≤4	PASS
				1000~12500	-72.02	≤-47	0.0628 ₁	≤20	PASS
			2472	30~1000	-82.99	≤-54	0.0050 ₂	≤4	PASS
				1000~12500	-71.80	≤-47	0.0660 ₇	≤20	PASS
	11N20 SISO	Ant1	2412	30~1000	-83.07	≤-54	0.0049 ₃	≤4	PASS
				1000~12500	-72.19	≤-47	0.0603 ₉	≤20	PASS
			2442	30~1000	-83.33	≤-54	0.0046 ₅	≤4	PASS
				1000~12500	-72.55	≤-47	0.0555 ₉	≤20	PASS
			2472	30~1000	-83.29	≤-54	0.0046 ₉	≤4	PASS
				1000~125	-71.87	≤-47	0.0650	≤20	PASS

				00			1		
	11N40 SISO	Ant1	2422	30~1000	-82.98	≤-54	0.0050 4	≤4	PASS
				1000~125 00	-72.00	≤-47	0.0631 0	≤20	PASS
			2442	30~1000	-83.33	≤-54	0.0046 5	≤4	PASS
				1000~125 00	-71.41	≤-47	0.0722 8	≤20	PASS
			2462	30~1000	-83.12	≤-54	0.0048 8	≤4	PASS
				1000~125 00	-72.42	≤-47	0.0572 8	≤20	PASS
	11AX2 0SISO	Ant1	2412	30~1000	-83.07	≤-54	0.0049 3	≤4	PASS
				1000~125 00	-72.32	≤-47	0.0586 1	≤20	PASS
			2442	30~1000	-83.02	≤-54	0.0049 9	≤4	PASS
				1000~125 00	-71.52	≤-47	0.0704 7	≤20	PASS
			2472	30~1000	-83.12	≤-54	0.0048 8	≤4	PASS
				1000~125 00	-71.97	≤-47	0.0635 3	≤20	PASS
	11AX4 0SISO	Ant1	2422	30~1000	-82.93	≤-54	0.0050 9	≤4	PASS
				1000~125 00	-72.28	≤-47	0.0591 6	≤20	PASS
			2442	30~1000	-83.21	≤-54	0.0047 8	≤4	PASS
				1000~125 00	-71.95	≤-47	0.0638 3	≤20	PASS
			2462	30~1000	-83.04	≤-54	0.0049 7	≤4	PASS
				1000~125 00	-70.75	≤-47	0.0841 4	≤20	PASS


12.5. Original Test Data

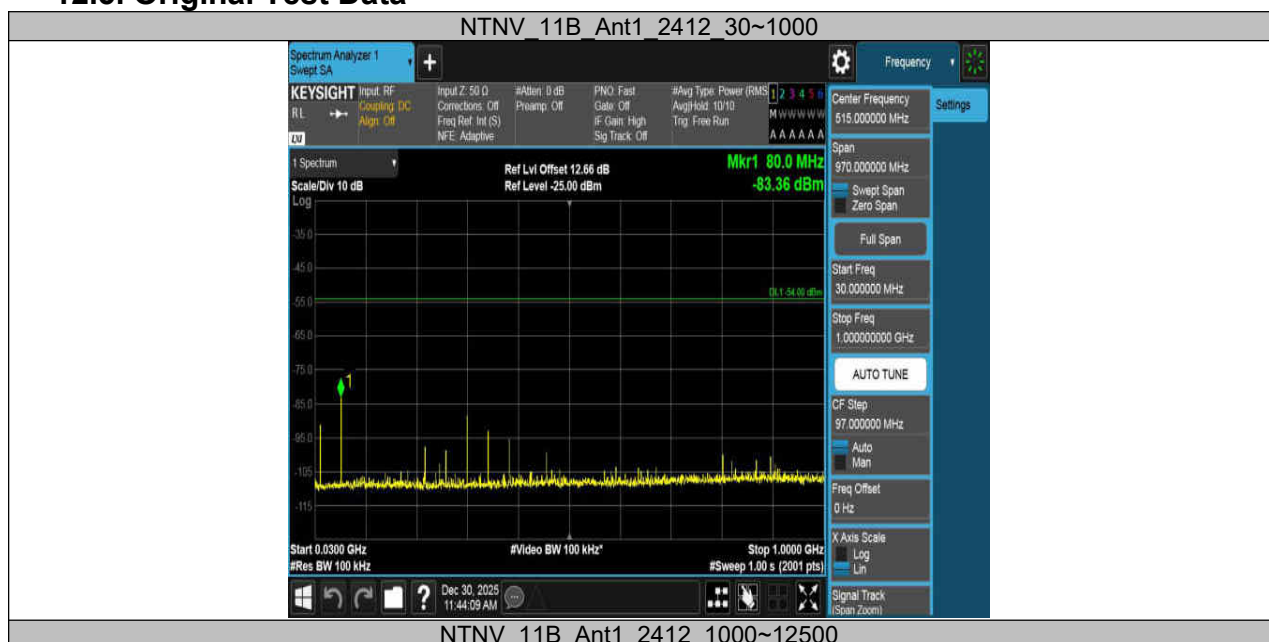









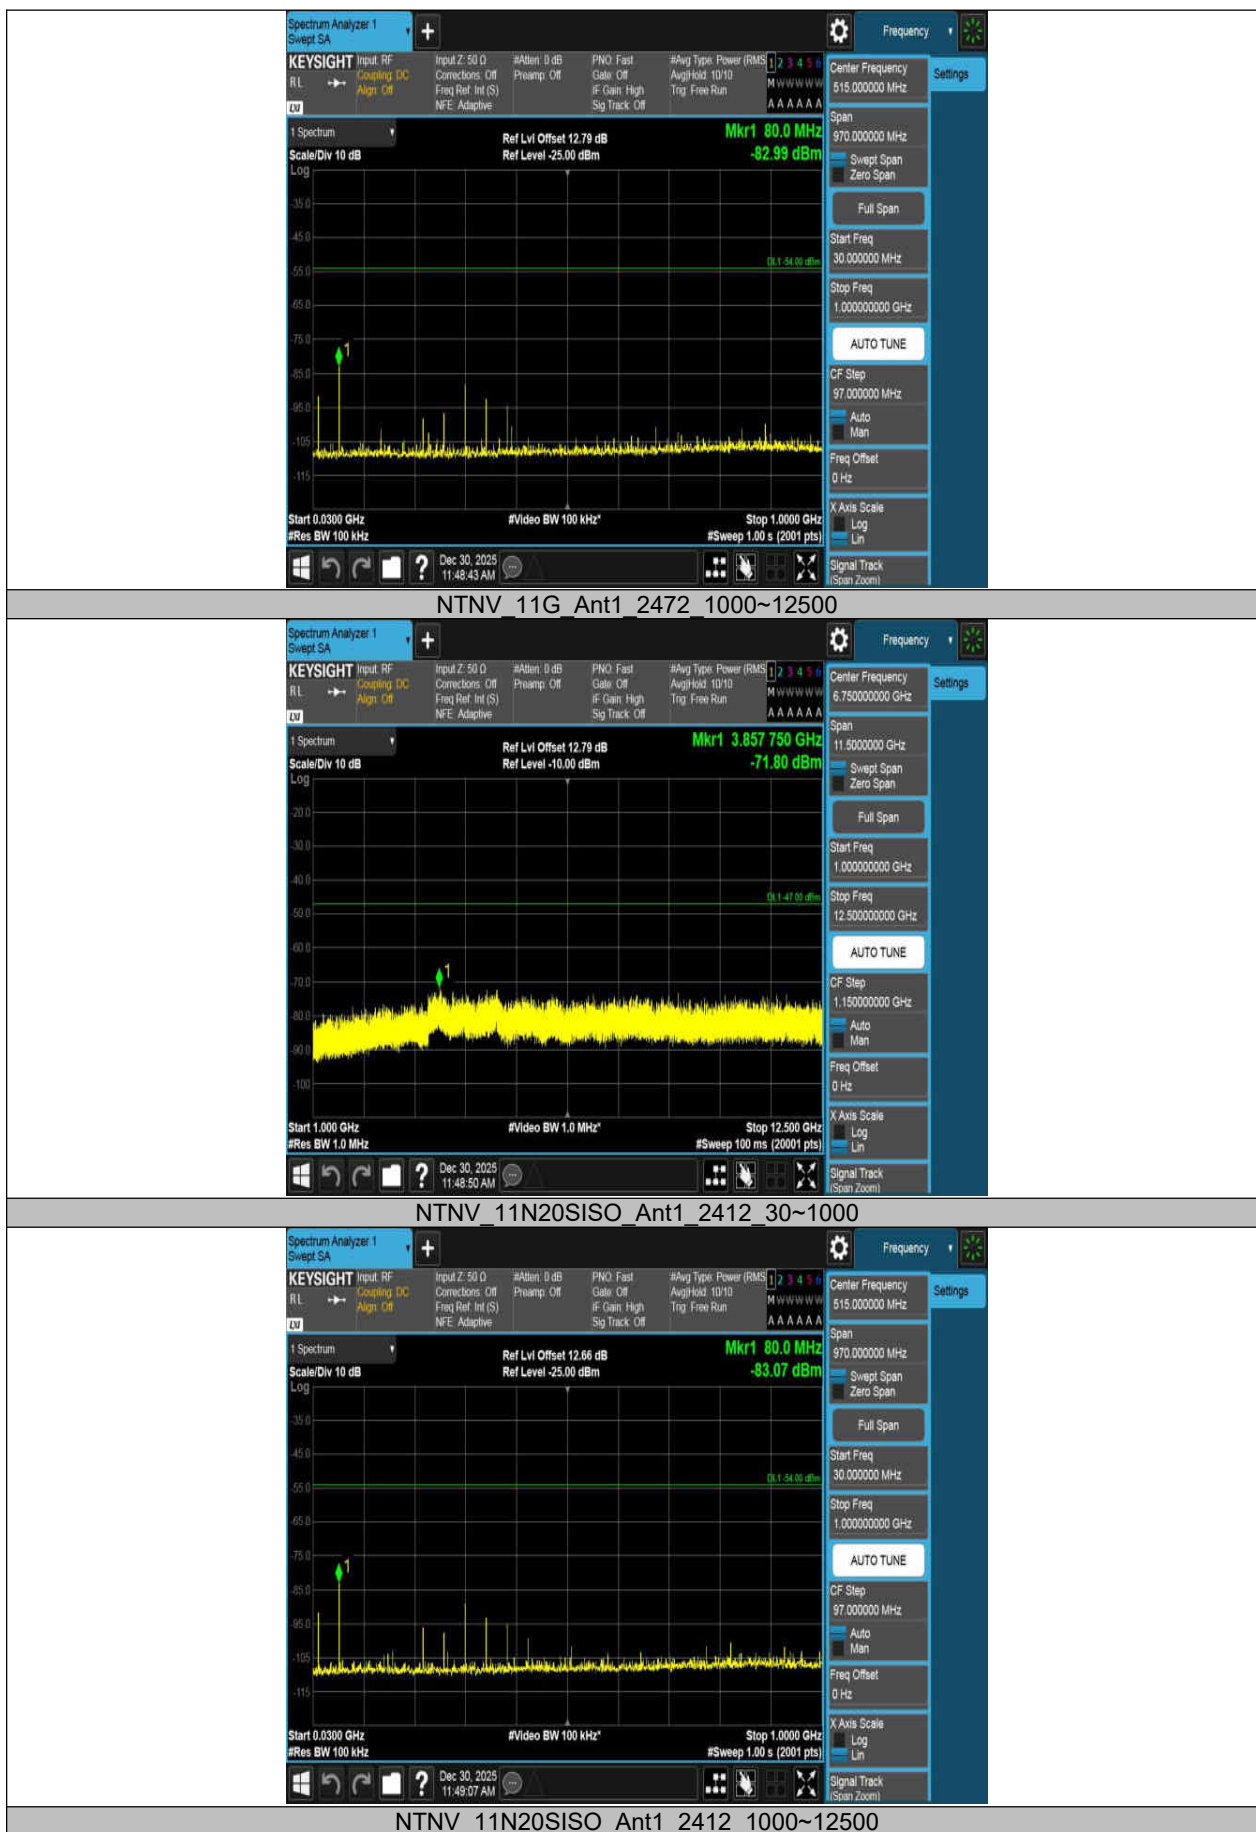




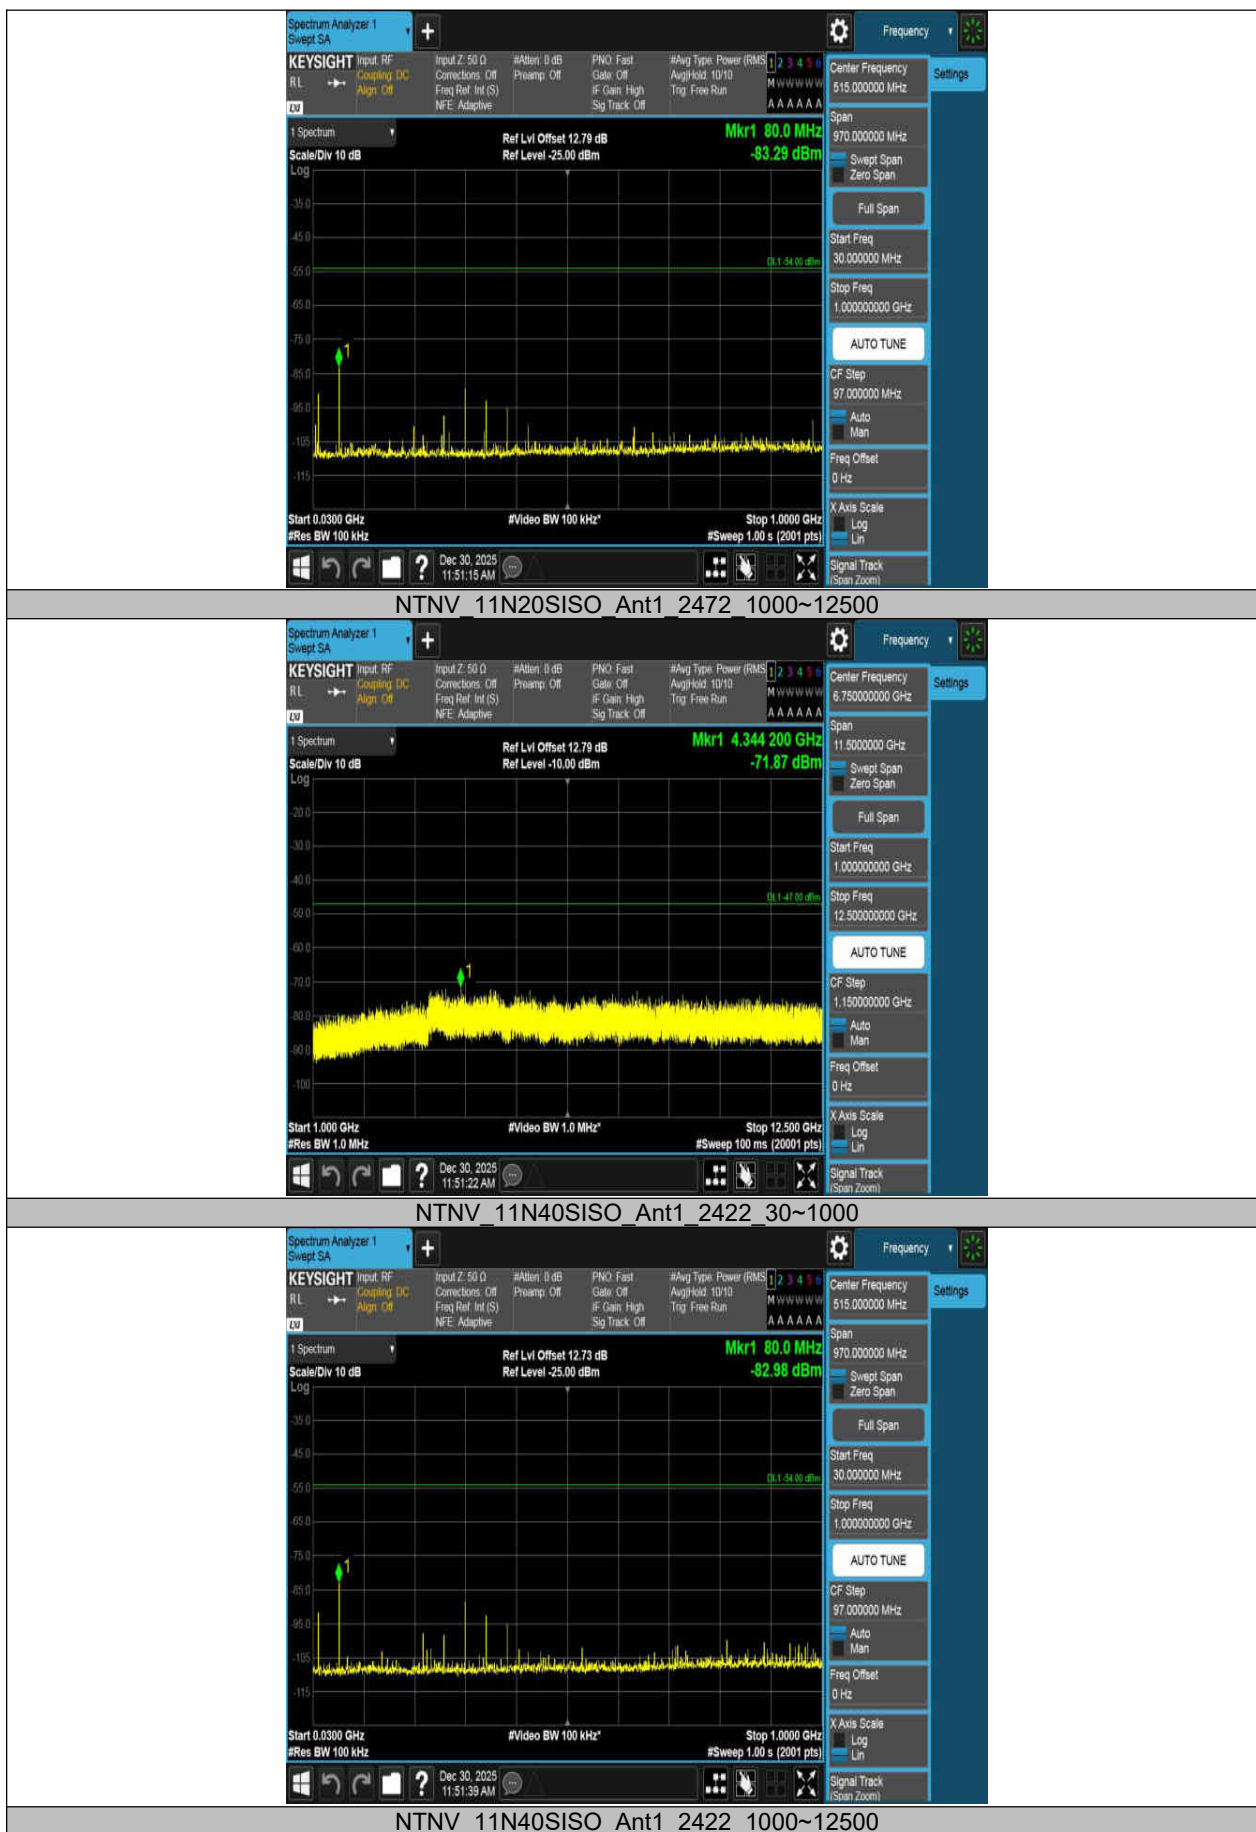




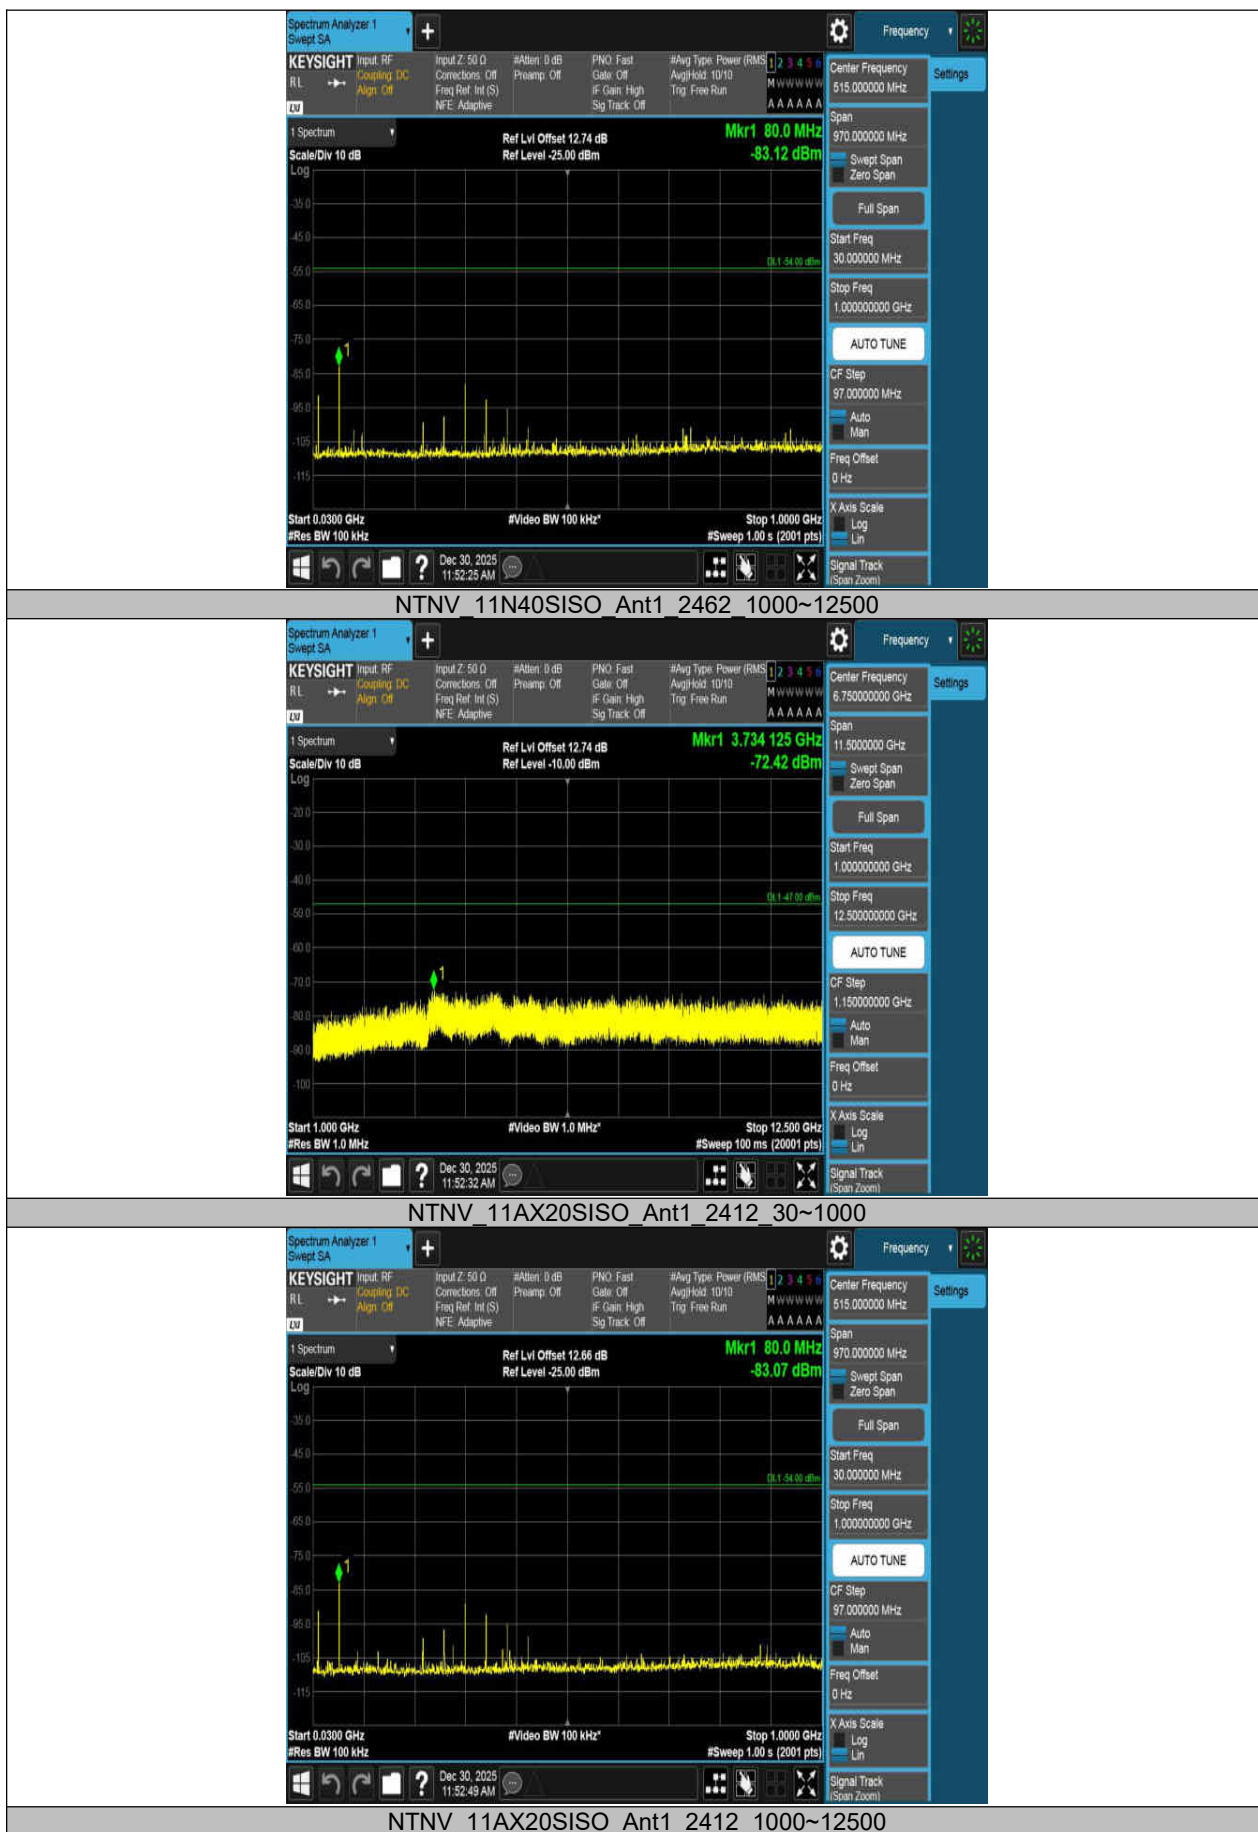



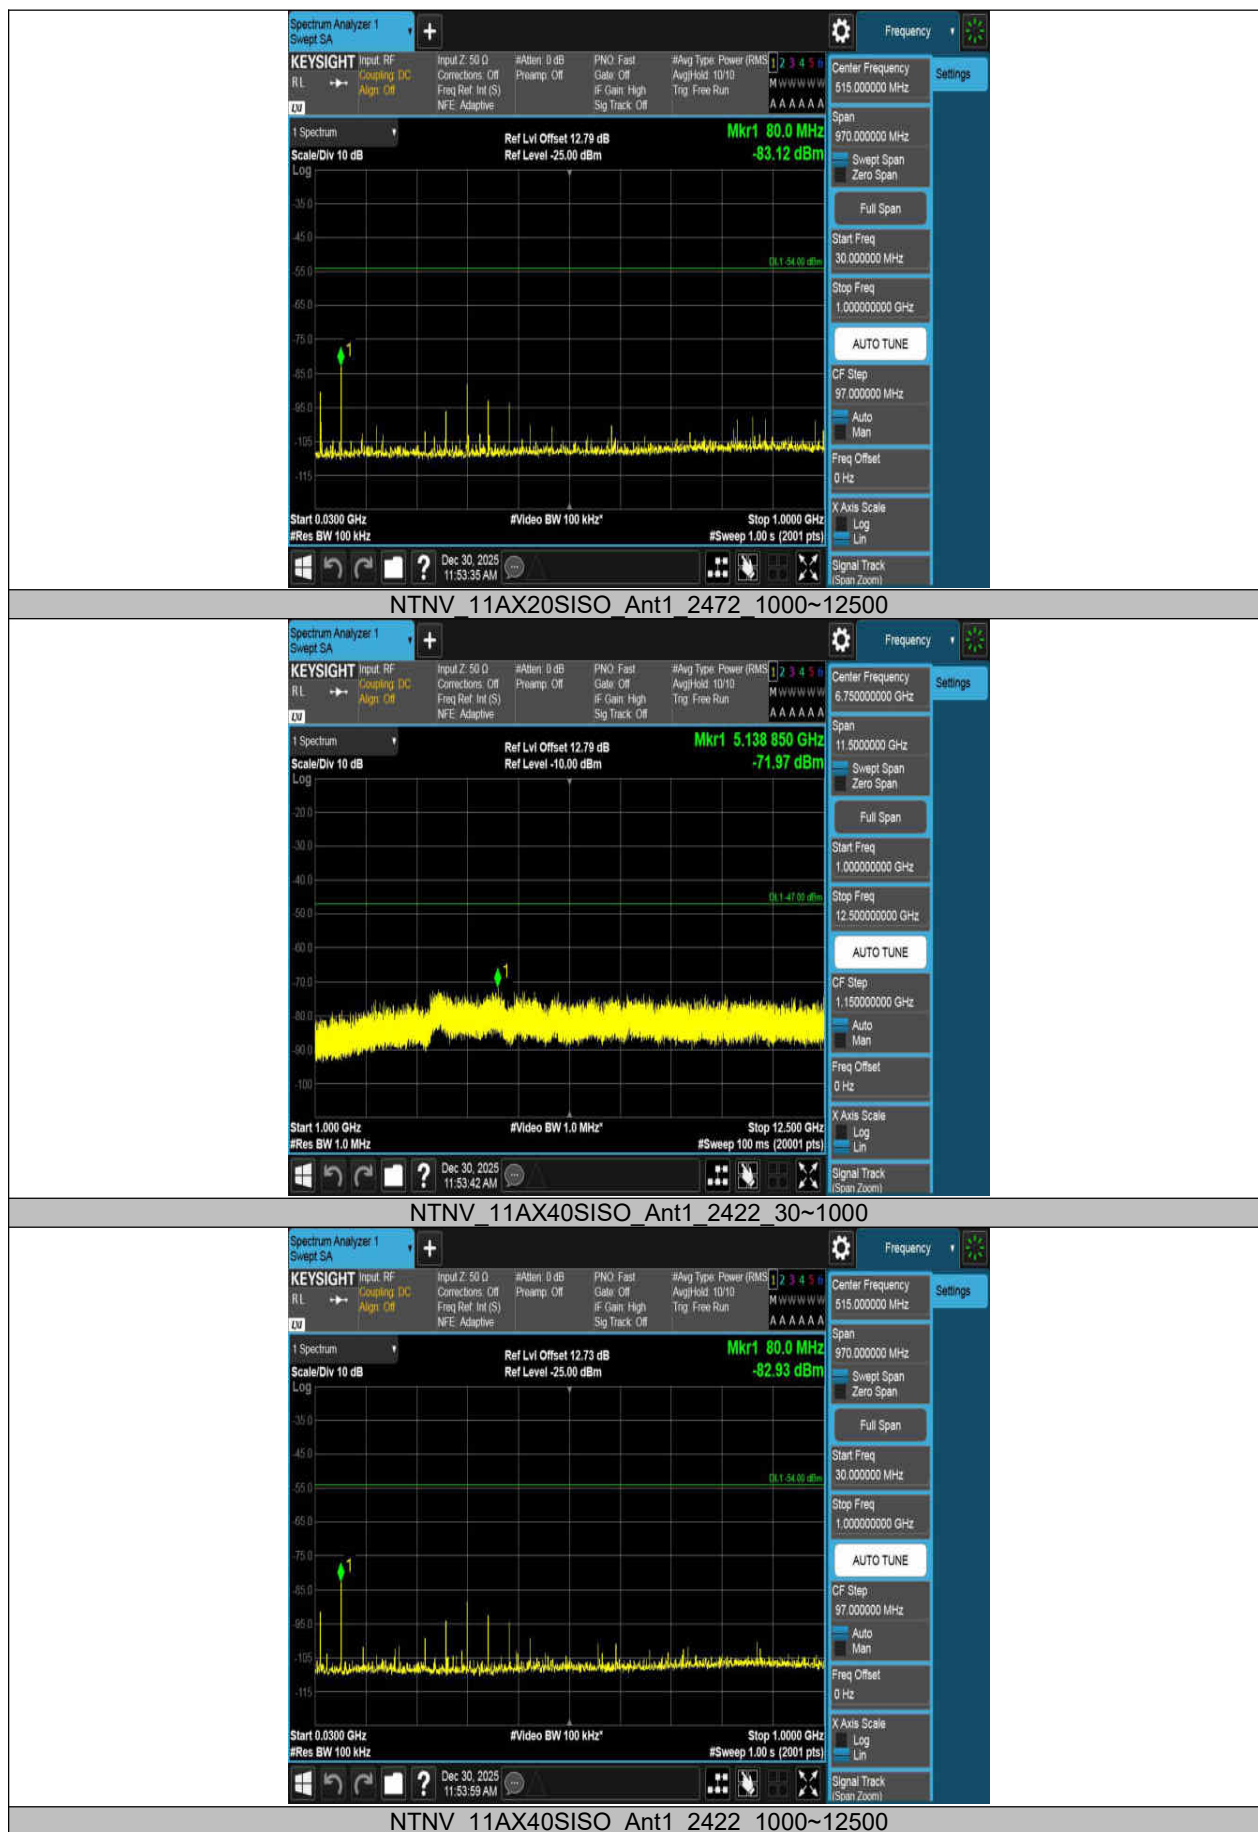




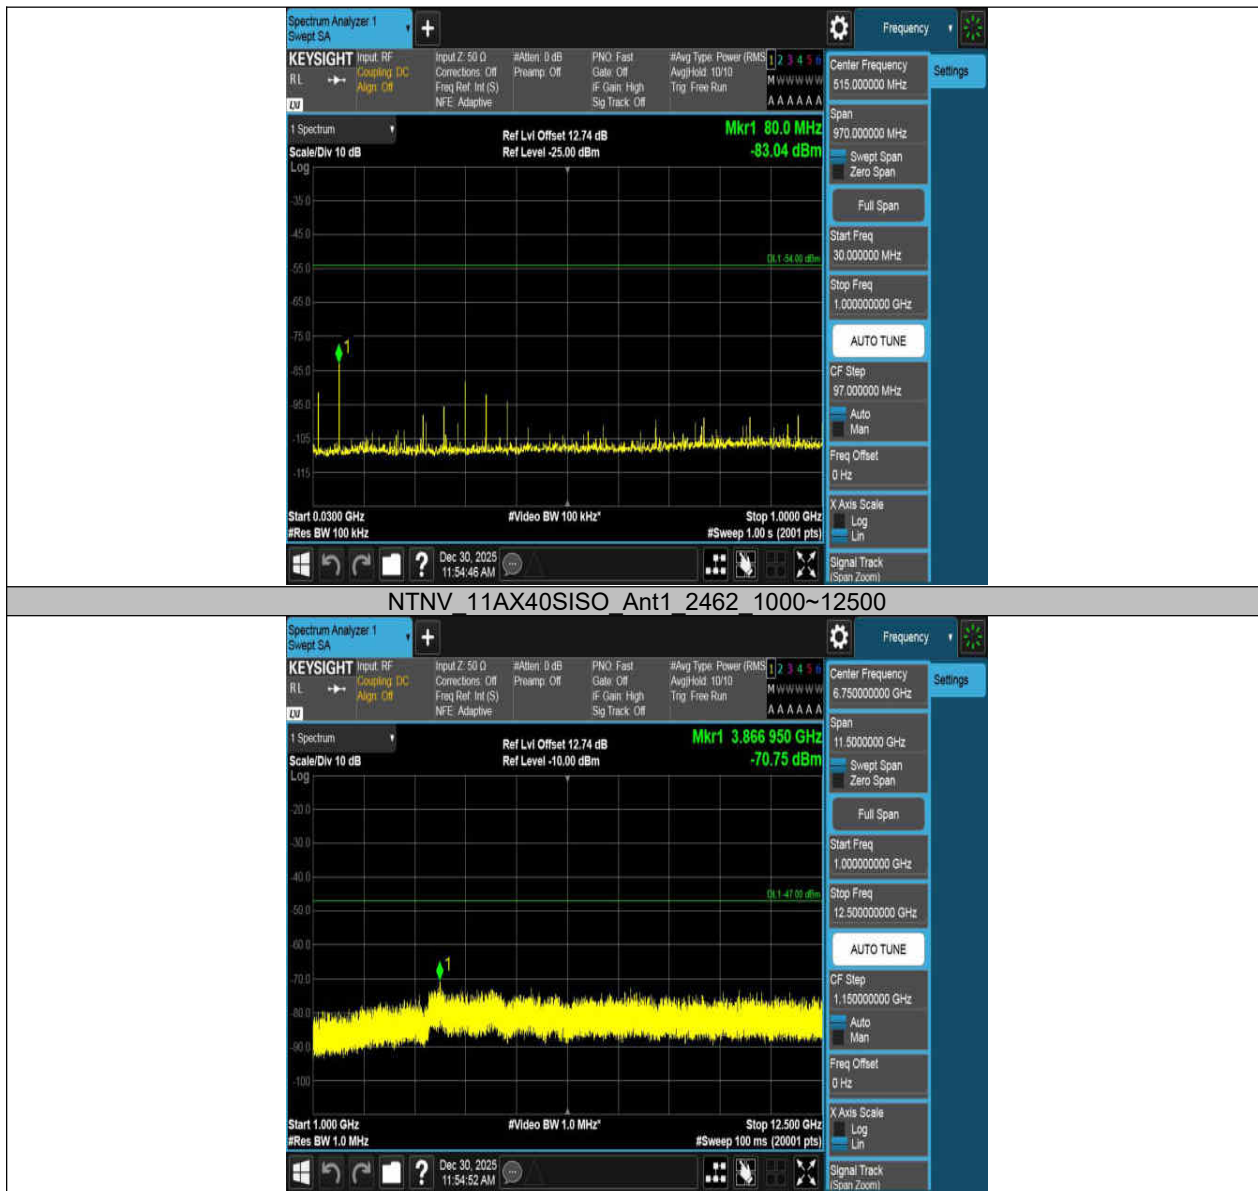


13. Carrier Sense Measurement

13.1. Block Diagram of Test Setup

(1) Test with test equipment only

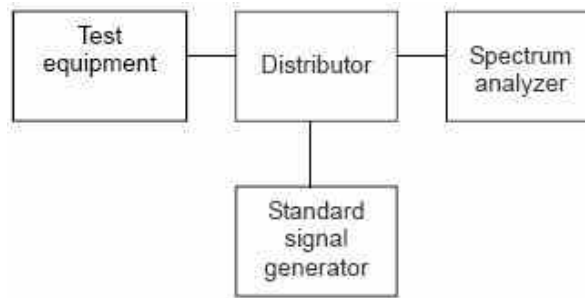

(2) Test with external test device

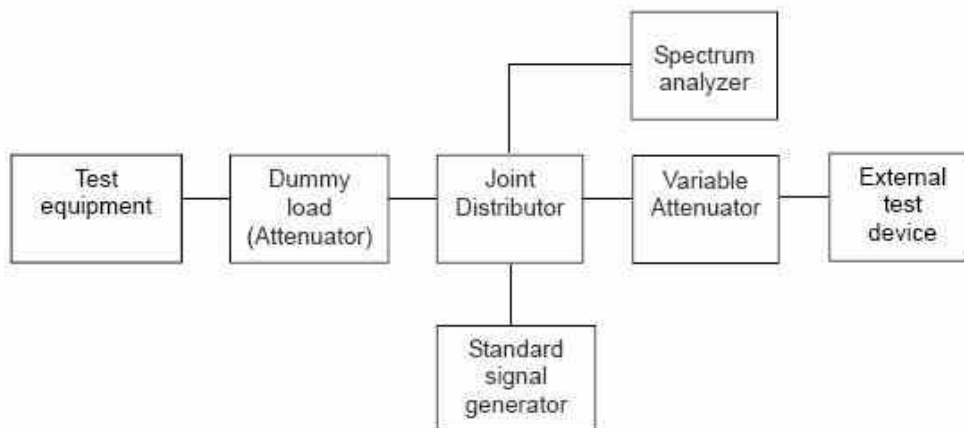

13.2. Test Procedure

Condition of measuring instrument

(1) Set the standard signal generator as follows:

Carrier frequency: Center frequency of receiving frequency band of test equipment

Modulation: No modulation. (note1)

Output level: regulated level on antenna input of test equipment

Note 1: The un-modulate carrier in the center frequency, when the carrier sense function of test equipment is not worked, if necessary, change the frequency or modulate it.

(2) Set the spectrum analyzer as follows:

Center frequency: Center frequency of the bandwidth used (note2)

Sweep frequency band: 50MHz (note2)

Resolution bandwidth: Approximately 1 MHz

Video bandwidth: Comparable level with resolution bandwidth

Trigger condition: Free-run

Detective mode: positive peak

Note 2: Under 26MHz of OFDM or other modulated method that with transmit function, set sweep frequency band as 0Hz, detective mode as sample, center frequency as the carrier frequency from 13MHz to 19MHz.

(3) External test device must be the one that can connect with the test equipment by line connection. However, facing device that can communicate with the test equipment can substitute it.

Condition of test equipment

Set the test equipment at the test frequency and the test spread code, and set it to the receiving mode in the beginning. When using external test device, connect with the test equipment by line connection.

Measuring operation procedure

(1) Test with test equipment only:

(A) Set the spectrum analyzer according to (2) of 2).

(B) Set the test equipment to the transmitting operation with the output of standard signal generator OFF, and confirm that it emits over 26MHz occupied frequency bandwidth OFDM radio wave, by using spectrum analyzer.

(C) Set the test equipment to the receiving mode.

(D) With the output of standard signal generator ON, set the test equipment to the transmitting operation, and confirm that it does not emit over 26MHz occupied frequency bandwidth OFDM radio wave, by using spectrum analyzer.

(2) Test with external device

(A) Set the spectrum analyzer according to (2) of 2).

(B) Set the output of standard signal generator OFF.

(C) Connect test equipment and external test device with line connection. Confirm that it emits over 26MHz occupied frequency bandwidth OFDM radio wave, by using spectrum analyzer.

(D) Set the test equipment to the receiving mode.


(E) With the output of standard signal generator ON, set the test equipment to the transmitting operation, and confirm that it does not emit over 26MHz occupied frequency bandwidth OFDM radio wave, by using spectrum analyzer.


13.3. Results

802.11n HT40

Frequency MHz	Conclusion
2422	Pass
2462	Pass

13.4. Original Test Data

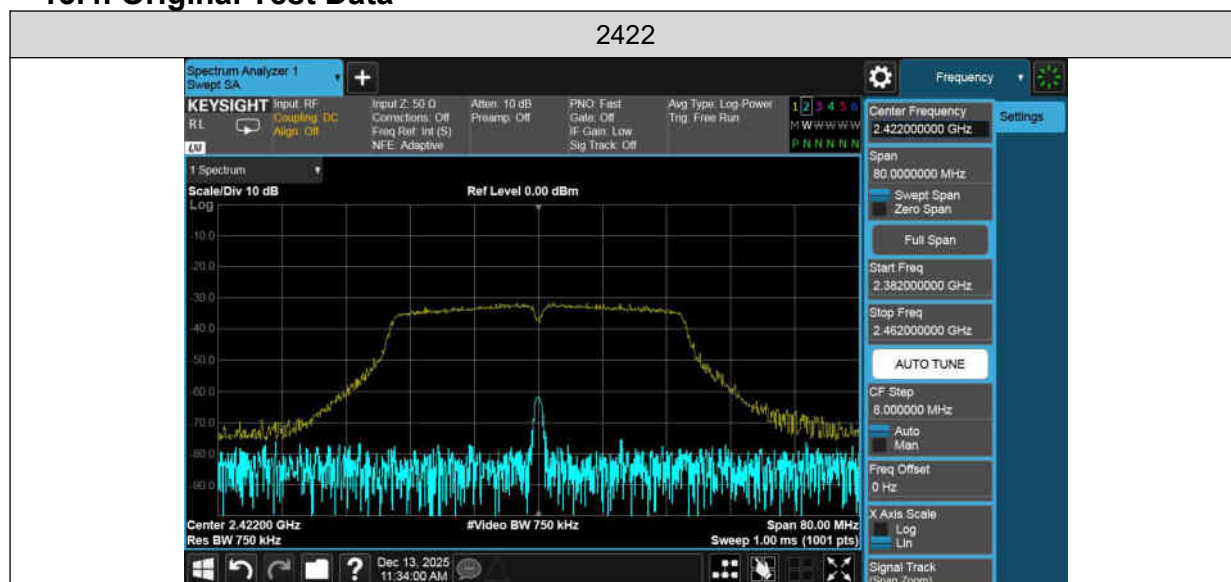

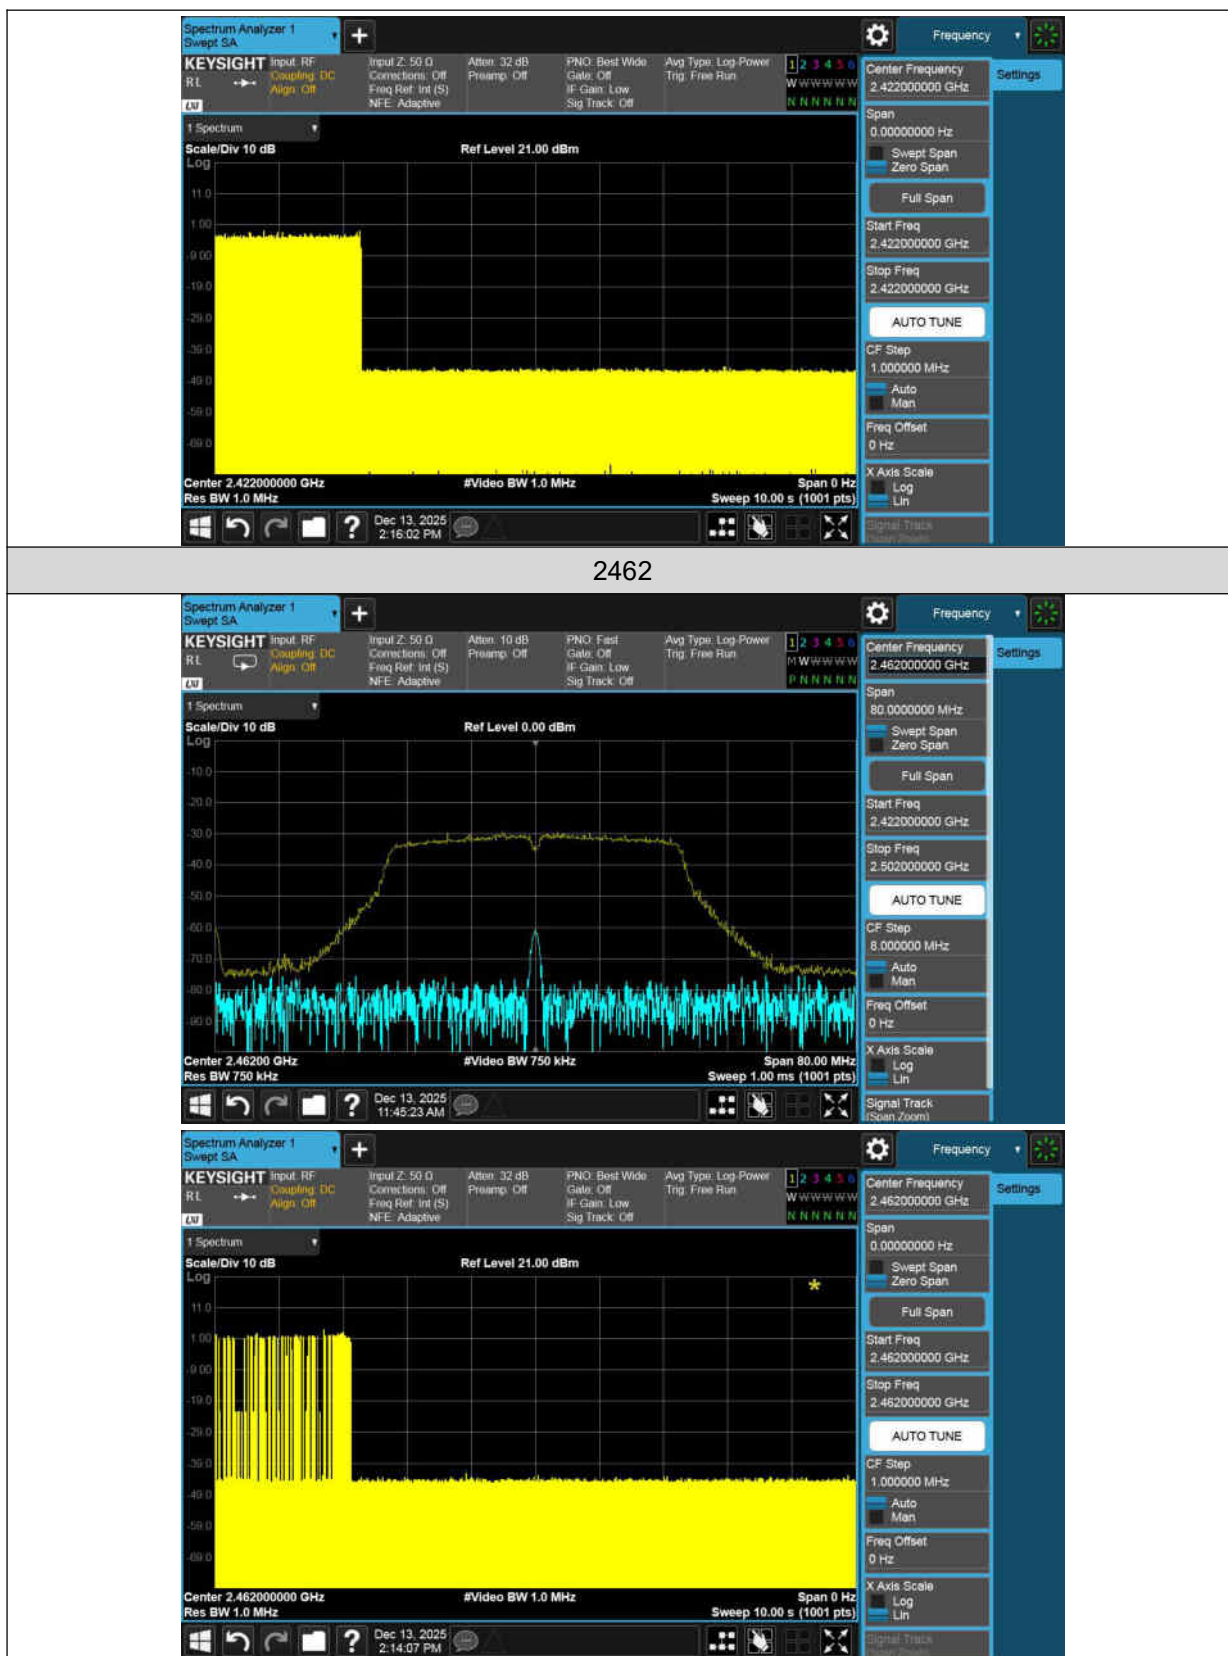


e: yellow wave communication state; blue wave communication stop state.

14. Interference prevention function

14.1. Block Diagram of Test Setup

(1) When transmitting identification code



2) Condition of measuring instrument

Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.

3) Condition of test equipment the mode of normal use.

14.2. Test Procedure

(1) When test equipment has the function to transmit identification code automatically:

(A) Transmit the predetermined identification code from test equipment.

(B) Confirm the transmitted identification code by demodulator.

```
wlan0: flags=4099<UP,BROADCAST,MULTICAST>  
ether 38:54:39:39:40:10 txqueuelen  
RX packets 0 bytes 0 (0.0 bytes)
```

A screenshot of a terminal window showing the status of the wlan0 network interface. The text is displayed on a dark background with light-colored characters. The first line shows 'wlan0: flags=4099<UP,BROADCAST,MULTICAST>' and the second line shows 'ether 38:54:39:39:40:10 txqueuelen'. The third line is partially visible and shows 'RX packets 0 bytes 0 (0.0 bytes)'.

14.3. Results

Test result: The unit does meet the requirements.

PASS

Report End