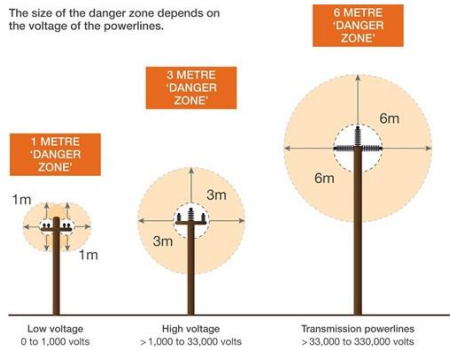


Item (Generic / Site Specific)		Risk Event	Consequence	Pre-treatment Risk			Treatment	Residual Risk		
				L	C	RR		L	C	RR
3.2.	2	9 G	Vegetation causing reduced visibility of the worksite and implemented traffic control resulting in serious injury or fatality.							
			Serious injury or fatality.	C	4	H12	To accommodate reduced sight distances from vegetation, Traffic Management Supervisor can extend dimensions by 25% or reduce dimensions by 10% to ensure sign visibility. Traffic Management Supervisor to record changes in the daily diary as required. Vegetation pruning can increase sight distances however, requires approval from the LGA prior to clearing.	D	4	M8
3.2.	2	10 G	Temporary lighting installed adjacent to residential properties causing adverse environmental impacts for locals resulting in adverse public reaction.							
			Adverse public reaction.	C	3	M9	Illumination from temporary lighting should not adversely affect residents and motorists. Risk assessment to determine the requirement and benefits of temporary lighting. Site Supervisor to record changes in the daily diary as required. Temporary lighting must be angled to ensure no glare is provided to road users.	D	3	L6
3.2.	2	11 G	Dust from the proposed works causing reduced visibility for traffic resulting in serious injury or fatality.							
			Serious injury or fatality.	C	3	M9	Workers to monitor locations where dust may form and apply the appropriate treatment as required. Water may be applied to sections of unsealed roads to reduce the impact of dust.	D	3	L6
3.2.	2	12 G	Overhead powerlines and infrastructure may conflict with the installation of high mast lighting towers and other work equipment resulting in serious injury or fatality.							
			Serious injury or fatality.	C	4	H12	All lighting tower locations must be checked prior to installation and consideration given to overhead hazards. Lighting tower underneath overhead powerlines should be avoided where possible. Exclusions zones depending on the voltage of the line should be as per the following: The size of the danger zone depends on the voltage of the powerlines.  Low voltage 0 to 1,000 volts High voltage > 1,000 to 33,000 volts Transmission powerlines > 33,000 to 330,000 volts	D	4	M8