8.2 穿透力与触摸引脚并联电容对应关系

电容（[1]）值	最实力材料穿透力
未接	4.9mm
5pF	4.9mm
5pF	3mm
10pF	2mm
20pF	1mm
30pF	1mm

（[1]）触摸引脚并联电容到地。
测试条件：感应电极（直径10mm），PCB厚度随安装PCB确定约36%减弱。

说明：
此表仅供参考，并联电容越小，可穿透介质材料越厚。

Rev R: Aug 3, 2022.
1. Commonized 10k to 0603 case size. R8,R17,R22
2. Commonized 0.1uF to 0805 case size. C15.
3. Commonized 1uF to 0603 case size. C24.

need to be interrupt enable GPIO,
warmer need to wake up
from sleep after detected plug in

DC PLUG DETECTION



TEMPERATURE SENSING



TILT SENSING



COVER DETECTOR



FLASHING PORT



BATTERY VOLTAGE DETECTION

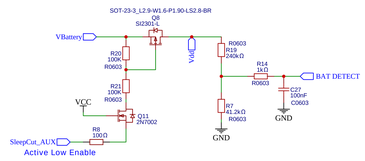

BUZZER



TOUCH BUTTON

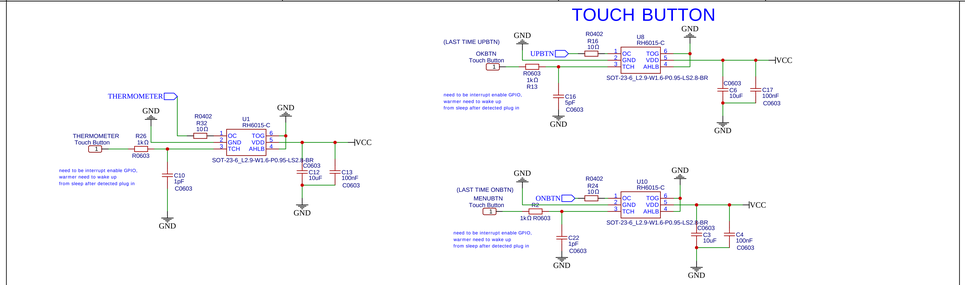

16.8V TO 3.3V

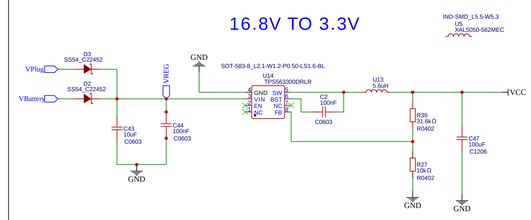

MCU

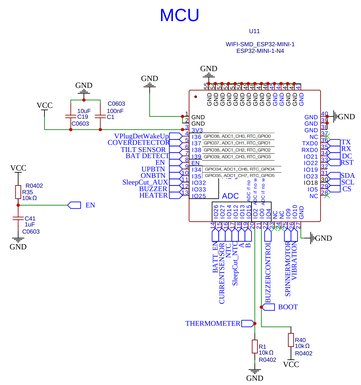

VCC_Cutoff@sleep



BATTERY CONNECTOR



VIBRATION MOTOR

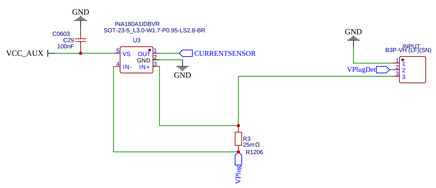



Options:
AP2302
AP2302B
DN2302S
EN2300
FSS2302S
FSS2302M
HX2300A
HX2302A
JSM2302
KY2300
KY2302S
KY2302H
PJM2302NSA-S
SI2302
SI2302A
SL2302S
YJL2302B

HEATER DRIVER

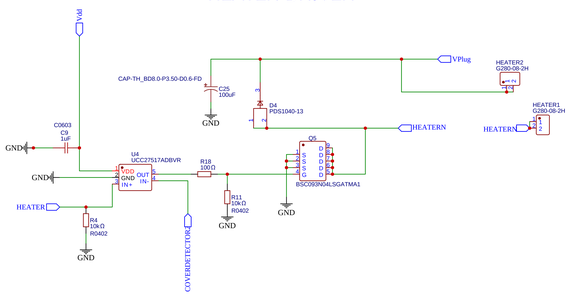

LCD DISPLAY



DC MOTOR DRIVER AND ENCODER

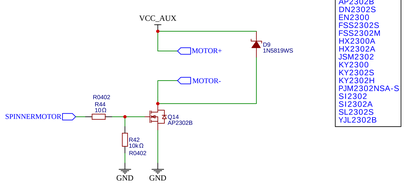

Options:
AP2302
AP2302B
DN2302S
EN2300
FSS2302S
FSS2302M
HX2300A
HX2302A
JSM2302
KY2300
KY2302S
KY2302H
PJM2302NSA-S
SI2302
SI2302A
SL2302S
YJL2302B



STEPPER MOTOR

TITLE: WM 2025	REV: R2
Company:	Sheet: 1/1
Date: 2025-02-006 Drawn By:	

Overview

On the ESP32-H2-MINI-1-H4, any of the RTC GPIOs can be used to wake up the MCU from a deep sleep state. Specifically, you can use the ext0 or ext1 methods for external wake-up. These RTC GPIOs are connected to the RTC low-power subsystem and can be used even when the main processor is in deep sleep.

For waking up the ESP32-H2-MINI-1-N2 from deep sleep, you can use the following RTC GPIOs: GPIO7, GPIO8, GPIO9, GPIO10. These GPIOs can be used for external wake-up, specifically for enabling the `ext0` and `ext1` wakeup methods. The `ext0` method uses a single GPIO pin for wake-up, while `ext1` allows for multiple GPIOs to trigger the wake-up.

Table 2-5. Analog Functions

Pin No.	Analog 30 Name [1]	Analog Function [7] F0	F1
4	GPIO1		ADC1_CH0
5	GPIO2		ADC1_CH1
6	GPIO3		ADC1_CH2
7	GPIO4		ADC1_CH3
8	GPIO5		ADC1_CH4
12	GPIO10	ZCD0	
13	GPIO11	ZCD1	
15	XTAL_32K_P	XTAL_32K_P	
16	XTAL_32K_N	XTAL_32K_N	
25	GPIO26	USB_D-	
26	GPIO27	USB_D+	