


D

C

B

A

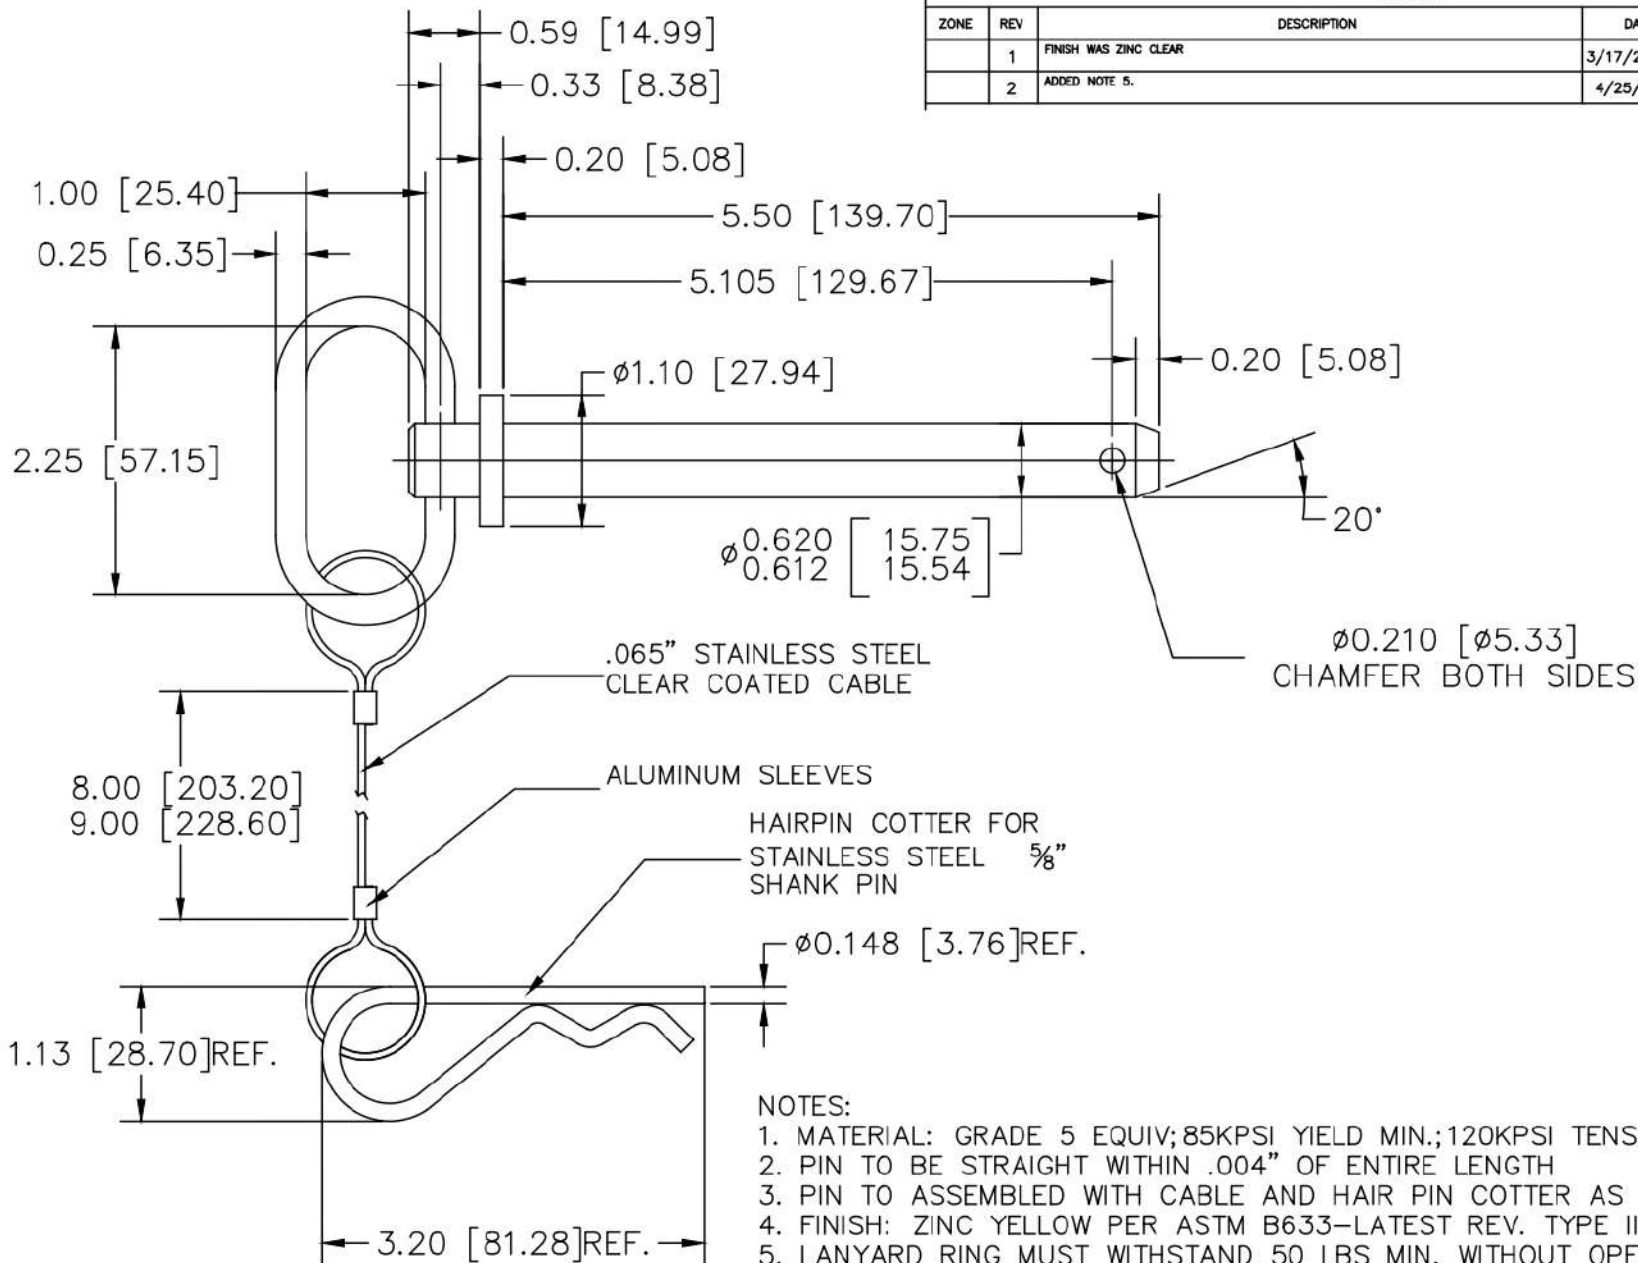

NOTES:

1. MATERIAL: GRADE 5 EQUIV; 85KPSI YIELD MIN.; 120KPSI TENSILE MIN.
2. PIN TO BE STRAIGHT WITHIN .004" OF ENTIRE LENGTH
3. PIN TO ASSEMBLED WITH CABLE AND HAIR PIN COTTER AS SHOWN
4. FINISH: ZINC YELLOW PER ASTM B633-LATEST REV. TYPE II
5. LANYARD RING MUST WITHSTAND 50 LBS MIN. WITHOUT OPENING.

TOLERANCES UNLESS SPECIFIED		DWG NO.	REV
DECIMAL: .XX +/- .03 .XXX +/- .005		47630	2
FRACTION: ANGLE: +/- 2		DATE: 9-14-09 DRAWN: TZ CHECKED BY: APPROVED BY:	SCALE: N.T.S. SHEET 1 OF 1 UNITS INCHES[MILLIMETERS]
ASSY, HITCH PIN, 5/8" x 5" UFP 3" & 4" SWING TONGUE			

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	FINISH WAS ZINC CLEAR	3/17/2011	LB
	2	ADDED NOTE 5.	4/25/11	

D

C

B

A