

DWG No.: 56103-0182


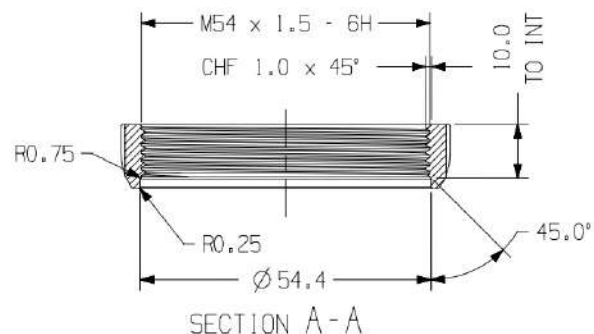
REV. B

DO NOT SCALE

IF IN DOUBT ASK

REVISIONS

REV	DESCRIPTION	ECN	DATE	ORG	CHK
A	RELEASED FOR PRODUCTION	-	SEP 03/14	J.H.	A.T.
B	ADDED SC DIMS, MATERIAL PROPERTIES. DS STAMP WAS INMET.	00038	APR 11/16		

ISOMETRIC VIEW
REFERENCE ONLY

MATH DATA: 56103-0182B.XLT

PART No.: P65 182 50

MATERIAL: ALUMINIUM 6061-T6
 (SC-1) MIN YIELD = 255MPa, MIN UTS = 300MPa, MIN ELONGATION 15%

FINISH: ANODISE NATURAL TO DSS005

TREATMENT: TUMBLE DE-BURR 30 MINS PRE-ANODISING

UNLESS OTHERWISE SPECIFIED:
 ALL DIMENSIONS METRIC (mm)
 ALL DIMENSIONS APPLY TO FINISHED PART

BREAK ALL SHARP EDGES BY R = 0.2mm
 TOL. LINEAR DIM +/- 0.1
 TOL. RADII +/- 0.1
 TOL. ANGULAR DIM +/- 0.5
 SURFACE FINISH Ra 0.8µm

GD&T IN ACCORDANCE WITH ASME Y14.5-2009

DRAWN BY: A. TOMLIN

DATE: SEP 03/14

PROJ. No.: 56103

SCALE: 1:1

TITLE:

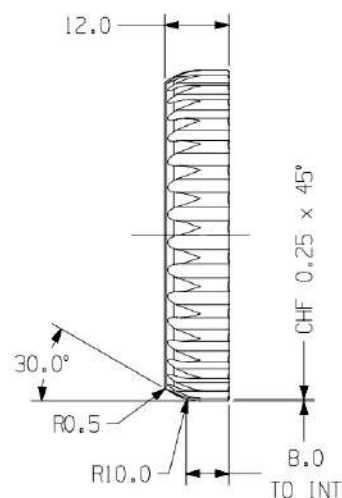
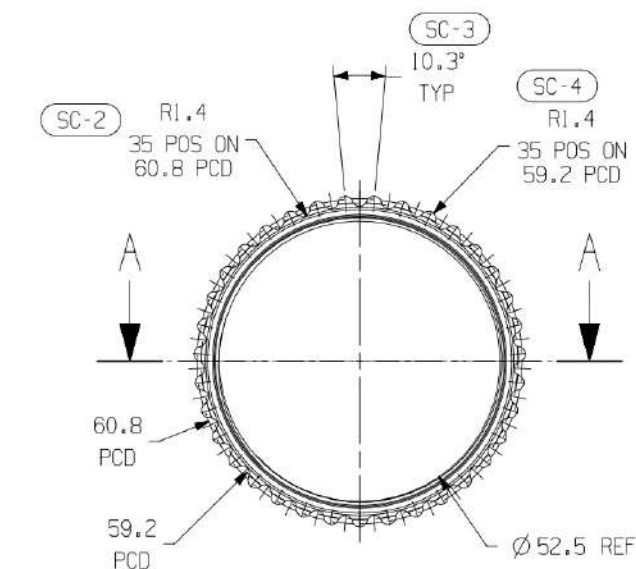
INLINE LOCKNUT

SIZE
A3

THIRD ANGLE PROJ.

DWG No.:

56103-0182

REV
BSHEET
1
OF
1

(SC) - SIGNIFICANT CHARACTERISTIC

MUST BE ADDRESSED IN THE CONTROL PLAN. MINIMUM VERIFICATION AS FOLLOWS:

VERIFICATION METHOD/FREQUENCY	SC1	SC2 ↔ SC4
VERIFY AT PPAP & TOOL/PROCESS CHANGES		X
VERIFY EACH BATCH/LOT	X	