





FINISH TURNED DIMENSIONS

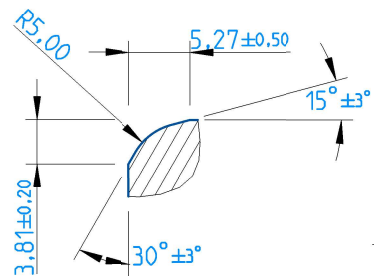


DETAIL A
SCALE 2:1




DETAIL C
SCALE 2:1

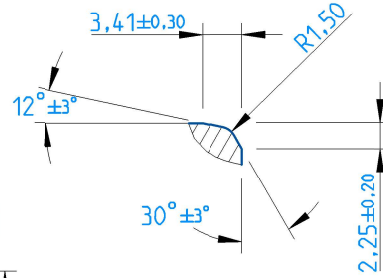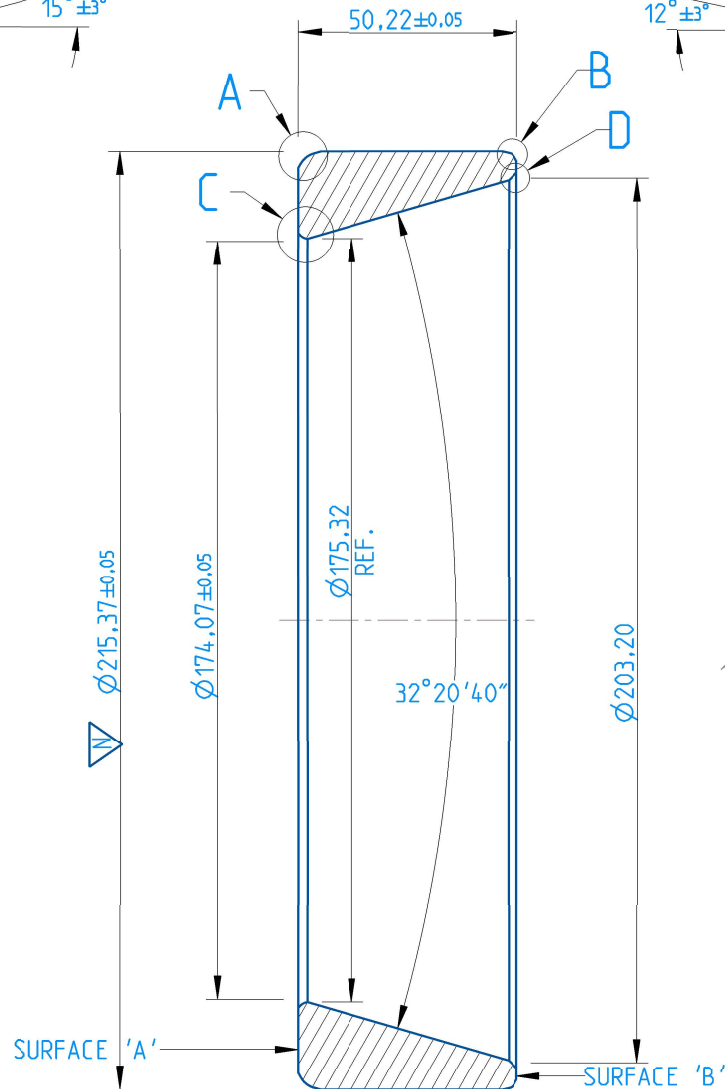

DETAIL B
SCALE 2:1



DETAIL D
SCALE 2:1

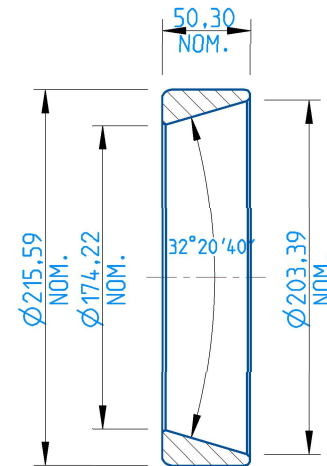

AFTER H/T DIMENSIONS
(FOR REF. ONLY)

WEIGHT (KG)	
TURNING	3.245

BEARING NO
① TS232224

ACCURACIES

RACEWAY	ROUNDNESS (2 PT./180)	50 μm MAX.
	ROUNDNESS (3 PT./120)	50 μm MAX.
	TAPER	50 μm MAX.
	SQUARENESS WITH FACE	50 μm MAX.
O.D.	ROUNDNESS (2 PT./180)	50 μm MAX.
	ROUNDNESS (3 PT./120)	50 μm MAX.
	TAPER	50 μm MAX.
	ECCENTRICITY WITH RACEWAYS	50 μm MAX.
	SQUARENESS WITH FACE	50 μm MAX.
	WIDTH VARIATION	50 μm MAX.
	SURFACE ROUGHNESS ON O.D., FACES, RACEWAY	6.3 Ra μm
	SURFACE ROUGHNESS ON CORNER LEADS & RADII	3.2 Ra μm

VISUAL DEEP TOOL MARK NOT ALLOWED

MATERIAL SAE52100/SUJ2
(H.T.TUBE/FORGED/RING)

FORGED RING NO TM-1850

HARDNESS ∇ ① Rc 58-63 (AFTER H/T) ②

MEAN ALLOWANCES FOR REF. ONLY

	GRINDING (AFTER H/T DIM.)	EXPANSION
TRACK (ID)	0.500	0.170
OD	0.600	0.215
SURFACE 'A'	0.150	0.038
SURFACE 'B'	0.200	0.038

REVISION	6			
	5			
	4			
	3			
	2	HRC MODIFIED AS PER ECN18980	15.07.2024	RKS
	1	PART NO. & HRC MODIFIED AS PER ECN18691	15.02.24	RKS
REV.	MODIFICATIONS		DATE	SIGN

DRAWN	CHECKED	APPROVED	SUPERSEDES	SUPERSEDED BY
RK	UD	RKS	--	--

DATE	07.08.2020	
PART NUMBER	TS232224 ①	OUTER RING (S. CUP)
DRAWING NUMBER	NEIC00052001	REV. 02

NATIONAL ENGINEERING INDUSTRIES LTD, JAIPUR



NOTE:
1. MATERIAL MUST BE FREE FROM CRACK.

∇_0	∇_2	INDICATE SIGNIFICANT CHARACTERISTICS
------------	------------	--------------------------------------

RADIUS	LINEAR DIMENSIONS		
	UP TO 6	6 TO 30	ABOVE 30
±0.2	±0.10	±0.20	±0.30

ALL DIMENSIONS ARE IN M.M.
DO NOT SCALE DRAWING
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED