

Do not scale the drawing.
Remove burrs and sharp corners.
Dimensions in mm.
Roughness values as per HHS-000307

This drawing is a business secret of Honda Motor Co., Ltd.
and/or the company herein, and any act to copy, use or transfer
this drawing without prior approval constitutes illegal misconduct

PART NO. 23121-KST-9010



INV. SPLINE SPECIFICATION	
TOOL FORM	INVOLUTE
PRESSURE ANGLE	37.5°
MODULE	1.0
NO. OF TEETH	19
SHIFT FACTOR	0
BACKLASH	
PITCH CIRCLE DIA.	
MEASURING PIN DIA.	2
MEASUREMENT BETWEEN PINS DIA.	15.612 ^{+0.07}

GEAR SPECIFICATION (NORMAL TO TOOTH FACE)	
MODULE	1.75
NO OF TEETH	18
PRESSURE ANGLE	20°
ADDENDUM MODIFICATION COEFFICIENT	+0.538
HELIX ANGLE & DIRECTION	0° (-)
BASE TANGENT LENGTH OVER K TEETH	14.000 ^{-0.021 -0.041} k=3
DIMENSION OVER BALLS OR PINS (BALLS OR PINS DIAMETER)	(39.885 ^{-0.037 -0.073}) (4.0)
OPERATING TOLERANCE	0.032
TOOTH WIDTH	(15.0 ^{0 -0.1})
TIP DIAMETER	(36.8 ^{0 -0.2})
ROOT DIAMETER	(28.45)

TOOL	HM TOOL TYPE	A
	ADDENDUM COEFF.	
	DEDENDUM COEFF.	
	NOSE RADIUS COEFF.	
THEORETICAL TIP DIAMETER		36.80
MINIMUM UTILIZABLE DIAMETER		30.06
UTILIZABLE LENGTH OF PATH OF CONTACT		7.68
TOOTH THICKNESS DATA ARE BASED ON DIN3967-1953x, QUALITY CLASS f7 s7		
MATING GEAR NO	23111-GF6 -3000 23111-KST-9001	
CENTER DISTANCE	74.5	

HEAT TREATMENT	
METHOD	CARBURIZING
APPLICABLE AREA	WHOLE SURFACE
DATUM MEASURING POSITION	
CASE DEPTH	0.3 ~ 0.5
HARDNESS	CARBURIZED AREA INSIDE (REF.) HRA78~83 HRC25~40
REMARKS	

INVOLUTE TEETH STANDARD BY TOOTH PROFILE TESTER					
PROFILE 500:1 ↗ 2:1			LEAD 500:1 ↗ 2:1		
PRESSURE ANGLE ERROR		TIP RELIEF		CROWNING	
BULGE		WAVINESS OF TOOTH FLANK		INCLINATION	
A	17	E	7 ± 3 (μm)	H	30
B	13 (MIN)	F	0 +3 (μm)	I	24 (MIN)
C	5 ± 5 (μm)	G	3 (μmMAX)	J	3 ± 3 (μm)
D	4 ± 1			K	0 ± 5 (μm)
REMARK	ADDENDUM SHALL NOT RISE SHARPLY				

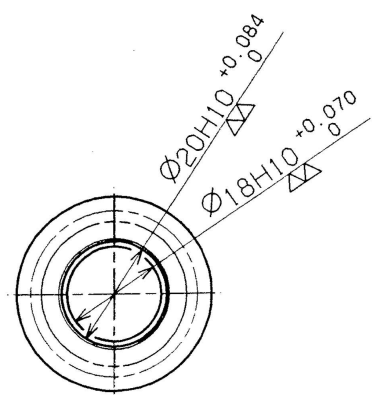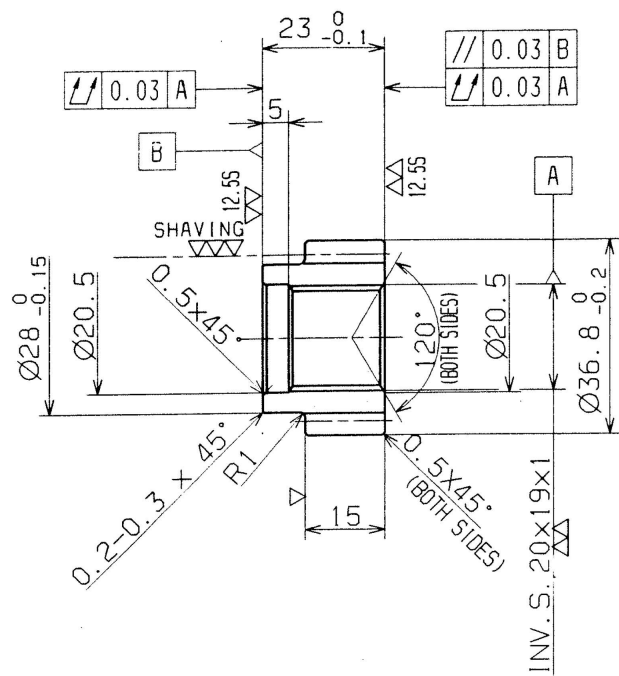

MATERIAL: SCM415 HV AS PER HES C:008

ITEM NO.	PART DRG. NO.	DESCRIPTION	NO. OFF	MATERIAL	REMARKS	DRGS
02	01	07/07/12 KKT				
02 BRAND-CH-HMCL-0001		DATE/SIGN				
NOT RELEASED		MODIFICATION				
24-1-388		DATE/SIGN				
		Hero MotoCorp Ltd.				
		R & D, PRODUCT DESIGN DEPARTMENT				
		DRAWN BY: AJAY K.S				
		CHECKED BY:				
		CHECKED BY:				
		APPROVED BY: [Signature]				
		DATE: 16/10/24				
		ASSY. NO.				
		WITH CRANK SHAFT RIGHT				
		STANDARD REFERENCE				
		HES C:008, HES A1013				
		PART DESCRIPTION				
		GEAR PRIMARY DRIVE 18T				
		REV. 02				
		DATE 07/07/12				
		PART NO. 23121-KST-9010				