


Moonlight



App Control • Timer • Adjustable Brightness
Integration via Sinric Pro

Welcome to Moonlight

RGB Lighting Controller • Operating Manual

Alexa & Google via Sinric • App Control • Smart Scheduling • Updates

Thank you for choosing Moonlight. Proudly made in the UK, our smart RGB lighting controller prioritises your privacy. The core web app operates entirely on your secure local network, giving you instant, server-free control over your custom lighting and sunrise simulations. Enjoy elegant control right at your fingertips, or choose to enable our secure cloud integration for seamless Alexa and Google Home voice commands.

Quick Setup

1. Power On

- Plug in the lamp. The LEDs blink **blue** to show it is in setup mode.

2. Connect to Lamp's Wi-Fi

- On your phone, join the network named **MoonLight_xxxxx**

3. Open Setup Page



- Go to **http://192.168.4.1** in any browser or wait for the configuration page to open automatically.

4. Connect to Home Wi-Fi

- Select from the list or enter your home Wi-Fi name and password, then tap Connect to Network.
- The lamp will restart and join your network.

5. Access Full Control

- If not opened automatically, open the lamp's IP address or try **[Serial_Number].local** in your browser (e.g. ml00001.local).

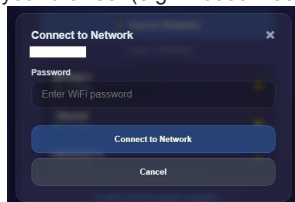



Daily Control (Web App)

Color & Brightness — Use the large color picker and brightness slider for instant control.

Animations — Choose Static, Smooth Scroll (continuous rainbow), or timed random color changes.

Favorites — Save up to 5 colors for one-tap recall.

Power Button — Large on/off control at the bottom of the screen.

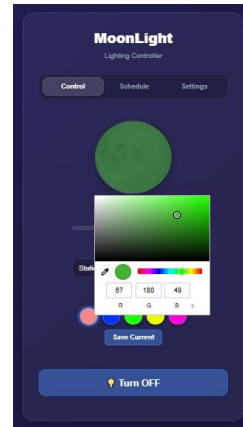
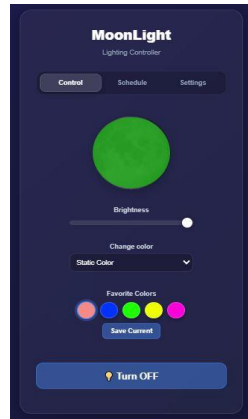


Alexa Google Home Integration

Register on sinric.pro and add a "Smart Light Bulb" device, copy the generated **App Key**, **App Secret**, and **Device ID** into the provided form fields and click Save Cloud Settings. The controller will reboot and establish a persistent WebSocket connection to the Sinric Pro broker. In your Alexa or Google Home add a Sinric Pro device and select the lamp. Once connected, the following voice commands are supported:

- "Alexa, turn MoonLight on / off"
- "Alexa, set MoonLight brightness to 50 percent"
- "Alexa, set MoonLight color to warm white / blue / purple"

Successful connection status screen confirming the lamp is ready for Alexa and Google Home voice commands will be shown.

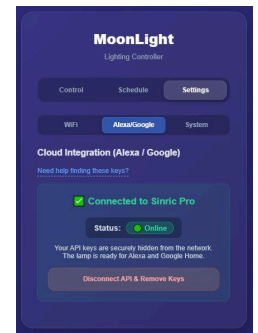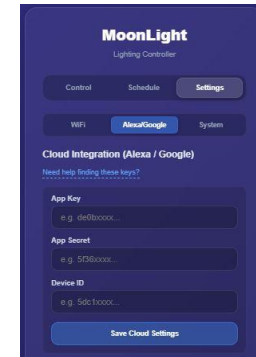

Quick Setup

1. Power On

- Plug in the lamp. The LEDs blink **blue** to show it is in setup mode.

2. Connect to Lamp's Wi-Fi

- On your phone, join the network named **MoonLight_xxxxx**

3. Open Setup Page



- Go to **http://192.168.4.1** in any browser or wait for the configuration page to open automatically.

4. Connect to Home Wi-Fi

- Select from the list or enter your home Wi-Fi name and password, then tap Connect to Network.
- The lamp will restart and join your network.

5. Access Full Control

- If not opened automatically, open the lamp's IP address or try **[Serial_Number].local** in your browser (e.g. ml00001.local).

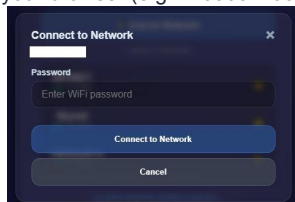

Smart Scheduling



The schedule allows 10 events that will be started and stopped at required time. The colour, brightness or colour change can be selected for each event.

Custom Times

- Set exact ON and OFF times (e.g. 18:00 – 06:30).

Sun Sync

- Automatically follows local sunrise and sunset. You can adjust timing with sunrise/sunset shift values ($\pm$ minutes).

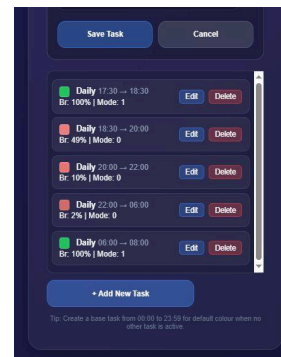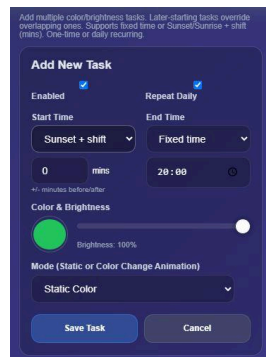

Settings/System

Click **Check for Updates**. If available, an **Install Update Now** button appears (lamp offline ~1-3 minutes).

Enable **Notify via LEDs** for green pulsing or dimming alerts.

Turn on **Install updates automatically** for silent updates during a set time window (lamp must be powered on and online).

Switch between LAN and Cloud firmware.

- LAN is fast and locally controlled in your network.
- Cloud is accessible from anywhere.

Visual Light Behavior	Condition / Meaning
Blue blinking (500 ms cycle)	Access Point Mode active
Smooth rainbow color fade	Connecting to home Wi-Fi
Blinking or dimming every 1 minute	Firmware update available

Physical Reset Button

To reset to factory settings plug in the power cable then quickly press and hold the reset button located on the bottom of the lamp. The lamp will blink 10 times with red colour and return the lamp to access point mode.

QR access codes

LandSmartThings



Operating Manual



