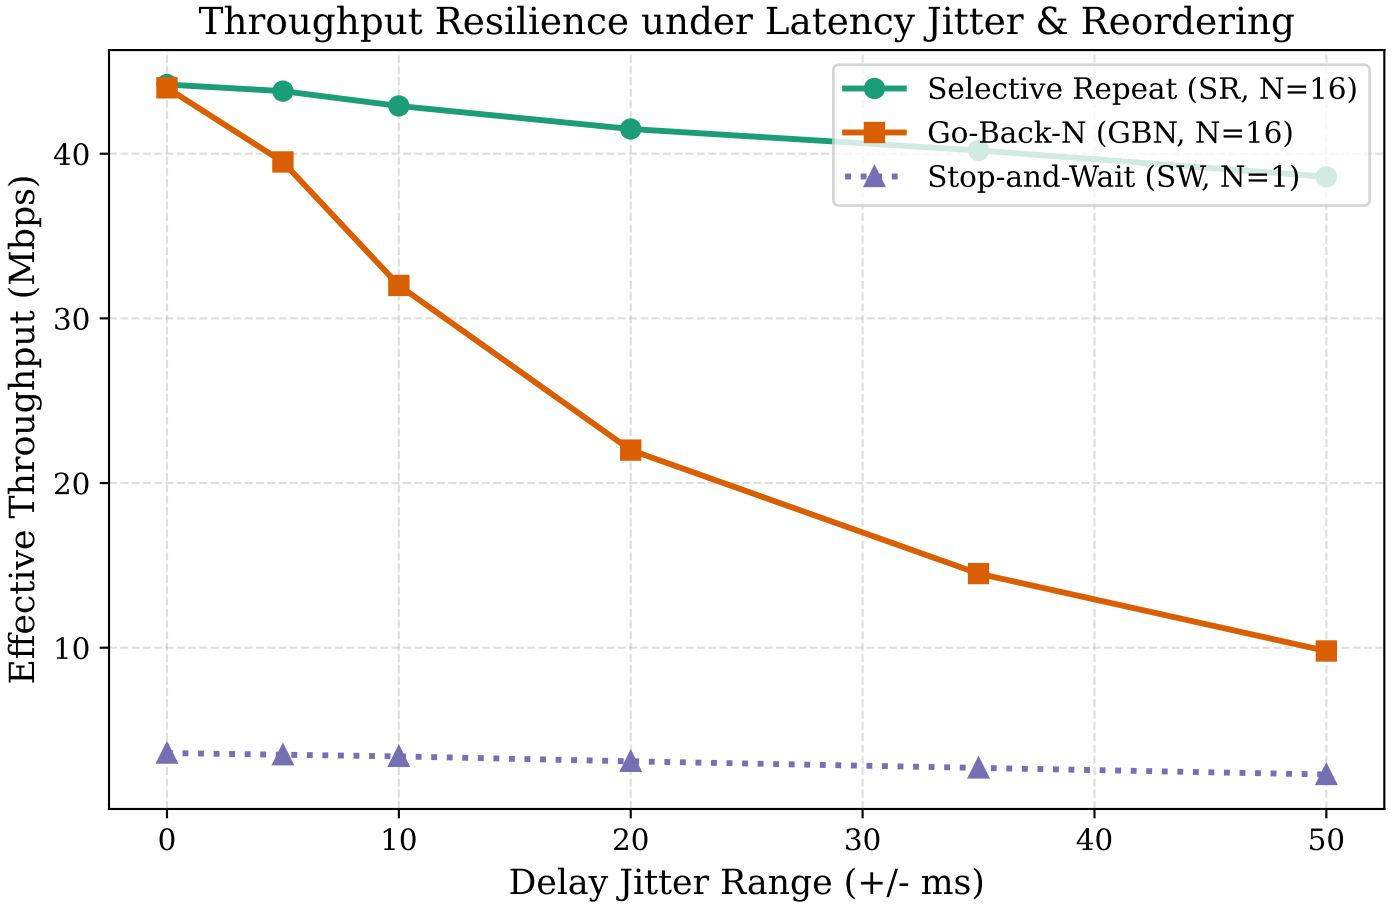
Throughput Resilience under Latency Jitter & Reordering
Selective Repeat (SR, N=16)
Go-Back-N (GBN, N=16)
Stop-and-Wait (SW, N=1)
Effective Throughput (Mbps)
40
30
20
10
0
10
20
30
40
50
Delay Jitter Range (+/- ms)