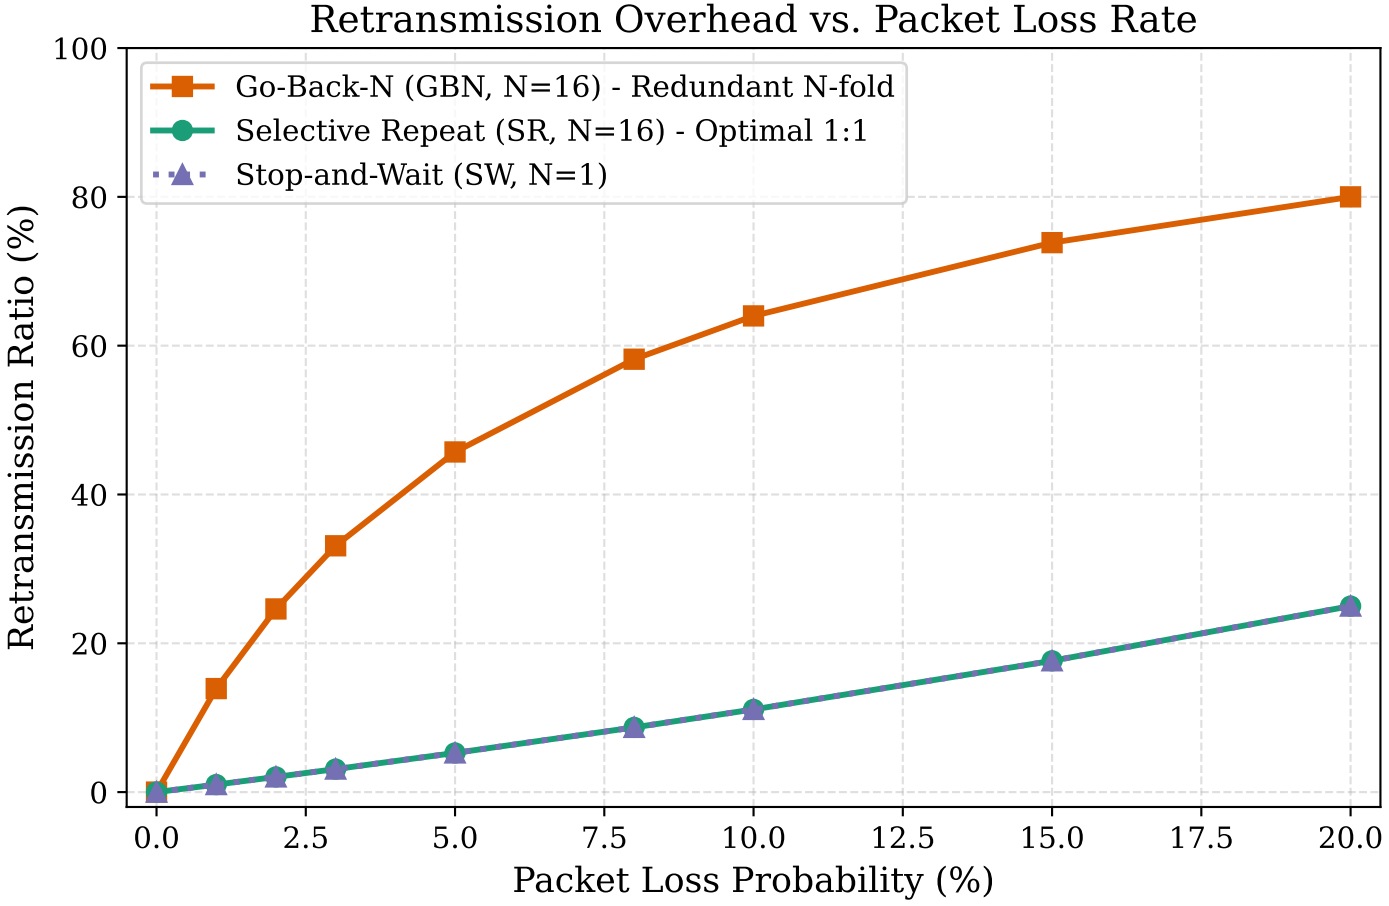
Retransmission Overhead vs. Packet Loss Rate
Go-Back-N (GBN, N=16) - Redundant N-fold
Selective Repeat (SR, N=16) - Optimal 1:1
Stop-and-Wait (SW, N=1)
Retransmission Ratio (%)
Packet Loss Probability (%)
0
20
40
60
80
100
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0