Current Mode PWM Controller

FEATURES

- Optimized For Off-line And DC To DC Converters
- Low Start Up Current (<1mA)
- Automatic Feed Forward Compensation
- Pulse-by-pulse Current Limiting
- Enhanced Load Response Characteristics
- Under-voltage Lockout With Hysteresis
- Double Pulse Suppression
- High Current Totem Pole Output
- Internally Trimmed Bandgap Reference
- 500khz Operation
- Low RO Error Amp

DESCRIPTION

The UC1842/3/4/5 family of control ICs provides the necessary features to implement off-line or DC to DC fixed frequency current mode control schemes with a minimal external parts count. Internally implemented circuits include under-voltage lockout featuring start up current less than 1mA, a precision reference trimmed for accuracy at the error amp input, logic to insure latched operation, a PWM comparator which also provides current limit control, and a totem pole output stage designed to source or sink high peak current. The output stage, suitable for driving N Channel MOSFETs, is low in the off state.

Differences between members of this family are the under-voltage lockout thresholds and maximum duty cycle ranges. The UC1842 and UC1844 have UVLO thresholds of 16V (on) and 10V (off), ideally suited to off-line applications. The corresponding thresholds for the UC1843 and UC1845 are 8.4V and 7.6V. The UC1842 and UC1843 can operate to duty cycles approaching 100%. A range of zero to 50% is obtained by the addition of an internal toggle flip flop which blanks the output off every other clock cycle.

BLOCK DIAGRAM

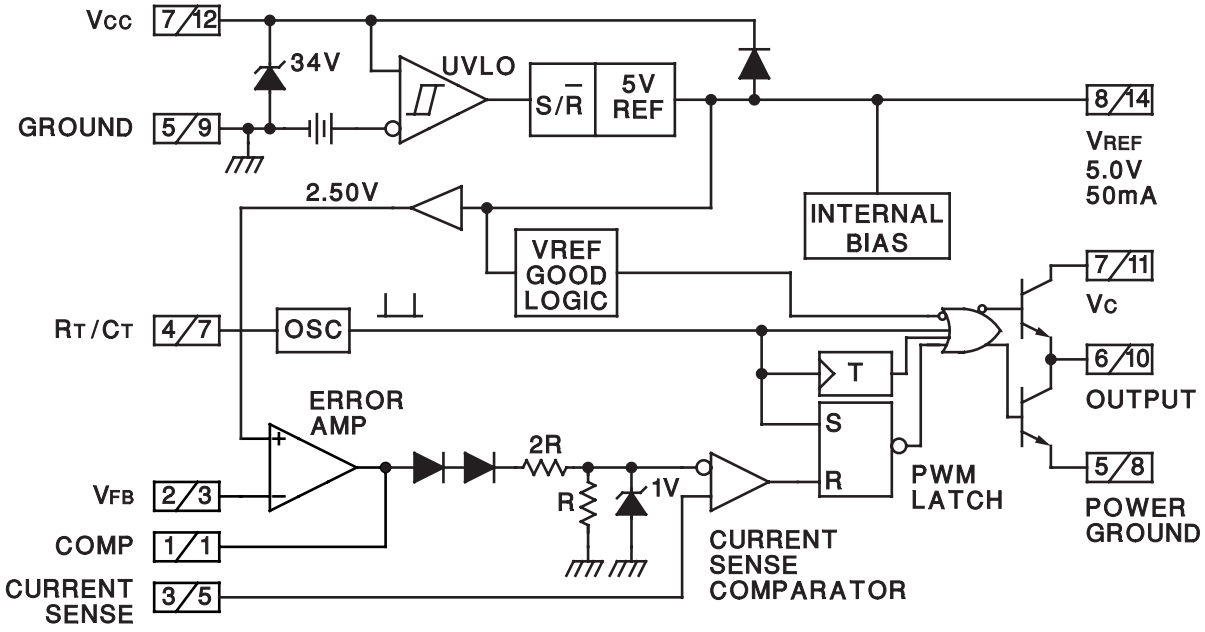

Note 1: A/B A = DIL-8 Pin Number. B = SO-14 and CFP-14 Pin Number.
Note 2: Toggle flip flop used only in 1844 and 1845.

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage (Low Impedance Source) 30V
Supply Voltage (I_{CC} < 30mA) . . . . . Self Limiting
Output Current. . . . . ±1A
Output Energy (Capacitive Load). 5µJ
Analog Inputs (Pins 2, 3). . . . . -0.3V to +6.3V
Error Amp Output Sink Current 10mA
Power Dissipation at $T_A \leq 25°C$ (DIL–8) 1Ω
Power Dissipation at $T_A \leq 25°C$ (SOIC-14) 725mW
Storage Temperature Range. . . . . -65°C to +150°C
Lead Temperature (Soldering, 10 Seconds) . . . . . 300°C

Note 1: All voltages are with respect to Pin 5.
All currents are positive into the specified terminal.
Consult Packaging Section of Databook for thermal limitations and considerations of packages.

CONNECTION DIAGRAMS

DIL-8, SOIC-8 (TOP VIEW)
N or J Package, D8 Package

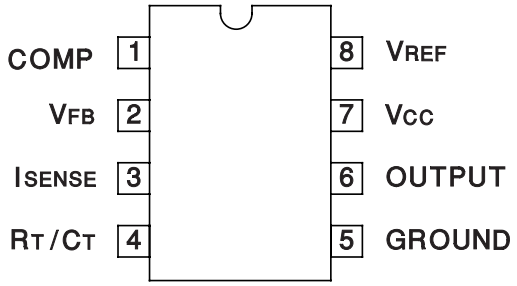

SOIC-14, CFP-14. (TOP VIEW)
D or W Package

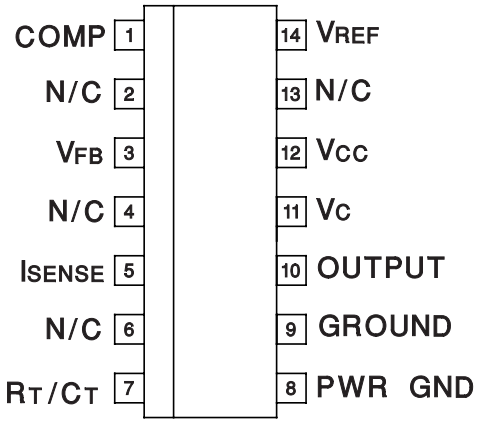

PLCC-20 (TOP VIEW)
Q Package



PACKAGE PIN FUNCTION	
FUNCTION	**PIN**
N/C	1
COMP	2
N/C	3
N/C	4
V_{FB}	5
N/C	6
I_{SENSE}	7
N/C	8
N/C	9
R_T/C_T	10
N/C	11
PWR GND	12
GROUND	13
N/C	14
OUTPUT	15
N/C	16
V_C	17
V_{CC}	18
N/C	19
V_{REF}	20

DISSIPATION RATING TABLE

Package	TA ≤ 25°C Power Rating	Derating Factor Above TA ≤ 25°C	TA ≤ 70°C Power Rating	TA ≤ 85°C Power Rating	TA ≤ 125°C Power Rating
W	700 mW	5.5 mW/°C	452 mW	370 mW	150 mW

ELECTRICAL CHARACTERISTICS: Unless otherwise stated, these specifications apply for -55°C ≤ T_A ≤ 125°C for the UC184X; -40°C ≤ T_A ≤ 85°C for the UC284X; 0°C ≤ T_A ≤ 70°C for the 384X; V_{CC} = 15V (Note 5); R_T = 10k; C_T = 3.3nF, T_A=T_J.

PARAMETER	TEST CONDITIONS	UC1842/3/4/5 UC2842/3/4/5			UC3842/3/4/5			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
Reference Section								
Output Voltage	T_J = 25°C, I_O = 1mA	4.95	5.00	5.05	4.90	5.00	5.10	V
Line Regulation	12 ≤ V_{IN} ≤ 25V		6	20		6	20	mV
Load Regulation	1 ≤ I_0 ≤ 20mA		6	25		6	25	mV
Temp. Stability	(Note 2) (Note 7)		0.2	0.4		0.2	0.4	mV/°C
Total Output Variation	Line, Load, Temp. (Note 2)	4.9		5.1	4.82		5.18	V
Output Noise Voltage	10Hz ≤ f ≤ 10kHz, T_J = 25°C (Note2)		50			50		µV
Long Term Stability	T_A = 125°C, 1000Hrs. (Note 2)		5	25		5	25	mV
Output Short Circuit		-30	-100	-180	-30	-100	-180	mA
Oscillator Section								
Initial Accuracy	T_J = 25°C (Note 6)	47	52	57	47	52	57	kHz
Voltage Stability	12 ≤ V_{CC} ≤ 25V		0.2	1		0.2	1	%
Temp. Stability	T_{MIN} ≤ T_A ≤ T_{MAX} (Note 2)		5			5		%
Amplitude	$V_{PIN\ 4}$ peak to peak (Note 2)		1.7			1.7		V
Error Amp Section								
Input Voltage	$V_{PIN\ 1}$ = 2.5V	2.45	2.50	2.55	2.42	2.50	2.58	V
Input Bias Current			-0.3	-1		-0.3	-2	µA
A_{VOL}	2 ≤ V_O ≤ 4V	65	90		65	90		dB
Unity Gain Bandwidth	(Note 2) T_J = 25°C	0.7	1		0.7	1		MHz
PSRR	12 ≤ V_{CC} ≤ 25V	60	70		60	70		dB
Output Sink Current	$V_{PIN\ 2}$ = 2.7V, $V_{PIN\ 1}$ = 1.1V	2	6		2	6		mA
Output Source Current	$V_{PIN\ 2}$ = 2.3V, $V_{PIN\ 1}$ = 5V	-0.5	-0.8		-0.5	-0.8		mA
V_{OUT} High	$V_{PIN\ 2}$ = 2.3V, R_L = 15k to ground	5	6		5	6		V
V_{OUT} Low	$V_{PIN\ 2}$ = 2.7V, R_L = 15k to Pin 8		0.7	1.1		0.7	1.1	V
Current Sense Section								
Gain	(Notes 3 and 4)	2.85	3	3.15	2.85	3	3.15	V/V
Maximum Input Signal	$V_{PIN\ 1}$ = 5V (Note 3)	0.9	1	1.1	0.9	1	1.1	V
PSRR	12 ≤ V_{CC} ≤ 25V (Note 3) (Note 2)		70			70		dB
Input Bias Current			-2	-10		-2	-10	µA
Delay to Output	$V_{PIN\ 3}$ = 0 to 2V (Note 2)		150	300		150	300	ns

Note 2: These parameters, although guaranteed, are not 100% tested in production.

Note 3: Parameter measured at trip point of latch with $V_{PIN\ 2}$ = 0.

Note 4: Gain defined as

$$A = \frac{\Delta VPIN\ 1}{\Delta VPIN\ 3}, 0 \le VPIN\ 3 \le 0.8V$$

Note 5: Adjust V_{CC} above the start threshold before setting at 15V.

Note 6: Output frequency equals oscillator frequency for the UC1842 and UC1843.
Output frequency is one half oscillator frequency for the UC1844 and UC1845.

Note 7: Temperature stability, sometimes referred to as average temperature coefficient, is described by the equation:

$$Temp\ Stability = \frac{V_{REF}\ (max) - VREF\ (min)}{TJ\ (max) - TJ\ (min)}$$

V_{REF} (max) and V_{REF} (min) are the maximum and minimum reference voltages measured over the appropriate temperature range. Note that the extremes in voltage do not necessarily occur at the extremes in temperature.

ELECTRICAL CHARACTERISTICS: Unless otherwise stated, these specifications apply for –55°C ≤ T_A ≤ 125°C for the UC184X; –40°C ≤ T_A ≤ 85°C for the UC284X; 0°C ≤ T_A ≤ 70°C for the 384X; V_{CC} = 15V (Note 5); R_T = 10k; C_T = 3.3nF, T_A=T_J.

PARAMETER	TEST CONDITION	UC1842/3/4/5 UC2842/3/4/5			UC3842/3/4/5			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
Output Section								
Output Low Level	I_{SINK} = 20mA		0.1	0.4		0.1	0.4	V
	I_{SINK} = 200mA		1.5	2.2		1.5	2.2	V
Output High Level	I_{SOURCE} = 20mA	13	13.5		13	13.5		V
	I_{SOURCE} = 200mA	12	13.5		12	13.5		V
Rise Time	T_J = 25°C, C_L = 1nF (Note 2)		50	150		50	150	ns
Fall Time	T_J = 25°C, C_L = 1nF (Note 2)		50	150		50	150	ns
Under-voltage Lockout Section								
Start Threshold	X842/4	15	16	17	14.5	16	17.5	V
	X843/5	7.8	8.4	9.0	7.8	8.4	9.0	V
Min. Operating Voltage After Turn On	X842/4	9	10	11	8.5	10	11.5	V
	X843/5	7.0	7.6	8.2	7.0	7.6	8.2	V
PWM Section								
Maximum Duty Cycle	X842/3	95	97	100	95	97	100	%
	X844/5	46	48	50	47	48	50	%
Minimum Duty Cycle				0			0	%
Total Standby Current								
Start-Up Current			0.5	1		0.5	1	mA
Operating Supply Current	$V_{PIN\ 2}$ = $V_{PIN\ 3}$ = 0V		11	17		11	17	mA
V_{CC} Zener Voltage	I_{CC} = 25mA	30	34		30	34		V

Note 2: These parameters, although guaranteed, are not 100% tested in production.

Note 3: Parameter measured at trip point of latch with $V_{PIN\ 2}$ = 0

Note 4: Gain defined as: $A = \frac{\Delta VPIN\ 1}{\Delta VPIN\ 3}; 0 \le VPIN\ 3 \le 0.8V.$

Note 5: Adjust V_{CC} above the start threshold before setting at 15V.

Note 6: Output frequency equals oscillator frequency for the UC1842 and UC1843.
Output frequency is one half oscillator frequency for the UC1844 and UC1845.

ERROR AMP CONFIGURATION

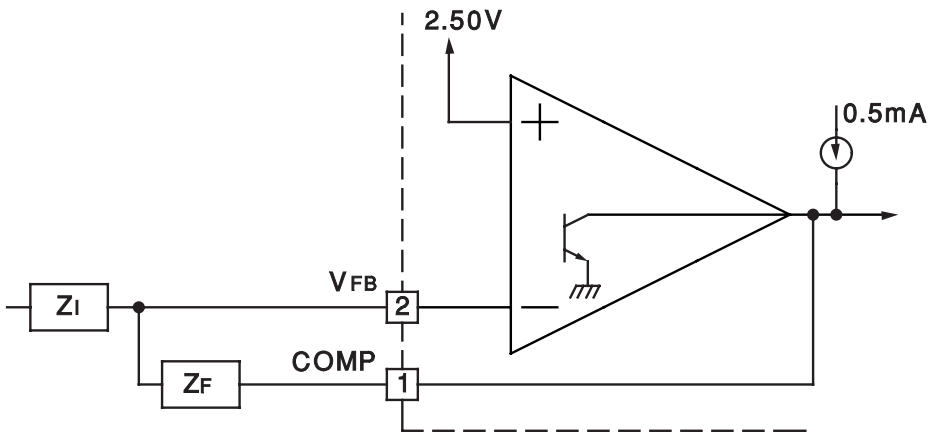

Error Amp can Source or Sink up to 0.5mA

UNDER-VOLTAGE LOCKOUT

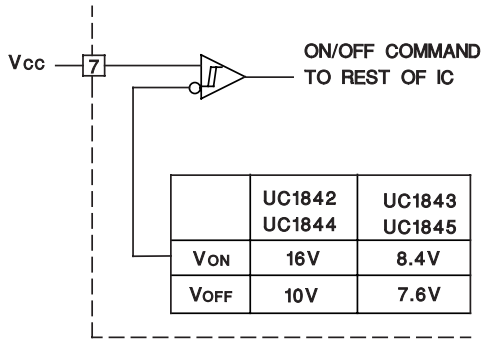

	UC1842 UC1844	UC1843 UC1845
VON	16V	8.4V
VOFF	10V	7.6V

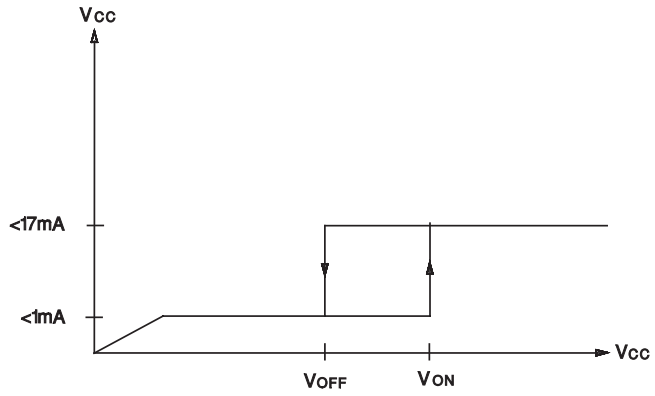

During under-voltage lock-out, the output driver is biased to sink minor amounts of current. Pin 6 should be shunted to ground with a bleeder resistor to prevent activating the power switch with extraneous leakage currents.

CURRENT SENSE CIRCUIT

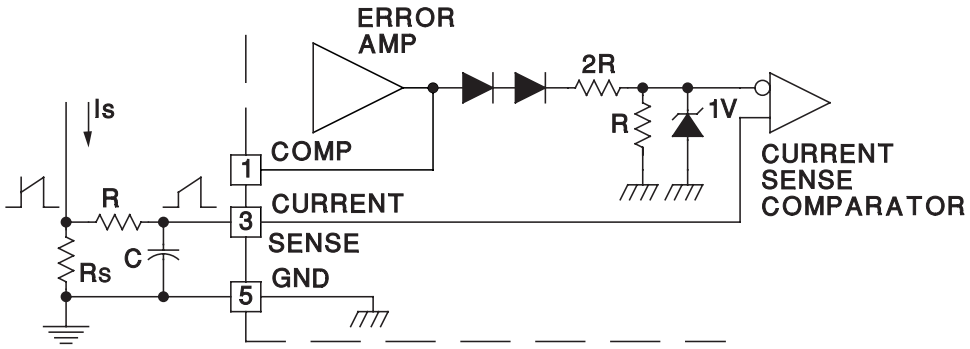

Peak Current (Is) is Determined By The Formula

$$I_{SMAX} \approx \frac{1.0V}{RS}$$

A small RC filter may be required to suppress switch transients.

OSCILLATOR SECTION

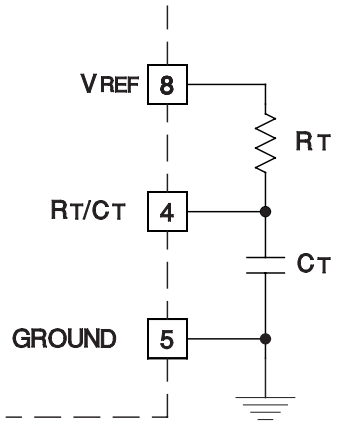

For $R_T > 5k$ $f \approx \frac{1.72}{R_T C_T}$

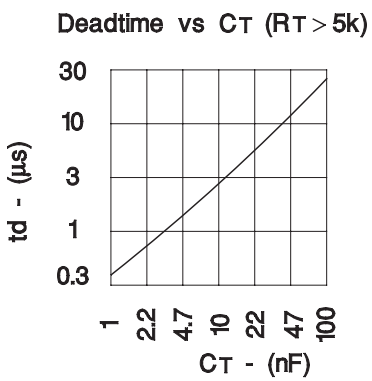

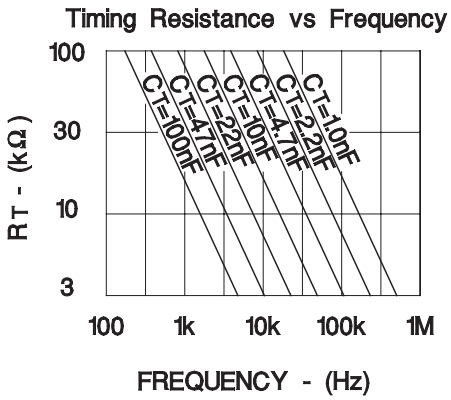

OUTPUT SATURATION CHARACTERISTICS

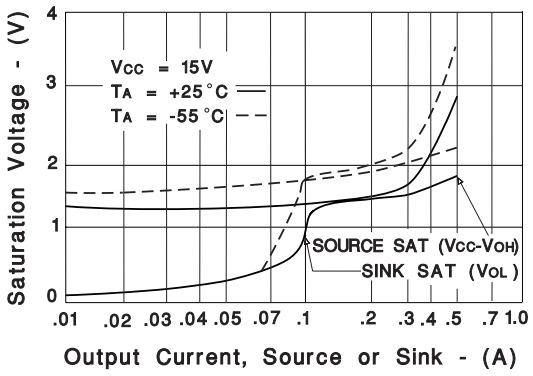

ERROR AMPLIFIER OPEN-LOOP FREQUENCY RESPONSE

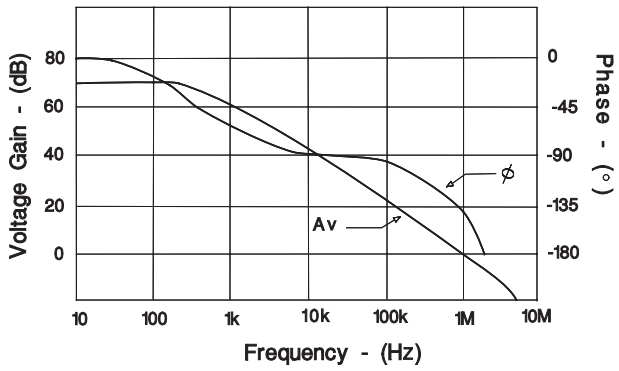

OPEN-LOOP LABORATORY FIXTURE

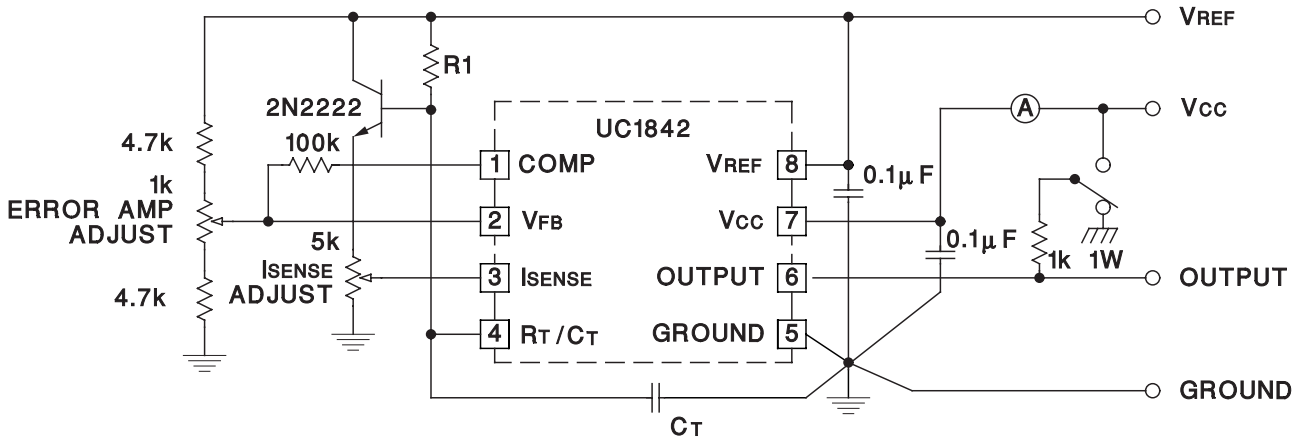

High peak currents associated with capacitive loads necessitate careful grounding techniques. Timing and bypass capacitors should be connected close to pin 5 in a single point ground. The transistor and 5k potentiometer are used to sample the oscillator waveform and apply an adjustable ramp to pin 3.

SHUT DOWN TECHNIQUES

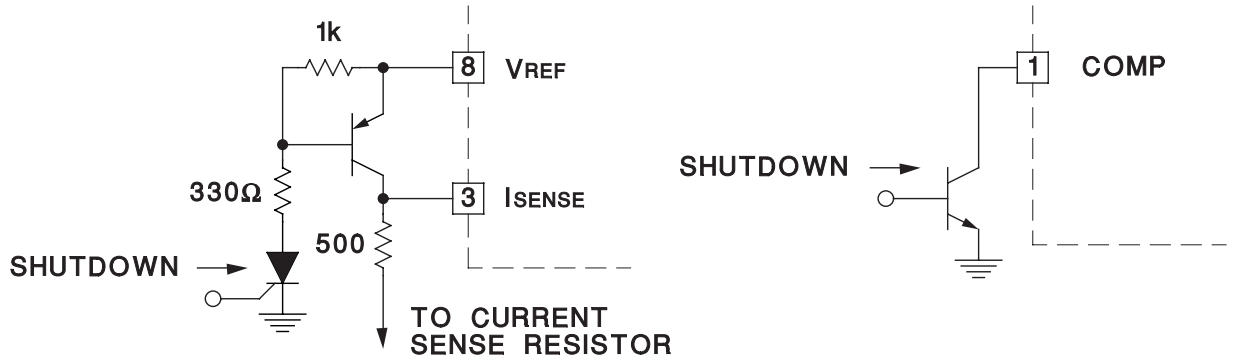

Shutdown of the UC1842 can be accomplished by two methods; either raise pin 3 above 1V or pull pin 1 below a voltage two diode drops above ground. Either method causes the output of the PWM comparator to be high (refer to block diagram). The PWM latch is reset dominant so that the output will remain low until the next clock cycle after the shutdown condition at pin 1 and/or 3 is removed. In one example, an externally latched shutdown may be accomplished by adding an SCR which will be reset by cycling Vcc below the lower UVLO threshold. At this point the reference turns off, allowing the SCR to reset.

OFFLINE FLYBACK REGULATOR

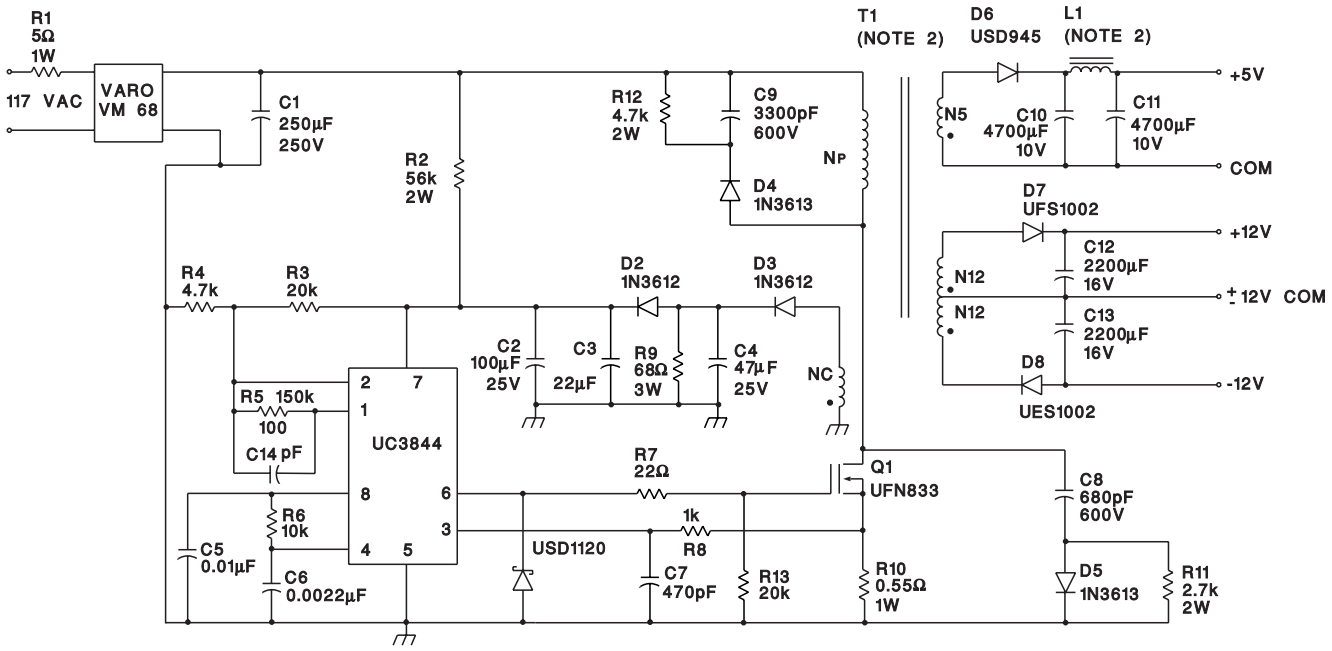

Power Supply Specifications

1. Input Voltages 5VAC to 130VA (50 Hz/60Hz)
2. Line Isolation 3750V
3. Switching Frequency 40kHz
4. Efficiency at Full Load 70%
5. Output Voltage:
   A. +5V, ±5%; 1A to 4A load
   Ripple voltage: 50mV P-P Max
   B. +12V, ±3%; 0.1A to 0.3A load
   Ripple voltage: 100mV P-P Max
   C. -12V ,±3%; 0.1A to 0.3A load
   Ripple voltage: 100mV P-P Max

SLOPE COMPENSATION

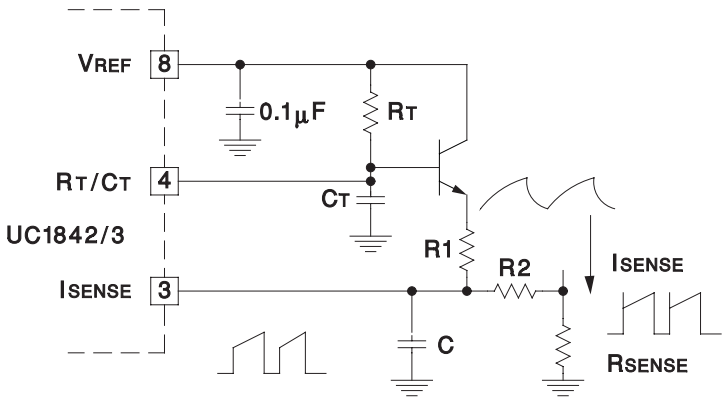

A fraction of the oscillator ramp can be resistively summed with the current sense signal to provide slope compensation for converters requiring duty cycles over 50%.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third–party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265