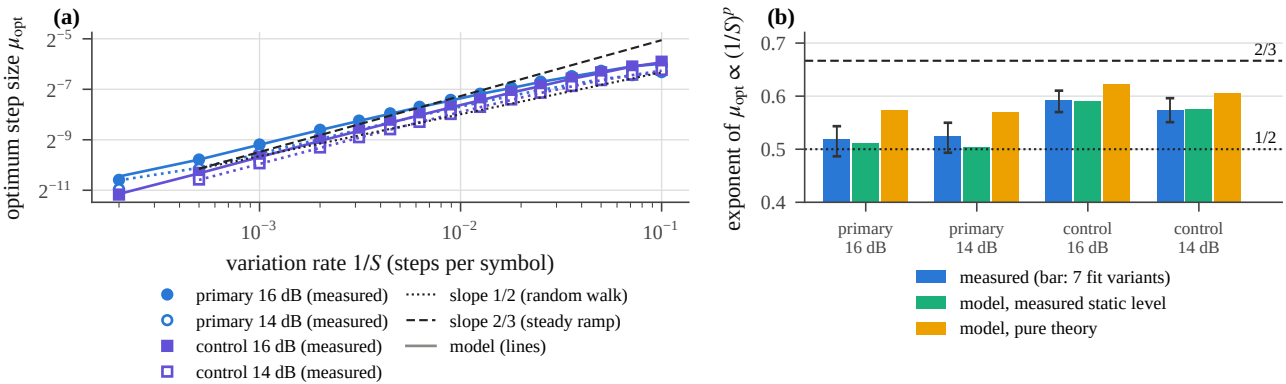
(a)
optimum step size μ_{opt}
2^{-5}
2^{-7}
2^{-9}
2^{-11}
10^{-3}
10^{-2}
10^{-1}
variation rate $1/S$ (steps per symbol)
primary 16 dB (measured)
primary 14 dB (measured)
control 16 dB (measured)
control 14 dB (measured)
slope 1/2 (random walk)
slope 2/3 (steady ramp)
model (lines)
(b)
exponent of $\mu_{opt} \propto (1/S)^p$
0.7
0.6
0.5
0.4
2/3
1/2
primary 16 dB
primary 14 dB
control 16 dB
control 14 dB
measured (bar: 7 fit variants)
model, measured static level
model, pure theory