



Datasheet

DIO-430-R1 Module

Part No. DIO-430-R1

Manufacturer: ISYSTEMS AUTOMATION S.R.L.

Hardware Version: V1.0

Architecture: Modular (MCU Board + Relay Board + Field Board)

Controller: RP2350



Functional Overview

The DIO-430-R1 is a compact digital I/O module designed for industrial and building automation systems. It provides 4 isolated digital inputs and 3 relay outputs for monitoring field signals and controlling external loads. The module operates from a 24 V DC supply and includes input protection, relay switching capability, and communication interfaces for integration with PLCs and distributed control systems. Its modular architecture and DIN-rail form factor make it suitable for use in control cabinets for applications such as lighting control, HVAC automation, alarm monitoring, and general-purpose I/O expansion.

The system is implemented using three hardware boards:

Board	Function
MCU Board	CPU, communication interfaces, USB configuration
Field Board	Digital inputs, signal protection, field interface
Relay Board	Relay outputs and load switching

Technical Specifications

Specification	Details
Microcontroller	RP2350A dual-core microcontroller
Storage	External QSPI Flash (W25Q32JV)
Power Input	24 V DC nominal
File system	LittleFS persistent configuration storage
Document revision	DS-DIO-430-R1 Rev. B · 2026-09 · Hardware R1 (V1.0)
Digital Inputs	4 × IEC 61131-2 compliant 24 V digital inputs (ISO1212 front-end) (D1x + GNDx), dry-contact (module-wetted); per-channel PTC fuse, TVS surge suppression, reverse-polarity protection, EMI filtering
Relay outputs	3 × SPDT (NO / C / NC); 3 A @ 250 VAC per contact (module limit)
User Interface	3 buttons (2 user-configurable), 13 LEDs (power, 3 user, RX, TX, 3× relay, 4× DI)
RS-485	half-duplex Modbus RTU, not galvanically isolated
USB	USB-C (ESD protected, configuration and firmware upload)
Modbus defaults	Address 3, 19200 baud, 8N1

Top Terminal Block (1–11)

Pos	Marking	Signal	Description
1	0V	POWER	24 V DC return
2	V+	POWER	24 V DC input
3	NO	RELAY1	Relay 1 normally open
4	C	RELAY1	Relay 1 common
5	NC	RELAY1	Relay 1 normally closed
6	NO	RELAY2	Relay 2 normally open
7	C	RELAY2	Relay 2 common
8	NC	RELAY2	Relay 2 normally closed
9	NO	RELAY3	Relay 3 normally

			open
10	C	RELAY3	Relay 3 common
11	NC	RELAY3	Relay 3 normally closed

Bottom Terminal Block (1–11)

Pos	Marking	Signal	Description
1	B	RS485	RS-485 data -
2	A	RS485	RS-485 data +
3	COM	RS485	RS-485 signal reference
4	GND	DI1	DI1 return
5	I.1	DI1	DI1 input
6	GND	DI2	DI2 return
7	I.2	DI2	DI2 input
8	GND	DI3	DI3 return
9	I.3	DI3	DI3 input
10	GND	DI4	DI4 return
11	I.4	DI4	DI4 input

*Relay outputs are **not internally fused**. External overcurrent protection must be provided in accordance with applicable standards and installation requirements. Use appropriately rated fuses or circuit breakers and consider external contactors for loads exceeding 3 A or for inductive and high inrush loads.

Installation, Environmental & Mechanical

Category	Specification	Details
Mechanical & Packaging	Terminal type	Pluggable screw terminal blocks, 5.08 mm pitch
	Terminal pitch	5.08 mm
	Wire cross-section	0.2–2.5 mm ² (AWG 24–12)
	Conductor type	Solid or stranded copper
	Stranded wire	Ferrules recommended


	Tightening torque	0.4–0.6 Nm
	Operating temperature	0 °C to +40 °C
	Storage temperature	–10 °C to +55 °C
	Relative humidity	0–90 % RH, non-condensing
	Ingress protection	IP20 (inside cabinet only)
	Installation	Indoor control cabinet only; not for outdoor or exposed installation
	Maximum altitude	2000 m
	Pollution degree	2
	Dimensions	70 × 90.6 × 67.3 mm (L × W × H)
	DIN width	4 modules (≈ 70 mm)
	Mounting	35 mm DIN rail
	Enclosure	PC/ABS industrial enclosure
	Net weight	TBD
	Gross weight	TBD
	Pack size	140 × 125 × 94 mm (L × W × H)

Install only inside a control cabinet with ventilation; the cabinet must include a protective front plate covering all module connection terminals and a closing protective door; not for outdoor or exposed installation.

All wiring terminals must be protected against accidental contact by an insulating front plate, wiring duct, or terminal cover. Exposed live terminals are not permitted.

DIO-430-R1

All dimensions in mm

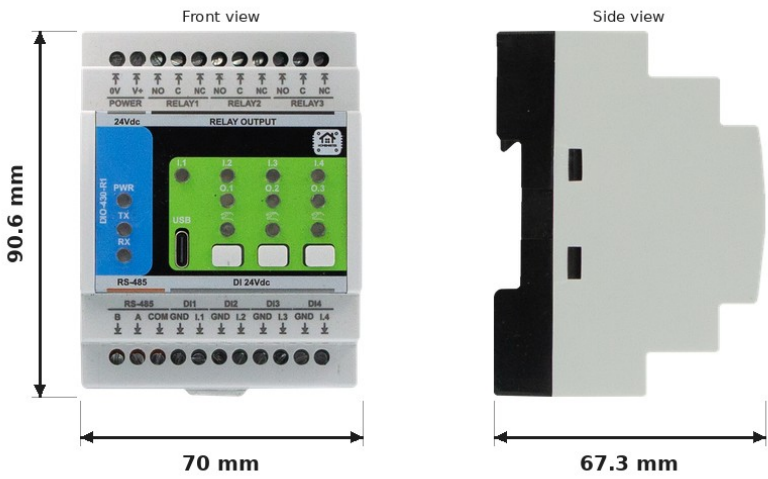

Cable Recommendations & Shield Grounding

Use shielded, twisted constructions and bond shields correctly to reduce EMI and ground-loop issues.

General Routing Rules

- Route low-level signal cables separately from mains, relay outputs, contactors, VFD motor cables, and power wiring.
- If crossing power cables is unavoidable, cross at **90°**.
- Keep cable runs as short as practical and avoid parallel runs with high-current conductors.

RS-485 Cable

- **Construction:** twisted pair for **A/B**
- **Characteristic impedance:** **120 Ω** (recommended)
- **Shielding:** overall shield is recommended in cabinets; use individually shielded pairs + overall shield in high-EMI
- **Examples:** **J-Y(ST)Y 2×2×0.5 mm²** or **LI2YCY PiMF 2×2×0.50**
- Use one twisted pair for A/B. Run COM to every node. Required, not optional: the RS-485 port is not galvanically isolated.

Shield Grounding

- **Default recommendation:** bond cable shield(s) to cabinet **PE/EMC ground at the PLC end only**.
- **Do not** connect shields to signal terminals (RS-485 A/B/COM).
- If both ends are in equipotential bonded cabinets, shields may be bonded at both ends using proper 360° clamps.

Compliance & Certifications

The HomeMaster DIO-430-R1 is CE marked and designed to comply with the applicable European Union directives. The manufacturer, ISYSTEMS AUTOMATION (HomeMaster brand), maintains the technical documentation and a signed EU Declaration of Conformity (DoC).

EU Directives

EMC 2014/30/EU · LVD 2014/35/EU · RoHS 2011/65/EU

Harmonised Standards

Area	Standards
EMC	EN 61000-6-1 (Immunity) · EN 61000-6-3 (Emissions)
Electrical Safety	EN 62368-1
RoHS	EN IEC 63000

Safety notice

24 V DC: SELV · Relay contacts may switch mains — treat relay terminals as hazardous when so wired. · Qualified personnel only

Published by

ISYSTEMS AUTOMATION S.R.L.

Deligintei 18

Ploiesti

Romania

Tel: +40721389963

<http://www.home-master.eu>