



Datasheet

DIM-420-R1 Module

Part No. DIM-420-R1



Manufacturer: ISYSTEMS AUTOMATION S.R.L.

Hardware Version: V1.0

Architecture: Modular (MCU Board + MOSFET Board + Field Board)

Controller: RP2350

Functional Overview

The system is implemented using three hardware boards:

Board	Function
MCU Board	CPU, communication interfaces, USB configuration
Field Board	Digital inputs, signal protection, field interface
MOSFET Board	AC dimming outputs and load switching

The DIM-420-R1 is a modular dimmer I/O module designed for industrial and building automation systems.

It provides 4 isolated digital inputs and 2 AC dimming outputs for monitoring field signals and controlling lighting loads using phase-cut dimming.

The module operates from a 24 V DC supply and includes digital input protection, MOSFET-based AC dimming stages, and communication interfaces for integration with PLCs and distributed control systems.

Its modular architecture and DIN-rail form factor make it suitable for control cabinet.

The module communicates with controllers through RS-485 Modbus RTU and can be configured via USB-C interface.

Technical Specifications

Specification	Details
Microcontroller	RP2350A dual-core microcontroller
Storage	External QSPI Flash (W25Q32JV)
Power Input	24 V DC nominal
File system	LittleFS persistent configuration storage
Document revision	DS-DIM-420-R1 Rev. B · 2026-09 · Hardware R1 (V1.0)
Digital Inputs	4 × isolated 24 V DC discrete inputs (DIx + GNDx), supporting dry-contact closure protected by per-channel PTC fuse, TVS surge suppression, and EMI filtering
Dimmer outputs	2 × MOSFET phase-cut dimmer channels (leading / trailing edge, selectable); 1 A RMS per channel continuous, Ta ≤ 40 °C
User Interface	4 buttons, 9 LEDs (LED1–LED9)
RS-485	half-duplex Modbus RTU, not galvanically isolated
USB	USB-C (ESD protected, configuration and firmware upload)
Modbus defaults	Address 3, 19200 baud, 8N1
Operating temperature	0 °C to +40 °C
Storage temperature	−10 °C to +55 °C
Relative humidity	0–90 % RH, non-condensing
Ingress protection	IP20 (inside cabinet only)
Installation	Indoor control cabinet only; not for outdoor or exposed installation
Maximum altitude	2000 m
Pollution degree	2
Dimensions	70 × 90.6 × 67.3 mm (L × W × H)
DIN width	4 modules (≈ 70 mm)
Mounting	35 mm DIN rail
Enclosure	PC/ABS industrial enclosure
Terminal type	Pluggable screw terminal blocks, 5.08 mm pitch
Wire cross-section	0.2–2.5 mm ² (AWG 24–12)
Tightening torque	0.4–0.6 Nm
Net weight	TBD
Gross weight	TBD
Pack size	TBD

Top Terminal Block (1–10)

Pos	Marking	Signal	Description
1	V+	POWER	24 V DC input
2	0V	POWER	24 V DC return
3	L2	CH2_OUTPUT	Channel 2 dimmed line out (MAINS)
4	N2	CH2_OUTPUT	Channel 2 neutral out (MAINS)
5	L2	CH2_INPUT	Channel 2 line in (MAINS)

6	N2	CH2_INPUT	Channel 2 neutral in (MAINS)
7	L1	CH1_OUTPUT	Channel 1 dimmed line out (MAINS)
8	N1	CH1_OUTPUT	Channel 1 neutral out (MAINS)
9	L1	CH1_INPUT	Channel 1 line in (MAINS)
10	N1	CH1_INPUT	Channel 1 neutral in (MAINS)

Bottom Terminal Block (1–11)


Pos	Marking	Signal	Description
1	B	RS485	RS-485 data -
2	A	RS485	RS-485 data +
3	COM	RS485	RS-485 signal reference
4	I.1	DI1	DI1 input
5	Gnd	DI1	DI1 return
6	I.2	DI2	DI2 input
7	Gnd	DI2	DI2 return
8	I.3	DI3	DI3 input
9	Gnd	DI3	DI3 return
10	I.4	DI4	DI4 input
11	Gnd	DI4	DI4 return

Dimmer outputs are MOSFET phase-cut channels, 1 A RMS per channel continuous ($T_a \leq 40\text{ }^{\circ}\text{C}$). Fit an upstream MCB/RCD and a fuse or breaker per channel sized to the load. Mains voltage is present on the load terminals.

Installation, Environmental & Mechanical

DIM-420-R1

All dimensions in mm

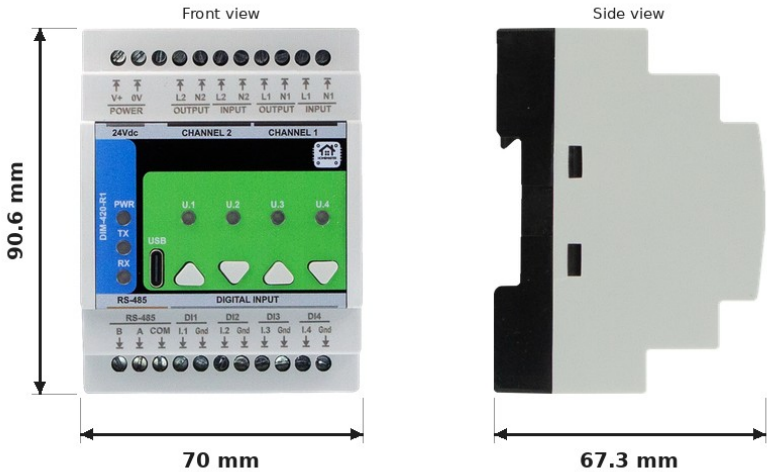

Mechanical drawing: front and side view, dimensions in mm

Category	Specification	Details
Terminal Specifications	Terminal type	Pluggable screw terminal blocks, 5.08 mm pitch
	Terminal pitch	5.08 mm
	Wire cross-section	0.2–2.5 mm ² (AWG 24–12)
	Conductor type	Solid or stranded copper
	Stranded wire	Ferrules recommended
	Tightening torque	0.4 Nm (max)
Environmental Ratings	Operating temperature	0 °C to +40 °C
	Storage temperature	-10 °C to 55 °C
	Relative humidity	0–90 % RH, non-condensing
	Ingress protection	IP20 (inside cabinet)
	Installation	Indoor control cabinet only; not for outdoor or exposed installation
	Terminal protection	All wiring terminals must be protected against accidental contact
Mechanical & Packaging	Product dimensions	70 × 90.6 × 67.3 mm (L × W × H)
	DIN units	4 modules (≈ 70 mm)
	Mounting	35 mm DIN rail
	Net weight	TBD
	Gross weight	TBD
	Pack size	140× 125 × 94 mm (L × W × H)
	Mechanical drawing	Mechanical drawing: front and side view, dimensions in mm
	Notes	All dimensions shown in millimeters unless stated otherwise

Install only inside a control cabinet with ventilation; the cabinet must include a protective front plate covering all module connection terminals and a closing protective door; not for outdoor or exposed installation.

All wiring terminals must be protected against accidental contact by an insulating front plate, wiring duct, or terminal cover. Exposed live terminals are not permitted.

Cable Recommendations & Shield Grounding

Use shielded, twisted constructions and bond shields correctly to reduce EMI and ground-loop issues.

General Routing Rules

- Route low-level signal cables separately from mains, relay outputs, contactors, VFD motor cables, and power wiring.
- If crossing power cables is unavoidable, cross at **90°**.
- Keep cable runs as short as practical and avoid parallel runs with high-current conductors.

RS-485 Cable

- **Construction:** twisted pair for A/B
- **Characteristic impedance:** 120 Ω (recommended)
- **Shielding:** overall shield is recommended in cabinets; use individually shielded pairs + overall shield in high-EMI
- **Examples:** J-Y(ST)Y 2×2×0.5 mm² or LI2YCY PiMF 2×2×0.50
- Use one twisted pair for A/B. Run COM to every node. Required, not optional: the RS-485 port is not galvanically isolated.

Shield Grounding

- **Default recommendation:** bond cable shield(s) to cabinet **PE/EMC ground at the PLC end only**.
- **Do not** connect shields to signal terminals (RS-485 A/B/COM).
- If both ends are in equipotential bonded cabinets, shields may be bonded at both ends using proper 360° clamps.

Compliance & Certifications

The DIM-420-R1 is CE marked and designed to comply with the applicable European Union directives. The manufacturer, ISYSTEMS AUTOMATION (HomeMaster brand), maintains the technical documentation and a signed EU Declaration of Conformity (DoC).

EU Directives

EMC 2014/30/EU · LVD 2014/35/EU · RoHS 2011/65/EU

Harmonised Standards

Area	Standards
EMC	EN 61000-6-1 (Immunity) · EN 61000-6-3 (Emissions)
Electrical Safety	EN 62368-1
RoHS	EN IEC 63000

Safety notice

Dimmer outputs are MOSFET phase-cut channels, 1 A RMS per channel continuous ($T_a \leq 40^\circ\text{C}$). Fit an upstream MCB/RCD and a fuse or breaker per channel sized to the load. Mains voltage is present on the load terminals.

Published by

ISYSTEMS AUTOMATION S.R.L.

Deligintei 18

Ploiesti

Romania

Tel: +40721389963

<http://www.home-master.eu>

