

DC FAN KIT - 06401-004-87-48



WARNING: This kit should be installed only by qualified service personnel to reduce risk of electric shock, serious injury, or fire. A plumbing permit and services of a licensed plumber and electrician might be required in some areas.



Turn off power supply and place dishwasher disconnect (if applicable) in off position. Lockout/tagout to prevent power supply from being turned back on inadvertently.

CAUTION: Failure to install this kit within guidelines might adversely affect safety, performance, component life, and warranty coverage.

TOOLS REQUIRED

- 5/16 Nutdriver
- Stepladder
- Phillips Screwdriver
- Wire Cutter/Stripper

PARTS INCLUDED

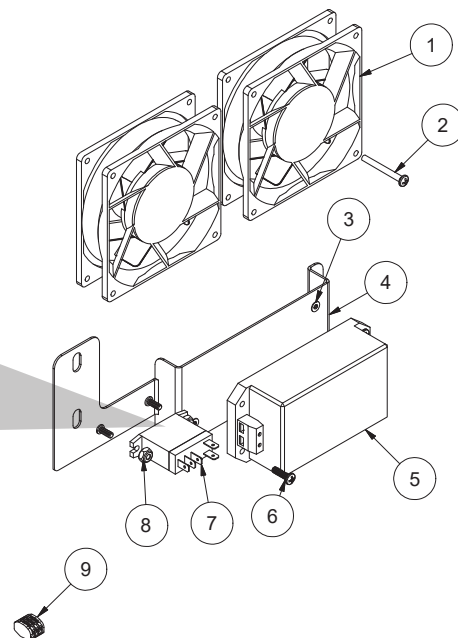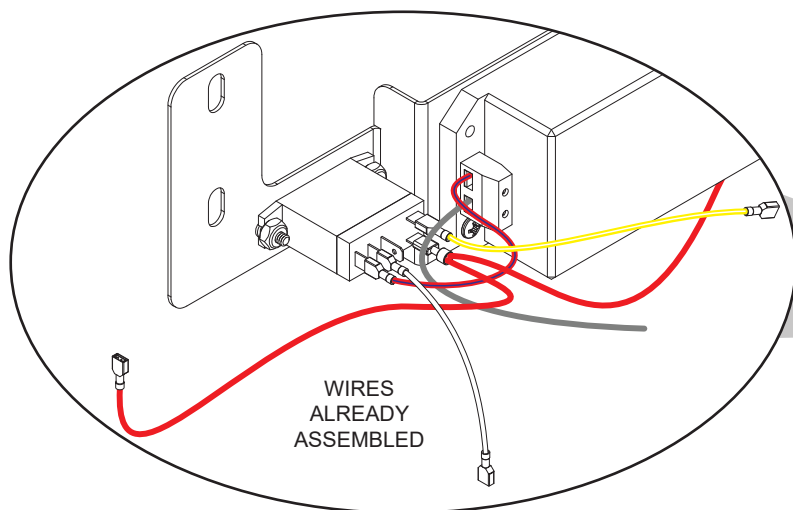


ITEM	QTY	DESCRIPTION	PART NUMBER
1	2	Fan, 24 V DC	05999-004-81-80
2	8	Screw, 6/32 x 1 1/4	05305-002-47-13
3	2	Nut, 6/32 Plated	05340-118-04-00
4	1	Bracket, Power Supply	05700-004-83-91
5	1	Power Supply, In 100-240 V DC, 1.8 A, Out 24 V, 2.5 A	05950-004-81-79
6	2	Screw, 6/32 x 1/2	05305-004-23-63
7	1	Relay, 10 A, 220 V	05945-004-84-93
8	2	Locknut, 6-32 Hex with Nylon Insert	05310-373-03-00
9	3	Connector, 3-Position	05935-004-09-31
-	1	Instructions, AC to DC Fans	07610-004-85-69
-	1	Schematic, DC Fan Option	09905-005-13-04

PROCEDURE

1. Remove screws securing old fans with screwdriver. Use stepladder to reach fans.


*Stepladder & screwdriver
used in this step.*

Keep hardware!

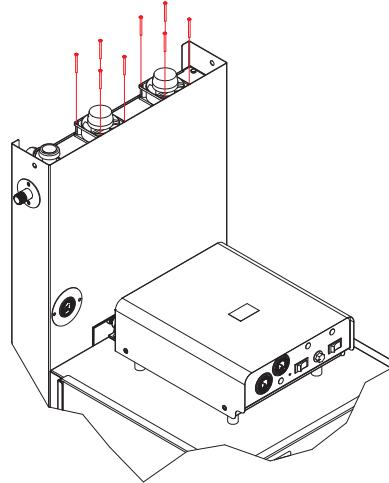


2. Disconnect four small BLK fan wires from connectors.

*Do not disconnect
larger wires.*

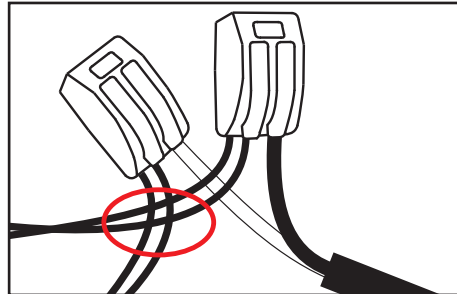


3. Remove old fans.

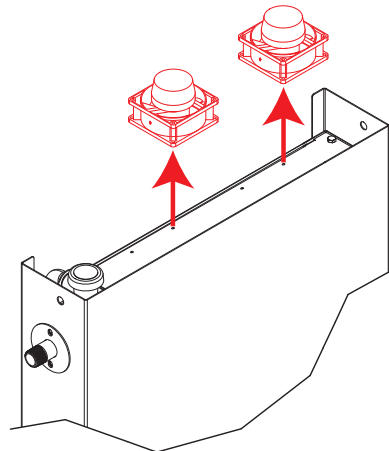

4. Replace with new fans from kit.


*Fans from kit
used in this step.*

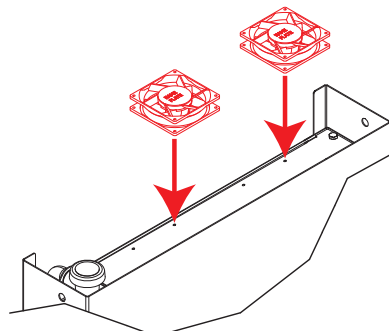

PROCEDURE


5. Reinstall screws from Step 1.

*Hardware from Step 1
used in this step.*

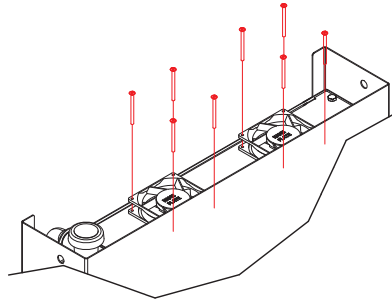


6. Connect BLK fan wires from new fans to connector with BLK wire from Step 2.
Connect RED fan wires from new fans to connector with WHT wire from Step 2.

*Ensure larger wires are
still securely connected.*

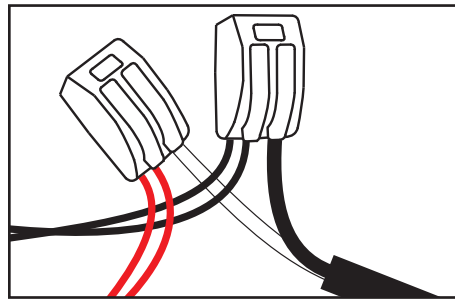

7. Remove control box cover using screwdriver.


*Screwdriver
used in this step.*

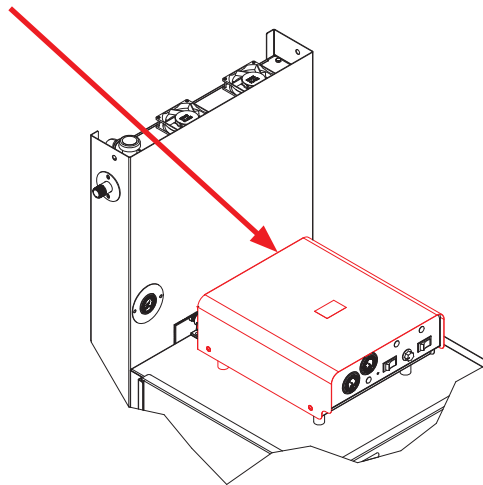

8. Remove control relay from studs using 5/16 nutdriver and keep hardware.

*5/16 nutdriver
used in this step.*


Keep hardware!

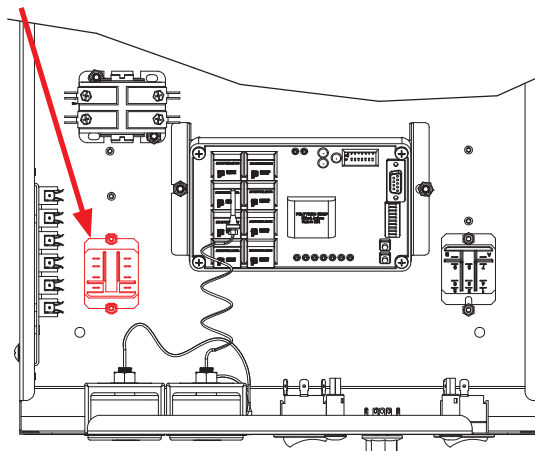

PROCEDURE

9. Install assembly from kit on studs from last step.


*Assembly from kit
used in this step.*

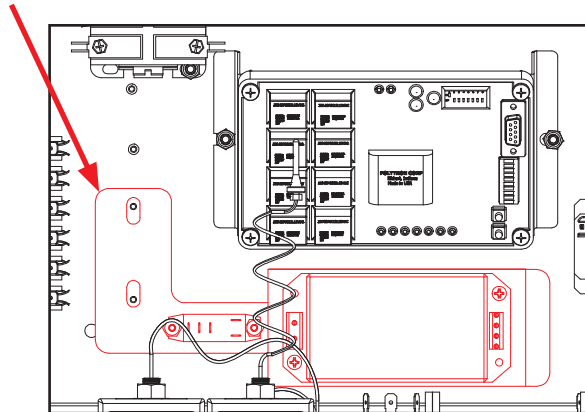


10. Reattach control relay using hardware from Step 8 and 5/16 nutdriver.

*5/16 nutdriver
used in this step.*

*Hardware from Step 8
used in this step.*

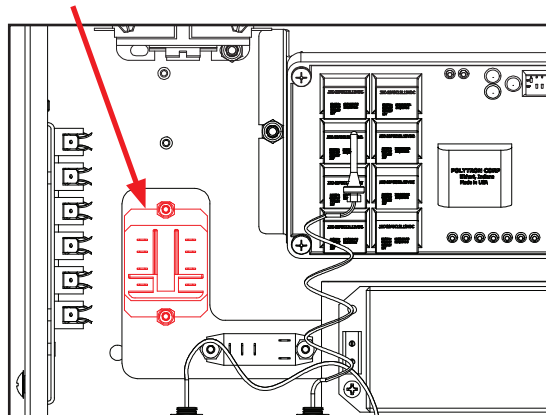


11. Locate YEL/WHT wire from fans connected to universal timer.

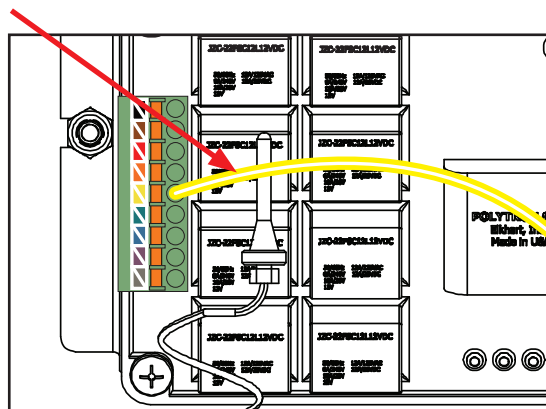

PROCEDURE

12. Disconnect other end of YEL/WHT wire from vent fan SJ cord and attach to YEL/WHT wire from kit.


*Assembly from kit
used in this step.*

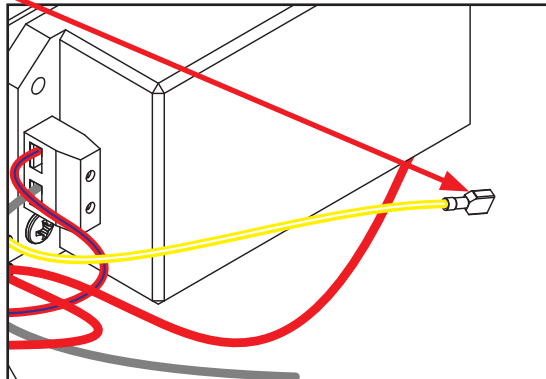


13. Connect loose end of WHT wire already attached to relay coil position 4 (on assembly from kit) to 3-position connector from kit.

*Assembly from kit
used in this step.*

*3-position connector from
kit used in this step.*

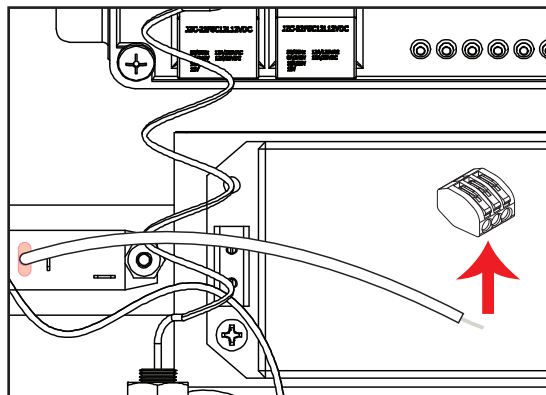


14. Locate WHT wire from vent fan SJ cord.

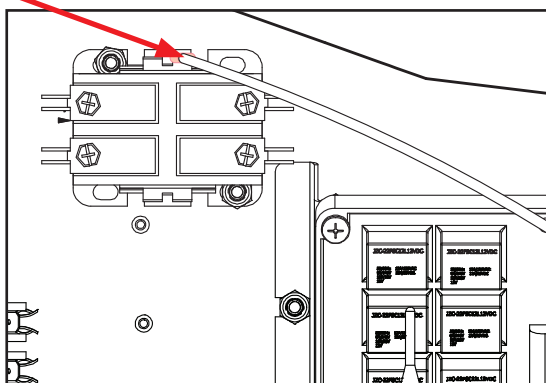

PROCEDURE


*Assembly from kit
used in this step.*

15. Disconnect WHT wire from relay coil position 3 and connect to WHT wire from kit.

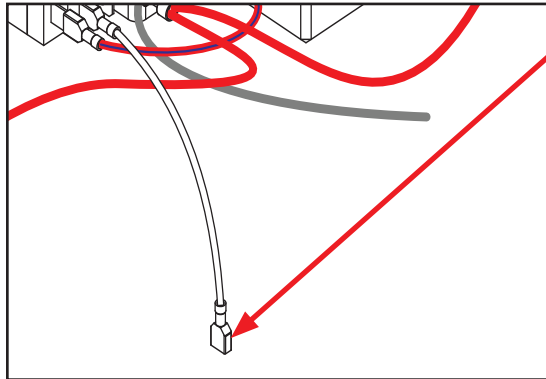


16. Follow wires from vent fan SJ cord. Locate where BLK wire terminates. Cut terminal off BLK wire, strip end, and attach to -Vo on power supply.

*Wire cutter/stripper
used in this step.*

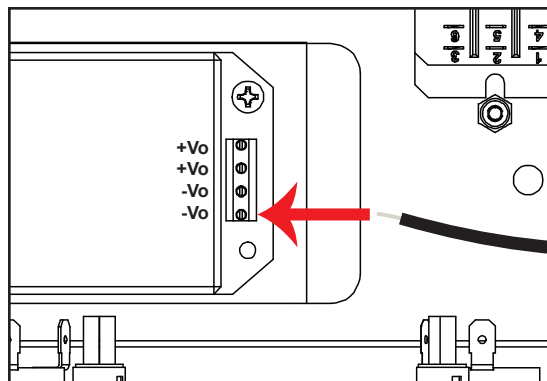

17. Follow wires from power light back to connector. Remove GRY wire from connector and insert into 3-position connector from kit.


*3-position connector from
kit used in this step.*

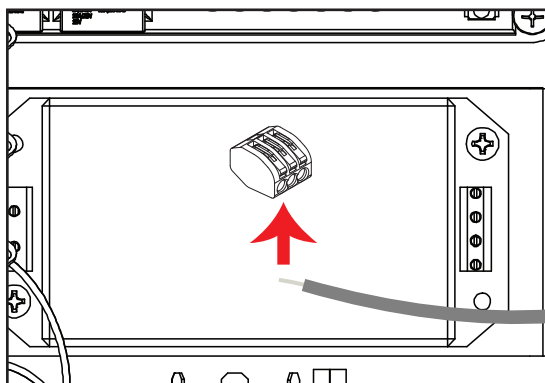

PROCEDURE


18. Connect loose end of GRY wire already attached to AC/L (on assembly from kit) to 3-position connector from Step 20.

*GRY wire from kit
used in this step.*

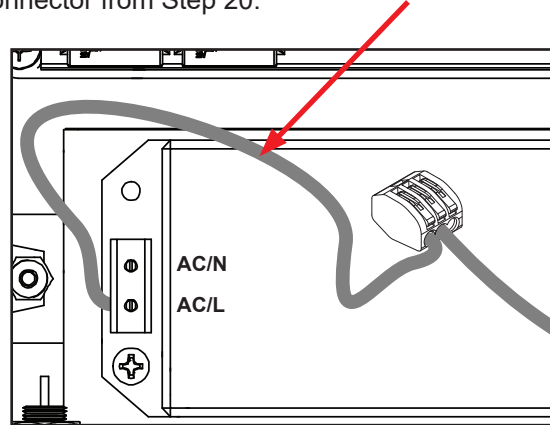


19. Attach RED wire with terminal already attached to AC/N and relay coil (on assembly from kit) to R2 coil.

*RED wire from kit
used in this step.*

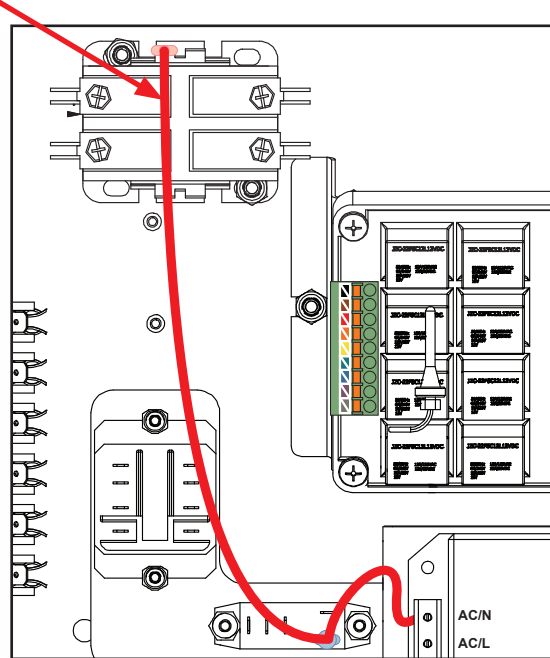

20. Replace control box cover using screwdriver.

*Screwdriver
used in this step.*

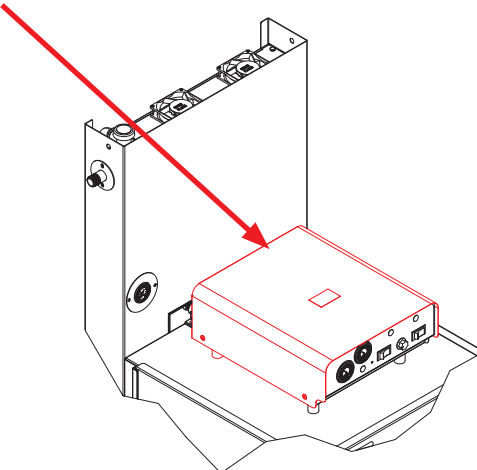

21. Restore power to machine.