

A1 - PHYSICAL ANTENNA GROUP 1 & 2 DETAILS

Sector 1										
Antenna Number										
Antenna Model	Commscope RRW2VW-6533D-R8								US	VODAFONE
Antenna Details	11-J									3
Port Number	Port 1&2	Port 3&4	Port 5&6	Port 7&8	Port 9&10	Port 11&12	Port 13&14	Port 15&16	O	23-V
Frequency	700/850	700/900	18/21/26	18/21/26	1800/2100	1800/2100	1800/2100	1800/2100	3500	AAU 3600
Carrier Using Ports	Voda	Optus	Optus	Optus	Voda	Voda	Voda	Voda	W	NEW
Orientation (degrees)					80				J	200
Electrical Down Tilt (degrees)	2	2	2	2	4	4	4	4	1	23.1
Mechanical Down Tilt					0					0
Mounting Height (m) - AGL					23.1					
Coordinates (Easting, Northing)	55 520051 5263789								B78Y	AVQL N78
RET Enabled on Antenna	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	SON	NOKIA
Feeder Type and Size									VE	ACTIVE
Feeder Length (metres)									2R	64T64R
Hybrid Cable (DC&Fibre)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	P	SFP
07 / 09 / 18 / 21 / 23 / 26									35	36
2577 × 498 × 197									567 × 370 × 118	758 × 406 × 155
53									12.5	24
2		2		21		22			2	2
L11	L21	H12	H22	H13	H23	H14	H24			
LP1 & LP2	LP3 & LP4	LP5 & LP6	LP7 & LP8	LP9 & LP10	LP11 & LP12	LP13 & LP14	LP15 & LP16			
3 & 4	1 & 2	15 & 16	5 & 6	9 & 10	13 & 14	7 & 8	11 & 12			
2	5	4	4	3	3	3	3		6	-3
0		0		-27		27				
200		200		173		227				
7,8,9	7,8,9	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26		35	36
Port 1&2	Port 3&4	Port 5&6	Port 7&8	Port 9&10	Port 11&12	Port 13&14	Port 15&16	V	V	
700/850	700/900	18/21/26	18/21/26	1800/2100	1800/2100	1800/2100	1800/2100	3,21	18/21	
Voda	Optus	Optus	Optus	Voda	Voda	Voda	Voda			
80										
2	2	2	2	4	4	4	4			

eJV ANTENNA SYSTEM CONFIGURATION FOR SECTOR 1 & 2

1. THIS ANTENNA TABLE SHALL BE READ IN CONJUNCTION WITH THE DETAIL RF PLUMBING DRAWING FOR THIS SITE.
2. A PHYSICAL SECTOR GROUP IS DEFINED AS A GROUP OF ANTENNAS GENERALLY ORIENTATED WITH SIMILAR AZIMUTHS AND EACH GROUP IS ASSIGNED A NUMBER 1, 2, 3, 4, ETC. THE PHYSICAL SECTOR GROUP MAY INCLUDE SINGLE BEAM OR MULTI-BEAM ANTENNAS. IN THE CASE OF MULTI-BEAM ANTENNAS THE RF SECTOR MAY DIFFER TO THE PHYSICAL SECTOR.
3. THE PHYSICAL ANTENNA NUMBER IS DEFINED BY ASSIGNING SEQUENCED NUMBERS TO EACH JV OPERATOR'S ANTENNAS WITHIN A PHYSICAL SECTOR GROUP, STARTING FROM LEFT TO RIGHT, TOP TO BOTTOM.
4. THE PHYSICAL ANTENNA ID IS DEFINED BY THE NUMBER MADE UP BY CONCATENATING THE PHYSICAL SECTOR GROUP NUMBER WITH THE PHYSICAL ANTENNA NUMBER & THE FIRST LETTER FROM THE OPERATOR'S NAME OR JOINT (O, V, J), SAME AS THE SAO NUMBER, AS SPECIFIED IN OSD-070 SECTION 5.6.
5. ANTENNA CO-ORDINATES ARE TO BE IN GDA94/GDA2020 REFERENCE SYSTEM, SPECIFIED FOR CENTRE OF EACH SECTOR TO NEAREST METRE.
6. THE PHYSICAL AZIMUTH (°) IS DEFINED AS THE DIRECTION OF THE PHYSICAL ANTENNA BORE SIGHT WITH RESPECT TO TRUE NORTH. AZIMUTHS OF EACH BEAM OF MULTI-BEAM ANTENNAS ARE NOT DOCUMENTED IN THIS TABLE.
7. THE PHYSICAL ANT CL EL (m) IS DEFINED AS THE MID-HEIGHT OF THE PHYSICAL ANTENNA. THE HEIGHT OF INDIVIDUAL BEAMS OR DIFFERENT SEGMENTS OF MULTI-BEAM OR HYBRID ANTENNAS (IPAA) ARE NOT DOCUMENTED IN THIS TABLE.
8. ELECTRICAL DOWN-TILTS ARE ONLY ACCURATE AT TIME OF BUILD AS THEY ARE FREQUENTLY OPTIMISED. ALWAYS REFER TO CURRENT VALUES IN MNIS.

A	27.10.25	ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))	ALL TELECOMS	VB	SA		GL		JM
AB	09.04.21	AS BUILT	METASITE	AU	JB		GC		PJ
A	28.06.18	ISSUED FOR CONSTRUCTION (eJV GREENFIELD PROJECT)	METASITE	JM	JB		GC		PJ
Rev	Date	Revision Details	Consultant	CAD	Designer		Verifier		Approver



Client:	
---------	--

Project:

ject: MOBILE NETWORK
AUSTRALIA
SITE No:- H8097
AUSTINS FERRY


LOT 13 PLAN 178737 WAKEHURST ROAD

Drawing Title:

eJV ANTENNA SYSTEM CONFIGURATION - SHEET 1 OF 2

Drawing Status:
FOR CONSTRUCTION

Drawing No.
H8097-A1

Revision
A

ANTENNA DETAILS		
PHYSICAL ANTENNA GROUP (N2)		
CO-ORDINATES (N5)	LATITUDE	
	LONGITUDE	
ANTENNA OPERATOR		
PHYSICAL ANTENNA NUMBER (N3)		
PHYSICAL ANTENNA ID (N4)		
ANTENNA ALIAS		
ANTENNA STATUS		
PHYSICAL AZIMUTH (°) (N6)		
PHYSICAL ANT CL EL (m) (N7)		
MECH DOWN-TILT (°)		
MODEL NO.		
MANUFACTURER		
TYPE		
NO. OF RF PORTS / TxRx		
PORT TYPE		
BAND CAPABILITY		
DIMENSIONS (HxWxD) (mm)		
WEIGHT (kg)		
RF SECTOR & BAND ALLOCATION		

Dimensions and weight

Table 405: Aircall dimensions and weight

Property	Value	Dimensions orientation
Height	758 mm (29.84 in.)	
Width	406 mm (15.98 in.)	
Depth	192 mm (7.56 in.) 155 mm (6.10 in.) with fan	
Weight	23.5 kg (51.81 lb)	

5.2.24 AirScale MAA **66T648** 192 AE n78 320 W **AVC11**

AVC11 (475976A) is introduced by CR007477 (for N8).

Functional description

Table 399: Aircall functional specification

Property	Value
Commercial name	Habrok 64
Maximum output power	320 W
Modulation	256 QAM
Power of 10dB	30dBm
Outdoor insulation	Yes

AIR 3268 B42

- Antenna Elements
- TRX Branches
- Antenna configuration
- Operation band:
- 1BW
- TCBW
- EIRP
- Output Power
- Supported RAT
- Weight
- Size
- eCPRI link

128
32T32R
 (4x1)x(2x8)
 B42: 3400~3600 MHz
 200 MHz
 Up to 200 MHz
 76 dBm
 200 W
 LTE & NR
12.5 kg
539Hx370Wx110mm, 22
 2*25G

3		
-42.77817		
147.24512		
JOINT	OPTUS	VODAFONE
1	2	3
31-J	32-O	33-V
16-PORT TALL 2B	AAU 3500	AAU 3600
NEW	NEW	NEW
340	340	340
23.1	24.1	23.1
0	0	0
RRV2W-6533D-R8	AIR3268 B78Y	AVQL N78
COMMS	ERICSSON	NOKIA
PASSIVE	ACTIVE	ACTIVE
16	32T32R	64T64R
4.3-10	SFP	SFP
07 / 09 / 18 / 21 / 23 / 26	35	36
2577 × 498 × 197	567 × 370 × 118	758 × 406 × 155
53	12.5	24

Sector 3

Antenna Number										
Antenna Model	Ericsson AIR3268 B78Y					Nokia AVQL				
Antenna Details	32-O					33-V				
Port Number	Port 1&2					Port 1&2				
Frequency	3500					3600				
Carrier Using Ports	Optus					Vodafone				
Orientation (degrees)	340					340				
Electrical Down Tilt (degrees)	6					-3				
Mechanical Down Tilt	0					0				
Mounting Height (m) - AGL	24.1					23.1				
Coordinates (Easting, Northing)	55 520051 5263789					55 520051 5263789				
RET on Antenna	N/A					N/A				
Feeder Type and Size										
Feeder Length (metres)										
Hybrid Cable (DC&Fibre)	Yes					Yes				


31		32		3	3
H23	H14	H24			
LP11 & LP12	LP13 & LP14	LP15 & LP16			
13 & 14					
3	3	3		6	-3
-27	27				
293	347				
18,21,23,26	18,21,23,26	18,21,23,26		35	36
V	V	V			
18/21	18/21	18/21			

ASSIGNED RF PORT FREQUENCY 3	
ASSIGNED RF PORT FREQUENCY 4	

DRAFT

NOTES:

1. THE ANTENNA TABLE SHALL BE READ IN CONJUNCTION WITH THE DETAIL RF PLUMBING DRAWING FOR THIS SITE.
2. A PHYSICAL SECTOR GROUP IS DEFINED AS A GROUP OF ANTENNAS GENERALLY ORIENTATED WITH SIMILAR AZIMUTHS AND EACH GROUP IS ASSIGNED A NUMBER 1, 2, 3, 4, ETC. THE PHYSICAL SECTOR GROUP MAY INCLUDE SINGLE BEAM OR MULTI-BEAM ANTENNAS. IN THE CASE OF MULTI-BEAM ANTENNAS THE RF SECTOR MAY DIFFER TO THE PHYSICAL SECTOR.
3. THE PHYSICAL SECTOR GROUP SHALL BE IDENTIFIED BY A SEQUENCE OF SEQUENCED NUMBERS TO EACH JV OPERATOR'S ANTENNAS WITHIN A PHYSICAL SECTOR GROUP, STARTING FROM LEFT TO RIGHT.
4. THE PHYSICAL ANTENNA NUMBER SHALL BE IDENTIFIED BY A SEQUENCE OF SEQUENCED NUMBERS (I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z), SAME AS THE PHYSICAL ANTENNA NUMBER.
5. ANTENNA CO-ORDINATES ARE TO BE IN GDA94/GDA2020 REFERENCE SYSTEM, SPECIFIED FOR CENTRE OF EACH SECTOR TO NEAREST METRE.
6. THE PHYSICAL AZIMUTH OF EACH ANTENNA BORE SIGHT SHALL BE IDENTIFIED BY A SEQUENCE OF SEQUENCED NUMBERS (1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12), SAME AS THE PHYSICAL ANTENNA BORE SIGHT.
7. THE PHYSICAL ANTENNA HEIGHT SHALL BE IDENTIFIED BY A SEQUENCE OF SEQUENCED NUMBERS (1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12), SAME AS THE PHYSICAL ANTENNA HEIGHT.
8. ELECTRICAL DOWN-TILTS ARE ONLY ACCURATE AT TIME OF BUILD AS THEY ARE FREQUENTLY OPTIMISED. ALWAYS REFER TO CURRENT VALUES IN MNIS.

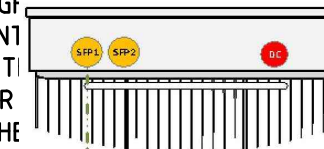

OPERATOR	OPTUS
MODEL	AIR3268
AAU1-A	NR3500

CAL
JOINT (0,



OPERATOR	Vodafone
MODE L	AVQL
BAND	NR3500

AL
CH BEAM OF

PHYSICAL OF


- check band based on DPD

I believe, Band value is incorrect in DPD

Optus 5G TU NR35 & NR23
Vodafone 5G TU NR36

PHYSICAL ASSET SUMMARY TABLE

EQUIPMENT ALIAS	PART NO.	STATUS	LOCATION	OPERATOR	PHY ANT GRP	QTY	FREQUENCY	MFR	RF PORT TYPE
850 REJ	E14V00P21	NEW	ANTENNA	O	1	1	85	COMMS	4.3-10
850 REJ	E14V00P21	NEW	ANTENNA	O	2	1	85	COMMS	4.3-10
850 REJ	E14V00P21	NEW	ANTENNA	O	3	1	85	COMMS	4.3-10
COM2g	E14F06P81	NEW	ANTENNA	V	1	1	07 / 85	COMMS	4.3-10
COM2g	E14F06P81	NEW	ANTENNA	V	2	1	07 / 85	COMMS	4.3-10
COM2g	E14F06P81	NEW	ANTENNA	V	3	1	07 / 85	COMMS	4.3-10

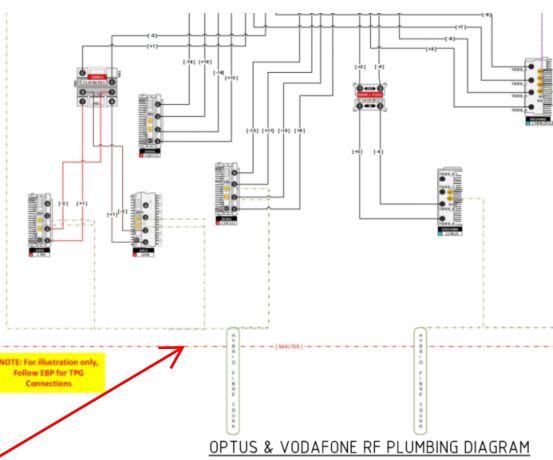


Future RRU also must to include in table

If ancillaries/RRU shown above the shelter (red line), means the location in "ANTENNA". If ancillaries/RRU shown below the shelter (red line), means location is "SHELTER"

RADIO UNITS												
EQUIPMENT ALIAS	PART NO.	STATUS	LOCATION	OPERATOR	PHY ANT GRP	QTY	RF PORT CONNECTED	MFR	NO. RF PORTS / TxRx	RF PORT TYPE	DIM (H x W x D)	WT (Kg)
RRU 700/900	RRU4480 B28/B8	NEW	ANTENNA	O	1	1	2	ERICSSON	4T4R	4.3-10	588 x 398 x 195	38.1
RRU 1800/2100/2600	RRU4466 B3/B1/B7	NEW	ANTENNA	O	1	1	4	ERICSSON	4T4R	4.3-10		
FUTURE-RRU	ERICSSON	FUTURE	ANTENNA	O	1	2	-	-	-	-		
RRU 700/900	RRU4480 B28/B8	NEW	ANTENNA	O	2	1	2	ERICSSON	4T4R	4.3-10		
RRU 1800/2100/2600	RRU4466 B3/B1/B7	NEW	ANTENNA	O	2	1	4	ERICSSON	4T4R	4.3-10		
FUTURE-RRU	ERICSSON	FUTURE	ANTENNA	O	2	2	-	-	-	-		
RRU 700/900	RRU4480 B28/B8	NEW	ANTENNA	O	3	1	2	ERICSSON	4T4R	4.3-10		
RRU 1800/2100/2600	RRU4466 B3/B1/B7	NEW	ANTENNA	O	3	1	4	ERICSSON	4T4R	4.3-10		
FUTURE-RRU	ERICSSON	FUTURE	ANTENNA	O	3	2	-	-	-	-		
RRU 700	AHPB B28	NEW	ANTENNA	V	1	1	2	NOKIA	4T4R	4.3-10		
RRU 850	AHCA B5	NEW	ANTENNA	V	1	1	2	NOKIA	4T4R	4.3-10		
RRU 1800/2100	AHEGG B3/B1	NEW	ANTENNA	V	1	2	4	NOKIA	4T4R	4.3-10		
RRU 700	AHPB B28	NEW	ANTENNA	V	2	1	2	NOKIA	4T4R	4.3-10		
RRU 850	AHCA B5	NEW	ANTENNA	V	2	1	2	NOKIA	4T4R	4.3-10		
RRU 1800/2100	AHEGG B3/B1	NEW	ANTENNA	V	2	2	4	NOKIA	4T4R	4.3-10		
RRU 700	AHPB B28	NEW	ANTENNA	V	3	1	2	NOKIA	4T4R	4.3-10		
RRU 850	AHCA B5	NEW	ANTENNA	V	3	1	2	NOKIA	4T4R	4.3-10		
RRU 1800/2100	AHEGG B3/B1	NEW	ANTENNA	V	3	2	4	NOKIA	4T4R	4.3-10		

Check RF ports in spec sheet or DPD
For below RRU AHPB in DPD RF port is 4 QTY but only two RF port are connected. same way to check all RRU's



COAXIAL FEEDER / HFDC TRUNK CABLES								
CABLE ALIAS	STATUS	LENGTH (m)	OPERATOR	PHY ANT GRP	QTY	COAX BAND ASSIGNMENT	MFR	
HFDC 9/18 (C6 ASSUMED)	EXISTING	40	O	1	2	-	H+S	
HFDC 9/18 (C6 ASSUMED)	EXISTING	40	V	1	1		H+S	
HFDC 9/18 C10	NEW	40	V	1	1		H+S	

Check manufacture based on hybrid model

check RRU model based on DPD

For existing cables, if the exact cable cross-section size is known, specify the value; otherwise, note it as 'C6 ASSUMED'

For New, Cable cross section size always "C10"

Check feeders size & QTY based on RLM/FR, which needs to be aligned with G3 & G4 sheet

NOTES:

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH RF PLUMBING DRAWING H8097-P1.
- INFORMATION IN THE TABLES SUPPLIED AND VERIFIED BY OPTUS.
- ANCILLARIES REFER TO ITEMS AT OR NEAR THE ANTENNA.
- ALL RF TAILS NOT TO BE MORE THAN 5m.
- TRUNK LENGTH ARE ESTIMATED, ROUNDED UP TO THE NEXT 10m.

check proposed length must be rounded off into 10

Check Plan View G3-1 sheet to confirm whether the RRU is installed close to or away from the passive antenna. If the RRU is close to the passive antenna, the RF tail length will be 5 m. If it is away, calculate the required RF tail length (including horizontal run, vertical run, and bending radius). The RF tail is the cable connecting the antenna and the RRU, with a maximum allowable length of 5 m. If more than 5 m is required, client approval is required


Check length based on the G3 sheet:

calculate the length of based on plan & elevation + including bending radius + extra allowance

Existing length is based on the As-built

proposed length must be rounded off into 10

DRAFT

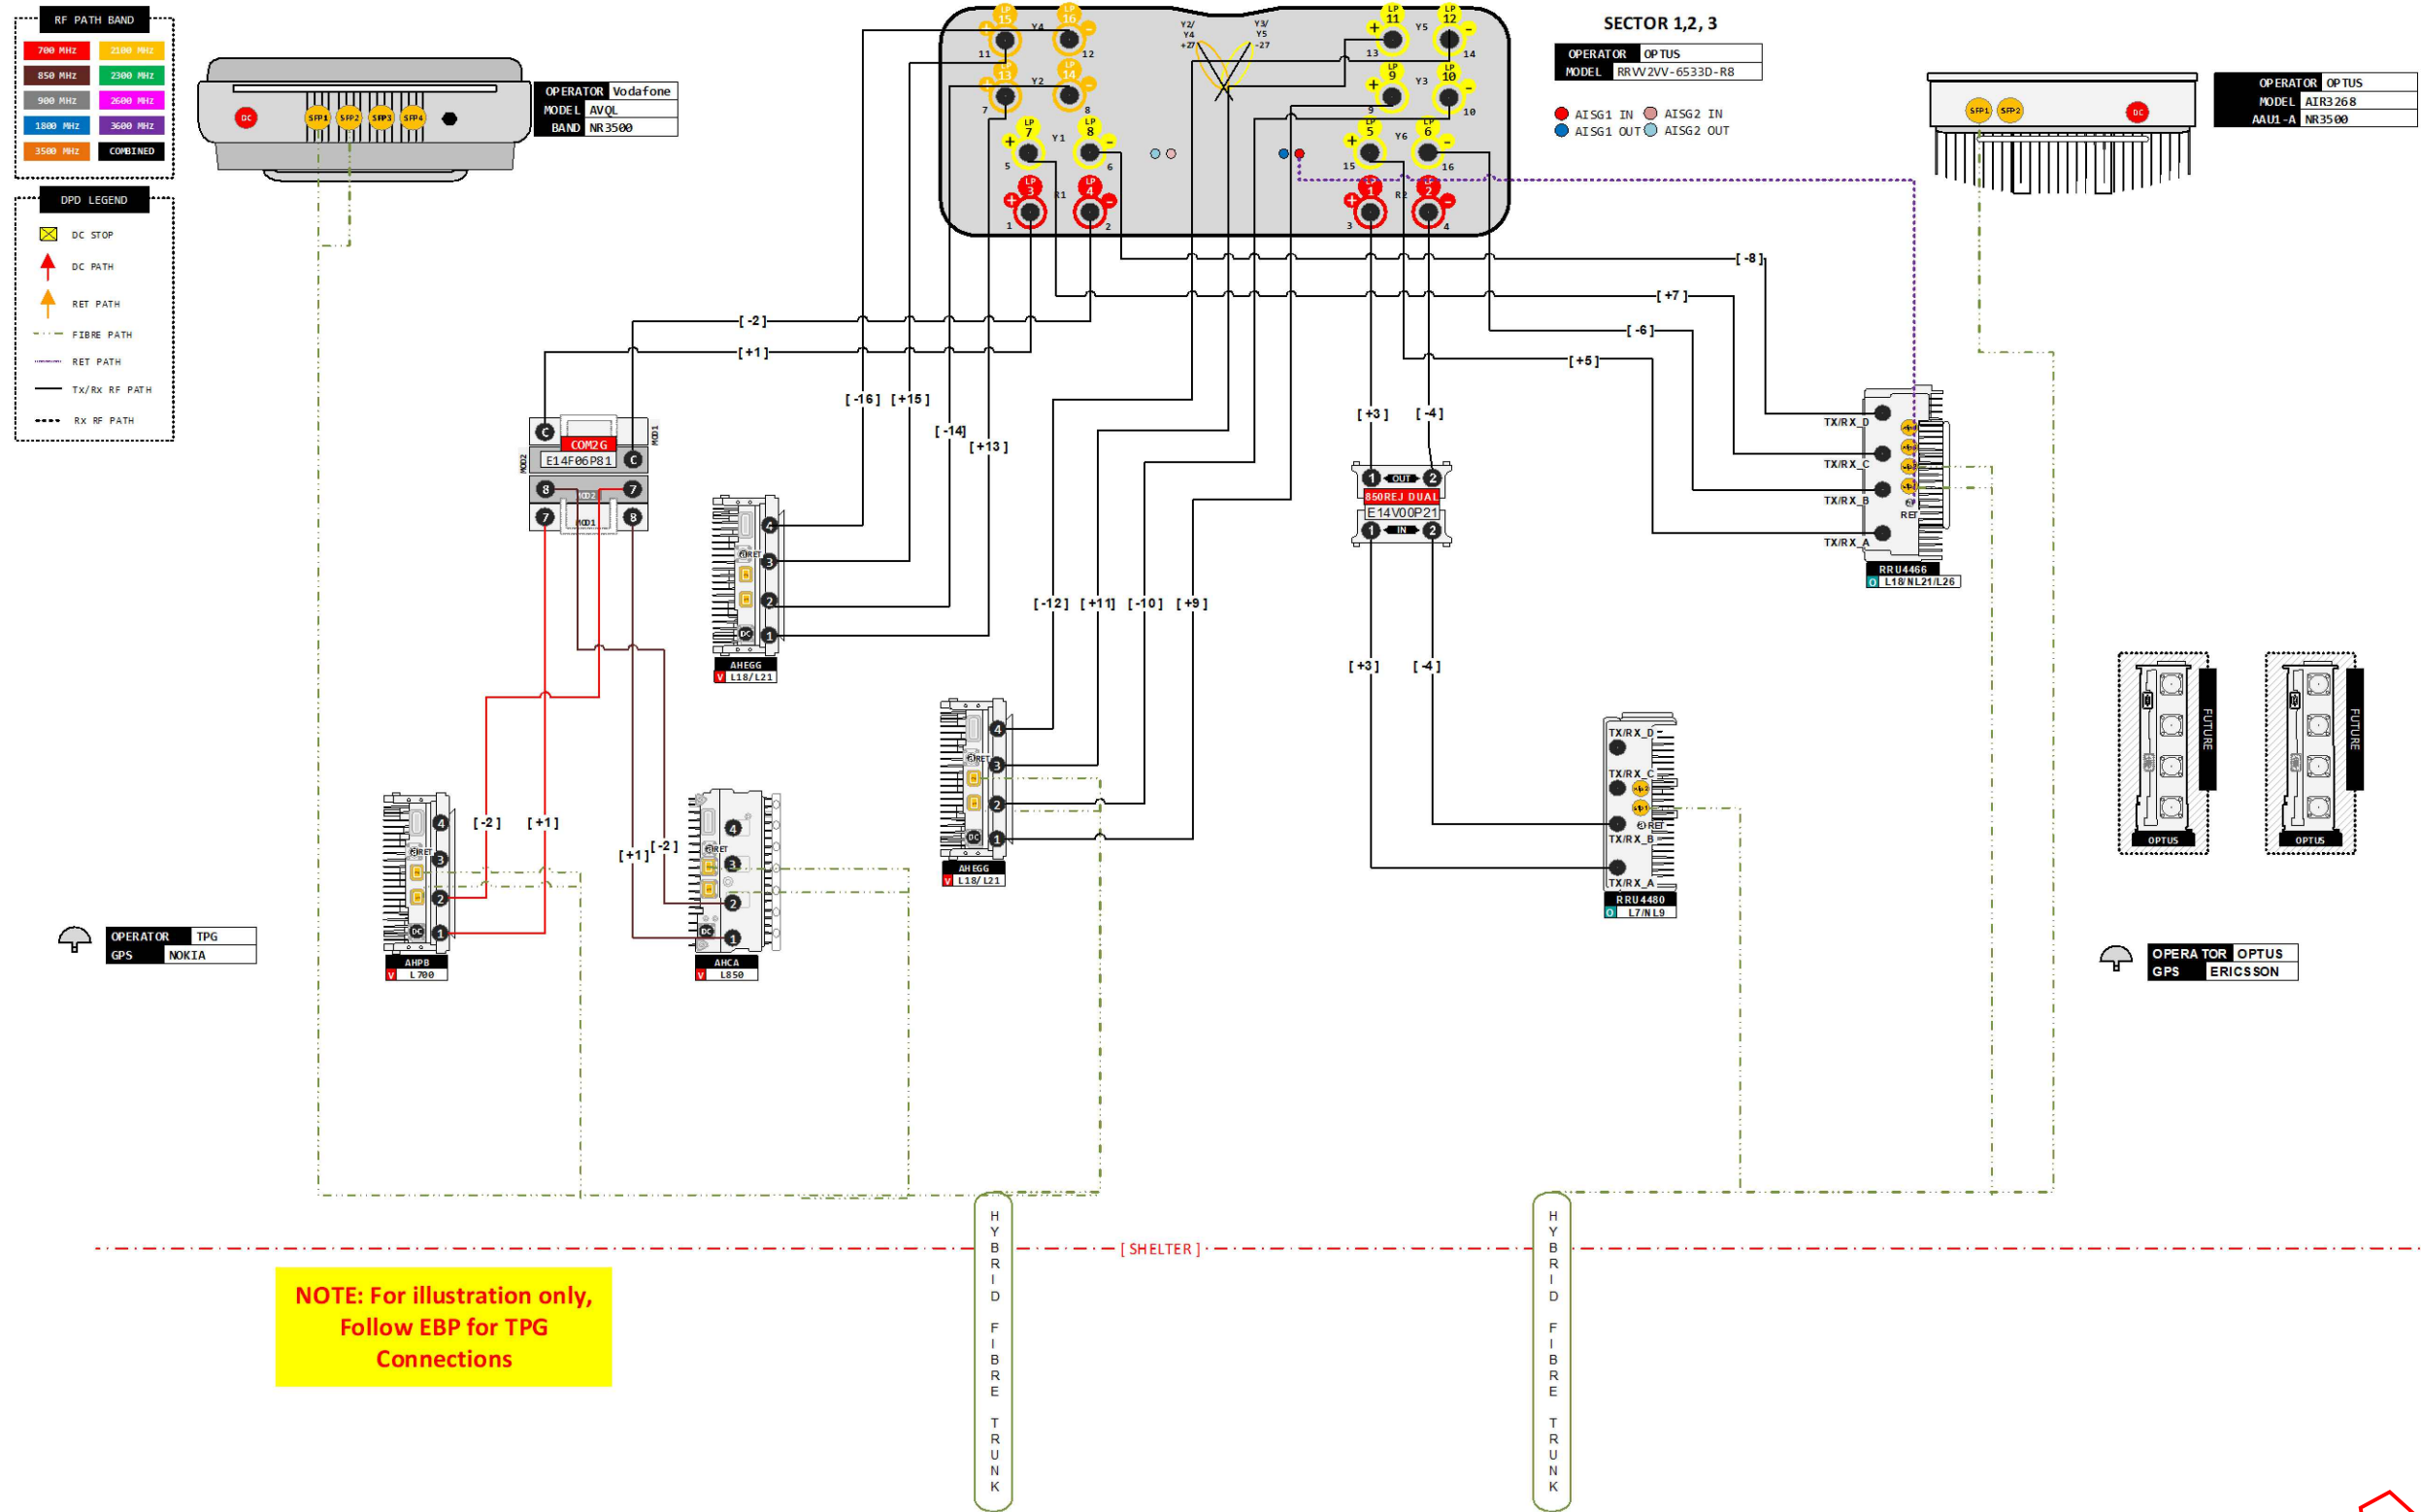

NOTE:

1. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH DRAWING H8097-A1, A2 & A3.

Rev	Date	Revision Details	Consultant	CAD	Designer	Verifier	Approver
A	27.10.25	ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))	ALL TELECOS	VB	SA	GL	JM



Client:

Project:

MOBILE NETWORK AUSTRALIA
SITE No:- H8097
AUSTINS FERRY
LOT 13 PLAN 178737 WAKEHURST ROAD

Drawing Title:

OPTUS & VODAFONE RF PLUMBING
DIAGRAM

Drawing Status:

FOR CONSTRUCTION

Drawing No.

H8097-P1

Revision

A