A PICO PINOUT · TOP VIEW, USB UP

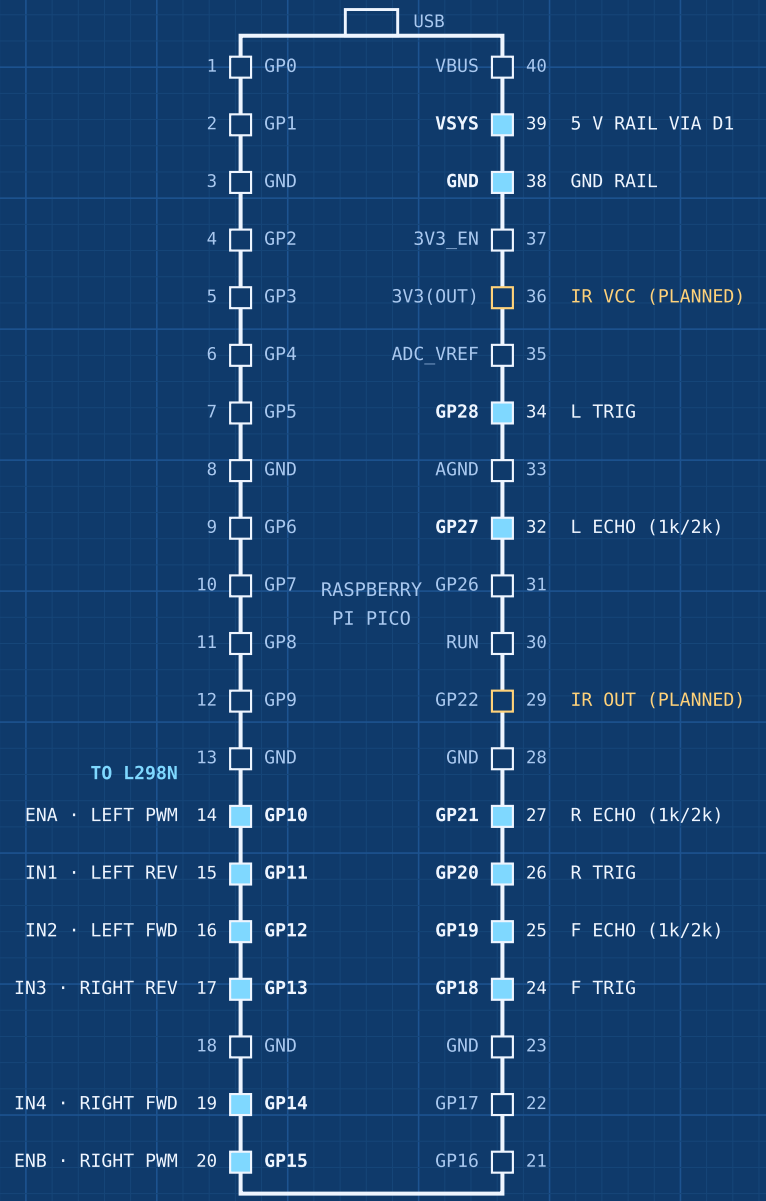

GP25 = ONBOARD LED (ON WHILE RUNNING)

FILLED PAD = USED BY CODE

B WIRING · FROM NAVIGATION CODE (V12 / V13)

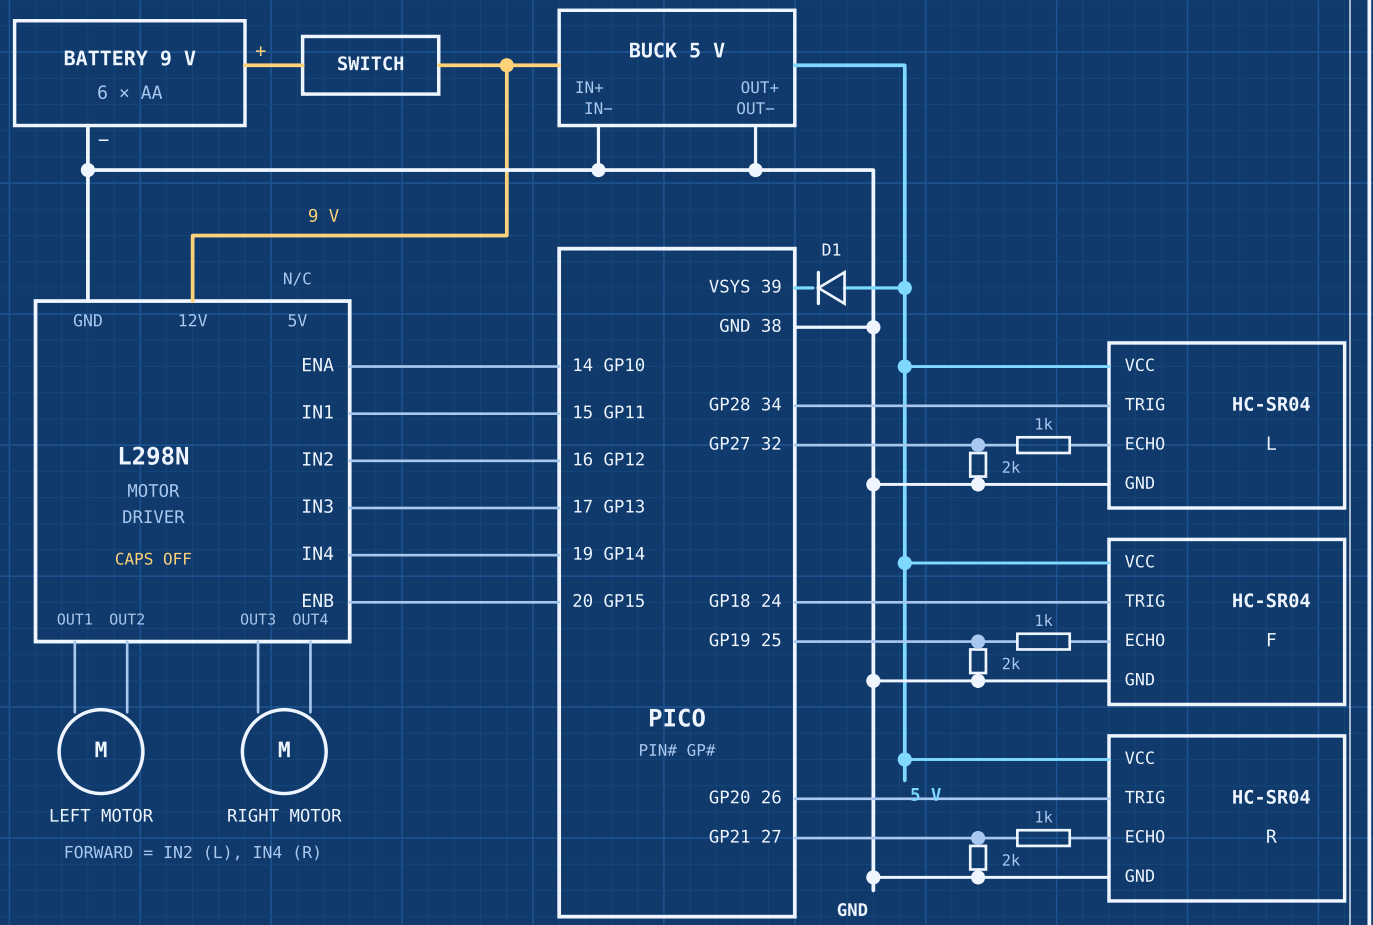

NOTES

1. DOT = CONNECTION; CROSSING WITHOUT DOT = NOT CONNECTED.
2. ECHO DIVIDER: 1k IN SERIES, 2k TO GND (5 V ECHO → 3.3 V AT PICO).
3. L298N ENA/ENB JUMPER CAPS OFF; ITS 5 V TERMINAL AND 5 V PINS UNUSED.
4. LEFT WHEEL = CHANNEL A (OUT1/2), RIGHT = CHANNEL B (OUT3/4).
5. D1 (1N5817) RECOMMENDED; WITHOUT IT, UNPLUG VSYS WHEN ON USB WITH THE BATTERY OFF.
6. SENSORS NEED THE BATTERY ON (5 V COMES FROM THE BUCK).
7. IR MODULE (GP22, 3V3) PLANNED; NOT IN THE CODE YET.

GE1501 AE1 ROBOT · WIRING		
DWG NO	04 OF 04	SCALE NTS
SOURCE	PIN MAP FROM CODE (V12/V13)	
DATE	2026-11-10	