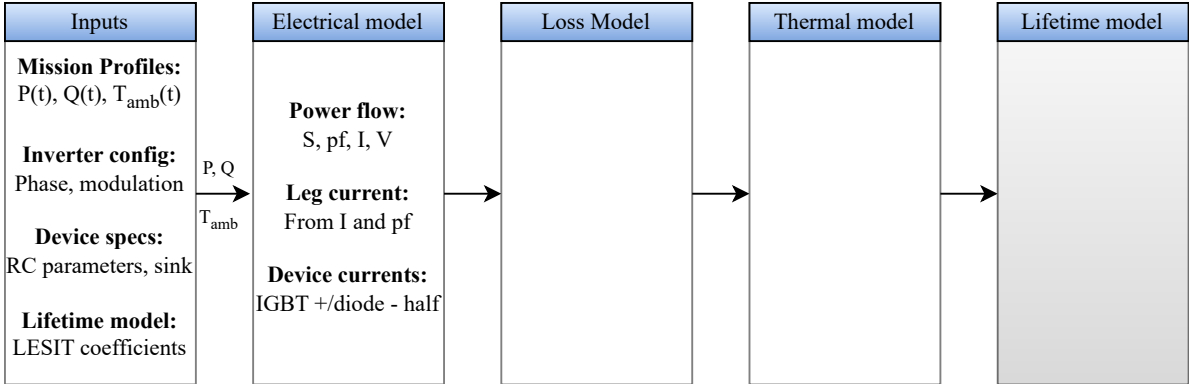
Inputs
Mission Profiles:
P(t), Q(t), T_amb(t)
Inverter config:
Phase, modulation
Device specs:
RC parameters, sink
Lifetime model:
LESIT coefficients
P, Q
T_amb
Electrical model
Power flow:
S, pf, I, V
Leg current:
From I and pf
Device currents:
IGBT +/diode - half
Loss Model
Thermal model
Lifetime model