
Reserved 5V input header, 2.54mm pitch



Regulated Power Supply

DevEBox Electronics
mcudev.taobao.com | DevEBox


DevEBox: shop389957290.taobao.com o.com

BOOT0	BOOT1	Boot Mode
0	X	User Flash
1	0	System (ISP)
1	1	Embedded SRAM


STM32 Boot default GND: BOOT0 pulled down via R7

STM32 Boot Mode Selection

SWD Debug / Programming Interface



DevEBox: shop389957290.taobao.com



TFT LCD Interface

Compatible OLED: 0.96", 1.3" displays


1.44", 1.8" TFT LCD displays

Other display sizes available upon inquiry


1.3", 2.0" HD TFT LCD displays

2.4", 2.8" TFT LCD displays


Store: mcudev.taobao.com




MicroSD / TF Card Socket (Push-Push)



Power Indicator LED



LED Indicators



Push Buttons


STM32H750VB / H743VI Core Board

Core: Cortex-M7

(H750VB) FLASH: 128KB

(H743VI) FLASH: 2048KB (2MB)

RAM: 1024KB (1MB)

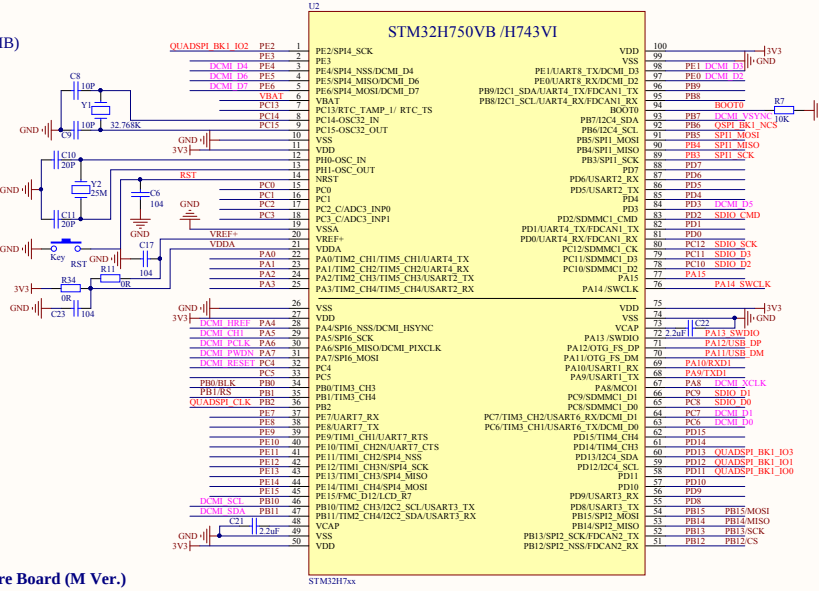


STM32H750VB / H743VI Core Board (M Ver.)


DevEBox Electronics

MCU-Dev Embedded Store

mcudev.taobao.com | DevEBox

DevEBox: shop389957290.taobao.com





Compatible camera modules:

OV2640 - 2.0 Megapixels

OV5640 - 5.0 Megapixels (Auto Focus)


FPC Connector (Flip-Lock Type)


FPC extension ribbon available in store

Store 1: mcudev.taobao.com

Store 2: shop389957290.taobao.com


DCMI Interface - Camera Header





Extension I/O Headers


Interface Supports QSPI Mode



External FLASH Memory


Standard MicroUSB Port

(Common Android 5V Cable Input)



USB Power Interface


(STM32 USB Slave)



RTC Backup Battery Header B1 (Reserved)

Title	STM32H750VB / H743VI Core Board (M Ver.)
Size	DevEBox Electronics | Embedded Dev Net
A2	mcudev.taobao.com | DevEBox
Date:	
File:	Z:\VMDOC\...\STM32_H7XX_M.SchDoc Drawn By:

DevEBox Innovation
mcudev.taobao.com
Embedded Development

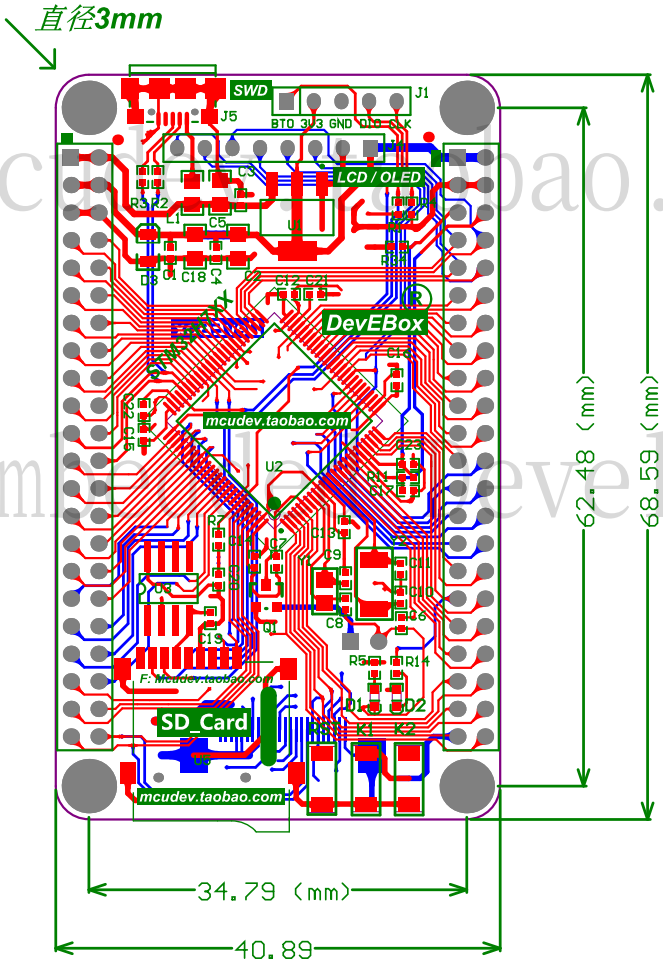

Bill of Materials <Parameter Title not found>

Source Data From: STM32_H7XX_M.PrjPcb
Project: STM32_H7XX_M.PrjPcb
Variant: None

Creation Date: 2019-11-23 01:44:44 PM
Print Date: 43792 43792.57279

D Box Innovation
moddev.taobao.com
Embedded Development

Footprint	Comment	LibRef	Designator	Description	Quantity
SIP2-2.54mm	BAT	BATTERY	B1		1
RC0402	104	Cap, CAP, CAP, CAP, Cap, Cap, Cap, Cap, Cap, Cap, Cap, Cap, Cap Semi, CAP, Cap	C1, C3, C4, C6, C7, C12, C13, C14, C15, C16, C17, C19, C20, C23	Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor (Semiconductor SIM Model), [NoValue], Capacitor	14
RC0805	106	ELECTRO2, ELECTRO2, Cap	C2, C5, C18	[NoValue], [NoValue], Capacitor	3
RC0402	10P	CAP	C8, C9		2
RC0402	20P	CAP	C10, C11	Capacitor	2
RC0603	2.2uF	Cap	C21, C22	Capacitor	2
LED-0603	LED	LED	D1, D2		2
SOD_323	5V1	Diode	D3	Default Diode	1
SIP5-2.54mm	SPI_1X5	Header 5H	J1	Header, 5-Pin, Right Angle	1
IDE2X22	Header 22X2	Header 22X2	J2, J3	Header, 22-Pin, Dual row	2
HDR1X8	SIP8-2.54mm	Header 8	J4	Header, 8-Pin	1
micro_USB	Micro_USB	MiniUSB	J5		1
FPC24-05MM	FPC-24P	FPC-24P	J6		1
SW-SPST	Key	SW-PB	K1, K2, RST		3
RC0805	500mA	RES	L1		1
SOT-23-BAT54C	BAT54C	BAT54C	Q1		1
RC0402	10K	Res2	R1, R4, R7	Resistor	3
RC0402	0R	Res2	R2, R3, R11, R34	Resistor	4
RC0402	510R	Res2	R5, R14	Resistor	2
SOT-223	AMS1117-3.3V	11	U1		1
	STM32H7xx	STM32H750V	U2		1
SOP8L	W25QXX	W25QXX	U3		1
	MiniSD	MiniSD	U5		1
JZ3215-32K	32.768K	CRYSTAL	Y1	Crystal	1
JZ5032-8M	25M	CRYSTAL	Y2	Crystal	1
					53

Approved **Notes**