

Lcm of 2 8 bit

The screenshot shows the GNUSim8085 - 8085 Microprocessor Simulator interface. The assembly code is as follows:

```

1 LDA 4200
2 STA 4300
3
4 LDA 4201
5 MOV E,A
6
7 CHECK: LDA 4300
8 MOV D,A
9 DIVIDE: MOV A,D
10 CMP E
11 JC NOT_DIVISIBLE
12 JZ FOUND
13 SUB E
14 MOV D,A
15 JMP DIVIDE
16 NOT_DIVISIBLE: LDA 4300
17 MOV B,A
18 LDA 4200
19 ADD B
20 STA 4300
21 JMP CHECK
22 FOUND: HLT
  
```

The registers section shows the following values:

Register	Value
A	02
BC	03 00
DE	02 02
HL	00 00
PSW	00 00
PC	42 2A
SP	FF FF
Int-Reg	00

The memory section shows the following values:

Address (Hex)	Address	Data
10CC	4300	06
10CD	4301	00
10CE	4302	00
10CF	4303	00
10D0	4304	00
10D1	4305	00
10D2	4306	00
10D3	4307	00
10D4	4308	00
10D5	4309	00
10D6	4310	00
10D7	4311	00
10D8	4312	00
10D9	4313	00

The simulator status is "Idle".

Gcd of 2 8 bit

The screenshot shows the GNUSim8085 - 8085 Microprocessor Simulator interface. The assembly code is as follows:

```

1 LDA 4200
2 MOV B,A
3 LDA 4201
4 MOV C,A
5 LOOP: MOV A,B
6 ORA A
7 JZ CZERO
8 MOV A,C
9 ORA A
10 JZ CZERO
11 MOV A,B
12 CMP C
13 JC CGREATER
14 JZ EQUAL
15 SUB C
16 MOV B,A
17 JMP LOOP
18 CGREATER: MOV A,C
19 SUB B
20 MOV C,A
21 JMP LOOP
22 EQUAL: MOV A,B
23 STA 4205
24 HLT
25 CZERO: MOV A,C
26 STA 4205
27 HLT
28 CZERO: MOV A,B
29 STA 4205
30 HLT
  
```

The registers section shows the following values:


Register	Value
A	01
BC	01 01
DE	02 02
HL	00 00
PSW	00 00
PC	42 2A
SP	FF FF
Int-Reg	00

The memory section shows the following values:

Address (Hex)	Address	Data
1068	4200	03
1069	4201	02
106A	4202	00
106B	4203	00
106C	4204	00
106D	4205	01
106E	4206	00
106F	4207	00
1070	4208	00
1071	4209	00
1072	4210	00
1073	4211	00
1074	4212	00
1075	4213	00

The simulator status is "Idle".

Factorial of 8 bit nnumber

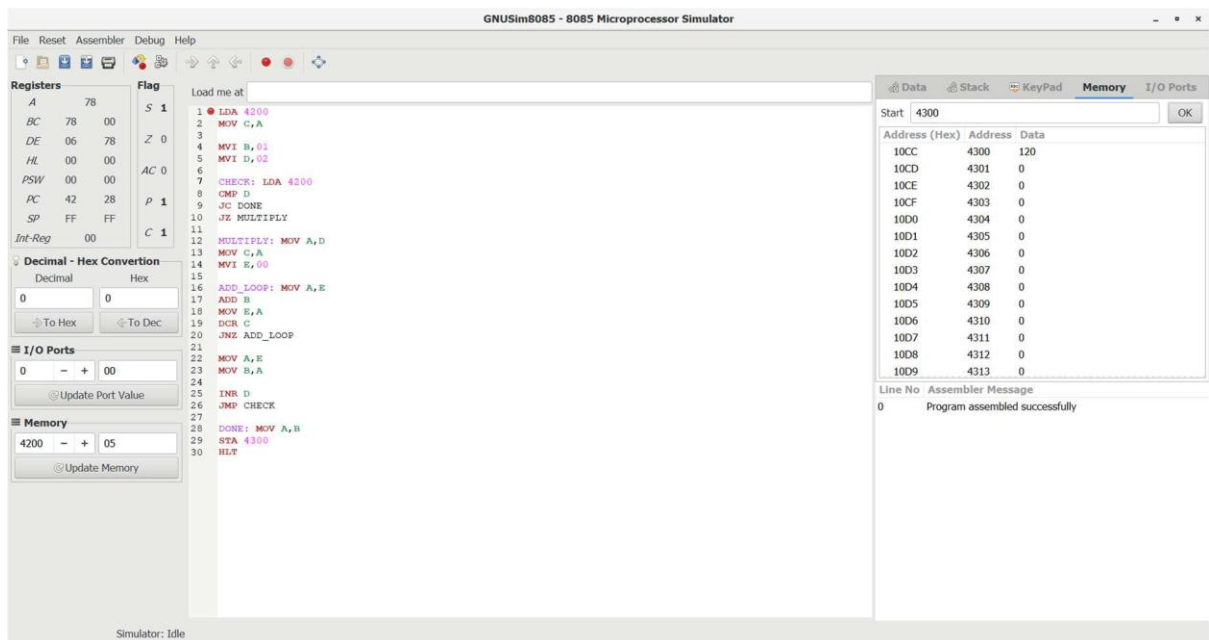

Decimal to hexadecimal

