







Duet Power Wiring Harnesses

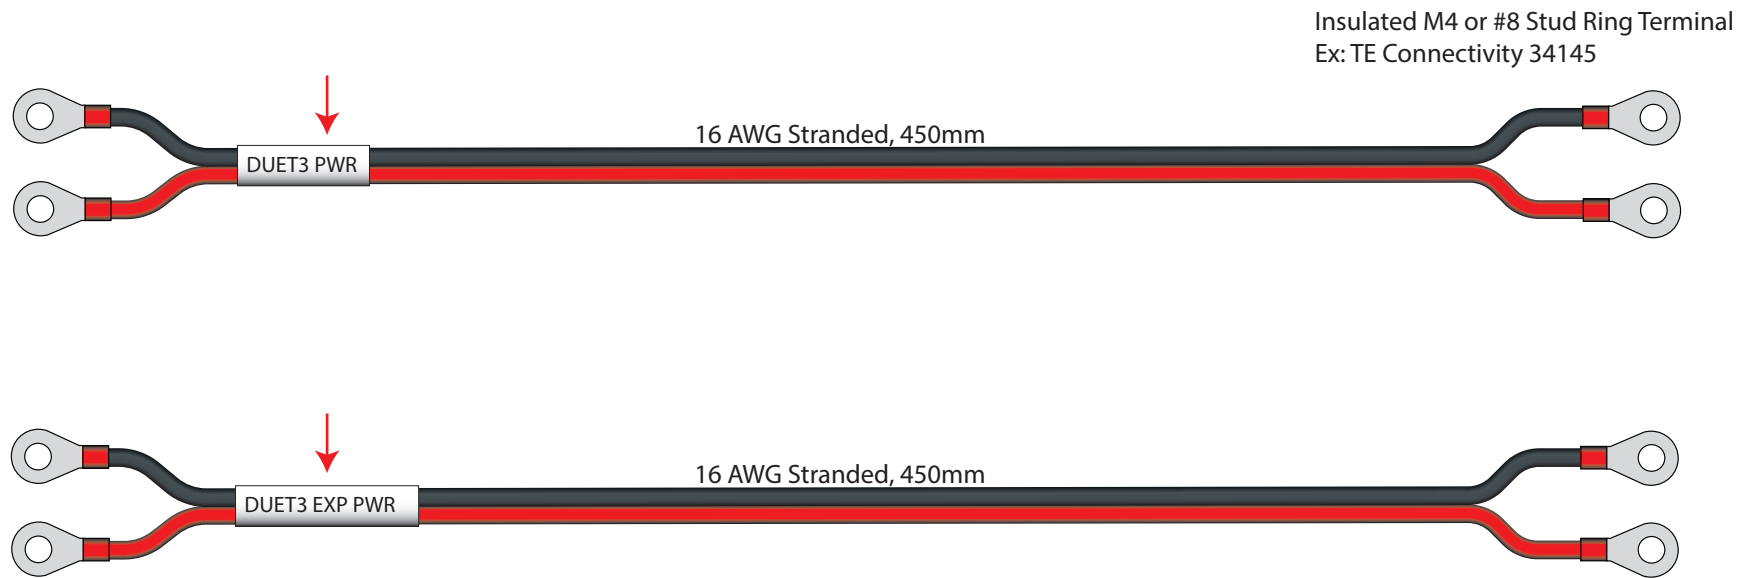


PSU Wiring Harnesses

Insulated Female Quick Disconnect Terminal, 0.25in. Tab
Ex: 3M 72F-250-32-NBL


All Ring Terminals except otherwise noted:
Insulated M4 or #8 Stud Ring Terminal
Ex: TE Connectivity 34145

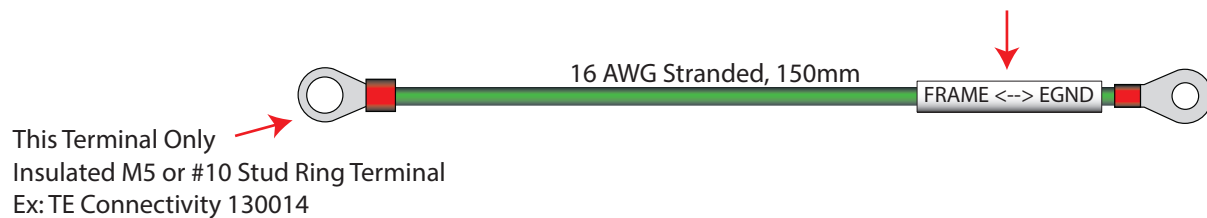

Duet 3 Mini Canbus Wiring Harness

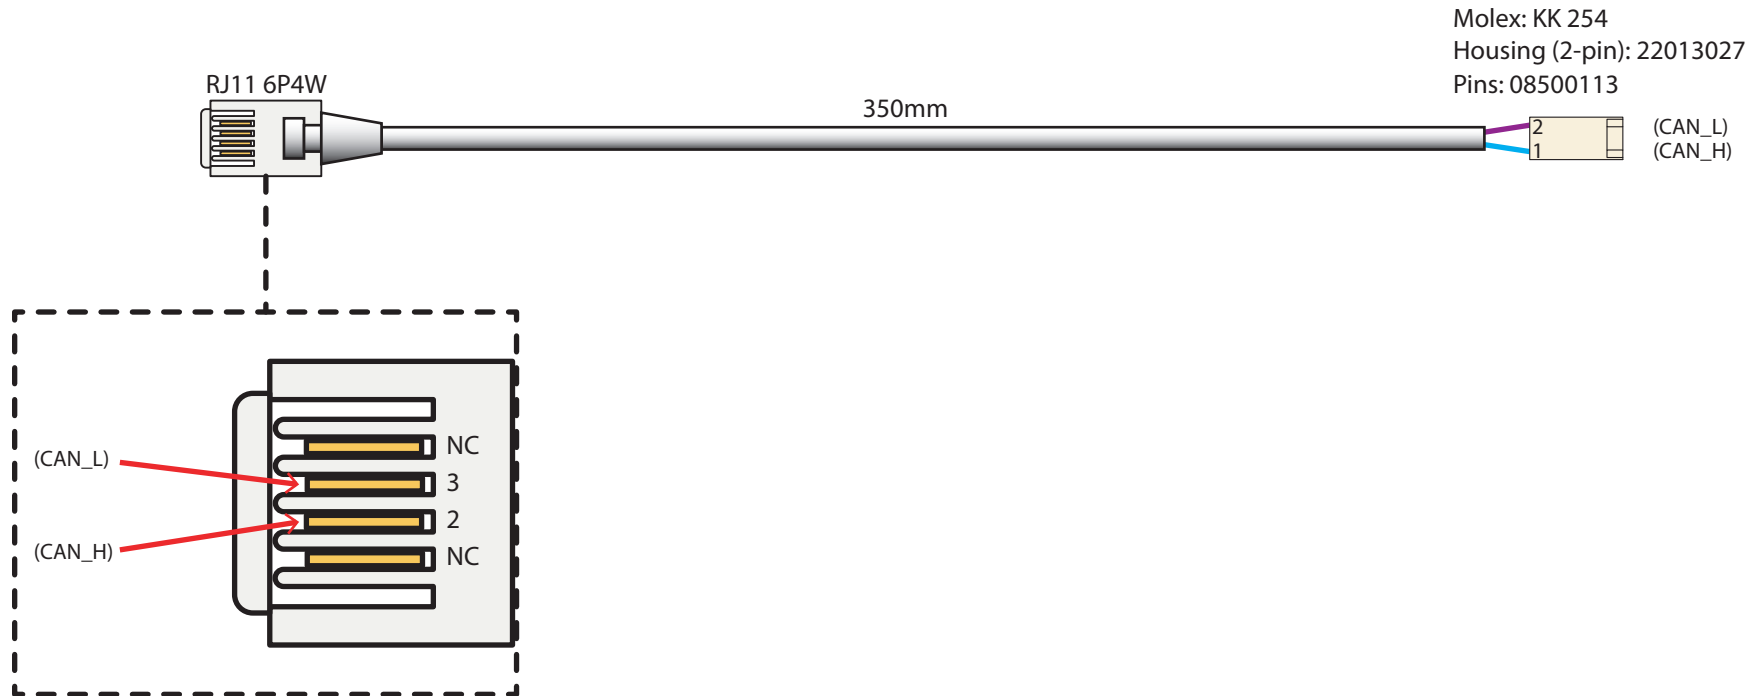


SSR Wiring Harnesses

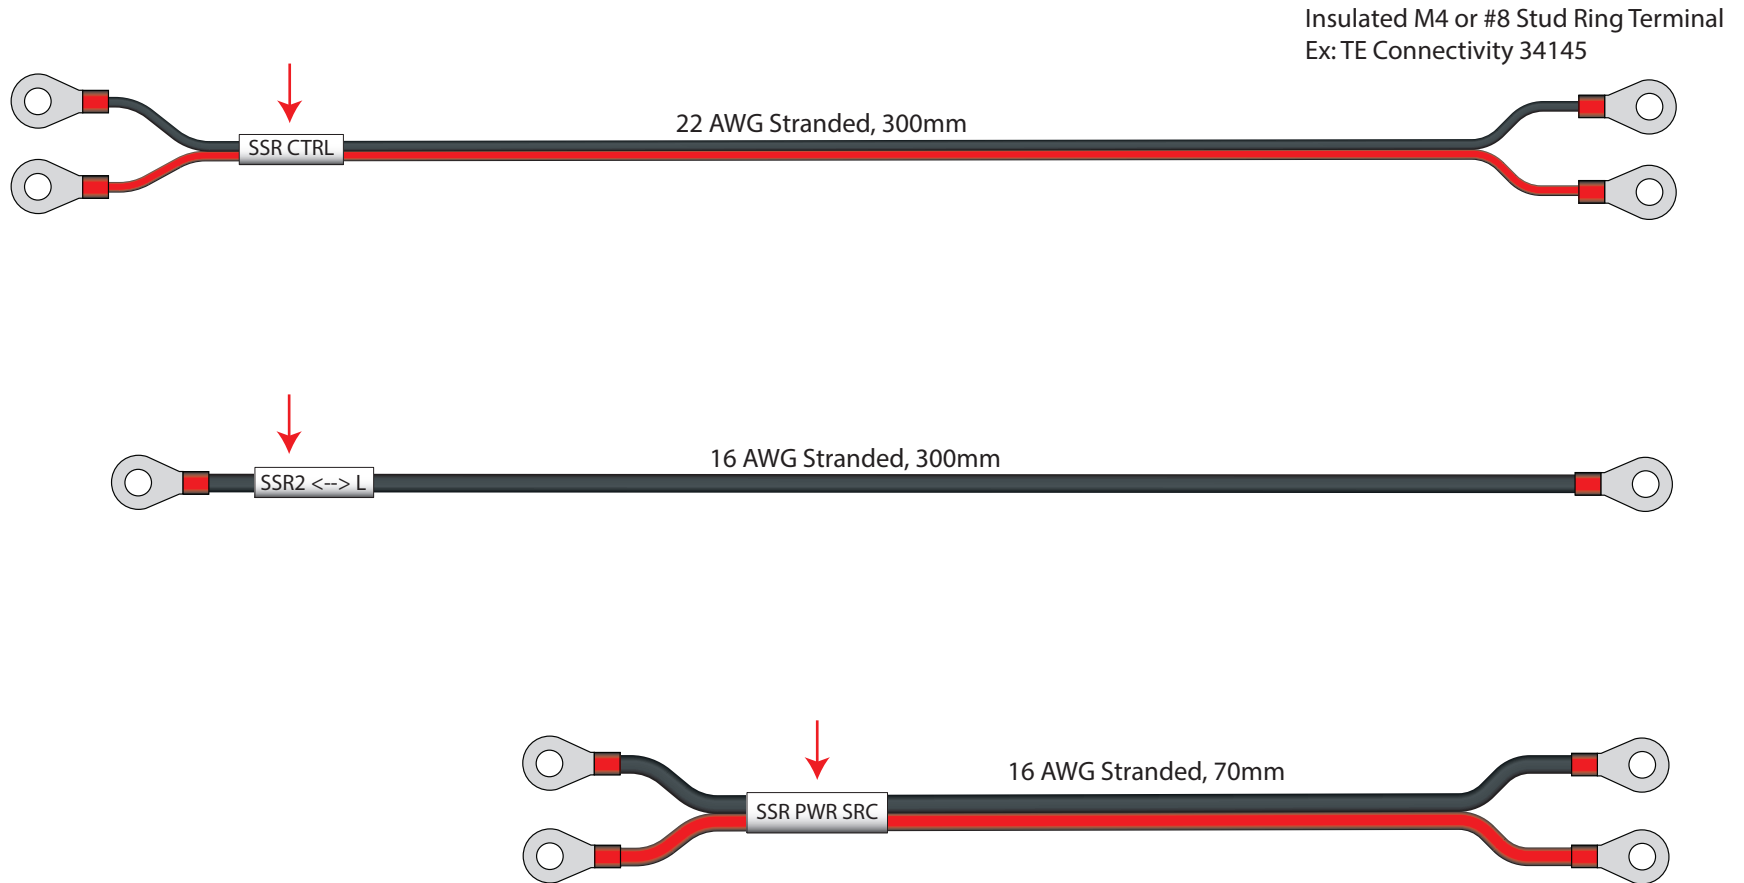

Bed Heater Wiring


750W Silicone Heater, 2-pin

Ex: Keenovo "Silicone Heated Pad, 300x300mm, 750W,
120V or 220V with 150C thermal cutoff"

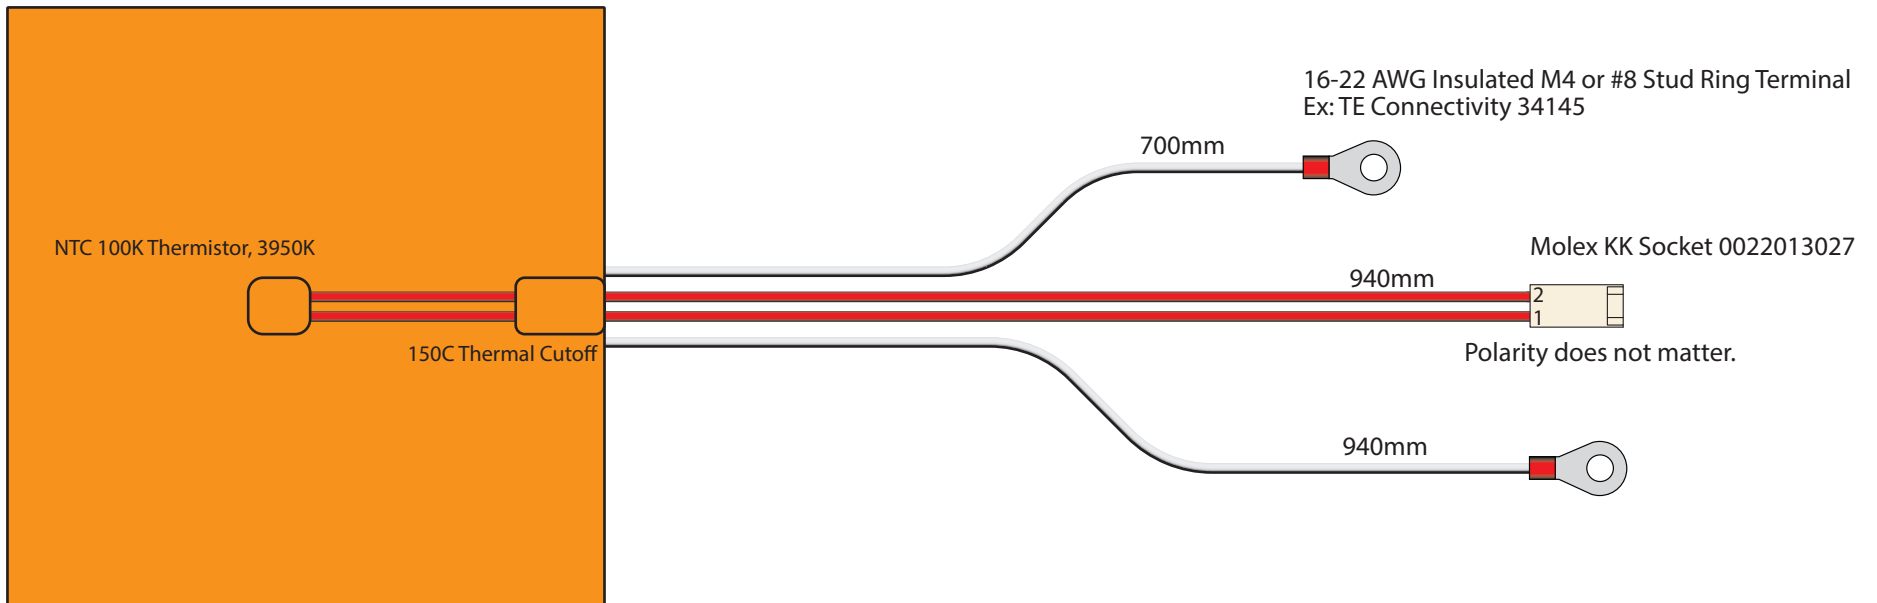


XYZ Limit Switch Wiring

22AWG Stranded, all wires.
Solder and apply heat shrink on switch terminals.

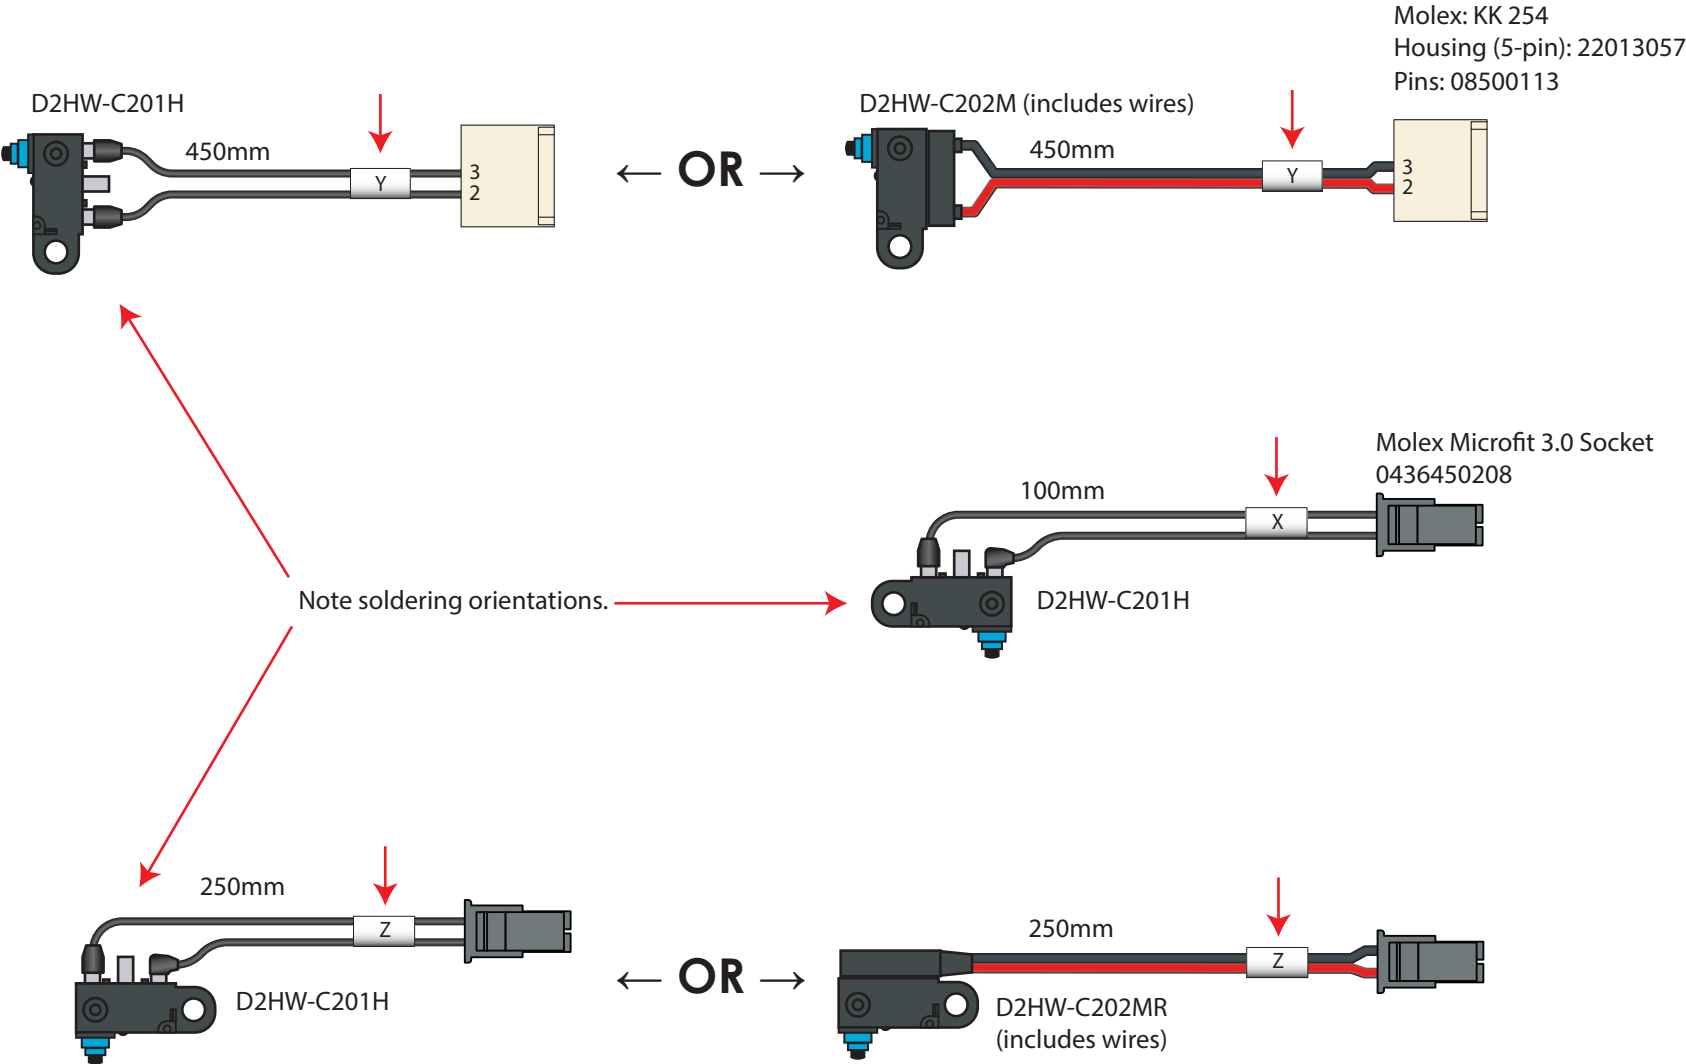


Limit Switch Wire Harnesses

Molex Microfit 3.0 Plug
0436400201

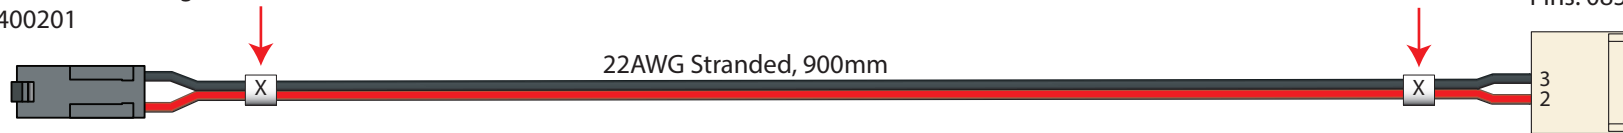

Molex: KK 254
Housing (5-pin): 22013057
Pins: 08500113

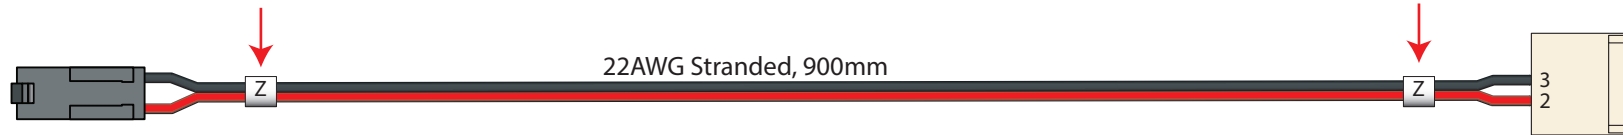

REL Switch Wiring

